MOTOROLA

SG73/D
REV 17

MOTOROLA SEMICONDUCTOR
MASTER SELECTION GUIDE

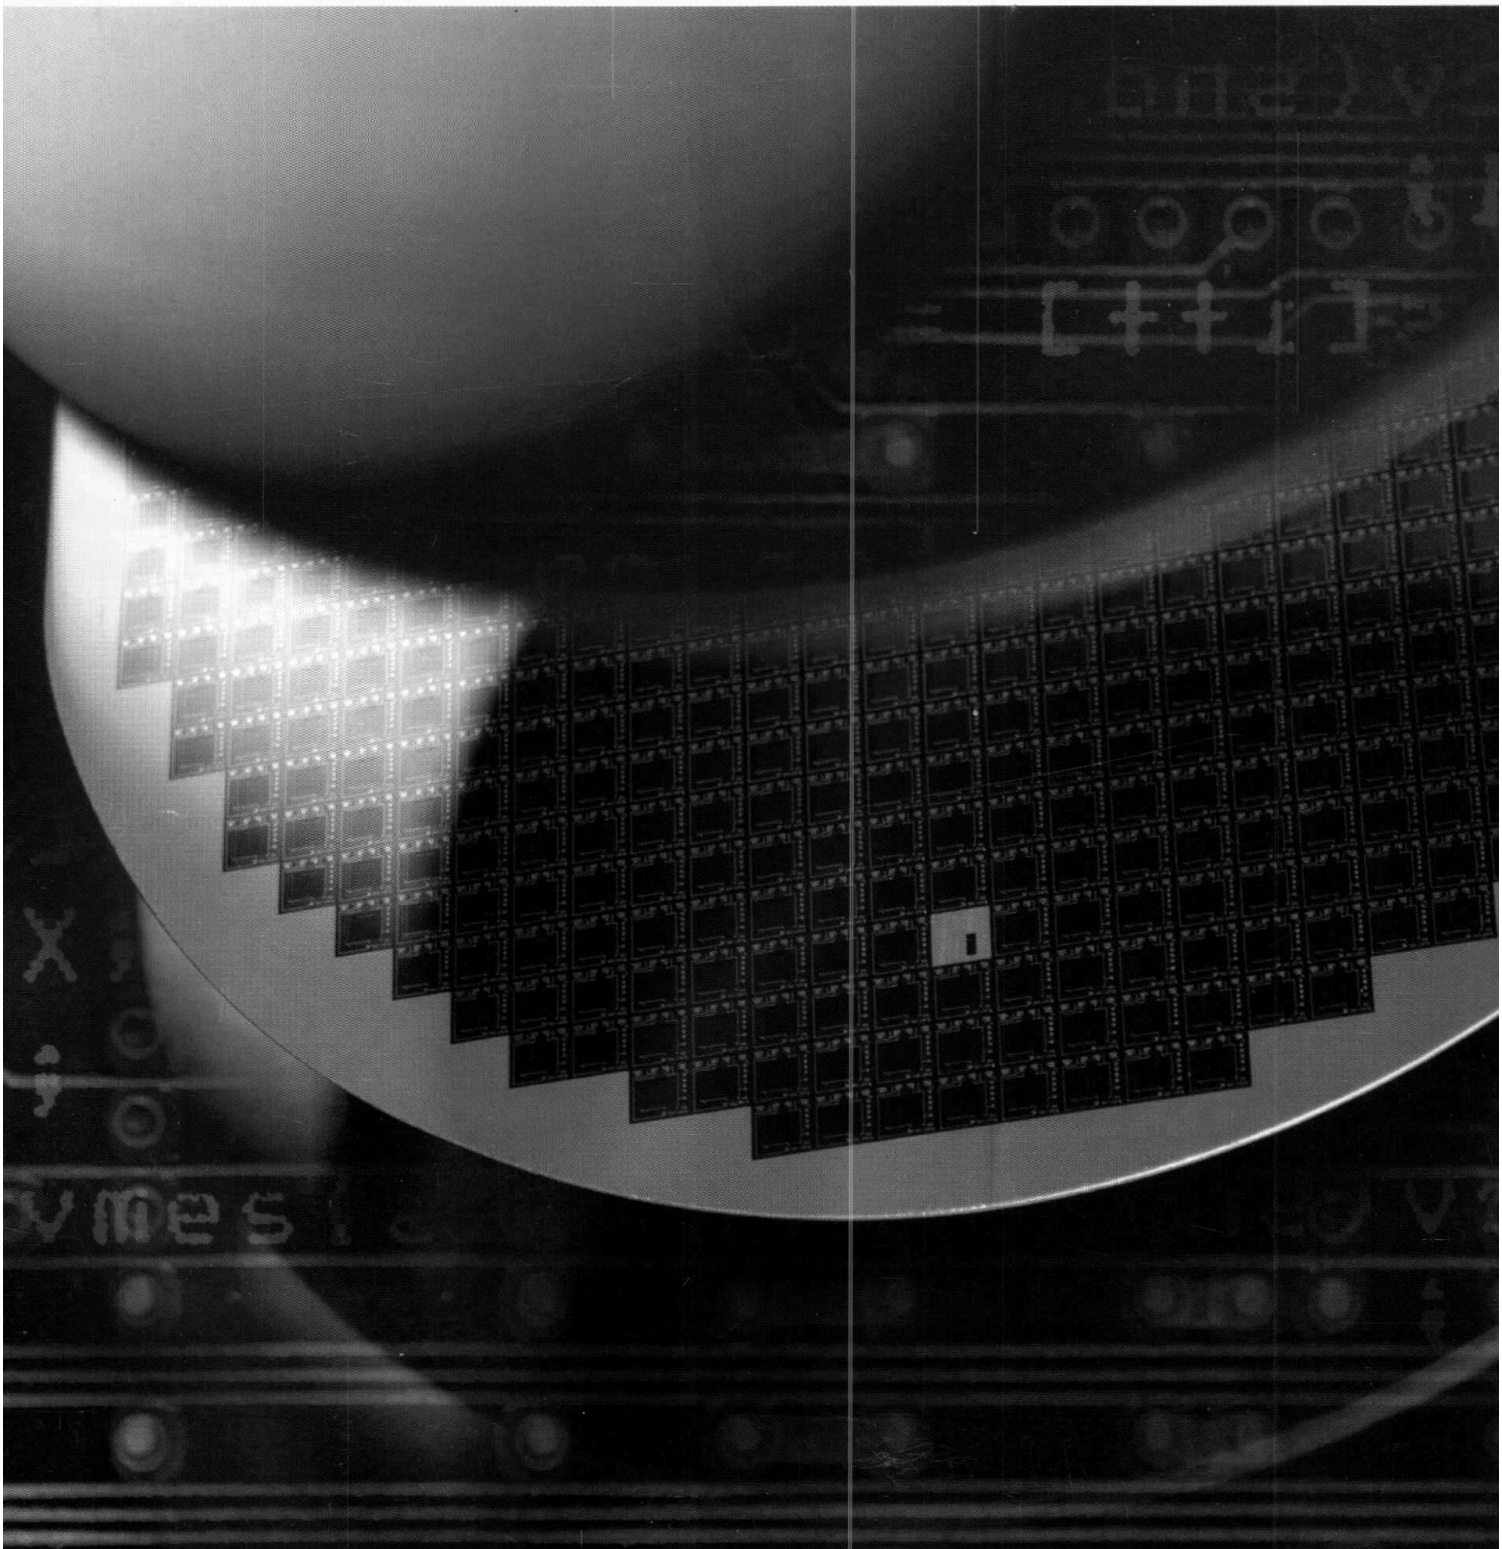

Introduction

Advanced Digital Consumer Products 1

Microcomputer Components 2

Logic: Standard, Special and Programmable 3

Analog and Interface Integrated Circuits 4

Semiconductor Components Group 5

Product Literature and Technical Training 6

Device Index and Subject Index 7

MOTOROLA

Master Selection Guide

Please note that only some of the information in this Selector Guide has been updated to reflect the new Motorola Semiconductor Product Sector realignment.

The information in this book has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of semiconductor devices any license under the patent rights to the manufacturer.

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

– NOTE –
REVS. 14, 15 AND 16 WERE PUBLISHED ELECTRONICALLY ONLY
NO BOOKS WERE PRINTED

© Motorola, Inc. 1998
Previous Edition © 1997
"All Rights Reserved"
Printed in U.S.A.

ALExIS, Buffalo, Bullet–Proof, CDA, Cheval, CMTL, Ceff–PGA, Customer Defined Array, DECAL, Designer's, DIMMIC, DSPRAM, ECLinPS, ECLinPS LITE, ECL300, E–FETs, E–POWER, EZFET, EpiBase, Epicap, FIRsT, FLEX Chip, FLEX Numeric Chip, FLEX Alphanumeric Chip, FLEX Stack, GEL–PAK, GEMFET, GlobalOptoisolator, GreenLine, HDC, HDTMOS, H4C Series, H4C Plus, HYPERformance, ICePAK, L^2TMOS, MAACPAC, MCML, MDTL, MECL, MECL 10K, MECL 10H, MECL III, MEGAHERTZ, MCCS, Media Engine, Memorist, MHTL, MicroCool, MicroSIMM, MiniMOS, Mini Mosorb, MONOMAX, MOSAIC I, MOSAIC II, MOSAIC III, MOSAIC IV, MOSAIC V, MOSFET, Mosorb, MRTL, MTTL, Multi–Pak, MUSCLE, Mustang, µSIMM, OACS, OnCE, PHACT, Predix, PowerBase, PowerLux, Power Manager, POWER OPTO, POWERTAP, PRISMCard, QUIL, Rail–To–Rail, SCANSWITCH, SENSEFET, Senseon, SLEEPMODE, SMALLBLOCK, SMARTDISCRETES, SMARTMOS, SMARTswitch, SORF, Surmetic, SWITCHMODE, Symmetric Superscalar, TestPAS, Thermopad, Thermopad II, Thermowatt, TMOS V, Unibloc, UNIT/PAK, VeComP, VersaPower, WaveFET, X–ducer, Z–Switch and ZIP R TRIM are trademarks of Motorola, Inc.

C–QUAM, MOSAIC and TMOS are registered trademarks of Motorola, Inc.

Apollo is a registered trademark of Hewlett Packard Inc.
AutoLogic, NetEd, QuickSim II, QuickPath and Falcon Framework are trademarks of Mentor Graphics Corp.
Cho–Therm is a registered trademark of Chromerics, Inc.
Concept, Gate Ensemble, Verilog–XL, Veritime and Dracula are trademarks of Cadence Design Systems, Inc.
Daisy is a trademark of Daisy Systems Corporation.
DDCMP and VAX are trademarks of Digital Equipment Corporation.
Design Compiler, HDL Compiler, Test Compiler and DesignWave are trademarks of Synopsys, Inc.
Echelon, LON, LonWorks and Neuron are registered trademarks of Echelon Corporation.
ETHERNET is a trademark of Xerox Corporation.
FACT and FAST are trademarks of National Semiconductor Corporation.
FIDE is a trademark of Aptronix.
GED is a trademark of Valid Logic Systems Inc.
Grafoil is a registered trademark of Union Carbide.
HP/Apollo is a registered trademark of Hewlett–Packard Inc.
Kapton is a registered trademark of E.I. Dupont.
Pentium is a registered trademark of Intel Corporation.
InterTools is a trademark of Intermetrics, Inc.
IBM, IBM PC, PowerPC and SDLC are trademarks of International Business Machines Corporation.
Isotop is a trademark of SGS–Thomson Microelectronics.
LonBuilder and LonTalk are trademarks of Echelon Corporation.
Macintosh is a trademark of Apple Computer, Inc.
Mentor Graphics is a trademark of Mentor Graphics Corporation.
Micro8 is a trademark of International Rectifier.
MOTIVE is a registered trademark of Quad Design.
NeXT is a trademark of NeXT Computer, Inc.
POWERMITE is a registered trademark of and used under a license from Microsemi Corporation.
ROM68K and SmartROM are trademarks of Integrated Systems, Inc.
Rubber–Duc is a trademark of AAVID Engineering.
Sil Pad and Thermal Clad is a trademark of the Bergquist Company.
SPARC is a trademark of SPARC International, Inc.
Sun–4 is a trademarks of Sun Microsystems Inc.
Sync–Nut is a trademark of ITW Shakeproof.
Thermasil is a registered trademark and Thermafilm is a trademark of Thermalloy, Inc.
UNIX is a registered trademark of X/Open Company, Ltd.
ZBT and Zero Bus Turnaround are trademarks of Integrated Device Technology, Inc. and the architecture is supported by Micron Technology, Inc. and Motorola, Inc.

All brand names and product names appearing in this document are registered trademarks or trademarks of their respective holders.

Master Selection Guide

Where We Stand. . .

Total Customer Success

Service, speed and facility of response, product quality and reliability are the goals to which we are dedicated. Our commitment to progress such as Six Sigma performance and Cycle Time Reduction are symbolic of a culture in which Total Customer Success is, overwhelmingly, our primary objective.

In today's highly competitive market, selecting the most effective semiconductor components for a given application poses a significant challenge. The range of available functions and the sheer number of components within each unique product line is staggering. Add to this the number of vendors capable of satisfying a portion of the overall system demands and the selection of a cost–effective component complement can be as time consuming as the design of the system itself.

This is where Motorola occupies a unique position among semiconductor manufacturers — one that can significantly shorten the product selection cycle. Please consider these facts:

As a manufacturer of semiconductors since the very beginning of the technology, Motorola has emerged as a leading supplier of such components to the world market.

Motorola's product line is the *broadest* in the industry, capable of filling 75–80% of the many applications for semiconductor devices.

In each of its various product categories, Motorola is a recognized leader, with leading edge products as well as commodity products for mass applications.

Motorola's vast network of sales offices and distributors, augmented by manufacturing centers throughout the world, not only ensures easy communications, cost–effective pricing and rapid service, but guarantees a continuing stream of state–of–the–art products based on world–wide experience and demand.

How To Use This Guide. . .

This Selection guide is arranged to provide three–way assistance to engineers and technicians in making a first–order selection of components best suited for a specific circuit or system design.

If you have a device number that needs identification or if you want to know if Motorola manufactures a particular device type:

1. Turn to the Device Index for a complete listing of Motorola products, and the page numbers where more detailed information is given for these products.

If you have a device name or acronym and wish to know if Motorola makes such a device:

2. Look for it in the Subject Index.

If you want an overview of Motorola products for a specific product category:

3. Refer to the General Subject Reference Guide located towards the front of this publication, or use the table of contents located at the front of each section.

On the next page we have provided a table, listing the new Motorola Business Groups (MBG) and Business Units (MBU). Use this table as a reference for the current Motorola Semiconductor Products Sector realignment.

Telephone Assistance, North America Only

For literature requests or general product information, call toll–free any weekday, 8:00 a.m. to 4:00 p.m., MST.

To order technical literature by specific document title, i.e., SGXX/D or DLXXX/D, or by part number only, call

1–800–441–2447

Non–North American Locations

Please contact your local Motorola Sales Office or Authorized Distributor.

Motorola Semiconductor Business Groups

Consumer Systems Group (CSG)	Networking & Computing Systems Group (NCSG)	Semiconductor Components Group (SCG)	Transportation Systems Group (TSG)	Wireless Subscriber Systems Group (WSSG)
Motorola Semiconductor Business Units				
Advanced Digital Consumer Division (ADCD) *(Formerly ASIC/ Semi–Custom/CACTG)*	**Communication Transmission and Access Division** *(Formerly Wireline Division/MDAD)*	**Consumer Components**	**Body Electronics/ Strategic Industrial Power Moduled Division**	**Wireless Messaging Division** *(Formerly Wireless Division/DSP/CACTG)*
Displays Division	**Fast Static RAMS** *(Formerly MMTG)*	**Networking and Computing Components** (Includes PPD/OSPD/ Analog/Logic Components)	**Intelligent Transportation Systems**	**Wireless Subscriber — Platforms/Systems Division** *(Formerly Wireless Division/DSP/CACTG)*
Personal and PC Media Division	**Networking Systems Division** *(Formerly Networking & Communications/RISC/ MMTG)*	**Transportation Components** (Includes PPD/OSPD/ Analog/Logic Components)	**Powertrain System Division** *(Formerly AMCU/ Advanced Microcontroller Division/MCTG)*	**Wireless Subscriber — RF/IF Division** *(Formerly Analog IC Division/Linear)*
Smart Information Transfer Division *(Formerly CSIC/CSIC Microcontroller & Smartcard Division)*	**Non–Volatile Memory Division** *(Formerly Dynamic Memory Products)*	**Wireless Subscriber Components** (Includes PPD/OSPD/ Analog/Logic Components)	**Safety and Chasis System Division** *(Formerly 68hc11 Custom MCU Solutions Division/ MCTG)*	**New Media Operation Division**
Storage and Image Division *(Formerly Imaging & Storage Division/ Tactical Marketing/ Hi–Performance/CACTG)*	**Personal Computing Division** *(Formerly RISC Microprocessor Division/MMTG)*	**Distribution Components** (Includes PPD/OSPD/ Analog/Logic Components)	**Sensors Products Division**	
CSG Core Technologies Center *(Formerly Software & Development Tools)*	**Wireless Infrastructure Systems** *(Formerly RFSD Products Division)*	**Electronic Manufacturer's Service Industry**	**Strategy and Advanced Systems Lab**	

This table represents the new Motorola Semiconductor Business Groups and Business Units. The Subject Index at the back of this book has not been completely changed to reflect the new reorganization.

General Subject Reference Guide

A

A–D Converters 4.5–2
Acceleration Sensors 5.8–12
Accelerometers 5.8–12
Adjustable Output Regulators 4.2–4
ADPCM Transcoder 4.7–42
Advanced Comb Filter–II (ACF–II) 4.8–11
Advanced Digital Consumer (ADC) Division 1.1–1
Advanced Digital Consumer Products 1.0–1
Advanced NTSC Comb Filter 4.8–10
Advanced PAL/NTSC Encoder 4.8–17
AGC Amplifiers 4.1–7
Alternator Regulators 4.9–3
Alternator Voltage Regulator 4.9–14
Amplifier 3.1–9
Amplifiers – Miscellaneous 4.1–8
Amplifiers and Comparators Package Overview 4.1–10
Amplifiers, CATV Distribution, RF 5.9–57–5.9–62
Amplifiers, Integrated Power, RF 5.9–6–5.9–7
Amplifiers, RF 5.9–51–5.9–55
Amplifiers, Wideband Linear, RF 5.9–54
Analog Circuits Package Overview 4.10–4
Analog Front End ICs 4.7–27
Analog MPQ Table 4.11–5
Analog-to-Digital Converter (ADC) 2.6–13
Analog-to-Digital Conversion Modules 2.6–13
AND/NAND Gates 3.1–21
Arithmetic Operators 3.1–9
Asynchronous Fast Static RAMs 2.8–3
ATM 2.9–1
ATM Cell Processor 2.9–3
ATM Network 2.9–2
Audio/Servo Loads, Bipolar Power Transistors 5.5–8
Automotive Direction Indicator 4.9–10
Automotive Electronic Circuits Package Overview 4.9–17
Automotive ISO 9141 Serial Link Driver 4.9–12
Automotive Wash Wiper Timer 4.9–11

B

Balanced Modulator/Demodulator 4.7–4, 5.9–14
Base Stations RF 5.9–53–5.9–54
Basic Octal Serial Switch with Serial Peripheral Interface I/O 4.9–16
Battery Management Circuits 4.2–36
Bipolar Amplifiers 4.1–8
Bipolar Dual Operational Amplifiers 4.1–8
Bipolar Dual Voltage Comparators 4.1–8
Bipolar Power Electronic Lamp Ballasts 5.5–9
Bipolar Power Transistors 5.5–2
Bipolar Power Transistors, Audio 5.5–8
Bipolar Power Transistors, Audio/Servo Loads 5.5–8
Bipolar Power Transistors, DPAK 5.5–2, 5.5–12
Bipolar Power Transistors, Electronic Lamp Ballasts 5.5–9
Bipolar Power Transistors, Metal 5.5–7
Bipolar Power Transistors, Plastic 5.5–3, 5.5–4, 5.5–5, 5.5–6

B (continued)

Bipolar Telecommunication Circuit Summary 4.7–45
Bipolar Transistors, Power, RF 5.9–41–5.9–47
Block Erasable Flash EEPROM (BEFLASH) 2.6–13
Bounce Eliminator 3.1–9
Brushless DC Motor Controllers 4.3–4
Buffers 3.1–9
Buffers, 3–State 3.1–9
Bus Interface 3.1–10

C

C Compiler Packages 2.1–26
C–Quam AM Stereo Decoders 4.8–2
Cache/Memory Management Units 2.3–3
Calling Line ID Receiver Evaluation Kit 4.7–43
Calling Line Identification (CLID) Receiver with Ring Detector 4.7–43
Case Outlines, Logic 3.1–50
CATV Distribution Amplifiers, RF 5.9–57–5.9–62
CBM 3.1–12
Central Processing Unit 2.6–2
Central Processing Units 2.6–12
Cheval 5.3–7
Clock Distribution Chips 3.1–12
Clock Drivers 3.1–12
Closed Loop Brushless Motor Adapter 4.3–7
CMOS A–D Converters 4.5–2
CMOS D–A Converters 4.5–3
CMOS Display Drivers 4.6–7
CMOS Dual Programmable Comparators 4.1–8
CMOS Dual Programmable Operational Amplifiers 4.1–8
CMOS Dual Video Amplifiers 4.1–8
CMOS Micropower DC–to–DC Converters 4.2–18
CMOS Quad Programmable Operational Amplifiers 4.1–8
Coax Cable Drivers 3.1–13
Comb Filters 4.8–3
Communication Bus Circuits 4.9–3
Communication Modules 2.6–13
Communications Circuits Package Overview 4.7–51
Comparators 3.1–14, 4.1–9
Complex Gates 3.1–22
Configurable Timer Module (CTM) 2.6–12
Configuration and Order Information for MMDS/MMEVS 2.5–13
Configuration and Order Information for Other Motorola Development Tools (EVM/EVS/ICS) 2.5–16
Configuration and Order Information for Programmers 2.5–17
Consumer Electronic Circuits Package Overview 4.8–18
Continuously Variable Slope Delta (CVSD) Modulator/Demodulator 4.7–44
Converters 3.1–14
Coprocessors 2.2–10
Cordless Universal Telephone Interface 4.7–31
Counters 3.1–14
CPU16 ..... 2.6–12
CPU32 ..... 2.6–12
Critical Conduction SMPS Controller 4.2–26

General Subject Reference Guide

C (continued)

CSIC Microcontroller Division World Wide Web Site 2.5–22
Current Mode Switching Regulator 4.7–41

D

D–A Converters 4.5–3
D2PAK 4.11–5
Data Communication Devices 2.2–12
Data Conversion Package Overview 4.5–4
DC Servo Motor Controller/Driver 4.3–8
Decoder 3.1–18
Decoder/Demultiplexers 3.1–16
Decoders 3.1–16
Deflection 4.8–3
Demultiplexers 3.1–16
Detectors 3.1–17
Device Nomenclatures, Logic 3.1–46
Digital I/O and Special Functions 2.6–2
Digital Signal Processors 2.1–1, 2.1–2
Digital-to-Analog Conversion 2.6–2
Digitally Controlled Video Processor for Multimedia Applications 4.8–6
Direct Memory Access (DMA) 2.6–13
Discrete Products 5.0–1
Discrete Transistors, RF 5.9–31–5.9–49
Discrete Wireless Transmitter Devices, RF 5.9–37
Display Decode Drivers 3.1–17
Dividers 3.1–17
DMA Controllers 2.2–10
DO–41, Zener Diodes 5.2–7
Double–Ended Controllers 4.2–16
DPAK 4.11–5, 5.5–2, 5.5–5, 5.5–12
DPAK–Surface Mount, Bipolar Power Transistors 5.5–2, 5.5–5
Driver 3.1–17
DSP Development Software 2.1–26
DSP Development Tools 2.1–17
DTL Circuits 3.1–48
Dual 16–Bit Linear Codec–Filter 4.7–27
Dual Bipolar Comparators 4.1–9
Dual Channel Controllers 4.2–27
Dual CMOS Comparators 4.1–9
Dual Comparators 4.1–9
Dual High–Side Switch 4.9–7
Dual Operational Amplifier and Dual Voltage Comparator ... 4.1–8
Dual Operational Amplifiers 4.1–3
Dual Timing Circuits 4.10–2
Dual Tone Multiple Frequency Receiver 4.7–18
Dual Universal Asynchronous/Synchronous Receiver Transmitter (DUART) 2.6–13

E

E–Power 5.3–6
Easy Switcher Single–Ended Controllers with On–Chip Power Switch 4.2–15, 4.2–20
ECLinPS 3.1–47

E (continued)

ECLinPS Lite 3.1–47, 3.1–49
EDACs 3.1–17
EIA Standard Line Drivers 4.6–5
EIA Standard Line Receivers 4.6–5
EIA–232–E/V.28 CMOS Drivers/Receivers 4.6–5
Electronic Ignition Circuits 4.9–2
Electronic Telephone 4.7–28
Electronic Telephone Circuits 4.7–28
Embedded Controllers 2.2–5
Encoder/Decoder 3.1–18
Encoders 3.1–17, 4.8–3
Enhanced Ethernet Transceiver 4.6–2
Entertainment Radio Receiver Circuits 4.8–2
Entertainment Radio Receiver Circuits – Audio Amplifiers ... 4.8–2
Entertainment Receiver RF/IF 4.8–2
Evaluation Boards, RF Monolithic Integrated Circuits 5.9–3
Evaluation Modules 2.1–17
Expanders 3.1–18
External Active Modem Chip Set and Software 4.7–24
80 mA Micropower Voltage Regulator 4.2–5

F

FACT 3.1–47
Family Wideband General Purpose Amplifiers 4.1–7
FAST 3.1–46
Fast Static RAM Modules 2.8–4
Fast Static RAMs 2.8–2
FETs, TMOS Power MOSFETs 5.4–1
Fiber Distributed Data Interface 2.2–13
Field Programmable Gate Array 3.1–18
Field Programmable Gate Arrays (FPGA) 3.1–1
Field–Effect Transistors, Small Signal 5.1–13
Fixed Voltage Medium and Low Dropout Regulators 4.2–3
Flash EEPROM (FLASH) 2.6–13
Flash Memory 2.8–5
Flip–Flop/Registers 3.1–18
Flip–Flops 3.1–18
Footprints for Soldering 5.10–5
Freeware Bulletin Board 2.5–22
Fuzzy Logic 2.6–26

G

GaAs Power Amplifier Support IC 4.2–11
Gates
- AND/NAND 3.1–21
- Complex 3.1–22
- NOR 3.1–24
- OR 3.1–24
- XOR/XNOR 3.1–23

General Purpose I/O 2.2–12
General Purpose Timer (GPT) 2.6–12

H

Hex EIA–485 Transceiver with Three–State Outputs 4.6–4
HF Transistors, RF 5.9–41

General Subject Reference Guide

H (continued)

High Definition TV 1.1–4
High Frequency Amplifiers 4.1–7
High Side TMOS Driver 4.9–9
High–Side Driver Switch 4.3–3
High–Speed CMOS 3.1–47
High–Speed Modem Chip Sets 4.7–23
How to Access Freeware 2.6–26
HTL Circuits 3.1–48

I

ICU 3.1–25
IEEE 802.3 Transceivers 4.6–6
Industrial Control Unit 3.1–25
Infrared Transceiver 4.7–4, 5.9–14
Inkjet Drivers 4.6–6
Integrated Circuits, RF Monolithic 5.9–3–5.9–9
Integrated Circuits, RF Monolithic, Evaluation Boards 5.9–3
Integrated Power Amplifers, RF 5.9–6–5.9–7
Integrated Processors 2.2–7
Integrated Services Digital Network 4.7–18
Integration Modules 2.6–12
Interface Circuits Package Overview 4.6–8
Intermodule Bus Peripherals 2.6–12
Inverter/Buffers, 2–State 3.1–25
Inverters 3.1–25
ISA Passive Modem Chip Set and Software 4.7–25
ISDN Voice/Data Circuits 4.7–18
ISO 8802–3[IEEE 802.3] 10BASE–T Transceiver 4.6–3
ISO Serial Link Interface 4.9–15

L

Land Mobile/Portable Amplifiers, RF 5.9–52–5.9–53
Latches 3.1–26
LCX 3.1–48
LDMOS, RF 5.9–6, 5.9–37, 5.9–40, 5.9–44, 5.9–47, 5.9–52–5.9–55
Legacy Converter Box 1.1–2
Line Drivers 4.6–5
Line Receivers 4.6–5
Line Transceivers 4.6–5
Linear Amplifiers, Wideband, RF 5.9–54
Linear Four–Quadrant Multipliers 4.10–2
Linear Transistors, RF 5.9–45–5.9–47
Linear Voltage Regulators 4.2–2
Linear Voltage Regulators – Adjustable Output 4.2–4
Linear Voltage Regulators – Fixed Output 4.2–2
Logic Device Index 3.1–36
Logic Functions 3.1–8
LonWorks Products 2.7–1
Low Dropout Regulator 4.2–9
Low Power DC – 1.8 GHz LNA, Mixer and VCO 5.9–19
Low Power DC – 2.4 GHz Linear Mixer 5.9–20
Low Side Protected Switch 4.9–8
Low– and High–Side Switches 4.9–3

L (continued)

LS – Low Power Schottky 3.1–46
LVQ 3.1–48

M

M6800 Series Microprocessors and Peripherals 2.6–10
M68000 Family 2.2–1
M68300 Family 2.6–19
M68HC05 CSIC Family 2.5–2
  M68HC05 Industry Solutions 2.5–2
    68HC05 General–Purpose Microcontrollers 2.5–2
    Automotive 2.5–2
    Computer 2.5–2
    Consumer 2.5–3
    Industrial 2.5–3
    Low–Voltage Microcontrollers 2.5–2
    Telecommunications 2.5–3
    Television and Video 2.5–3
M68HC05 Family 2.6–22
M68HC05 Microcontroller Development Tools
  Choosing Between the MMEVS and MMDS 2.5–13
  Modular Architecture Benefits 2.5–13
M68HC08 Family 2.5–12
M68HC11 Family 2.6–2, 2.6–22
M68HC16 Family 2.6–14
M88000 RISC Family 2.3–1
Masked ROM (MRM) 2.6–13
Math Coprocessor 2.6–2
MC2681 — Dual Universal Asynchronous Receiver/Transmitter, DUART 2.2–12
MC68000 — The 16-Bit Foundations 2.2–4
MC68008 — An 8-Bit Compatible Competitor 2.2–4
MC68010 — A Virtual Memory Enhancement 2.2–4
MC68020 — The Original 32-–Bit Performance Standard 2.2–4
MC68030 — The Second Generation 32-Bit MPU 2.2–3
MC68040 — Third-Generation 32-Bit Microprocessor 2.2–3
MC68060 — Superscaler 32-Bit Microprocessor 2.2–3
MC68184 — Broadband Interface Controller 2.2–10
MC68185 — Twisted-Pair Modem 2.2–11
MC68194 — Carrierband Modem 2.2–11
MC68195 — LocalTalk Adaptor 2.2–11
MC68230 — Parallel Interface/Timer, PI/T 2.2–12
MC68302 — Integrated Multiprotocol Processor 2.2–8
MC68306 — Integrated 68EC00 Processor 2.2–8
MC68330 — Integrated CPU32 Processor 2.2–8
MC68331 — 32-Bit Microcontroller 2.2–8
MC68332 — 32-Bit Microcontroller 2.2–9
MC68334 — 32-Bit Microcontroller 2.2–9
MC68340 — Integrated Multiprotocol Processor with DMA 2.2–9
MC68440 — Dual Direct Memory Access Controller, DDMA 2.2–10
MC68450 — DMA Controller, DMAC 2.2–10
MC68605 — X.25 Protocol Controller, XPC 2.2–11
MC68606 — Multi-Link LAPD Controller CCITT Q.920/Q.921, LAPD 2.2–11
MC68681 — Dual Universal Asynchronous Receiver/Transmitter, DUART 2.2–12

General Subject Reference Guide

M (continued)

MC68824 — Token Bus Controller, TBC 2.2–10
MC68836 — FDDI Clock Generator 2.2–13
MC68837 — Elasticity Buffer and Link Manager 2.2–13
MC68838 — Media Access Controller 2.2–13
MC68839 — FDDI System Interface 2.2–13
MC68851 — Paged Memory Management Unit, PMMU 2.2–10
MC68881 — A Floating Point Coprocessor 2.2–10
MC68882 — Enhanced Floating Point Coprocessor 2.2–10
MC68901 — Multifunction Peripheral, MFP 2.2–12
MC68EC000 — Low-Powered HCMOS Embedded Controller 2.2–6
MC68EC020 — 32-Bit Embedded Controller 2.2–6
MC68EC030 — 32-Bit Enhanced Embedded Controller 2.2–6
MC68EC040 — 32-Bit High-Performance Embedded Controller 2.2–5
MC68F333 — 32-Bit Microcontroller 2.2–9
MC68HC000 — A Micropower Alternative 2.2–4
MC68HC001 — Low Power HCMOS 8-/16-/32-Bit Microprocessor 2.2–4
MC68HC05 Microcontrollers 2.5–6
MC88100RC 2.3–2
MC88200RC — 16-Kilobyte Cache/Memory Management Unit 2.3–3
MECL 10H 3.1–46
MECL 10K 3.1–46
MECL III 3.1–48
Medium Power Transistors, RF 5.9–37
Memory Modules 2.6–13
Memory Products 2.8–1
Memory Support 3.1–27
Metal 5.5–7
Metal Gate 14000 Series CMOS 3.1–47
Metal TO–204AA, TO–204AE, Bipolar Power Transistors ... 5.5–7
Mfax – Touch–Tone FAX for Technical Data 6.1–1
MI–Bus Interface Stepper Motor Controller 4.9–10
Micro–8 ..... 4.11–5
Microcomputer Components, Single-Chip Microcontrollers (MCU) 2.5–1, 2.6–1
Microcontroller Development Tools 2.5–13, 2.6–22
Microcontroller Electronic Bulletin Board 2.6–26
Micropower smallCAP Voltage Regulators with On/Off Control 4.2–7
Micropower Undervoltage Sensing Circuits 4.2–32
Micropower Undervoltage Sensing Circuits with Programmable Output Delay 4.2–33
Micropower Voltage Regulator for External Transistor 4.2–6
Micropower Voltage Regulators for Portable Applications ... 4.2–5
Microprocessor Voltage Regulator and Supervisory Circuit 4.2–9
Microprocessors 2.2–2, 2.3–2
Microwave Transistors, RF 5.9–44–5.9–45
Miscellaneous Logic 3.1–27
Modular Microcontroller Families 2.6–22
Modular Microcontrollers 2.6–12
Modular Power Systems 5.3–1
Modulator 4.8–4

M (continued)

Module Part Numbering System 5.3–2
Monitor Subsystem 4.8–4
Monolithic Integrated Circuits, RF 5.9–3–5.9–9
MOSFET/IGBT Drivers 4.2–42
MOSFETs, Power, RF 5.9–38–5.9–40
MOSFETs, Power, TMOS 5.4–1
Motor Controllers 4.3–4
Motorola Programmable Logic (MPA) 3.1–18
Motorola SPS World Marketing Internet Server 6.1–1
Motorola Technical Training Courses 6.1–6
Motorola Programmable Array (MPA) 3.1–1
MPA Design System 3.1–1
MPC105 PCI Bridge/Memory Controller 2.4–15
MPC106 PCI Bridge/Memory Controller 2.4–16
MPC601 RISC Microprocessor 2.4–2
MPC602 RISC Microprocessor 2.4–3
MPC603 RISC Microprocessor 2.4–3
MPC603e RISC Microprocessor 2.4–6
MPC604 RISC Microprocessor 2.4–9
MPC604e RISC Microprocessor 2.4–9
MPC620 RISC Microprocessor 2.4–13
Multi-Channel Communications Interface (MCCI) 2.6–13
Multi–integrated Devices, Small Signal 5.1–27
Multifunction Very Low Dropout Voltage Regulator 4.9–13
Multiplexer/Data Selectors 3.1–27
Multipliers 4.10–2
Multistandard Video/Timebase Processor 4.8–9
Multivibrators 3.1–29

N

NAND Gates 3.1–21
Narrowband Dual Conversion Receivers – FM/FSK – VHF 4.7–3, 5.9–13
Narrowband FM Coilless Detector IF Subsystem 4.7–9, 5.9–22
Narrowband FM Receiver 4.7–8, 5.9–18
Narrowband Single Conversion Receivers – VHF ... 4.7–3, 5.9–13
Network Devices 2.2–10
Neuron Chips 2.7–2
NOR Gates 3.1–24

O

Octal Serial Switch 4.9–6
On-Chip Memory 2.6–2
On-Line Help 2.5–22, 2.6–26
One Volt SMARTMOS Rail–to–Rail Dual Operational Amplifier 4.1–6
One-Time Programmable (OTP) / Emulator MCUs 2.5–9
Operational Amplifiers 4.1–2
OR Gates 3.1–24
Ordering Information, Logic 3.1–46
Oscillator/Timers 3.1–30
Oscillators 3.1–29
Over/Undervoltage Protection Circuit 4.2–31
Overvoltage Crowbar Sensing Circuit 4.2–31
120 mA Micropower Voltage Regulator 4.2–6

General Subject Reference Guide

P

Packaging Specifications 5.11–7
Parity Checkers 3.1–30
PBX Architecture (Analog Transmission) 4.7–14
PCI (peripheral component interconnect) bus 2.4–15
PCI Passive Modem Chip Set and Software 4.7–26
PCM Monocircuits Codec–Filters (CMOS LSI) 4.7–14
Peripheral Drivers 4.6–6
Phase–Locked Loop 3.1–30
Phase–Locked Loop Components 4.7–48, 5.9–26
Pin Conversion, Logic 3.1–83
PLCC 4.11–5
PLL Frequency Synthesizers 4.7–48, 5.9–26
PLL Tuning Circuit with 3–Wire Bus 4.8–15
PLL Tuning Circuit with DC/DC Converter and I2C Bus 4.8–15
PLL Tuning Circuit with I2C Bus 4.8–14, 4.8–15, 4.8–16
PLL Tuning Circuits with 3–Wire Bus 4.8–13
Power Audio Output Stage 5.5–8
Power Bipolar Transistors, RF 5.9–41–5.9–47
Power Controllers 4.3–2
Power Factor Controllers 4.2–28, 4.2–29
Power Management Controller 4.2–10
Power MOSFETs, RF 5.9–38–5.9–40
Power MOSFETs, TMOS 5.4–1
Power Supply Circuits Package Overview 4.2–44
Power/Motor Control Circuits Package Overview 4.3–11
PowerPC RISC Family 2.4–1
Precision Low Voltage References 4.4–2
Prescalers 3.1–30
Pressure Sensors, 4–Pin 5.8–6, 5.8–8, 5.8–9, 5.8–10
Pressure Sensors, 6–Pin 5.8–6, 5.8–9
Pressure Sensors, 8–Pin 5.8–9
Pressure Sensors, Compensated and Calibrated (On–Chip) 5.8–7, 5.8–9
Pressure Sensors, Compensated and Calibrated, Medical Grade 5.8–7
Pressure Sensors, High Impedance 5.8–7
Pressure Sensors, Packaging Options 5.8–14
Pressure Sensors, Signal Conditioned 5.8–7, 5.8–9
Pressure Sensors, Uncompensated 5.8–7
Programmable Logic 3.1–1, 3.1–18
Programmable Telephone Line Interface Circuit with Loudspeaker Amplifier 4.7–32
Programmble Delay Chips 3.1–31
Pulse-Width Modulation 2.6–2

Q

Quad Bipolar Comparators 4.1–9
Quad CMOS Comparators 4.1–9
Quad Comparators 4.1–9
Quad Fuel Injector Driver 4.9–5
Quad Operational Amplifiers 4.1–4
Quad Programmable Operational Amplifier 4.1–8
Queued Analog-to-Digital Converter (QADC) 2.6–13
Queued Serial Module (QSM) 2.6–13

R

RAMs, Logic 3.1–31
Receiver Functions, RF 5.9–4–5.9–5
Receivers 3.1–31
Rectifier Numbering System 5.6–2
Rectifiers 5.6–1
Rectifiers, Application Specific 5.6–3
Rectifiers, Axial Lead Schottky 5.6–5
Rectifiers, Axial Lead Ultrafast 5.6–8
Rectifiers, Fast Recovery 5.6–10
Rectifiers, General Purpose 5.6–10
Rectifiers, MEGAHERTZ 5.6–3, 5.6–9
Rectifiers, POWERTAP II Schottky 5.6–7
Rectifiers, POWERTAP II Ultrafast 5.6–9
Rectifiers, POWERTAP III Schottky 5.6–7
Rectifiers, Schottky 5.6–3, 5.6–4
Rectifiers, Surface Mount 5.6–8
Rectifiers, Surface Mount Schottky 5.6–4
Rectifiers, TO–218 Schottky 5.6–6
Rectifiers, TO–218 Ultrafast 5.6–9
Rectifiers, TO–220 and D2PAK Schottky 5.6–5
Rectifiers, TO–220 Type Ultrafast 5.6–9
Rectifiers, TO–247 Schottky 5.6–6
Rectifiers, TO–247 Ultrafast 5.6–9
Rectifiers, Ultrafast 5.6–8
Rectifiers, UltraSoft 5.6–3, 5.6–7
Register Files 3.1–32
Registers 3.1–32
RF Amplifiers 5.9–51–5.9–55
RF Base Stations 5.9–53–5.9–54
RF CATV Distribution Amplifiers 5.9–57–5.9–62
RF Communications 4.7–2, 5.9–12
RF Discrete Transistors 5.9–31–5.9–49
RF Front End ICs 4.7–2, 5.9–12
RF HF Transistors 5.9–41
RF Integrated Power Amplifiers 5.9–6–5.9–7
RF Land Mobile/Portable Amplifiers 5.9–52–5.9–53
RF Linear Transistors 5.9–45–5.9–47
RF Medium Power Transistors 5.9–37
RF Microwave Transistors 5.9–44–5.9–45
RF Monolithic Integrated Circuits 5.9–3–5.9–9
RF Power Bipolar Power Transistors 5.9–41–5.9–47
RF Power MOSFETs 5.9–38–5.9–40
RF Products 5.9–1, 5.9–2
RF Receiver Functions 5.9–4–5.9–5
RF Small Signal Transistors 5.9–32–5.9–36
RF Switching 5.9–4
RF Transmitter Functions 5.9–5–5.9–8
RF UHF Transistors 5.9–42–5.9–43
RF VHF Transistors 5.9–41–5.9–42
RF, LDMOS 5.9–6, 5.9–7, 5.9–37, 5.9–40, 5.9–44, 5.9–47, 5.9–52–5.9–55
RF, Micro–8 ..... 5.9–5, 5.9–9
RF, PFP–16 ..... 5.9–6–5.9–7, 5.9–9
RF, PLD–1 ..... 5.9–37
RF, PLD–1.5 ..... 5.9–40

General Subject Reference Guide

R (continued)

RF, SC–70/SOT–323 ..... 5.9–33, 5.9–35–5.9–36
RF, SC–70ML/SOT–363 ..... 5.9–33, 5.9–35–5.9–36
RF, SC–90/SC–75 ..... 5.9–33, 5.9–35–5.9–36
RF, SO–16 ..... 5.9–5–5.9–9
RF, SO–8 ..... 5.9–4–5.9–9, 5.9–34–5.9–36, 5.9–43
RF, SOT–143 ..... 5.9–4–5.9–5, 5.9–33, 5.9–35–5.9–36, 5.9–37
RF, SOT–23 ..... 5.9–33, 5.9–35–5.9–36
RF, SOT–89 ..... 5.9–37
RF, TQFP–48 ..... 5.9–5, 5.9–9
RF, TSSOP–16 ..... 5.9–5, 5.9–7–5.9–9
RF, TSSOP–20 ..... 5.9–5, 5.9–9
RF, TSSOP–20HS 5.9–7, 5.9–9

S

SCG Surface Mount Information 5.10–2
Schmitt Triggers 3.1–32
Schottky Diodes, Small Signal 5.1–22
SCSI Bus Terminators 3.1–32
SCSI Regulator 4.2–12
Second Generation S/T–Interface Transceivers 4.7–19
Second Generation U–Interface Transceivers 4.7–19
Semiconductor Components Group 5.0–1
Sensors 5.8–1
Serial Communication 2.6–2
Serial EPROMs 3.1–32
Shift Registers 3.1–32
Sigma–Delta A–D Converters 4.5–2
Sigma–Delta D–A Converters 4.5–3
Silicon Controlled Rectifiers (SCRs), Thyristors 5.7–2
Single Bipolar Comparators 4.1–9
Single CMOS Comparators 4.1–9
Single Comparators 4.1–9
Single Operational Amplifiers 4.1–2
Single Timing Circuits 4.10–2
Single-Chip Integration Module (SCIM) 2.6–12
Single–Ended Controllers 4.2–13
Single–Ended Controllers with On–Chip Power Switch 4.2–15
Single–Ended GreenLine Controllers 4.2–22
Small Signal Bipolar Transistors 5.1–2
Small Signal Integrated Relay/Solenoid Driver 5.1–27
Small Signal Multi–integrated Devices 5.1–27
Small Signal Transistors 5.1–1
Small Signal Transistors, RF 5.9–32–5.9–36
Small Signal Tuning and Switching Diodes 5.1–18, 5.1–24
Small Signal, FETs 5.1–16
Small Signal, JFETs 5.1–13
Small Signal, SC–59 ..... 5.1–7, 5.1–25
Small Signal, SC–70/SOT–323 ..... 5.1–7, 5.1–17, 5.1–23, 5.1–25
Small Signal, Schottky Diodes 5.1–22, 5.1–23
Small Signal, SOT–223 ..... 5.1–11
Small Signal, SOT–23 ..... 5.1–6, 5.1–16, 5.1–19, 5.1–21, 5.1–25, 5.1–27
Small Signal, SOT–363 ..... 5.1–7, 5.1–23
Small Signal, SOT–416/SC–90 ..... 5.1–8

S (continued)

Small Signal, TMOS MOSFETs 5.1–15
Small Signal, TO–226AA (TO–92) 5.1–2, 5.1–13, 5.1–15
Small Signal, TO–226AC (TO–92) 5.1–18, 5.1–21, 5.1–23, 5.1–25
Small Signal, TO–226AE (TO–92) 5.1–2
Small Signal, TO–236AB 5.1–6, 5.1–16, 5.1–21, 5.1–23, 5.1–25
Smoke Detectors (CMOS) 4.10–3
SO–8, Bipolar Power Transistors 5.5–2, 5.5–4
SOE Case, Ceramic, RF 5.9–34
SOIC 4.11–5
SOT–223, Bipolar Power Transistors 5.5–2, 5.5–5
SOT–23 (5 Pin) 4.11–5
SOT–89 (3 Pin) 4.11–5
SOT–89 (5 Pin) 4.11–5
Speakerphone Integrated Circuits 4.7–39
Speakerphones 4.7–34
Special Function Circuits 4.9–4
Special Logic Circuits 3.1–48
Special Regulators 4.2–8
Special Switching Regulator Controllers 4.2–27
Specialized Control Modules 2.6–13
Speech Networks 4.7–30
Standard Definition TV 1.1–3
Standby RAM (SRAM) 2.6–13
Standby RAM with TPU Emulation (TPURAM) 2.6–13
Stepper Motor Driver 4.3–9
Subscriber Loop Interface Circuit (SLIC) 4.7–13
Supervisory Circuits 4.2–31
Surface Mount Information 5.10–2
Surface Mount Products, Bipolar Power Transistors 5.5–2, 5.5–5
Surface Mount Products, Rectifiers 5.6–4
Surface Mount Products, RF 5.9–4–5.9–9, 5.9–33–5.9–36, 5.9–37, 5.9–43
Surface Mount Products, Small Signal 5.1–16, 5.1–19, 5.1–25, 5.1–26
Surface Mount Products, Thyristors 5.7–7
Surface Mount Products, TVS/Zeners 5.2–3, 5.2–8
Surmetic 30, Transient Voltage Suppressors 5.2–2
Surmetic 40, Zener Diodes 5.2–7
Switching Regulator Control Circuits 4.2–13
Synthesizers 3.1–34
System Integration Module (SIM) 2.6–12
16 Pin 3&3 VersaPower 5.3–4
16 Pin VersaPower 5.3–3

T

Tape and Reel Configurations 4.11–2
Tape and Reel Information Table 4.11–4
Tape and Reel Specifications 5.11–2
Tape and Reel, Logic 3.1–84
Tape/Reel and Ammo Pack 4.11–5
Technical Data and Literature 6.1–2
Technical Data Services 6.1–1
Telecommunications 4.7–13

General Subject Reference Guide

T (continued)

Telephone Accessory Circuits 4.7–41
Telephone Accessory Circuits – Audio Amplifiers 4.7–41
Telephone Line Interface 4.7–33
Telephone Line Interface and Speakerphone Circuit 4.7–38
Telephone Speech Network with Dialer Interface 4.7–30
Terminators, SCSI Bus 3.1–32
Third Party Developers for 68HC05 and 68HC705 Family MCUs 2.5–18
Third-Party Development Tools 2.6–27
Third-Party Support 2.6–27
Thyristors, High Voltage Bidirectional TVS Devices 5.7–14
Thyristors, Programmable Unijunction Transistors 5.7–14
Thyristors, Silicon Bidirectional Switch 5.7–14
Thyristors, Silicon Controlled Rectifiers 5.7–2
Thyristors, SOT–223 ..... 5.7–2, 5.7–7
Thyristors, TO–220AB 5.7–4, 5.7–8
Thyristors, TO–225AA 5.7–3, 5.7–7
Thyristors, TO–226AA (TO–92) 5.7–2, 5.7–7
Thyristors, TRIACs, General Purpose 5.7–7
Thyristors, Triggers 5.7–14
Time Processor Unit (TPU) 2.6–12
Timer 2.6–2
Timer Module (TM) 2.6–13
Timers 2.6–12
Timing Circuits 4.10–2
TMOS MOSFETs, Small Signal 5.1–15
TMOS Power MOSFETs 5.4–1
TMOS Power MOSFETs Numbering System 5.4–2
TMOS, D2PAK 5.4–6
TMOS, D3PAK 5.4–7
TMOS, DPAK 5.4–6
TMOS, EZFET 5.4–4
TMOS, IGBT 5.4–8
TMOS, Micro8 HDTMOS 5.4–4
TMOS, SC–70/SOT–323 ..... 5.4–5
TMOS, SMARTDISCRETES 5.4–8
TMOS, SO–8 ..... 5.4–3
TMOS, SOT–223 ..... 5.4–4
TMOS, SOT–23 ..... 5.4–5
TMOS, TO–220AB 5.4–7
TMOS, TO–247 ..... 5.4–7
TMOS, TO–264 ..... 5.4–8
TMOS, TSOP–6 ..... 5.4–5
TO–204AA (TO–3), Bipolar Power Transistors 5.5–2
TO–204AE, Bipolar Power Transistors 5.5–2
TO–218, Bipolar Power Transistors 5.5–2
TO–220 (Isolated), Bipolar Power Transistors 5.5–2, 5.5–6, 5.5–12
TO–220AB, Bipolar Power Transistors 5.5–2, 5.5–3, 5.5–11
TO–220AB, Thyristors 5.7–4, 5.7–8
TO–225, Bipolar Power Transistors 5.5–12
TO–225AA (TO–126), Bipolar Power Transistors 5.5–2
TO–225AA, Bipolar Power Transistors 5.5–4
TO–225AA, Thyristors 5.7–3, 5.7–7

T (continued)

TO–226AA (TO–92), Thyristors 5.7–2, 5.7–7
TO–247, Bipolar Power Transistors 5.5–2
TO–264, Bipolar Power Transistors 5.5–2, 5.5–5
TO–92 ..... 4.11–5
TO–92, Thyristors 5.7–14
Tone Ringers 4.7–29
Transceivers 3.1–34
Transient Voltage Suppressors 5.2–2
Transient Voltage Suppressors, Axial Leaded for Through–hole Designs 5.2–2
Transient Voltage Suppressors, General Purpose 5.2–2
Transient Voltage Suppressors, Mini Mosorb 5.2–2
Transient Voltage Suppressors, Mosorb 5.2–2, 5.2–3
Transient Voltage Suppressors, SMA 5.2–5
Transient Voltage Suppressors, SMB 5.2–5
Transient Voltage Suppressors, SMC 5.2–6
Transient Voltage Suppressors, Surface Mount 5.2–3
Transient Voltage Suppressors, Surmetic 30 ..... 5.2–2
Transient Voltage Suppressors, Surmetic 40 ..... 5.2–2
Transistors, Discrete, RF 5.9–31–5.9–49
Transistors, Medium Power, RF 5.9–37
Transistors, Power Bipolar, RF 5.9–41–5.9–47
Transistors, Power MOSFETs, RF 5.9–38–5.9–40
Transistors, Small Signal, RF 5.9–32–5.9–36
Translators 3.1–34
Transmitter Functions, RF 5.9–5–5.9–8
Transmitters – AM/FM/FSK 4.7–4, 5.9–14
TRIACs, Thyristors 5.7–7
Triple 8–Bit A/D Converter 4.8–7
Tuner PLL Circuits 4.8–4
TV Decoder 4.8–3
TV IF Circuits 4.8–3
TV Picture–in–Picture 4.8–3
TVS/Zeners 5.2–1
TVS/Zeners, Mini Mosorb 5.2–2
TVS/Zeners, Mosorb 5.2–2
TVS/Zeners, SC–59 ..... 5.2–4
TVS/Zeners, SMA 5.2–5
TVS/Zeners, SMB 5.2–5
TVS/Zeners, SMC 5.2–6
TVS/Zeners, SOD–123 ..... 5.2–8
TVS/Zeners, SOT–23 ..... 5.2–3
TVS/Zeners, Surmetic 30 ..... 5.2–2
TVS/Zeners, Surmetic 40 ..... 5.2–2
2–Wire ISDN Universal Digital Loop Transceiver II (UDLT II) 4.7–22
2–Wire Universal Digital Loop Transceiver (UDLT) 4.7–21
24 Pin VersaPower 5.3–5
28–Channel Inkjet Driver 4.6–6
300 Baud FSK Modems 4.7–42

U

U–Interface Transceiver Evaluation Kit 4.7–20
UHF Transistors, RF 5.9–42–5.9–43
UHF, FM/AM Transmitter 4.7–12, 5.9–25

General Subject Reference Guide

U (continued)

Ultrafast Rectifiers 5.6–8
TO–220 Type 5.6–9
UltraSoft Rectifiers 5.6–7
Undervoltage Sensing Circuit 4.2–34
Universal Cordless Phone Subsystem ICs 4.7–3, 5.9–13
Universal Cordless Telephone Subsystem IC 4.7–5, 5.9–15
Universal Cordless Telephone Subsystem IC with Scrambler 4.7–6, 5.9–16
Universal Microprocessor Power Supply Controllers 4.2–27
Universal Motor Speed Controller 4.3–10
Universal Voltage Monitor 4.2–35

V

VCO 3.1–35
Very High Voltage Single–Ended Controller with On–Chip Power Switch 4.2–16
Very High Voltage Switching Regulator 4.2–24, 4.2–25
Very Low Dropout Regulator 4.2–10
VHF – 2.0 GHz Low Noise Amplifier with Programmable Bias 5.9–21
VHF Transistors, RF 5.9–41–5.9–42
Video Capture Chip Sets 4.8–3
Video Circuits 4.8–3
Video Circuits – Miscellaneous 4.8–4
Video Data Converters 4.8–4
Voice Switched Speakerphone Circuit 4.7–34, 4.7–35, 4.7–37
Voice Switched Speakerphone with μProcessor Interface 4.7–36

V (continued)

Voice/Data Communication (Digital Transmission) 4.7–21
Voltage Controlled Oscillator 3.1–35
Voltage References Package Overview 4.4–2
Voltage Regulator/Supervisory 4.2–8
Voltage Regulators 4.9–2

W

Wideband (FM/FSK) IFs 4.7–2, 5.9–12
Wideband FM IF Subsystem 4.7–11, 5.9–24
Wideband FM IF System 4.7–10, 5.9–23
Wideband Linear Amplifiers, RF 5.9–54
Wideband Single Conversion Receivers – VHF 4.7–2, 5.9–12

X

XNOR Gates 3.1–23
XOR Gates 3.1–23

Z

Zener Voltage Regulator Diodes, DO–204AH (DO–35) 5.2–7
Zener Voltage Regulator Diodes, DO–41 ..... 5.2–7
Zener Voltage Regulator Diodes, SMA 5.2–8
Zener Voltage Regulator Diodes, SMB 5.2–8
Zener Voltage Regulator Diodes, SOD–123 ..... 5.2–8
Zener Voltage Regulator Diodes, SOT–23 ..... 5.2–8
Zener Voltage Regulator Diodes, Surmetic 40 ..... 5.2–7
Zener Voltage Regulator Diodes, TO–236AB 5.2–8
Zero Voltage Controller 4.3–3
Zero Voltage Switch 4.3–2

Advanced Digital Consumer Products

In Brief . . .

Digital Imaging

Motorola has entered the CMOS imaging market with Advanced CMOS Imager sensors manufactured on the ImageMOS™ technology platform which makes possible totally integrated solutions that combine high performance image sensors with state–of–art analog and digital signal processing — the result is outstanding image quality at very low power consumption.

Digital TV

Motorola and Sarnoff Corporation are jointly developing components for true high–definition digital TV sets; standard–definition, wide aspect–ratio digital TVs; and converter boxes that allow current analog TVs to receive digital signals and display pictures as NTSC. As a Grand Alliance member, Sarnoff brings significant HDTV experience to the market. Motorola provides expertise in host processors and graphics display engines, plus the most modern manufacturing ability.

	Page
Advanced Digital Consumer (ADC) Division	1.1–1
Legacy Converter Box	1.1–2
Standard Definition TV	1.1–3
High Definition TV	1.1–4
Digital Still Camera Systems Solutions	1.1–5
Kodak and Motorola Join Forces	1.1–6
Advanced CMOS Imager Technology	1.1–7

Advanced Digital Consumer (ADC) Division

Motorola Digital Imaging Program

Motorola is committed to providing total system solutions to the emerging digital imaging market (digital cameras, scanners, security, communications, home networks, PDA's, automotive, computer vision, robotics, motion detection, light sensing).

We are partnering with market leaders to develop all of the silicon parts to build imaging systems in the form of a library of building blocks which can be assembled to provide a wide range of imaging system solutions.

The development of CMOS image sensors is a cornerstone technology for providing complete solutions. The ability to integrate functionality onto the image sensor chip allows the possibility of a complete imaging systems.

Motorola has developed an ImageMOS™ technology platform capable of producing high quality sensors, yet allow the integration of standard CMOS analog and digital functional blocks.

In parallel with the ImageMOS™ process development, Motorola is designing several mixed signal building blocks which include:

- 10 bit 5V 3 MHz A/D, SRAM, and USB blocks
- 10 bit 3.3V 24 MHz A/D, CDS (Correlated Double Sampler), PGA (Programmable Gain Amplifier) blocks

These blocks will be integrated on–chip to provide a series of standard products. Products to be announced in 1Q98 include:

- Digital Image Capture Engine
- Image and Video A/D Converter
- Triple Channel Image and Video A/D Converter

Motorola and Sarnoff Form HDTV Coalition

Under the multi–year agreement, Motorola's Semiconductor Products Sector will license Sarnoff's ground breaking digital television research and technology. Sarnoff will also provide Motorola with extensive design assistance and product development resources. Sarnoff is a leader in technology development and standards setting for HDTV in the consumer electronics industry.

Three semiconductor solutions are already in development through the alliance: a digital Standard Definition Television (SDTV) chipset for affordable, entry–level television sets providing digital display quality and a movie–style aspect ratio; a converter–box chipset solution to allow today's analog televisions to display SDTV signals; and a functionally robust chipset solution for HDTV sets delivering five times the picture resolution of SDTV. All three solutions include six–channel Dolby™ Digital Surround Sound. Development boards for SDTV chipset solutions will be available in Q1, 1998. The HDTV chipset is slated for production in Q4.

Additional products under consideration will target both the DVD video disk and Digital Video Camcorder markets. CEMA forecasts that the global market for HDTV–related semiconductors will be $1.6 billion by 2002.

Legacy Converter Box

HDTV

Features:

- ***low cost demodulation***
- ***high quality conversion***
- ***integrated OSD***
- ***lowest system memory***

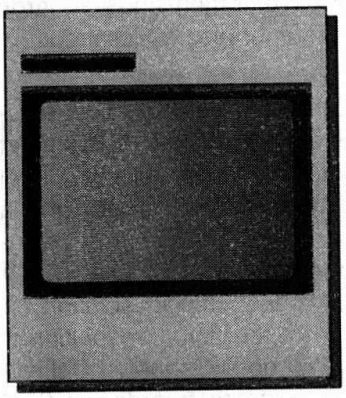

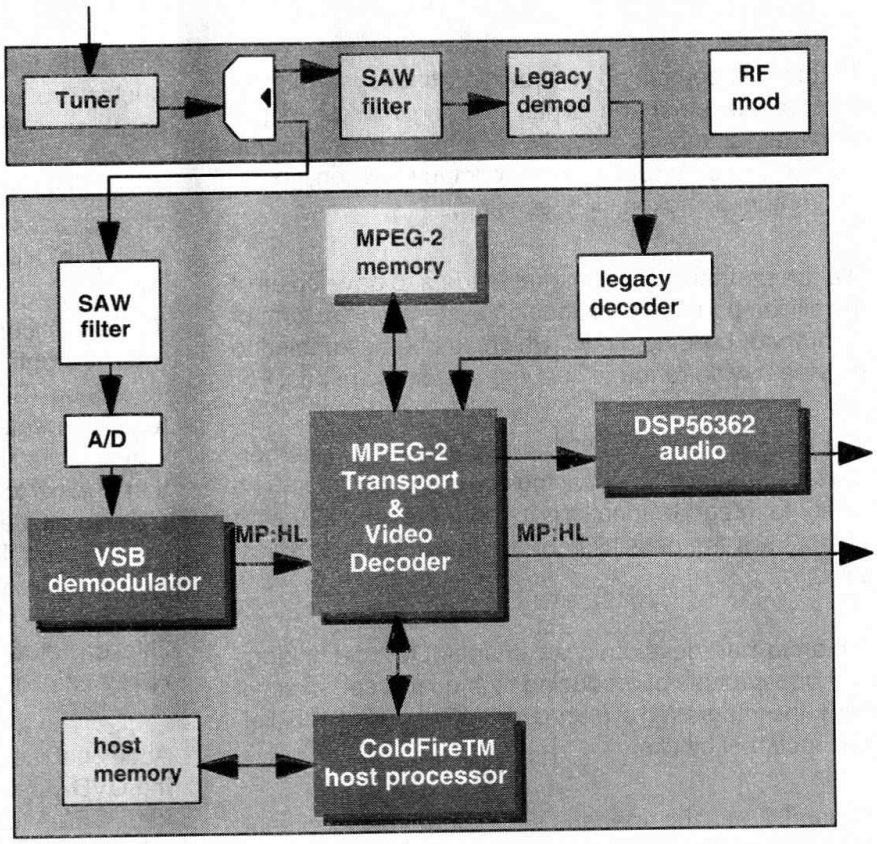

Feast your eyes on Motorola's scalable digital television chipsets, designed to help you meet your cost/performance targets:

Host processor

ColdFire™ processors – the optimum solution for high volume, cost critical, performance oriented applications. Based on variable–length RISC technology that combines the architectural simplicity of conventional 32–bit fixed–length RISC with a memory saving variable–length instruction set.

Audio

pleasing to any audio palate, providing Dolby AC–3, MPEG–2 and DTS capability in one IC.

Video

programmable compression for reducing memory costs while maintaining picture quality.

Demodulation

single–chip digital IC to lower cost; few external components required (A/D and single clock source).

MOTOROLA

Semiconductor Products Sector

Standard Definition TV

Features:

- ***low cost demodulation***
- ***high quality conversion***
- ***state–of–the–art graphics***
- ***low system memory***

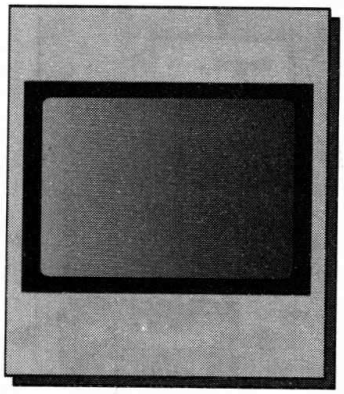

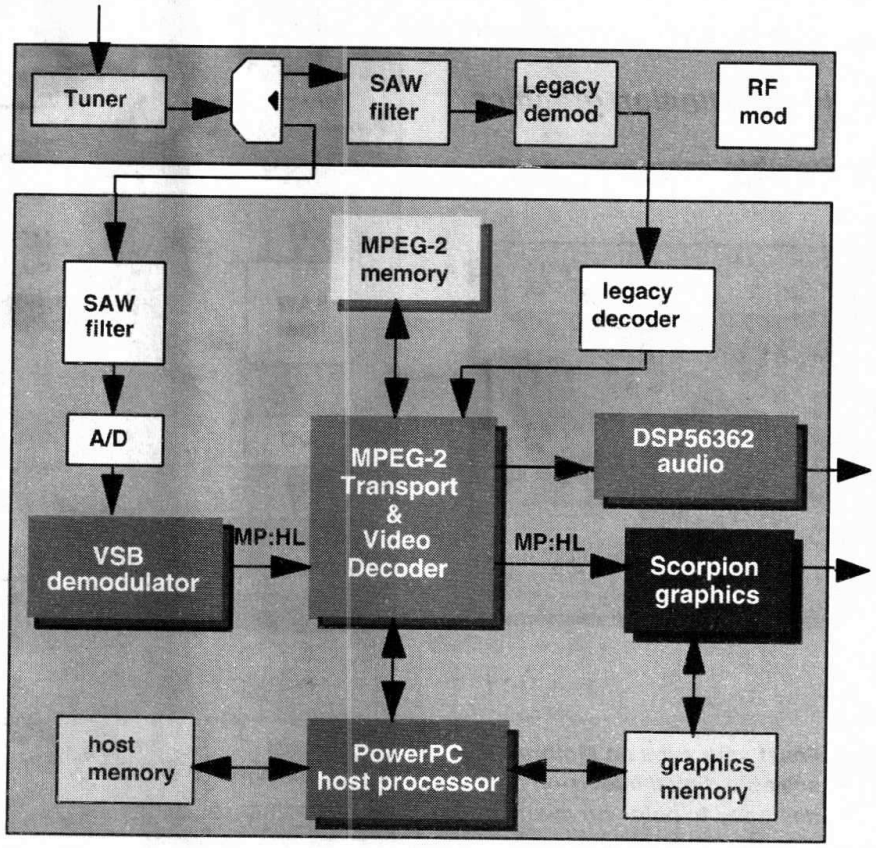

Feast your eyes on Motorola's scalable digital television chipsets, designed to help you meet your cost/performance targets:

Host processor

PowerPC microprocessors are the optimum solution to make performance–hungry applications more user friendly and provide the data rates needed to perform. Designed to support industry–standard operating systems with a wide selection of development tools, emulators and software to aid in new product development.

Graphics

Scorpion provides the ultimate in flexible, television based graphics overlay and mixing capabilities that allow incorporating interactive features such as internet browsing and electronic program guide. Multiple windows of interactive graphics can be diplayed over the traditional video stream allowing users to watch TV and browse other information sources at the same time.

Audio

pleasing to any audio palate, providing Dolby AC–3, MPEG–2 and DTS capability in one IC.

Video

programmable compression for reducing memory costs while maintaining picture quality.

Demodulation

single–chip digital IC to lower cost; few external components required (A/D and single clock source).

MOTOROLA

Semiconductor Products Sector

High Definition TV

Features:

- ***low cost demodulation***
- ***high quality conversion***
- ***high definition graphics***
- ***flexible memory usage***

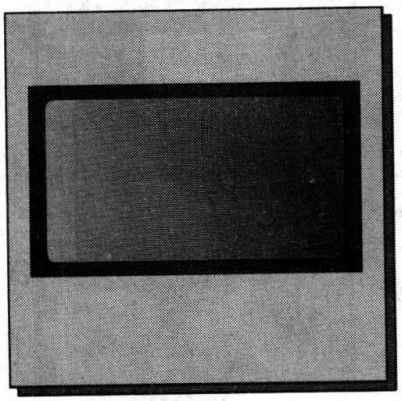

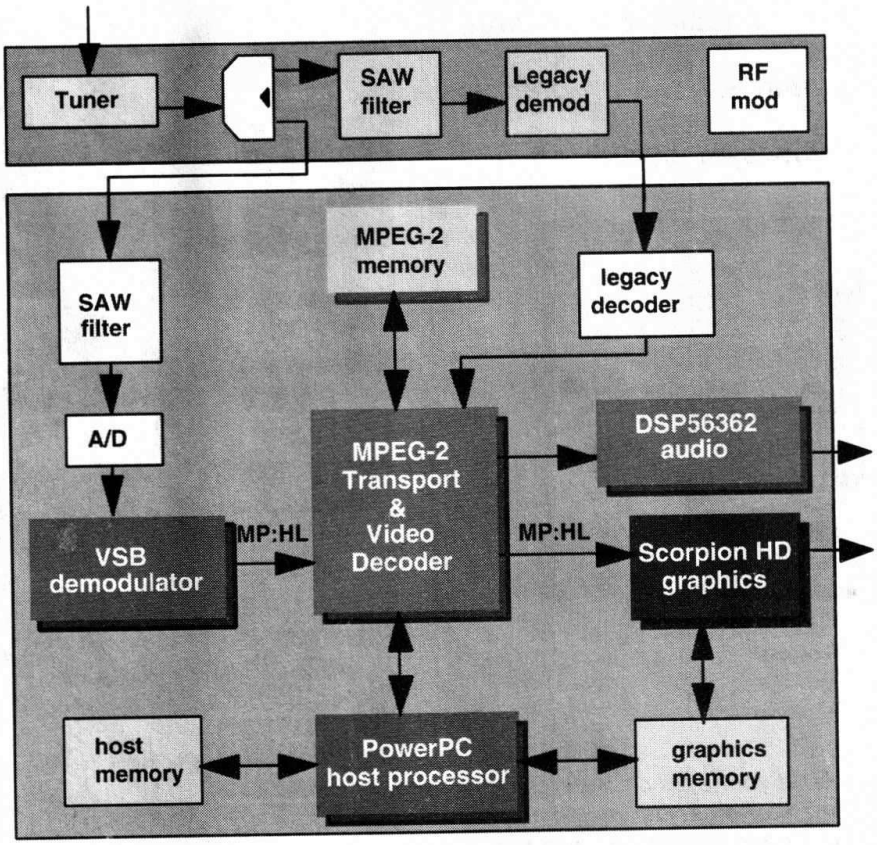

Feast your eyes on Motorola's scalable digital television chipsets, designed to help you meet your cost/performance targets:

Host processor

PowerPC microprocessors are the optimum solution to make performance–hungry applications more user friendly and provide the data rates needed to perform. Designed to support industry–standard operating systems with a wide selection of development tools, emulators and software to aid in new product development.

Graphics

Scorpion HD provides the ultimate in flexible, television based graphics overlay and mixing capabilities that allow incorporating interactive features such as internet browsing and electronic program guide. Multiple windows of interactive graphics can be diplayed over the traditional video stream allowing users to watch TV and browse other information sources at the same time.

Audio

pleasing to any audio palate, providing Dolby AC–3, MPEG–2 and DTS capability in one IC.

Video

programmable compression for reducing memory costs while maintaining picture quality.

Demodulation

single–chip digital IC to lower cost; few external components required (A/D and single clock source).

MOTOROLA

Semiconductor Products Sector

Digital Still Camera Systems Solutions

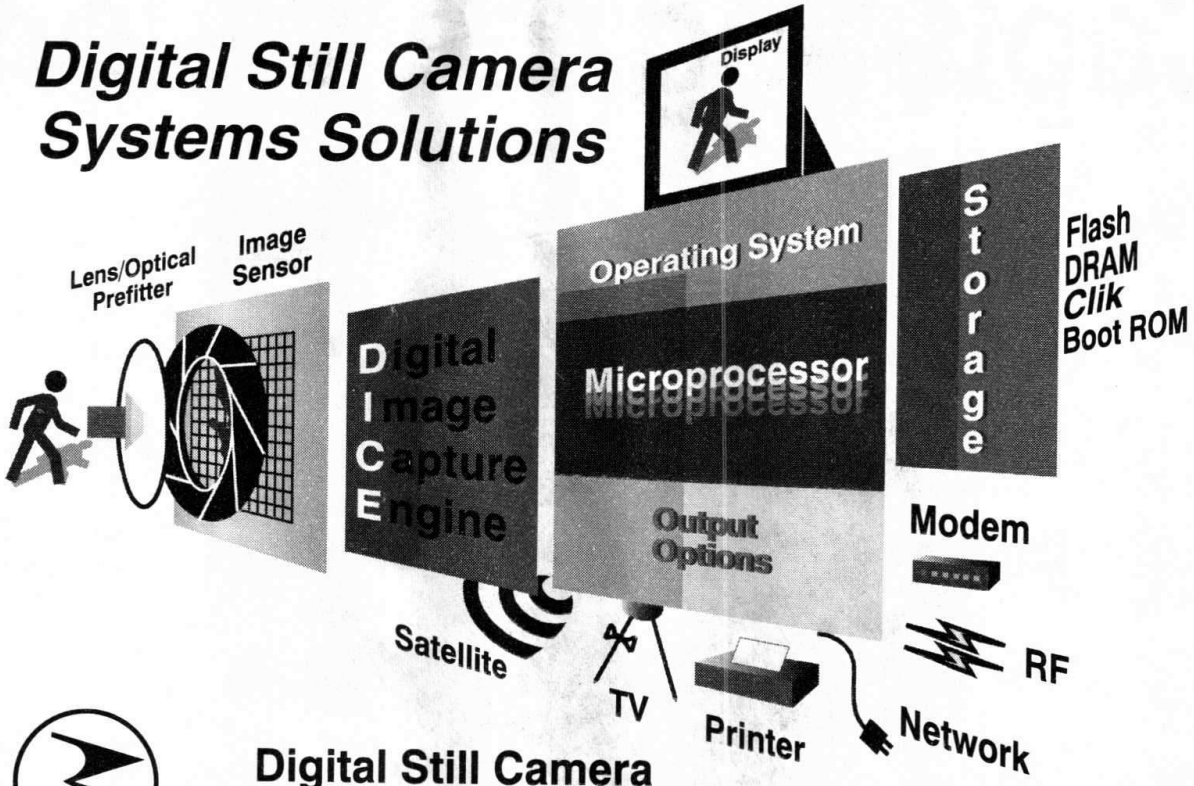

MOTOROLA

Digital Still Camera Systems Solutions

Reference Platform
Image Sensors
Digital Image Capture Engines
Displays
Operating System
Microprocessors
Storage
Output Options
Application Notes
Contact Us

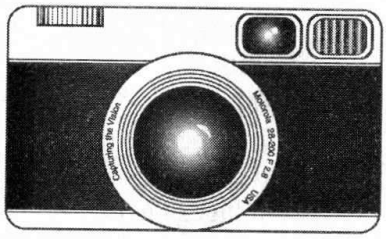

Capturing the Vision.

Kodak and Motorola join forces to develop Advanced CMOS Imager Technology.

Combining Motorola's manufacturing and semiconductor capabilities with Kodak's technology expertise in digital imaging products, the two companies are developing CMOS sensors for use in the growing digital imaging marketplace.

Advanced CMOS Imager sensors are being manufactured on the *ImageMOS*™ technology platform, featuring outstanding image quality with low–power consumption.

The lower power consumption enables the design of smaller, lighter products with longer battery life.

ImageMOS™ technology allows Motorola and Kodak to create a totally integrated solution by combining analog and microprocessor technologies on to the sensor chip.

The ability to integrate vision capability with mainstream CMOS manufacturing is adding new dimension and excitement to the way people communicate - beyond voice and data to transporting information through images - *with broad applications for cameras, scanners, ... and transportation, wireless consumer, security and industrial products.*

Kodak Eastman Kodak Company

MOTOROLA
Semiconductor Products Sector

ImageMOS is a trademark of Motorola, Inc.

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

ImageMOS™

Product Brief

Technology with a Vision.

'Capturing the Vision'. Using Advanced CMOS Imager technology, Motorola is developing sensors for use in the growing digital imaging marketplace.

The *ImageMOS*™ (Image sensor + mixed–mode CMOS) technology platform integrates vision capability with mainstream CMOS manufacturing. This technology allows Motorola to create a totally integrated solution by combining analog and microprocessor technologies on to the sensor chip.

ImageMOS technology features outstanding image quality with low power consumption, ... enabling the design of smaller, lighter products with longer battery life.

This is truly 'Technology with a Vision' ... adding new dimension to the way people communicate - beyond voice and data to transporting information through images.

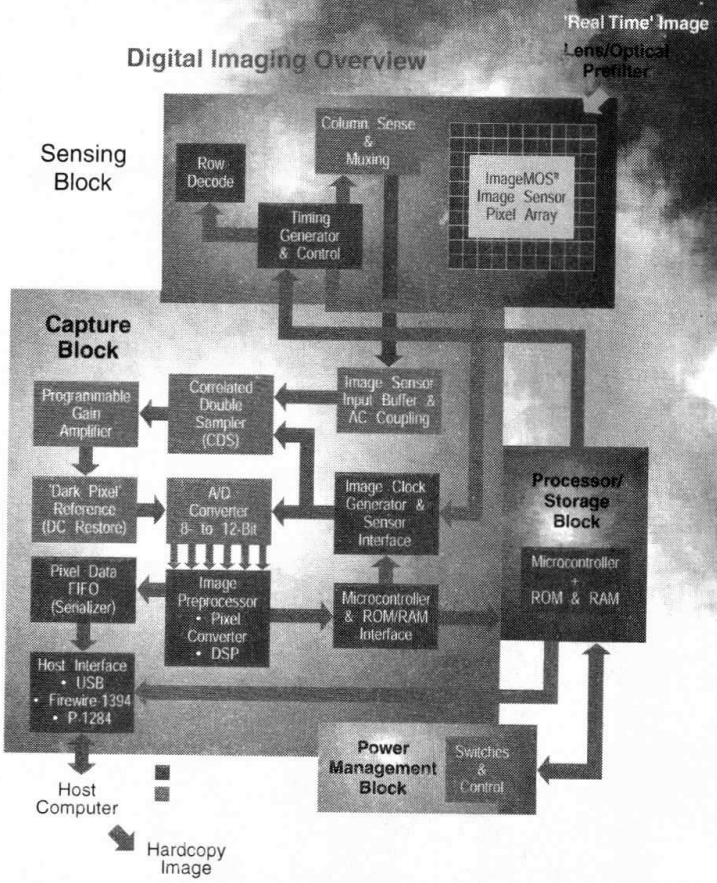

ImageMOS Features:

Patented CMOS image sensor technology –

- High conversion gain with 10–bit signal/noise performance
- 1 V p–p output signal swing
- Optimized spectral response
- Low dark current

Color Filter Array (CFA) technology –

- In–house 8" color imaging capability
- Optional lenslet module for increased light sensitivity

Advantages:

- Sensor technology is compatible with extensive Motorola CMOS circuit portfolio
- Increased functionality reduces part count
- Low–power (3.3 V)
- Wide range of useable lighting
- Accurate color response

ImageMOS Applications:

'Camera on a chip' –

- Integrated sensor, Sample & Hold's, A/D's, signal processor, timing circuits
- Add microcontroller core for more functions
- Video and still applications

Additional Applications –

- Optical Scanners
- Surveillance/Monitoring
- Wireless Video
- Automotive
- Robotics
- Fingerprint ID

MOTOROLA
Semiconductor Products Sector

ImageMOS is a trademark of Motorola, Inc.

Microcomputer Components

In Brief . . .

Motorola continues to be a leading supplier of components for microcomputer systems. The product portfolio includes digital signal processors; CSIC and RISC and PowerPC advanced microprocessors and complementary full–function peripherals; a comprehensive selection of high–performance microcontrollers; VLSI functions for Local Operating Network applications; and a broad range of fast static RAM and Flash memory chips and modules.

Our commitment is to provide state–of–the–art devices as well as continuing support of established products, with six–sigma quality and total customer satisfaction.

	Page
Digital Signal Processors	2.1–1
The M68000 Family	2.2–1
The M88000 RISC Family	2.3–1
The PowerPC RISC Family Microprocessors	2.4–1
Single–Chip Microcontrollers (CSIC)	2.5–1
Single–Chip Microcontrollers (AMCU)	2.6–1
LonWorks Products	2.7–1
Memory Products	2.8–1
ATM	2.9–1

Digital Signal Processors

In Brief . . .

Drawing on both design excellence and expertise in manufacturing, Motorola has created a range of architecturally compatible digital signal processing chips. The philosophy behind the Digital Signal Processor (DSP) families has been to create compatibility between products, as well as to conform to international standards.

Motorola offers a complete portfolio of 16- and 24-bit fixed point and 32-bit floating point DSPs.

In addition, we offer a comprehensive array of development tools to give the designer access to the full power and versatility of the DSPs with minimum fuss. All the tools were designed for ease of use and functionality. They provide a low-cost means of evaluation and greatly simplify the design and development phase of a DSP project.

	Page
DSP56000—24-Bit Digital Signal Processors	2.1–2
DSP56100—16-Bit Digital Signal Processors	2.1–4
DSP56300—24-Bit Digital Signal Processors	2.1–6
DSP56600—16-Bit Digital Signal Processors	2.1–11
DSP56800—16-Bit Digital Signal Processors	2.1–13
DSP96002—32-Bit Digital Signal Processors	2.1–15
MC68175 FLEX Chip	2.1–16
DSP Development Tools	2.1–17
Application Development Systems	2.1–17
Evaluation Modules	2.1–17
MC68175FDB FLEX Development Board	2.1–25
DSP Development Software	2.1–26
C Compiler Packages	2.1–26

16-/24-/32-Bit Families—Your Complete DSP Solution

DSP56000—24-Bit Digital Signal Processors

The DSP56000 family of 24-bit, fixed point, general purpose Digital Signal Processors is Motorola's original DSP family and has set the standard for high end DSP devices with its triple Harvard architecture of seven internal buses and three parallel execution units—Data ALU, Address Generation Unit, and Program Controller. Motorola has retained architectural compatibility with the 24-bit family into the 16-bit DSP56100 and 32-bit DSP96002 products helping to preserve our customer software investment.

The DSP56000 family of HCMOS, 24-bit DSP devices consists of the DSP56002, DSP56L002, DSP56004, DSP56007, DSP56009, DSP56011, and the transitional DSP56001A. All these products are source code compatible and are used extensively in telecommunications, control, and audio applications. The DSP56000 family's unique 24-bit architecture has made these products the industry standard for CD-quality digital audio processing.

DSP56000 Core Features

- Efficient, object code compatible, 24-bit 56000 family DSP engine
  - — Up to 33 Million Instructions Per Second (MIPS)
  - — 30.3 ns instruction cycle at 66 MHz
  - — Up to 198 Million Operations Per Second (MOPS) at 66 MHz
  - — Performs a 1024-point complex Fast Fourier Transform (FFT) in 59,898 clocks
  - — Highly parallel instruction set with unique DSP addressing modes
  - — Two 56-bit accumulators including extension byte
  - — Parallel 24 x 24-bit multiply-accumulate in 1 instruction cycle (2 clock cycles)
  - — Double precision 48 x 48-bit multiply with 96-bit result in 6 instruction cycles
  - — 56-bit Addition/Subtraction in 1 instruction cycle
  - — Fractional and integer arithmetic with support for multiprecision arithmetic
  - — Hardware support for block-floating point FFT
  - — Hardware nested DO loops
  - — Zero-overhead fast interrupts (2 instruction cycles)
  - — Four 24-bit internal data buses and three 16-bit internal address buses for maximum information transfer on-chip

DSP56002 Features

- On-chip Harvard architecture permitting simultaneous accesses to program and two data memories
- Two 256 x 24-bit on-chip data RAMs
- Two 256 x 24-bit on-chip data ROMs containing sine, A-law, and μ-law tables
- Two 256 x 24-bit on-chip data ROMs containing sine, A-law, and μ-law tables
- External memory expansion with 16-bit address and and 24-bit data buses
- 512 x 24-bit on-chip Program RAM and 64 x 24-bit bootstrap ROM
- Two 256 x 24-bit on-chip data RAMs
- Two 256 x 24-bit on-chip data ROMs containing sine, A-law, and μ-law tables
- External memory expansion with 16-bit address and 24-bit data buses
- Bootstrap loading from external data bus, Host Interface, or Serial Communications Interface

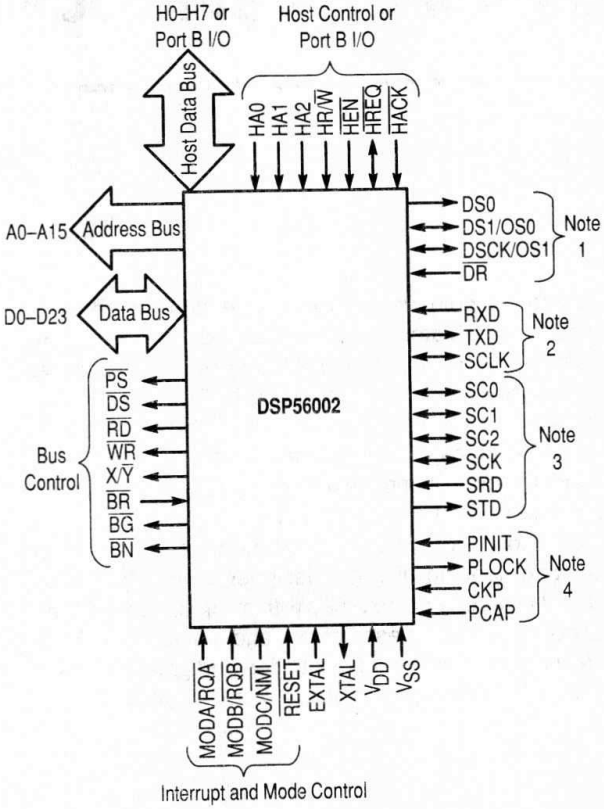

NOTES:
1. On-Chip Emulation (OnCE™) port
2. SCI Serial or Port C I/O
3. SSI Serial or Port C I/O
4. Phase Lock Loop (PLL)

Peripheral and Support Circuits

- Byte-wide Host Interface (HI) with Direct Memory Access support
- Synchronous Serial Interface (SSI) to communicate with codecs and synchronous serial devices
  - — Up to 32 software-selectable time slots in Network mode
- Serial Communication Interface (SCI) for full-duplex asynchronous communications
- 24-bit Timer/Event Counter also generates and measures digital waveforms
- On-chip peripheral registers memory mapped in data memory space
- Double buffered peripheral supply options
- Up to twenty-five general purpose I/O (GPIO) pins
- Three external interrupt request pins; one non-maskable

- On-Chip Emulation (OnCE™) port for unobtrusive, processor speed-independent debugging
- Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the core clock
- Power-saving Wait and Stop modes
- Fully static, HCMOS design for operating frequencies from 80 MHz, 66 MHz, or 40 MHz down to DC
- 132-pin Ceramic Pin Grid Array (PGA) package; 13 x 13 array
- 132-pin Plastic Quad Flat Pack (PQFP) surface-mount package; 24 x 24 x 4 mm
- 144-pin Thin Quad Flat Pack (TQFP) surface-mount package; 20 x 20 x 1.4 mm
- 3.3 V (DSP56L002) and 5 V (DSP56002) power supply options

DSP56004/DSP56007 Features

Digital Signal Processing Core

- Efficient, object-code compatible, 24-bit DSP56000 family DSP engine

Memory

- DSP56004 memory: 512 words Program RAM, 2 x 256 words data RAM, 2 x 256 words data ROM
- DSP56007 memory: 6400 words Program ROM, 3200 words data RAM, 1024 words data ROM

Peripheral and Support Circuits

- Serial Audio Interface (SAI) includes 2 receivers and 3 transmitters, master or slave capability, and implementation of I^2S, Sony, and Matshushita audio protocols; two sets of SAI interrupt vectors
- Serial Host Interface (SHI) features single master capability, 10-word receive FIFO, and support for 8-, 16-, and 24-bit words
- External Memory Interface (EMI), implemented as a peripheral supporting:
  - — Page-mode DRAMs (one or two chips): 64 K x 4, 256 K x 4, and 4M x 4 bits
  - — SRAMs (one to four): 256 K x 8 bits
  - — Data bus may be 4 or 8 bits wide
  - — Data words may be 8, 12, 16, 20, or 24 bits wide
- Four dedicated, independent, programmable General Purpose I/O (GPIO) lines
- On-chip peripheral registers memory mapped in data memory space
- Three external interrupt request pins
- On-Chip Emulation (OnCE™) port for unobtrusive, processor speed-independent debugging
- Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the core clock
- Power-saving Wait and Stop modes
- Fully static, HCMOS design for operating frequencies from 40, 50, 66, and 80 MHz down to DC
- 80-pin plastic Quad Flat Pack surface-mount package; 14 x 14 x 2.45 mm; 0.65 mm lead pitch
- 3.3 V (DSP56L007) and 5 V (DSP56007) power supply options

DSP56009 Features

Digital Signal Processing Core

- Efficient, object-code compatible, 24-bit DSP56000 family DSP engine
- Completely pin-compatible with DSP56004 and DSP56007 for easy upgrades
- 5 V power supply

Memory

- On-chip Harvard architecture permitting simultaneous accesses to program and two data memories
- 10240 x 24-bit on-chip Program ROM*
- 4608 x 24-bit on-chip X data RAM and 3072 x 24-bit on-chip X data ROM*
- 4352 x 24-bit on-chip Y data RAM and 1792 x 24-bit on-chip Y data ROM*
- 512 x 24-bit on-chip Program RAM and 64 x 24-bit bootstrap ROM
- Up to 2304 x 24-bit from X and Y data RAM can be switched to Program RAM giving a total of 2816 x 24 bits of Program RAM
- Bootstrap loading from Serial Host Interface or External Memory Interface

DSP56011 Features

Digital Signal Processing Core

- Efficient, object-code compatible, 24-bit DSP56000 family DSP engine

Memory

- Modified Harvard architecture allows simultaneous access to program and data memories
- 12800 x 24-bit on-chip Program ROM*
- 4096 x 24-bit on-chip X-data RAM and 3584 x 24-bit on-chip X-data ROM*
- 4352 x 24-bit on-chip Y-data RAM and 2048 x 24-bit on-chip Y-data ROM*
- 512 x 24-bit on-chip Program RAM and 64 x 24-bit bootstrap ROM
- As much as 2304 x 24 bits of X- and Y-data RAM can be switched to Program RAM, giving a total of 2816 x 24 bits of Program RAM

Peripheral and Support Circuits

- Serial Audio Interface (SAI) includes two receivers and three transmitters, master or slave capability, and implementation of I^2S, Sony, and Matshushita audio protocols; two sets of SAI interrupt vectors
- Serial Host Interface (SHI) features single master capability, SPI and I^2C protocols, 10-word receive FIFO, and support for 8-, 16-, and 24-bit words
- Byte-wide Parallel Host Interface with DMA support capable of reconfiguration as fifteen General Purpose Input/Output (GPIO) lines

*These ROMs may be factory programmed with data/program provided by the application developer.

- Digital Audio Transmitter (DAX) features one serial transmitter capable of supporting SPDIF, IEC958, CP-340, and AES/EBU formats
- Eight dedicated, independent, programmable GPIO lines
- On-chip peripheral registers memory mapped in data memory space
- OnCE port for unobtrusive, processor speed-independent debugging
- Software programmable PLL-based frequency synthesizer for the core clock
- Power saving Wait and Stop modes
- Fully static, HCMOS design for operating frequencies from 81 MHz down to DC
- 100-pin plastic Thin Quad Flat Pack (TQFP) surface-mount package
- 5 V power supply

DSP56100—16-Bit Digital Signal Processors

The DSP56100 family of HCMOS, low-power, 16-bit fixed point general purpose Digital Signal Processors (DSPs) is ideal for high end speech coding, telecommunications, and control applications. The first DSP56100 family member, the DSP56156, combines the high-speed core with 8 K bytes RAM, two serial ports, one parallel port, codec, Phase Lock Loop (PLL), and an On-Chip Emulation (OnCE™) port. The DSP56166, the second member of the DSP56100 family, has identical package and pinout to the DSP56156 with different memory configuration and peripherals.

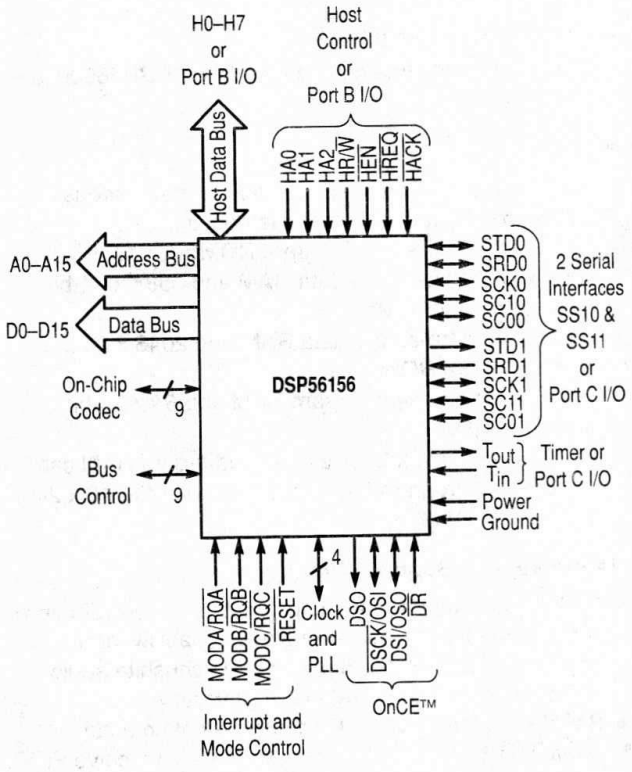

DSP56156 Features

Digital Signal Processing Core

- Efficient, object code compatible, 16-bit 56100-family DSP engine
  - — Up to 30 Million Instructions Per Second (MIPS); 33 ns instruction cycle at 60 MHz
  - — Up to 180 Million Operations Per Second (MOPS) at 60 MHz
  - — Highly parallel instruction set with unique DSP addressing modes
  - — Two 40-bit accumulators including extension byte
  - — Parallel 16 x 16-bit multiply-accumulate in 1 instruction cycle (2 clock cycles)
  - — Double precision 32 x 32-bit multiply with 72-bit result in 6 instruction cycles
  - — Least Mean Square (LMS) adaptive loop filter in 2 instructions
  - — 40-bit Addition/Subtraction in 1 instruction cycle
  - — Fractional and integer arithmetic with support for multiprecision arithmetic
  - — Hardware support for block-floating point FFT
  - — Hardware-nested DO loops including infinite loops
  - — Zero-overhead fast interrupts (2 instruction cycles)
  - — Three 16-bit internal data buses and three 16-bit internal address buses for maximum information transfer on-chip

Memory

- On-chip Harvard architecture permitting simultaneous accesses to program and memories
- 2048 x 16-bit on-chip Program RAM and 64 x 16-bit bootstrap ROM (or 12 K x 16-bit on-chip Program ROM on the DSP56156ROM)
- 2048 x 16-bit on-chip data RAM
- External memory expansion with 16-bit address and data buses
- Bootstrap loading from external data bus, Host Interface, or Synchronous Serial Interface

DSP56100—16-Bit Digital Signal Processors (continued)

Peripheral and Support Circuits

- Byte-wide Host Interface (HI) with Direct Memory Access (DMA) support
- Two Synchronous Serial Interfaces (SSI) to communicate with codecs and synchronous serial devices
  - — Built in μ-law and A-law compression/expansion
  - — Up to 32 software-selectable time slots in Network mode
- 16-bit Timer/Event Counter also generates and measures digital waveforms
- On-chip sigma-delta voice band codec
  - — Sampling clock rates between 100 kHz and 3 MHz
  - — Four software-programmable decimation/interpolation ratios
  - — Internal voltage reference (2/5 of positive power supply)
  - — No external components required
- On-chip peripheral registers memory mapped in data memory space
- Double buffered peripherals
- Up to twenty seven General Purpose I/O pins
- Two external interrupt request pins
- OnCE port for unobtrusive, processor speed-independent debugging
- Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the core clock

Miscellaneous Features

- Power-saving Wait and Stop modes
- Fully static, HCMOS design for operating frequencies from 40 or 60 MHz down to DC
- 112-pin Ceramic Quad Flat Pack (CQFP) surface-mount package; 20 x 20 x 3 mm
- 112-pin Plastic Thin Quad Flat Pack (TQFP) surface-mount package; 20 x 20 x 1.4 mm
- 5 V power supply

DSP56167 Features

- Digital Signal Processing Core
  - — Up to 30 Million Instructions Per Second (MIPS) at 60 MHz with 33.3 ns instruction cycle
  - — Single-cycle 16 x 16-bit parallel Multiplier-Accumulator (MAC)
  - — 2 x 40-bit accumulators with extension byte
  - — Fractional and integer arithmetic with support for multiprecision arithmetic
  - — Highly parallel instruction set with unique DSP addressing modes
  - — Nested hardware DO loops including infinite loops and DO zero loop
  - — Two instruction LMS adaptive filter loop
  - — Fast auto-return interrupts
  - — Three external interrupt request pins
  - — Three 16-bit internal data and three 16-bit internal address buses
  - — Individual programmable wait states on the external bus for program, data, and peripheral memory spaces
  - — Programmable Absolute Short addressing mode
  - — Off-chip memory-mapped peripheral space with programmable access time and separate peripheral enable pin
  - — Peripheral Address Generation Unit (PAGU)
  - — On-chip memory-mapped peripheral registers
  - — On-Chip Emulation (OnCE™) port for unobtrusive, processor speed-independent debugging with DR line static latch with Reset
- Memory
  - — Modified Harvard architecture permits simultaneous accesses to program and data memories
  - — 2 K x 16-bit on-chip Program RAM
  - — 4 K x 16-bit on-chip data RAM
  - — 64 x 16-bit bootstrap ROM
  - — External memory expansion with 16-bit address and data buses with static latches with Reset and software-controlled BG pull-down
  - — Bootstrap loading from external byte-wide Program ROM, Host Interface, or 16-bit Synchronous Serial Interface (SSI0)
- Peripherals
  - — Up to twenty-five General Purpose Input/Output (GPIO) pins, depending on which peripherals are enabled
  - — Byte-wide Host Interface with Direct Memory Access (DMA) support (or up to fifteen Port B GPIO lines)
  - — On-chip SD voice band codec, Analog-to-Digital (A/D) and Digital-to-Analog (D/A)
- Internal voltage reference (1/2 of positive power supply) and split-voltage operation (with respect to the core)
- No off-chip components required
  - — 16-bit SSI support: two 4-pin ports (or up to eight Port C GPIO lines)
  - — One 16-bit timer/event counter (or two Port C GPIO lines)
  - — Double-buffered peripherals
  - — Independent external chip enables BR and PEREN during Bus Master mode
  - — Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the DSP core clock with a wide input frequency range (12.2 kHz to 60 MHz) that initializes to a preset low frequency operation during hardware reset
- Energy Efficient Design
  - — Power-saving Wait and Stop modes
  - — Fully static, HCMOS design allows operation from 60 MHz down to DC operating frequencies
  - — 112-pin plastic Thin Quad Flat Pack (TQFP) surface-mount package

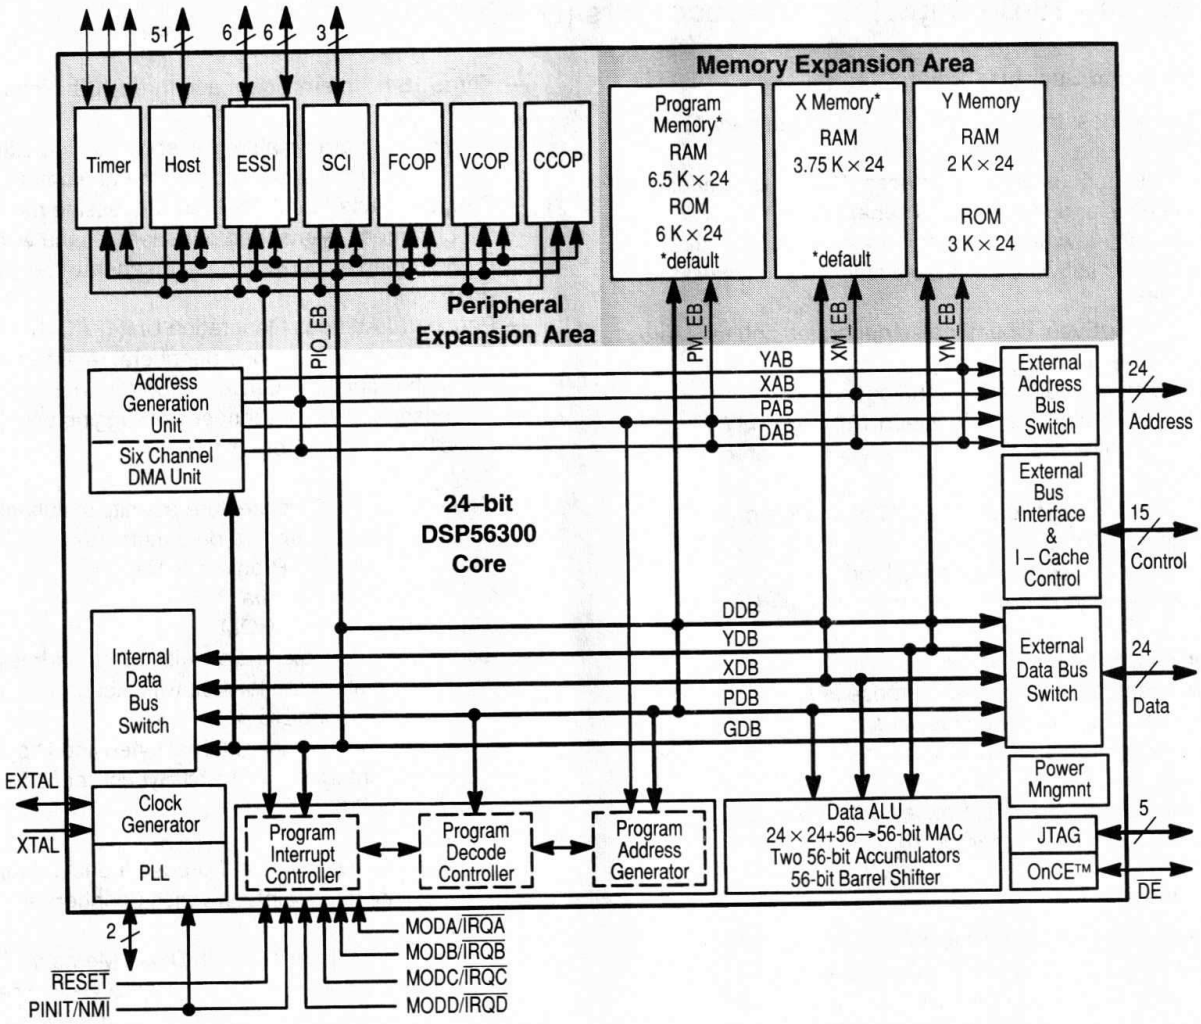

DSP56300—24-Bit Digital Signal Processors

The first programmable Motorola DSP product to provide a true single-clock-cycle execution, the DSP56300 core effectively doubles the number of instructions executed without increasing clock speed, providing 80 MIPS of performance at 80 MHz, while retaining code compatibility with the rest of the Motorola DSP offerings. The DSP56300 family offers a new level of performance in MIPS, a rich instruction set and low power dissipation, enabling a new generation of products in wireless, telecommunications, and multimedia.

Several significant architectural enhancements include a barrel shifter, 24-bit addressing, instruction cache, and DMA functionality. The DSP56301 offers 66/80 MIPS using an internal 66/80 MHz clock at 3.0–3.6 V.

DSP56301 Features

High Performance DSP56300 Core

- 66/80 Million Instructions Per Second (MIPS) with a 66/80 MHz clock at 3.3 V
- Object code compatible with the DSP56000 core
- Highly parallel instruction set
- Data Arithmetic Logic Unit (Data ALU)
- Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
- 56-bit parallel barrel shifter (fast shift and normalization; bit stream generation and parsing)
- Conditional ALU instructions
- 24-bit or 16-bit arithmetic support under software control
- Program Control Unit (PCU)
  - — Position Independent Code (PIC) support
- Addressing modes optimized for DSP applications (including immediate offsets)
  - — On-chip instruction cache controller
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
- Direct Memory Access (DMA)
  - — Six DMA channels supporting internal and external accesses
  - — One-, two-, and three- dimensional transfers (including circular buffering)

  - — End-of-block-transfer interrupts
  - — Triggering from interrupt lines and all peripherals
- Phase Lock Loop (PLL)
  - — Allows change of low power Divide Factor (DF) without loss of lock
  - — Output clock with skew elimination
- Hardware debugging support
  - — On-Chip Emulation (OnCE™) module
  - — Joint Action Test Group (JTAG) Test Access Port (TAP) port
  - — Address Tracing mode reflects internal Program RAM accesses at the external port

On-Chip Memories

- 4096 x 24-bit Program RAM (or, if the cache option is enabled, 1024 x 24-bit Instruction Cache and 3072 x 24-bit Program RAM)
- 2048 x 24-bit X data RAM
- 2048 x 24-bit Y data RAM
- 192 x 24-bit bootstrap ROM

Off-Chip Memory Expansion

- Data memory expansion to two 16 M x 24-bit word memory spaces
- Program memory expansion to one 16 M x 24-bit words memory space
- External memory expansion port
- Chip Select Logic for glueless interface to SRAMs and SSRAMs
- On-chip DRAM controller for glueless interface to DRAMs

On-Chip Peripherals

- 32-bit parallel PCI/Universal Host Interface (HI32), PCI Rev. 2.1 compliant with glueless interface to other DSP563xx buses
- ISA interface requires only 74LS45-style buffer
- Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1)
- Serial Communications Interface (SCI) with baud rate generator
- Triple timer module
- Up to forty-two programmable General Purpose Input/Output pins (GPIO), depending on which peripherals are enabled

Reduced Power Dissipation

- Very low power CMOS design
- Wait and Stop low power standby modes
- Fully-static logic, operation frequency down to 0 Hz (DC)
- Optimized power management circuitry (instruction-dependent, peripheral-dependent, and mode-dependent)

Target Applications

The DSP56301 is intended for general-purpose digital signal processing, particularly in multimedia and telecommunication applications, such as videoconferencing and cellular telephony.

DSP56302 Features

High Performance DSP56300 Core

- 66 Million Instructions Per Second (MIPS) with a 66 MHz clock
- Object code compatible with the DSP56000 core
- Highly parallel instruction set
- Data Arithmetic Logic Unit (Data ALU)
  - — Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
  - — 56-bit parallel barrel shifter (fast shift and normalization; bit stream generation and parsing)
  - — Conditional ALU instructions
  - — 24-bit or 16-bit arithmetic support under software control
- Program Control Unit (PCU)
  - — Position Independent Code (PIC) support
  - — Addressing modes optimized for DSP applications (including immediate offsets)
  - — On-chip instruction cache controller
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
- Direct Memory Access (DMA)
  - — Six DMA channels supporting internal and external accesses
  - — One-, two-, and three-dimensional transfers (including circular buffering)
  - — End-of-block-transfer interrupts
  - — Triggering from interrupt lines and all peripherals
- Phase Lock Loop (PLL)
  - — Allows change of low power Divide Factor (DF) without loss of lock
  - — Output clock with skew elimination
- Hardware debugging support
  - — On-Chip Emulation (OnCE™) module
  - — Joint Action Test Group (JTAG) Test Access Port (TAP) port
  - — Address Tracing mode reflects internal accesses at the external port

On-Chip Memories

- Program RAM, Instruction Cache, X data RAM, and Y data RAM size is programmable
- 192 x 24-bit bootstrap ROM

Instruction Cache	Switch Mode	Program RAM Size	Instruction Cache Size	X Data RAM Size	Y Data RAM Size
disabled	disabled	20480 × 24-bit	0	7168 × 24-bit	7168 × 24-bit
enabled	disabled	19456 × 24-bit	1024 × 24-bit	7168 × 24-bit	7168 × 24-bit
disabled	enabled	24576 × 24-bit	0	5120 × 24-bit	5120 × 24-bit
enabled	enabled	23552 × 24-bit	1024 × 24-bit	5120 × 24-bit	5120 × 24-bit

Off-Chip Memory Expansion

- Data memory expansion to two 256 K x 24-bit word memory spaces
- Program memory expansion to one 256 K x 24-bit words memory space
- External memory expansion port
- Chip Select Logic for glueless interface to SRAMs and SSRAMs
- On-chip DRAM controller for glueless interface to DRAMs

On-Chip Peripherals

- Enhanced DSP56000-like 8-bit parallel Host Interface (HI08) supports a variety of buses (e.g., ISA) and provides glueless connection to a number of industry standard microcomputers, microprocessors, and DSPs
- Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1), each with one receiver and three transmitters (allows six-channel home theater)
- Serial Communications Interface (SCI) with baud rate generator
- Triple timer module
- Up to thirty-four programmable General Purpose Input/Output (GPIO) pins, depending on which peripherals are enabled

Reduced Power Dissipation

- Very low power CMOS design
- Wait and Stop low power standby modes
- Fully-static logic, operation frequency down to 0 Hz (DC)
- Optimized power management circuitry (instruction-dependent, peripheral-dependent, and mode-dependent)

Target Applications

The DSP56302 is intended for applications requiring a large amount of on-chip memory, such as wireless infrastructure applications. It is also intended as a RAM-based emulation part for low-cost ROM-based solutions.

DSP56303 Features

High Performance DSP56300 Core

- 66/80 Million Instructions Per Second (MIPS) with a 66/80 MHz clock at 3.3 V
- Object code compatible with the DSP56000 core
- Highly parallel instruction set
- Data Arithmetic Logic Unit (Data ALU)
  - — Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
  - — 56-bit parallel barrel shifter (fast shift and normalization; bit stream generation and parsing)
  - — Conditional ALU instructions
  - — 24-bit or 16-bit arithmetic support under software control
- Program Control Unit (PCU)
  - — Position Independent Code (PIC) support
  - — Addressing modes optimized for DSP applications (including immediate offsets)
  - — On-chip instruction cache controller
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
- Direct Memory Access (DMA)
  - — Six DMA channels supporting internal and external accesses
  - — One-, two-, and three-dimensional transfers (including circular buffering)
  - — End-of-block-transfer interrupts
  - — Triggering from interrupt lines and all peripherals
- Phase Lock Loop (PLL)
  - — Allows change of low power Divide Factor (DF) without loss of lock
  - — Output clock with skew elimination
- Hardware debugging support
  - — On-Chip Emulation (OnCE™) module
  - — Joint Action Test Group (JTAG) Test Access Port (TAP)
  - — Address Tracing mode reflects internal Program RAM accesses at the external port

On-Chip Memories

- Program RAM, Instruction Cache, X data RAM, and Y data RAM size is programmable:
- 192 x 24-bit bootstrap ROM

Instruction Cache	Switch Mode	Program RAM Size	Instruction Cache Size	X Data RAM Size	Y Data RAM Size
disabled	disabled	4096 × 24-bit	0	2048 × 24-bit	2048 × 24-bit
enabled	disabled	3072 × 24-bit	1024 × 24-bit	2048 × 24-bit	2048 × 24-bit
disabled	enabled	2048 × 24-bit	0	3072 × 24-bit	3072 × 24-bit
enabled	enabled	1024 × 24-bit	1024 × 24-bit	3072 × 24-bit	3072 × 24-bit

Off-Chip Memory Expansion

- Data memory expansion to two 256 K x 24-bit word memory spaces
- Program memory expansion to one 256 K x 24-bit words memory space
- External memory expansion port
- Chip Select Logic for glueless interface to SRAMs and SSRAMs
- On-chip DRAM controller for glueless interface to DRAMs

On-Chip Peripherals

- Enhanced DSP56000-like 8-bit parallel Host Interface (HI08) supports a variety of buses (e.g., ISA) and provides glueless connection to a number of industry standard microcomputers, microprocessors, and DSPs
- Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1), each with one receiver and three transmitters (allows six-channel home theater)

- Serial Communications Interface (SCI) with baud rate generator
- Triple timer module
- Up to thirty-four programmable General Purpose Input/Output (GPIO) pins, depending on which peripherals are enabled

Reduced Power Dissipation

- Very low power CMOS design
- Wait and Stop low power standby modes
- Fully-static logic, operation frequency down to 0 Hz (DC)
- Optimized power management circuitry (instruction-dependent, peripheral-dependent, and mode-dependent)

Target Applications

The DSP56303 is intended for use in telecommunication applications, such as multi-line voice/data/fax processing, videoconferencing, audio applications, control, and general digital signal processing.

DSP56304 Features

- High performance DSP56300 core
  - — 66/80 Million Instructions Per Second (MIPS) with a 66/80 MHz clock
  - — Object code compatible with the DSP56000 core
  - — Highly parallel instruction set
  - — Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
  - — 56-bit parallel barrel shifter
  - — 24-bit or 16-bit arithmetic support under software control
  - — Position independent code support
  - — Addressing modes optimized for DSP applications
  - — On-chip instruction cache controller
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
  - — On-chip concurrent six-channel DMA controller
  - — On-chip Phase Lock Loop (PLL) and clock generator
  - — On-Chip Emulation (OnCE™) module
  - — JTAG Test Access Port (TAP)
  - — Address Tracing mode reflects internal accesses at the external port

On-Chip Memories

- Program RAM, Instruction Cache, X data RAM, and Y data RAM size is programmable:
- 33,792 x 24-bit Program ROM with Patch mode update capability using instruction cache memory space
- 9,216 x 24-bit X data ROM and 9,216 x 24-bit Y data ROM
- 192 x 24-bit bootstrap ROM Instruction Cache

Instruction Cache	Switch Mode	Program RAM Size	Instruction Cache Size	X Data RAM Size	Y Data RAM Size
disabled	disabled	1024 × 24-bit	0	3328 × 24-bit	1792 × 24-bit
enabled	disabled	0	1024 × 24-bit	3328 × 24-bit	1792 × 24-bit
disabled	enabled	3584 × 24-bit	0	2048 × 24-bit	512 × 24-bit
enabled	enabled	2560 × 24-bit	1024 × 24-bit	2048 × 24-bit	512 × 24-bit

Off-Chip Memory Expansion

- Data memory expansion to two 256 K x 24-bit word memory spaces
- Program memory expansion to one 256 K x 24-bit word memory space
- External memory expansion port
- Chip select logic requires no additional circuitry to interface to SRAMs and SSRAMs
- On-chip DRAM controller requires no additional circuitry to interface to DRAMs

On-Chip Peripherals

- 8-bit parallel Host Interface (HI08), ISA-compatible bus interface, providing a cost-effective solution for applications not requiring the PCI bus
- Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1)
- Serial Communications Interface (SCI) with baud rate generator
- Triple timer module
- Up to thirty-four programmable General Purpose I/O pins (GPIO), depending on which peripherals are enabled

Reduced Power Dissipation

- Very low power CMOS design
- Wait and Stop low power standby modes
- Fully-static logic, operation frequency down to DC
- Optimized power management circuitry

Target Applications

The DSP56304 is intended for use in embedded multifunction DSP applications requiring large on-board ROM spaces, such as wireless products that combine standard cellular phone operation with options such as two-way digital paging and fax capability in one unit.

DSP56305 Features

High Performance DSP56300 Core

- 80 Million Instructions Per Second (MIPS) with an 80 MHz clock at 3.3 V
- Object code compatible with the DSP56000 core
- Highly parallel instruction set
- Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
- 56-bit parallel barrel shifter
- 24-bit or 16-bit arithmetic support under software control
- Position independent code support
- Addressing modes optimized for DSP applications
- On-chip instruction cache controller
- On-chip memory-expandable hardware stack
- Nested hardware DO loops
- Fast auto-return interrupts
- On-chip concurrent six-channel Direct Memory Access (DMA) controller
- On-chip Phase Lock Loop (PLL) and clock generator
- On-Chip Emulation (OnCE™) module
- JTAG Test Access Port (TAP)
- Address Tracing mode reflects internal accesses at the external port
- 21 mm x 21 mm, 252-pin PBGA package
- Pin-compatible in 252-pin PBGA package with the DSP56301

On-Chip Memories

- Program RAM, instruction cache, X data RAM, and Y data RAM sizes are programmable:
- 6144 x 24-bit Program ROM
- 3072 x 24-bit Y data ROM
- 192 x 24-bit bootstrap ROM

Off-Chip Memory Expansion

- Data memory expansion to two 16 M x 24-bit word memory spaces
- Program memory expansion to one 16 M x 24-bit word memory space
- External memory expansion port
- Chip select logic provides glueless interface to SRAMs and SSRAMs
- On-chip DRAM controller provides glueless interface to DRAMs

On-Chip Peripherals

- PCI Rev. 2.1-compliant 32-bit parallel PCI/Universal Host Interface (HI32) with glueless interface to other DSP563xx buses
- ISA interface requires only 74LS45-style buffer
- Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1)
- Serial Communications Interface (SCI) with baud rate generator
- Triple timer module
- Up to forty-two programmable General Purpose Input/ Output pins (GPIO), depending on which peripherals are enabled

On-Chip Co-Processors

- The Filter Co-Processor (FCOP) implements a wide variety of convolution and correlation filtering algorithms. In GSM applications, the FCOP cross-correlates between the received training sequence and a known midamble sequence to estimate the channel impulse response, and then performs match filtering of received data symbols using coefficients derived from that estimated channel.
- The Viterbi Co-Processor (VCOP) implements Maximum Likelihood Sequential Estimation (MLSE) algorithm for channel decoding and equalization (uplink) and channel convolution coding (downlink). The VCOP supports constraint lengths (k) of 4, 5, 6, or 7 with number of states 8, 16, 32, or 64, respectively; code rates of 1/2, 1/3, 1/4, or 1/6; and trace-back Trellis depth of 36.
- The Cyclic-code Co-Processor (CCOP) executes cyclic code calculations for data ciphering and deciphering, as well as parity code generation and check. The CCOP is fully programmable and not dedicated to a specific algorithm, but it is well suited for GSM A5.1 and A5.2 data ciphering algorithms. The CCOP can generate mask sequences for data ciphering, and supports Fire encode and decode for burst error correction, as well as generation of Cyclic Redundancy Code (CRC) syndrome for any polynomial of any degree up to 48.

Reduced Power Dissipation

- Very low power CMOS design
- Wait and Stop low power standby modes
  - — Fully-static logic, operation frequency down to DC
- Optimized power management circuitry

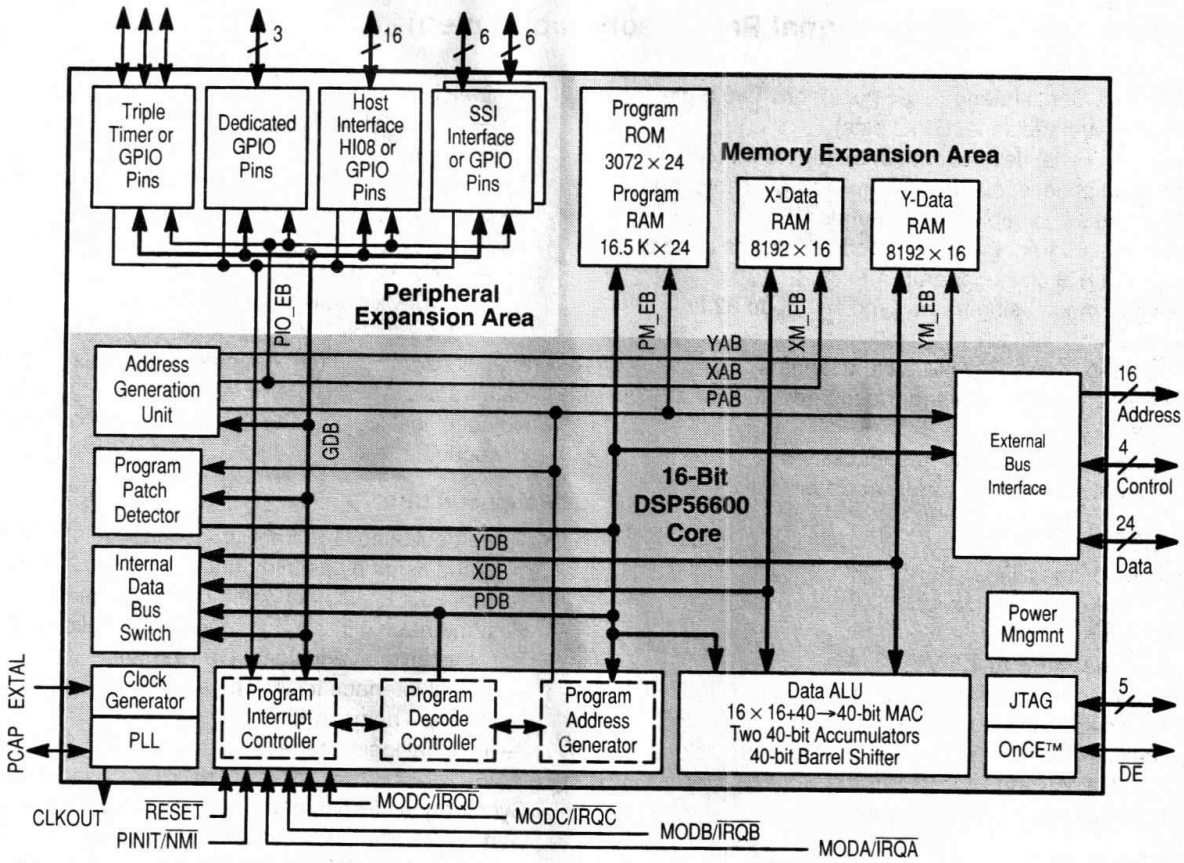

DSP56600—16-Bit Digital Signal Processors

The DSP56600 core can execute one 24-bit instruction per clock cycle using 16-bit data. The 60 MHz chip includes a mixture of peripherals and memories optimized for processing-intensive, yet cost-effective, low power consumption digital mobile communications applications. The DSP56600 core includes the Data Arithmetic Logic Unit (Data ALU), Address Generation Unit (AGU), Program Controller, program patch detector, bus interface unit, On-Chip Emulation (OnCE™)/JTAG port, and a Phase Lock Loop (PLL)-based clock generator.

DSP56602 Features

Digital Signal Processing Core

- High-performance DSP56600 core
- Up to 60 million instructions per second (MIPS) at 2.7 V
- 24-bit instructions using 16-bit data
- Fully pipelined 16 x 16-bit parallel Multiplier-Accumulator (MAC)
- Two 40-bit accumulators including extension bits
- 40-bit parallel barrel shifter
- Highly parallel instruction set with unique DSP addressing modes
- Code-compatible with the DSP56300 core
- Position-Independent Code support PIC)
- Nested hardware DO loops
- Fast auto-return interrupts
- On-chip support for software patching and enhancements
- On-chip Phase Lock Loop (PLL) circuit
- Real-time trace capability via external address bus
- On-Chip Emulation (OnCE™) module
- JTAG port

Memory

- 512 x 24 Program RAM
- 24 K x 24 Program ROM
- 4 K x 16 X data RAM
- 6 K x 16 X data ROM
- 4 K x 16 Y data RAM
- 6 K x 16 Y data ROM
- Off-chip expansion for both program fetch and program data transfers
- Glueless interface to external SRAM memories

Peripheral Circuits

- Three dedicated General Purpose Input/Output (GPIO) pins and up to thirty one additional GPIO pins (user-selectable as peripherals or GPIO pins)
- Host interface (HI) support: One 8-bit parallel port (or up to sixteen additional GPIO pins)
  - — Direct interface to Motorola HC11, Hitachi H8, 8051 family, Thomson P6 family
  - — Minimal logic interface to standard ISA bus, Motorola 68 K family, and Intel x86 microprocessor family

- Synchronous Serial Interface (SSI) support: Two 6-pin ports (or twelve additional GPIO pins)
  - — Supports serial devices with one or more industry-standard codecs, other DSPs, microprocessors, and Motorola-SPI-compliant peripherals
  - — Independent transmitter and receiver sections and a common RSI clock generator
  - — Network mode using frame sync and up to 32 time slots
  - — 8-bit, 12-bit, and 16-bit data word lengths
- Three programmable timers (or up to three additional GPIO pins)
- Three external interrupt/mode control lines
- One external reset pin for hardware reset

Energy Efficient Design

- Operating voltage range: 1.8 V to 3.3 V
- Very low power CMOS design
  - — < 0.85 mA/MIPS at 2.7 V
  - — < 0.55 mA/MIPS at 1.8 V
- Low power Wait for interrupt standby mode
- Ultra low power Stop standby mode
- Fully static, HCMOS design for operating frequencies from 60 MHz down to DC
- Special power management circuitry

DSP56603 Features

Digital Signal Processing Core

- High-performance DSP56600 core
- Up to 60 Million Instructions Per Second (MIPS) at 2.7–3.3 V
- Fully pipelined 16 x 16-bit parallel Multiplier-Accumulator (MAC)
- Two 40-bit accumulators including extension bits
- 40-bit parallel barrel shifter
- Highly parallel instruction set with unique DSP addressing modes
- Code-compatible with the DSP56300 core
- Position-Independent Code support (PIC)
- Nested hardware DO loops
- Fast auto-return interrupts
- On-chip support for software patching and enhancements
- On-chip Phase Lock Loop (PLL) circuit
- Real-time trace capability via external address bus
- On-Chip Emulation (OnCE™) module and JTAG port

Memory

- Switch mode memory allows reconfiguring program, X-data, and Y-data RAM sizes
  - — Switch mode off
    - — 16 K x 24-bit Program RAM
    - — 8 K x 16-bit X data RAM
    - — 8 K x 16-bit Y data RAM
  - — Switch mode on
    - — 11 K x 24-bit Program RAM
    - — 10.5 K x 16-bit X data RAM
    - — 10.5 K x 16-bit Y data RAM
    - — 3 K x 24-bit Program ROM
- Off-chip expansion for both program fetch and program data transfers
- No additional logic needed for interface to external SRAM memories

Peripheral Circuits

- Three dedicated General Purpose Input/Output (GPIO) pins and as many as thirty-one additional GPIO pins (user-selectable as peripherals or GPIO pins)
- Host Interface (HI) support: one 8-bit parallel port (or as many as sixteen additional GPIO pins)
  - — Direct interface to Motorola HC11, Hitachi H8, 8051 family, Thomson P6 family
  - — Minimal logic interface to standard ISA bus, Motorola 68 K family, and Intel x86 microprocessor family
- Synchronous Serial Interface (SSI) support: two 6-pin ports (or twelve additional GPIO pins)
  - — Supports serial devices with one or more industry-standard codecs, other DSPs, microprocessors, and Motorola SPI-compliant peripherals
  - — Independent transmitter and receiver sections and a common SSI clock generator
  - — Network mode using frame sync and up to 32 time slots
  - — 8-bit, 12-bit, and 16-bit data word lengths
- Three programmable timers (or as many as three additional GPIO pins)
- Three external interrupt/mode control lines
- One external reset pin for hardware reset

Energy Efficient Design

- Very low power CMOS design
  - — Operating voltage range: 1.8 V to 3.3 V
  - — < 0.85 mA/MIPS at 2.7 V
  - — < 0.55 mA/MIPS at 1.8 V
- Low power Wait for interrupt standby mode, and ultra low power Stop standby mode
- Fully static, HCMOS design for operating frequencies from 60 MHz down to DC
- Special power management circuitry

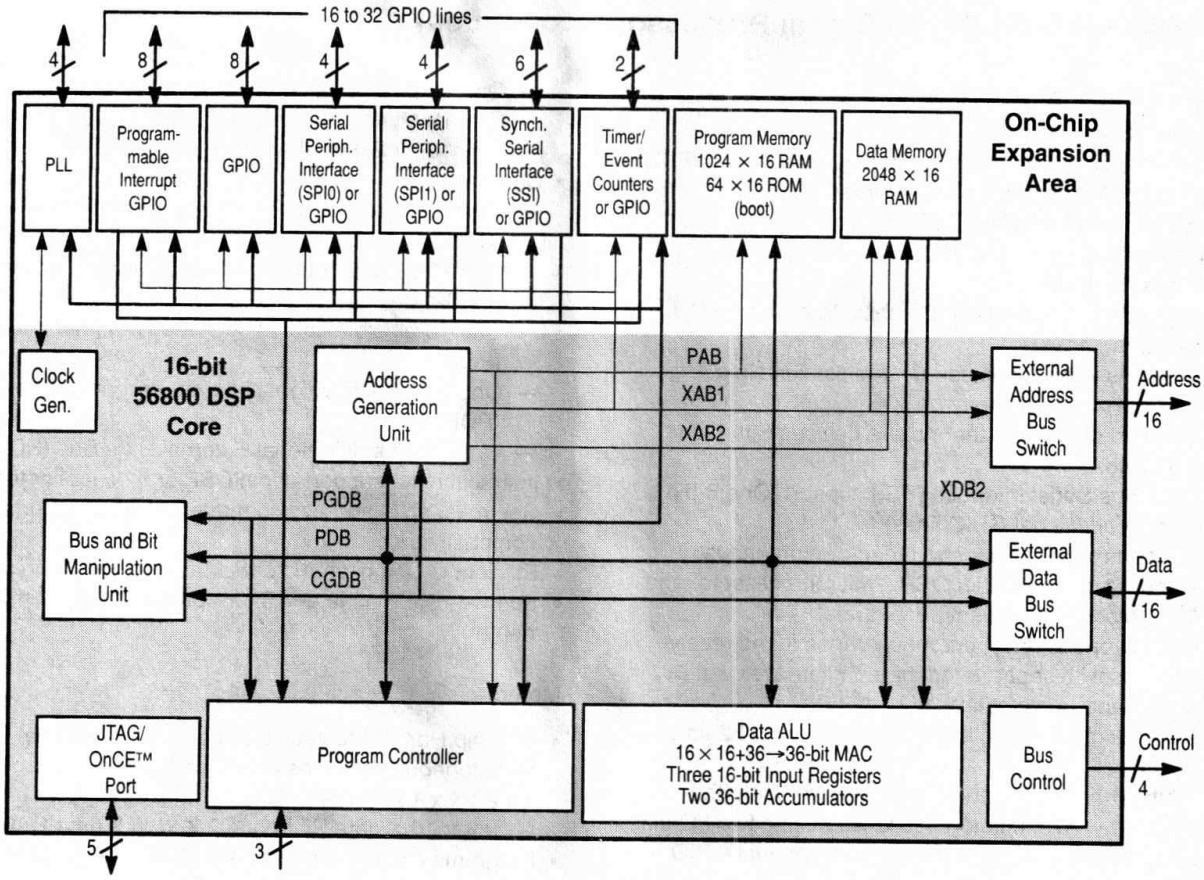

DSP56800—16-Bit Digital Signal Processors

The DSP56800 core family is the first architecture designed to enable digital signal processing and embedded microcontroller functionality. This multi-functional approach supports applications requiring both signal processing and control functionality, such as wireless messaging, digital answering machines, feature phones, and low-cost wireline modems.

The first two DSP56800 family members, the DSP56L811 and DSP56L812, are identical except for memory configuration. The DSP56L811 contains 1 K of Program RAM and 2 K of data RAM. The DSP56L812 features 22 K of Program ROM, 2 K of data ROM, and 2 K of data RAM.

DSP56L811 Features

Digital Signal Processing Core

- Efficient 16-bit DSP56800 family DSP engine
- Up to 20 Million Instructions Per Second (MIPS) at 40 MHz
- Single-cycle 16 x 16-bit parallel Multiplier-Accumulator (MAC)
- Two 36-bit accumulators including extension bits
- Parallel instruction set with unique DSP addressing modes
- Hardware DO and REP loops
- DO loops nestable in software
- Address buses:
  - — One 16-bit internal memory address bus (XAB1)
  - — One 16-bit internal memory address bus (XAB2)
  - — One 19-bit internal Program Address Bus (PAB)
  - — One 16-bit External Address Bus (EAB)
- Data buses:
  - — One 16-bit bidirectional internal memory data bus (CGDB)
  - — One 16-bit unidirectional internal memory data bus (XDB2)
  - — One 16-bit bidirectional dedicated peripheral data bus (PGDB)
  - — One 16-bit bidirectional internal Program Data Bus (PDB)
  - — One 16-bit bidirectional External Data Bus (EDB)
- Instruction set supports both DSP and controller functions
- Controller style addressing modes and instructions for compact code
- Efficient C Compiler and local variable support
- Software subroutine and interrupt stack with unlimited depth

Memory

- On-chip Harvard architecture permits up to three simultaneous accesses to program and data memory
  - — 1 K x 16 Program RAM
  - — 64 x 16 bootstrap ROM
  - — 2 K x 16 X data RAM
  - — Programs can run out of X data RAM

DSP56800—16-Bit Digital Signal Processors (continued)

Peripheral and Support Circuits

- External Memory Interface (EMI)
- Sixteen dedicated General Purpose Input/Output (GPIO) pins (eight pins programmable as interrupts)
- Serial Peripheral Interface (SPI) support: Two configurable 4-pin ports (SPI0 and SPI1) (or eight additional GPIO lines)
  - — Supports LCD drivers, A/D subsystems, and MCU systems
  - — Supports inter-processor communications in a multiple master system
  - — Demand-driven master or slave devices with high data rates
- Synchronous Serial Interface (SSI) support: One 6-pin port (or six additional GPIO lines)
  - — Supports serial devices with one or more industry-standard codecs, other DSPs, microprocessors, and Motorola SPI-compliant peripherals
  - — Asynchronous or synchronous transmit and receive sections with separate or shared internal/external clocks and frame syncs
  - — Network mode using frame sync and up to 32 time slots
  - — 8-bit, 10-bit, 12-bit, and 16-bit data word lengths
- Three programmable timers (accessed using two I/O pins that can also be programmed as two additional GPIO lines)
- Two external interrupt/mode control lines
- One external reset for hardware reset
- JTAG/On-Chip Emulation (OnCE™) 5-pin port for unobtrusive, processor speed-independent debugging
- Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the DSP core clock
- Computer-Operating Properly (COP) and Real-Time Interrupt (RTI) timers

Energy Efficient Design

- Power-saving Wait and multiple Stop modes available
- Fully static, HCMOS design for operating frequencies from 40 MHz down to DC
- 100-pin plastic Thin Quad Flat Pack (TQFP) surface-mount package
- 2.7 V–3.6 V power supply

DSP56L812 Features

Digital Signal Processing Core

- Efficient 16-bit DSP56800 core
- Up to 20 Million Instructions Per Second (MIPS) at 40 MHz
- Single-cycle 16 x 16-bit parallel Multiplier-Accumulator (MAC)
- Two 36-bit accumulators including extension bits
- 16-bit bidirectional barrel shifter
- Parallel instruction set with unique DSP addressing modes
- Hardware DO and REP loops
- DO loops nestable in software
- Address buses:
  - — One 16-bit internal memory address bus (XAB1)
  - — One 16-bit internal memory address bus (XAB2)
  - — One 19-bit internal Program Address Bus (PAB)
  - — One 16-bit External Address Bus (EAB)
- Data buses:
  - — One 16-bit bidirectional internal memory data bus (CGDB)
  - — One 16-bit unidirectional internal memory data bus (XDB2)
  - — One 16-bit bidirectional dedicated peripheral data bus (PGDB)
  - — One 16-bit bidirectional internal Program Data Bus (PDB)
  - — One 16-bit bidirectional External Data Bus (EDB)
- Instruction set supports both DSP and controller functions
- Controller style addressing modes and instructions for compact code
- Efficient C Compiler and structured programming support
- Software subroutine and interrupt stack with unlimited depth

Memory

- On-chip Harvard architecture permits up to three simultaneous accesses to program and data memory
  - — 22 K x 16 Program ROM
  - — 2 K x 16 X data ROM and 2 K x 16 X data RAM
- Programs can run out of X data RAM

Peripheral and Support Circuits

- External Memory Interface (EMI)
- Sixteen dedicated General Purpose Input/Output (GPIO) pins (eight pins programmable as interrupts)
- Serial Peripheral Interface (SPI) support: Two configurable 4-pin ports (SPI0 and SPI1) (or eight additional GPIO lines)
  - — Supports LCD drivers, A/D subsystems, and MCU systems
  - — Supports inter-processor communications in a multiple master system
  - — Demand-driven master or slave devices with high data rates
- Synchronous Serial Interface (SSI) support: One 6-pin port (or six additional GPIO lines)
  - — Supports serial devices with one or more industry-standard codecs, other DSPs, microprocessors, and Motorola-SPI-compliant peripherals
  - — Asynchronous or synchronous transmit and receive sections with separate or shared internal/external clocks and frame syncs
  - — Network mode using frame sync and up to 32 time slots
  - — 8-bit, 10-bit, 12-bit, and 16-bit data word lengths
- Three programmable 16-bit timers (accessed using two I/O pins that can also be programmed as two additional GPIO lines)
- Computer-Operating Properly (COP) and Real-Time Interrupt (RTI) timers
- Two external interrupt/mode control pins
- One external reset pin for hardware reset

DSP56800—16-Bit Digital Signal Processors (continued)

- JTAG/On-Chip Emulation (OnCE™) 5-pin port for unobtrusive, processor speed-independent debugging
- Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the DSP core clock

Energy Efficient Design

- Power-saving Wait and multiple Stop modes available
- Fully static, HCMOS design for 40 MHz to DC operating frequencies
- 100-pin plastic Thin Quad Flat Pack (TQFP) surface-mount package
- Pin-compatible with the DSP56L811
- 2.7 V–3.6 V power supply

DSP96002—32-Bit Digital Signal Processors

The DSP96002 has full architecture compatibility with the 16-bit DSP56100 and 24-bit DSP56000 families. The DSP96002 is the first in a family of 32-bit IEEE floating point DSP devices. The DSP96002 has two identical memory expansion ports simplifying network configurations for multiprocessor and DSP96002 communications. These ports interface to SRAM, DRAM (operating in their fast access modes), video RAM, or directly to other processors with Host Interface logic.

Although designed primarily for image processing, other proven applications include communications, spectrum analysis, instrumentation, speech processing, and pattern recognition.

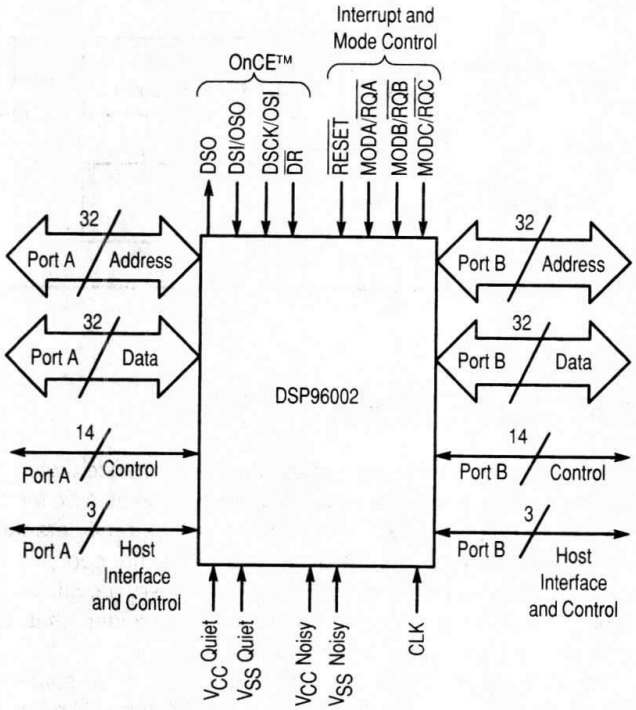

DSP96002 Features

DSP96000 Family Architecture

- Full IEEE Standard 754 compatible for 32-bit (SP) and 44-bit (SEP) arithmetic
- 20 MIPS, 50 ns instruction cycle at 40 MHz
- 60 Million Floating Point Operations Per Second (MFLOPS) at 40 MHz
- Single cycle 32 x 32 → 96-bit Multiplier-Accumulator (MAC)
- Ten 96-bit general purpose data registers
- Zero-overhead nested DO loops
- Two instruction-cycle fast interrupts
- Low-power Wait and Stop modes
- On-Chip Emulation (OnCE™) port for unobtrusive, full-speed debugging
- 4 K byte instruction cache
- Integer mode available
- Single precision mode available
- Timer/Event Counter

DSP96002 Peripherals

- Two 32-bit address and data host ports
- Dual channel DMA controller

DSP96002 Memories

- 1024 x 32 Program RAM
- 2 x 512 x 32 data RAM
- 2 x 512 x 32 data ROM (sine and cosine tables)

DSP96002 BENCHMARKS

Benchmark	Instruction Cycles
Real	
FIR Filter with Data Shift	1 per Tap
V = V*S + V	2
Lattice Filter with Data Shift	3 per Tap
Cascaded IIR Biquad Filter	4 per Section
Sections (4 coeff.)	
1024-point FFT and bit reversal	12880
Complex	
V = V*V + V	4
FIR Filter with Data Shift	4 per Tap
1024-point FFT and bit reversal	20931
Graphics/Image Processing	
Divide (32-bit accuracy)	7
Square Root (32-bit accuracy)	12
Bezier Cubic Evaluation for	13
Font Compilation	
[4 × 4][4 × 4] = [4 × 4]	67

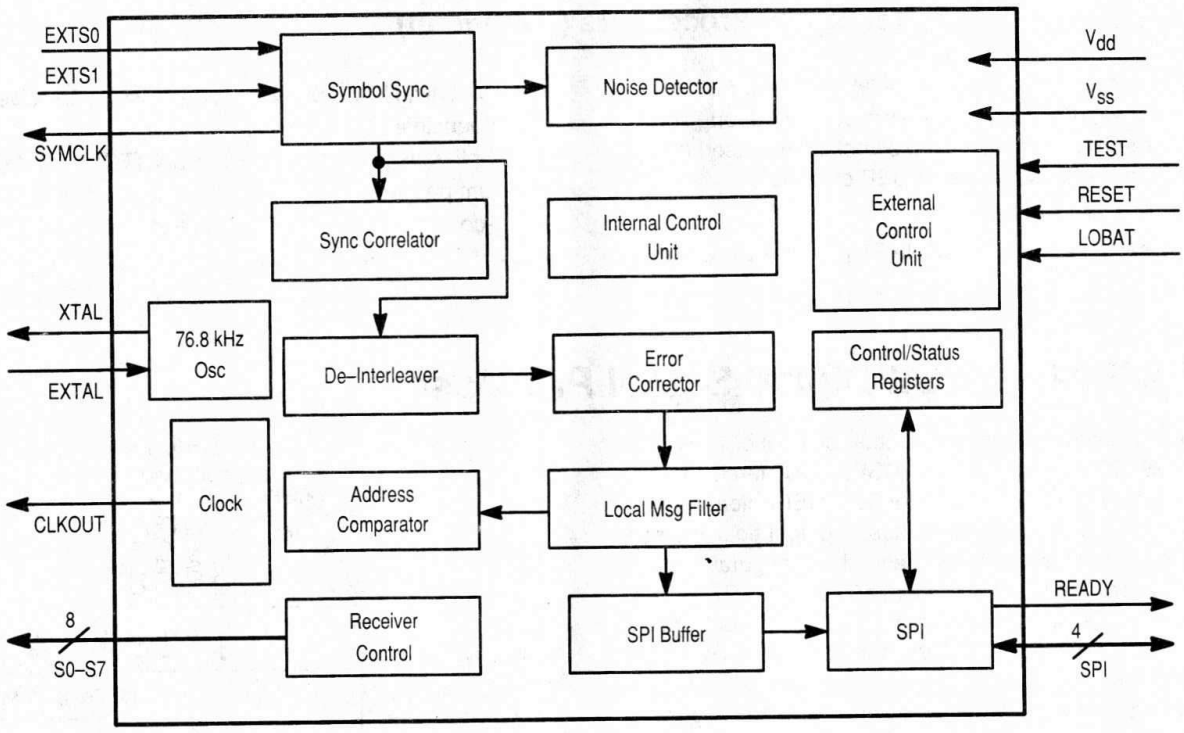

MC68175 FLEX™ Chip

FLEX protocol is a multi-speed, high-performance protocol adopted by leading service providers worldwide as a de facto paging standard. FLEX protocol gives service providers the increased capacity, added reliability, and enhanced pager battery performance they need today. It also provides an upward migration path to the service provider that is completely transparent to the end user.

The MC68175 FLEX chip IC is part of a total solution available from Motorola for providing FLEX capabilities in a low-power, low-cost system. The FLEX chip simplifies implementation of a FLEX paging device by interfacing with any of several off-the-shelf paging receivers, such as the MC13150 or MC3374, and any of several off-the-shelf host microcontroller/microprocessors. The primary function of the FLEX chip is to process information received and demodulated from a radio paging channel, select messages addressed to the paging device, and communicate the message information to the host. The host interprets the message information in an appropriate manner (numeric, alphanumeric, binary, etc.) and handles all the I/O activity. The FLEX chip IC also operates the paging receiver in an efficient Power Consumption mode and enables the host to operate in a low power mode when message information for the paging device is not being received.

FLEX Chip Features

- FLEX paging protocol signal processor
- Sixteen programmable user address words
- Sixteen fixed temporary addresses
- 1600, 3200, and 6400 bits per second (bps) decoding
- Any-phase decoding
- Uses standard Serial Peripheral Interface (SPI) in Slave mode
- Wide operating voltage range from 3.3 V down to 1.8 V
- Allows low current Stop mode operation of host processor
- Highly programmable receiver control
- Real time clock time base
- FLEX fragmentation, and group messaging support
- Real time clock over-the-air update support
- Compatible with synthesized receivers
- Low battery indication (external detector)
- 32-pin Thin Quad Flat Pack (TQFP) package
- Operating temperature range 0° to +70°C (32° to 158°F)

DSP Development Tools

Application Development Systems

Every member of the Motorola family of 16-, 24-, and 32-bit DSPs is supported by a multi-component Application Development System (ADS), which acts as a tool for designing, debugging, and evaluating real-time DSP target system equipment. The ADS simplifies evaluation of the user's prototype hardware/software product by making all of the essential timing and I/O circuitry easily accessible. Using an IBM PC™, Macintosh™ II, a Sun-4™, or Hewlett-Packard Series 700 as a medium between the user and the DSP hardware significantly reduces the overall complexity and cost of development while increasing the capabilities of the system. With the ADS, DSP programs can be executed in real-time, single-instruction-traced or multiple-instruction-stepped, with registers and/or memory block contents displayed. The ADS is fully compatible with the CLAS design-in software package for each product and may act as an accelerator for testing DSP algorithms.

All Application Development Systems offer an On-Chip Emulation (OnCE™) circuit for unobtrusive, processor speed independent debugging. The ADS takes full advantage of this circuit to allow the user non-intrusive control of the target.

General ADS Features

Software

- Single/multiple stepping through DSP object programs
- Conditional/unconditional software and hardware breakpoints
- Program patching using a single-line Assembler/ disassembler
- Session and/or command logging for later reference
- Loading and saving of files to/from Application Development Module (ADM) memory
- Macro command definition and execution
- Display enable/disable of registers and memory
- Debug commands which support multiple DSP development
- Hexadecimal/decimal/binary calculator
- Multiple input/output file access from DSP object programs
- On-line help screens for each command and register

Hardware

- Full speed operation
- Multiple ADM support with programmable ADM addressing
- Stand-alone operation of ADM after initial development

DSP56002ADS Features

- Host operating system commands from within ADS user interface program
- 8 K/32 K words of configurable RAM for DSP56002 code development
- 96-pin euro-card connector for accessing all DSP56002 pins
- 1 K words of monitor ROM expandable to 4 K words
- Separate connectors for accessing serial or host/DMA ports

Evaluation Modules

DSP56002EVM

The DSP56002EVM Evaluation Module is a low-cost platform designed to familiarize the user with Motorola's DSP56002 Digital Signal Processor (DSP). The 24-bit precision of the DSP combined with the on-board 32 K words of external SRAM and stereo CD-quality audio codec makes the Evaluation Module ideal for implementing and demonstrating many audio processing algorithms, as well as for learning the architecture and instruction set of the DSP56002 processor. The user need only supply a 7–9 volt calculator-style power supply and an RS-232 serial cable.

The DSP56002EVM comes with Motorola's DSP56000 cross Assembler and Domain Technologies' debug software with windowed user interface. The software runs under MS-DOS on an IBM PC-compatible computer (386 class or higher) and communicates with the Evaluation Module over an RS-232 serial port.

Hardware Features

Fully assembled and tested Printed Circuit Board containing:

- 24-bit DSP56002 Digital Signal Processor operating at 40 MHz
  - — Up to 20 Million Instructions Per Second (MIPS)
  - — 50 ns instruction cycle at 40 MHz
  - — Up to 120 Million Operations Per Second (MOPS) at 40 MHz
  - — Executes a 1024-point complex Fast Fourier Transform (FFT) in 59,898 clocks
  - — Four 24-bit internal data buses and three 16-bit internal address buses for simultaneous accesses to one program and two data memories
  - — 512 x 24-bit on-chip Program RAM with bootstrap ROM
  - — Two 256 x 24-bit on-chip data RAMs
  - — Two 256 x 24-bit on-chip data ROMs containing sine, A-law, and μ-law tables
  - — External memory expansion with 16-bit address and 24-bit data buses
  - — Byte-wide Host Interface (HI) with Direct Memory Access support
  - — Synchronous Serial Interface (SSI) to communicate with codecs and synchronous serial devices
  - — Serial Communication Interface (SCI) for full-duplex asynchronous communications

DSP56002EVM—Evaluation Modules (continued)

  - — 24-bit Timer/Event Counter also generates and measures digital waveforms
  - — On-Chip Emulation (OnCE™) port for unobtrusive, processor speed-independent debugging
  - — Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer
- 32 K x 24-bit zero-wait-state external Static RAM for expansion memory
  - — Option for 32 K x 8 bits of flash EEPROM for program bootstrapping and stand-alone operation
- Crystal Semiconductor's CS4215 stereo CD-quality sigma-delta Analog-to-Digital and Digital-to-Analog converter for high quality audio
  - — 24.576 MHz crystal for audio sampling rates of 48, 32, 16, 9.6, or 8 kHz
  - — 16-bit linear, 8-bit μ-law, 8-bit A-law, and 8-bit linear data formats
  - — Option for other crystals/frequencies for other sample rates, such as 44.1 kHz
- MC7805ACT voltage regulator
- RS-232 interface to OnCE™ controller and Serial Communications Interface (SCI)
  - — Option for a second RS-232 connector for access to the DSP56002 processor's serial communications port (SCI)
- MC68HC705K1 microcontroller performing RS-232-to-OnCE command conversion
- MC33078 pre-amp for analog buffering
- Strip connectors for external access to the DSP56002's memory expansion, Host Interface, and serial communications ports
- Jacks for stereo inputs, outputs, and headphones
- 2.1 mm jack and two screw terminals for power connection
- Documentation for the DSP56002, CS4215, Assembler, and debugger; plus board schematics

Software Features

- Motorola's DSP5600x Cross Assembler
  - — DSP56002 binary code from source code using labels, line numbers, definitions, and titles incorporating the architecture's complete instruction set and addressing modes, memory spaces, and parallel data transfers
  - — Macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Reports for cross-references, instruction cycle count, and memory use
  - — Extensive error checking and reporting
- Domain Technologies' debug software with windowed user interface
  - — Symbolic debugging
  - — Four independent windows for data, disassembly, DSP registers, and commands
  - — Data and registers displayed as fractions, decimals, or hexadecimals
  - — Symbolic addressing and animated ASCII graphical display of memory segments
  - — Up to eight simultaneous breakpoints
  - — Built-in Assembler and disassembler
- Installation instructions and user notes on disk
- Demo software showing the advantages of 24 bits over 16 bits in audio processing
- Self-test files
  - — Executable and source code

DSP56007EVM

The DSP56007EVM Evaluation Module is a low-cost platform for multichannel digital audio applications development and prototyping. It demonstrates the capabilities and features of Motorola's DSP Symphony™ audio products which include the DSP56004, the DSP56004ROM, and the DSP56007. The DSP56007EVM features a DSP56007 with embedded software including FFTs, FIRs, and IIR filters useful in a variety of user developed audio software.

Special versions of the DSP56007EVM are available to authorized licensees of Dolby Laboratories and Lucasfilms Ltd. for supporting Dolby ProLogic®, Home THX™ Theater System, and Dolby AC-3® Surround (using a DSP56009).

The DSP56007EVM is a complete system with high quality stereo Analog-to-Digital conversion and Digital-to-Analog conversion. It also includes microcontroller, RS-232 to OnCE™ port debug interface, LCD display, memory, and digital audio I/O. The user need only supply a dual 8-to-12 volt power supply for analog circuits, an 8-to-15 volt power supply for digital circuits, and an RS-232 serial cable. The DSP56007EVM comes with Motorola's DSP56000 cross Assembler and Domain Technologies' debug software, which features a windowed user interface. This software runs under MS-DOS on an IBM PC-compatible computer (386 class or higher) and communicates with the Evaluation Module over an RS-232 serial port.

Hardware Features

Fully assembled and tested Printed Circuit Board containing:

- 24-bit DSP56007 Digital Signal Processor operating at 66 MHz
  - — Up to 33 Million Instructions Per Second (MIPS)—30.3 ns instruction cycle at 66 MHz
  - — Four 24-bit internal data buses and three 16-bit internal address buses for simultaneous accesses to one program and two data memories
  - — 2176 x 24-bit on-chip Y data RAM and 512 x 24 bit Y data ROM
  - — 1024 x 24-bit on-chip X data RAM and 512 x 24 bit X data ROM
  - — 6400 x 24-bit on-chip Program ROM of which 6348 words are available for the user code and the remaining 52 words include proprietary code for initilization and boot-straps

DSP56007EVM—Evaluation Modules (continued)

  - — 1024 x 24 bits of Y data RAM can be configured as Program RAM, replacing 1280 x 24 bits of Program ROM
  - — On-Chip Emulation (OnCE™) port for unobtrusive, processor speed-independent debugging
  - — Software-programmable, Phase Lock Loop (PLL)-based frequency synthesizer
- External DSP Memory
  - — 8192 bytes SRAM, 8192 bytes non-volatile RAM
  - — SRAM operates at zero wait states at 40 MHz DSP clock speed and with one wait state at 50 and 66 MHz
  - — Contents of SRAM may be block loaded into non-volatile RAM, enabling storage of bootstrap code in the lowest 3072 bytes
  - — Contents of non-volatile RAM may be block loaded into SRAM. This occurs automatically when DSP is bootstrapped in modes 1, 2, or 3
  - — 30-pin SIMM slot for easy DRAM expansion; addresses up to 4 M x 8, uses a standard Macintosh or PC SIMM
- Multichannel audio conversion
  - — Two channels (stereo) A/D audio quality conversion with 20-bit quality
  - — Six channels D/A audio quality conversion with 18-bit quality
  - — Selectable 44.1 and 48 kHz sample frequencies for A/D and D/As
  - — A/D may be clocked by selected sample frequency or by received SPDIF signal
- Convenient Signal I/O
  - — D/A outputs have programmable, analog-domain volume attenuators. These may be used for channel trim and master volume control to enable maximum use of D/A dynamic range at lower output levels
  - — RCA jacks for all analog audio input/output
  - — Optical and transformer-isolated electrical SPDIF/CP340 stereo digital audio inputs and outputs
  - — 50-pin expansion connector allows easy expansion and/or substitution of other input/output peripherals
- Complete User Interface
  - — MC68HC11E9 (52-pin CLCC package) allows the user to substitute user-programmed 68HC11 and prototype custom 68HC11 code
  - — 2 x 16 character Liquid Crystal Display and four soft switches for user interface
  - — Enables use of standard 4 x 4 keypad matrix
  - — Infrared remote control of user interface with optional remote
  - — MC68705 K1 microcontroller performing RS-232-to-OnCE™ port command conversions
- All technical information available for use as a reference design

Software Features

- Motorola's DSP5600x Cross Assembler
  - — DSP56007 binary code from source code using labels, sections, and macro definitions incorporating the DSP's complete instruction set, all addressing modes, and all memory spaces
  - — Offers macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Reports for cross-references, instruction cycle count, and memory usage
  - — Extensive error checking and reporting
- Domain Technologies' debug software with windowed user interface
  - — Symbolic debugging
  - — Four main windows for data, code, DSP registers, and commands
  - — Data and registers displayed in fractional, decimal, or hexadecimal format
  - — Graphical display of memory segments
  - — Up to eight simultaneous software breakpoints
  - — Built-in in-line Assembler and disassembler
- Installation instructions and user notes on disk
- Demo software illustrating the advantage of 24 bits over 16 bits in audio processing
- I/O drivers and microcontroller interface software
- Microcontroller code for user interface and DSP control
- Sound field processing demo software
  - — executable and source code
- Self-test files
  - — executable and source code

DSP56009EVM

The DSP56009EVM Evaluation Module is a low-cost platform for multichannel digital audio applications development and prototyping. It demonstrates the capabilities and features of Motorola's DSP Symphony™ audio products, which include the DSP56004, the DSP56004ROM, the DSP56007, and the DSP56009. The DSP56009EVM features a DSP56009 with embedded software (including FFTs, FIR filters, and IIR filters) that is useful in a variety of user-developed audio software.

The DSP56009EVM is intended to provide a turnkey solution for digital audio decoding in audio/video applications, such as stereos and television sets. It provides full support for Dolby Pro Logic® and Dolby AC-3® Surround embedded in software. This on-board functionality is ready to use immediately.

This Evaluation Module is a complete system with high quality stereo Analog-to-Digital (A/D) conversion and six channels of Digital-to-Analog (D/A) conversion. The onboard circuitry includes a microcontroller, RS-232-to-On-Chip Emulation (OnCE™) port debug interface, LCD display, memory, and digital audio Input/Output (I/O). The user only needs to supply a dual 8-to-12 volt power supply for analog circuits, an 8-to-15 volt power supply for digital circuits, and an RS-232 serial cable.

DSP56009EVM—Evaluation Modules (continued)

The DSP56009EVM also includes Motorola's DSP56000 cross Assembler and Domain Technologies' Debug-56K debugging software, which runs under Microsoft® Windows™ 3.1 and Windows 95 on IBM PC-compatible computers (386 class or higher) and communicates with the evaluation module via an RS-232 serial port.

Hardware Features

The DSP56009EVM includes a fully assembled and tested Printed Circuit Board containing:

- 24-bit DSP56009 Digital Signal Processor operating at 81 MHz
  - — 40.5 Million Instructions Per Second (MIPS), 24.7 ns instruction cycle at 81 MHz
  - — Four 24-bit internal data buses and three 16-bit internal address buses for simultaneous accesses to one program and two data memories
  - — 4608 x 24-bit on-chip X data RAM and 3072 x 24-bit X data ROM
  - — 4352 x 24-bit on-chip Y data RAM and 1792 x 24-bit Y data ROM
  - — 512 x 24-bit Program RAM
  - — Additional 2304 x 24-bits X and Y data RAM configurable as Program RAM
  - — 10240 x 24-bit on-chip Program ROM
  - — OnCE port for unobtrusive, processor speed-independent debugging
  - — Software-programmable, Phase Lock Loop (PLL)-based frequency synthesizer
- External DSP memory
  - — 8192 bytes SRAM, 8192 bytes non-volatile RAM
  - — SRAM operates at zero wait states at 40 MHz, one wait state at 50, 66, and 81 MHz
  - — Contents of SRAM and non-volatile RAM block-loadable into non-volatile RAM
  - — Standard 30-pin SIMM slot addresses up to 4 M x 8 for easy DRAM expansion
- Complete user interface
  - — One-time-programmable MC68HC711E9 (socketed 52-pin CLCC package) allows user-programmed 68HC11 and prototyping custom 68HC11 code
  - — MC68705K1 performs RS-232-to-OnCE port command conversion
  - — 2 x 16 character LCD display, four soft switches, and optional 16-key keypad
  - — Infrared remote control of user interface with optional remote
- Convenient signal I/O
  - — D/A outputs with programmable, analog-domain attenuators for channel trim and master volume control give maximum dynamic range at lower output levels
  - — RCA jacks for all analog audio I/O
  - — Optical and transformer-isolated SPDIF/CP340 stereo digital audio I/O
  - — 50-pin expansion connector for expansion or substitution of other I/O peripherals
- Multi-channel audio conversion
  - — Two-channel (stereo) A/D audio-quality conversion with 20-bit quality
  - — Six-channel D/A audio-quality conversion with 18-bit quality
  - — Selectable 44.1 and 48 kHz sample frequencies for A/D and D/A conversion
  - — A/D clocked either by selected sample frequency or by received SPDIF signal
- Reference design information (including microcontroller code) provided on the Motorola DSP WWW site (http://www.motorola-dsp.com)

Software Features

Software included with the DSP56009EVM includes the following:

- Motorola's DSP5600x Cross Assembler
  - — Assembles binary code from source with labels, sections, and macro definitions using the full DSP instruction set, all addressing modes, and all memory spaces
  - — Allows using macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Generates reports for cross-references, instruction cycle count, and memory usage
  - — Provides extensive error checking and reporting
- Domain Technologies' Debug-56K debugging software with windowed user interface
  - — Provides four main windows for data, code, DSP registers, and commands
  - — Performs symbolic debugging with eight simultaneous software breakpoints
  - — Displays data and registers in fractional, decimal, or hexadecimal format
  - — Graphically displays memory segments
  - — Includes a built-in in-line Assembler and disassembler
- Installation instructions and user notes on disk
- Demo software and example pass-through code
- Interface software, drivers, and microcontroller code for user I/F and DSP control

DSP56302EVM

The DSP56302 Evaluation Module (DSP56302EVM) is designed as a low-cost platform for developing real-time software and hardware products to support a new generation of applications in wireless, telecommunications, and multimedia products using multi-line voice/data/fax processing, videoconferencing, audio applications, control, and general digital signal processing. The user can download software to on-chip or on-board RAM, then run and debug it. The user can also connect hardware, such as external memories and A/D or D/A converters, for product development. The 24-bit precision of the DSP56302 Digital Signal Processor (DSP) combined with the on-board 32 K of external SRAM and Crystal Semiconductor's CS4215 stereo, CD-quality, audio codec makes the DSP56302EVM ideal for implementing and demonstrating many communications and audio processing algorithms, as well as for learning the architecture and instruction set of the DSP56302 processor.

Hardware Features

- 24-bit DSP56302 Digital Signal Processor
- High Performance DSP56300 core
  - — 66/80 Million Instructions Per Second (MIPS) with a 66/80 MHz clock
  - — Object-code compatible with the DSP56000 core
  - — Highly parallel instruction set
  - — Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
  - — 56-bit parallel barrel shifter
  - — 24-bit or 16-bit arithmetic support under software control
  - — Position Independent Code (PIC) Support
  - — Unique DSP addressing modes
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
  - — On-chip concurrent six-channel DMA controller
  - — On-chip Phase Lock Loop (PLL)
  - — On-Chip Emulation (OnCE™) module
  - — JTAG port
  - — Address Tracing mode reflects internal Program RAM accesses at external port
- On-Chip Memories
  - — Program RAM, Instruction Cache, X data RAM, and Y data RAM size is programmable:
  - — 192 x 24-bit bootstrap ROM
- Off-Chip Memory Expansion
  - — Data memory expansion to two memory spaces of 256 K x 24-bit words
  - — Program memory expansion to one memory space of 256 K x 24-bit words
  - — External memory expansion port
  - — Four chip-select logic lines for glueless interface to SRAMs and SSRAMs
  - — On-chip DRAM controller for glueless interface to DRAMs
- On-Chip Peripherals
  - — Enhanced DSP56000-like 8-bit parallel Host Interface (HI08)
  - — Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1)
  - — Serial Communications Interface (SCI) with baud rate generator
  - — Triple timer module
  - — Up to thirty-four programmable General Purpose Input/Output (GPIO) pins, depending on which peripherals are enabled
- Reduced Power Dissipation
  - — Very low power CMOS design
  - — Wait and Stop low power standby modes
  - — Fully-static logic, operation from the device maximum frequency down to DC
  - — 32 K x 24-bit Fast Static RAM for expansion memory
  - — 64 K x 8-bit Flash PEROM for stand-alone operation
  - — 16-bit CD-quality audio codec
- Two channels of 16-bit Analog-to-Digital (A/D) conversion
- Two channels of 16-bit Digital-to-Analog (D/A) conversion
- Software-selectable 8-bit and 16-bit data formats, including μ-law and A-law companding
- Stereo jacks for audio input, output, and headphones
- Command Converter
  - — DSP56002 for high-speed OnCE/JTAG command conversion software
  - — JTAG connector for use with the Application Development System (ADS) Command Converter card
- Connectors
  - — Host-to-ISA bus connector
  - — Port A connector
  - — ESSI0, ESSI1, and SCI connector

Software Features

- Motorola's DSP56xxx Cross Assembler
  - — Produces DSP56302 binary code from source code using labels, sections, and macro definitions incorporating the DSP's complete instruction set, all addressing modes, and all memory spaces
  - — Offers macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Creates reports for cross-references, instruction cycle count, and memory usage
  - — Provides extensive error checking and reporting
- Domain Technologies debug software with Windows-based user interface
  - — Symbolic debugging
  - — Windows for data, code, DSP registers, commands, peripherals, etc.
  - — Data and registers displayed in fractional, decimal, or hexadecimal format
  - — Graphical display of memory segments
  - — Up to eight simultaneous software breakpoints
  - — Built-in-line Assembler and disassembler
- Demonstration software and example pass-through code
- Self-test files
  - — Executable and source code (Flash PEROM is preprogrammed with self-test and audio echo software)

DSP56303EVM

The DSP56303 Evaluation Module (DSP56303EVM) is designed as a low-cost platform for developing real-time software and hardware products to support a new generation of applications in wireless, telecommunications, and multimedia products using multi-line voice/data/fax processing, videoconferencing, audio applications, control, and general digital signal processing. The user can download software to on-chip or on-board RAM, then run and debug it. The user can also connect hardware, such as external memories and A/D or D/A converters, for product development. The 24-bit precision of the DSP56303 Digital Signal Processor (DSP) combined with the on-board 32 K of external SRAM and Crystal Semiconductor's CS4215 stereo, CD-quality, audio codec makes the DSP56303EVM ideal for implementing and demonstrating many communications and audio processing algorithms, as well as for learning the architecture and instruction set of the DSP56303 processor.

Hardware Features

- 24-bit DSP56303 Digital Signal Processor
- High Performance DSP56300 core
  - — 66/80 Million Instructions Per Second (MIPS) with a 66/80 MHz clock
  - — Object-code compatible with the DSP56000 core
  - — Highly parallel instruction set
  - — Fully pipelined 24 x 24-bit parallel Multiplier-Accumulator (MAC)
  - — 56-bit parallel barrel shifter
  - — 24-bit or 16-bit arithmetic support under software control
  - — Position Independent Code (PIC) support
  - — Unique DSP addressing modes
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
  - — On-chip concurrent six-channel DMA controller
  - — On-chip Phase Lock Loop (PLL)
  - — On-Chip Emulation (OnCE™) module
  - — JTAG port
  - — Address Tracing mode reflects internal Program RAM accesses at external port
- On-Chip Memories
  - — Program RAM, Instruction Cache, X data RAM, and Y data RAM size is programmable:
  - — 192 x 24-bit bootstrap ROM
- Off-Chip Memory Expansion
  - — Data memory expansion to two memory spaces of 256 K x 24-bit words
  - — Program memory expansion to one memory space of 256 K x 24-bit words
  - — External memory expansion port
  - — Four chip-select logic lines for glueless interface to SRAMs and SSRAMs
  - — On-chip DRAM controller for glueless interface to DRAMs
- On-Chip Peripherals
  - — Enhanced DSP56000-like 8-bit parallel Host Interface (HI08)
  - — Two Enhanced Synchronous Serial Interfaces (ESSI0 and ESSI1)
  - — Serial Communications Interface (SCI) with baud rate generator
  - — Triple timer module
  - — Up to thirty-four programmable General Purpose Input/Output (GPIO) pins, depending on which peripherals are enabled
- Reduced Power Dissipation
  - — Very low power CMOS design
  - — Wait and Stop low power standby modes
  - — Fully-static logic, operation from the device maximum frequency down to DC
- 32 K x 24-bit fast Static RAM for expansion memory
- 64 K x 8-bit Flash PEROM for stand-alone operation
- 16-bit CD-quality audio codec
  - — Two channels of 16-bit Analog-to-Digital (A/D) conversion
  - — Two channels of 16-bit Digital-to-Analog (D/A) conversion
  - — Software-selectable 8-bit and 16-bit data formats, including μ-law and A-law companding
  - — Stereo jacks for audio input, output, and headphones
- Command Converter
  - — DSP56002 for high-speed OnCE/JTAG command conversion software
  - — JTAG connector for use with the Application Development System (ADS) command converter card
- Connectors
  - — Host-to-ISA bus connector
  - — Port A connector
  - — ESSI0, ESSI1, and SCI connector

Software Features

- Motorola's DSP56xxx cross assembler
  - — Produces DSP56303 binary code from source code using labels, sections, and macro definitions incorporating the DSP's complete instruction set, all addressing modes, and all memory spaces
  - — Offers macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Creates reports for cross-references, instruction cycle count, and memory usage
  - — Provides extensive error checking and reporting
- Domain Technologies debug software with Windows-based user interface
  - — Symbolic debugging
  - — Windows for data, code, DSP registers, commands, peripherals, etc.
  - — Data and registers displayed in fractional, decimal, or hexadecimal format
  - — Graphical display of memory segments
  - — Up to eight simultaneous software breakpoints
  - — Built-in-line Assembler and disassembler
- Demonstration software and example pass-through code
- Self-test files
  - — executable and source code (Flash PEROM is preprogrammed with self-test and audio echo software.)

DSP56603EVM

The DSP56603 Evaluation Module (DSP56603EVM) is designed as a low-cost platform for developing real-time software and hardware products to support a new generation of applications in wireless and wireline communications, multimedia, speech, control, and general digital signal processing. The user can download software to on-chip or on-board RAM, then run and debug it. The user can also connect hardware, such as external memories and A/D or D/A converters, for product development. The 16-bit precision of the DSP56603 Digital Signal Processor (DSP) combined with the on-board 32 K of external SRAM and Crystal Semiconductor's CS4215 stereo, CD-quality, audio codec makes the DSP56603EVM ideal for implementing and demonstrating many communications and speech processing algorithms, as well as for learning the architecture and instruction set of the DSP56603 processor.

Hardware Features

- 16-bit DSP56603 Digital Signal Processor
- High Performance DSP56600 core
  - — 60 Million Instructions Per Second (MIPS) with a 60 MHz clock (at 2.7 volts)
  - — Object-code compatible with the DSP56000 and DSP56300 cores
  - — Highly parallel instruction set
  - — Fully pipelined 16 x 16-bit parallel Multiplier-Accumulator (MAC)
  - — Two 40-bit accumulators including extension bits
  - — 40-bit parallel barrel shifter
  - — Position Independent Code (PIC) support
  - — Unique DSP addressing modes
  - — On-chip memory-expandable hardware stack
  - — Nested hardware DO loops
  - — Fast auto-return interrupts
  - — On-chip Phase Lock Loop (PLL)
  - — On-Chip Emulation (OnCE™) module
  - — JTAG port
  - — Address Tracing mode reflects internal Program RAM accesses at external port
  - — On-chip support for software patching and enhancements
- On-Chip Memories
  - — Program RAM, X data RAM, and Y data RAM size is programmable:
  - — 3 K x 24-bit bootstrap ROM
  - — Off-Chip Memory Expansion
  - — Program memory expansion to one memory space of 64 K x 24-bit words
- On-Chip Peripherals
  - — Enhanced DSP56000-like 8-bit parallel Host Interface (HI08)
  - — Two Synchronous Serial Interfaces (SSI0 and SSI1)
  - — Triple timer module
  - — As many as thirty-four programmable General Purpose Input/Output (GPIO) pins, depending on which peripherals are enabled
- Reduced Power Dissipation
  - — Very low power CMOS design
  - — Wait and Stop low power standby modes
  - — Fully static logic, operation from the device maximum frequency down to DC
- 32 K x 24-bit Fast Static RAM for external program memory expansion
- 16-bit CD-quality audio codec
  - — Two channels of 16-bit Analog-to-Digital (A/D) conversion
  - — Two channels of 16-bit Digital-to-Analog (D/A) conversion
  - — Software-selectable 8-bit and 16-bit data formats, including μ-law and A-law companding
  - — Stereo jacks for audio input, output, and headphones
- JTAG Controller
  - — On-board DSP56002 for high-speed JTAG/OnCE serial transfers
  - — JTAG connector for use with the Application Development System (ADS) Command Converter card
- Connectors
  - — Host port connector
  - — External memory expansion connector
  - — SSI0, SSI1, and GPIO connector
  - — RS-232 serial connector to host computer

Software Features

- Motorola's DSP56xxx Cross Assembler
  - — Produces DSP56603 binary code from source code using labels, sections, and macro definitions incorporating the DSP's complete instruction set, all addressing modes, and all memory spaces
  - — Offers macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Creates reports for cross-references, instruction cycle count, and memory usage
  - — Provides extensive error checking and reporting
- Domain Technologies debug software with Windows-based user interface
  - — Symbolic debugging
  - — Windows for data, code, DSP registers, commands, peripherals, etc.
  - — Data and registers displayed in fractional, decimal, or hexadecimal format
  - — Graphical display of memory segments
  - — Up to eight simultaneous software breakpoints
  - — Built-in-line Assembler and disassembler
- Demonstration software and example pass-through code
- Self-test files—executable and source code

DSP56L811EVM

The DSP56L811 Evaluation Module (DSP56L811EVM) is designed as a low-cost platform for developing real-time software and hardware products to support a new generation of applications in digital messaging, two-way radio, speech processing, and consumer electronics. The user can download software to on-chip or on-board RAM, then run and debug it. The 16-bit precision of the DSP56L811 Digital Signal Processor (DSP) combined with the on-board 64 K x 16-bit external SRAM and Motorola's MC145483 13-bit linear voice audio codec makes the DSP56L811EVM ideal for developing and implementing many messaging and audio processing algorithms, as well as for learning the architecture and instruction set of the DSP56L811 processor. The user can connect hardware, such as external memories and other devices, A/D or D/A converters, keypads, displays, and so forth via the expansion connectors.

Hardware Features

- 16-bit DSP56L811 Digital Signal Processor
- DSP56800 core
  - — Efficient 16-bit fixed point DSP56800 family DSP engine
  - — Up to 20 Million Instructions Per Second (MIPS) at 40 MHz
  - — Single-cycle 16 x 16-bit parallel Multiplier-Accumulator (MAC)
  - — Two 36-bit accumulators including extension bits
  - — 16-bit bidirectional barrel shifter
  - — Parallel instruction set with unique DSP addressing modes
  - — Hardware DO and REP loops
  - — DO loops nestable in software
  - — Address buses:
    - — One 16-bit internal memory address bus (XAB1)
    - — One 16-bit internal memory address bus (XAB2)
    - — One 19-bit internal Program Address Bus (PAB)
    - — One 16-bit External Address Bus (EAB)
  - — Data buses:
    - — One 16-bit bidirectional internal memory data bus (CGDB)
    - — One 16-bit unidirectional internal memory data bus (XDB2)
    - — One 16-bit bidirectional dedicated Peripheral Data Bus (PGDB)
    - — One 16-bit bidirectional internal Program Data Bus (PDB)
    - — One 16-bit bidirectional External Data Bus (EDB)
  - — Instruction set supports both DSP and controller functions
  - — Controller style addressing modes and instructions for compact code
  - — Efficient C Compiler and local variable support
  - — Software subroutine and interrupt stack with unlimited depth
  - — On-Chip Memories
    - — On-chip Harvard architecture permits up to three simultaneous accesses to program and data memory
    - — 1 K x 16 Program RAM
    - — 64 x 16 bootstrap ROM
    - — 2 K x 16 X data RAM
    - — Programs can run out of X data RAM
- Peripheral and Support Circuits
  - — External Memory Interface (EMI)
  - — Sixteen dedicated General Purpose Input/Output (GPIO) pins (eight pins programmable as interrupts)
  - — Serial Peripheral Interface (SPI) support: Two configurable 4-pin ports (SPI0 and SPI1) (or eight additional GPIO lines)
    - — Supports LCD drivers, A/D subsystems, and MCU systems
    - — Supports inter-processor communications in a multiple master system
    - — Demand-driven master or slave devices with high data rates
  - — Synchronous Serial Interface (SSI) support: One 6-pin port (or six additional GPIO lines)
    - — Supports serial devices with one or more industry-standard codecs, other DSPs, microprocessors, and Motorola SPI-compliant peripherals
    - — Asynchronous or synchronous transmit and receive sections with separate or shared internal/external clocks and frame syncs
    - — Network mode using frame sync and up to 32 time slots
    - — 8-bit, 10-bit, 12-bit, and 16-bit data word lengths
  - — Three programmable 16-bit timers (accessed using two I/O pins that can also be programmed as two additional GPIO lines)
  - — Computer-Operating Properly (COP) and Real-Time Interrupt (RTI) timers
  - — Two external interrupt/mode control pins
  - — One external reset pin for hardware reset
  - — JTAG/On-Chip Emulation (OnCE) 5-pin port for unobtrusive, processor speed-independent debugging
  - — Software-programmable, Phase Lock Loop-based (PLL) frequency synthesizer for the DSP core clock
- Energy Efficient Design
  - — Power-saving Wait and multiple Stop modes available
  - — Fully static, HCMOS design for 40 MHz to DC operating frequencies
  - — 100-pin plastic Thin Quad Flat Pack (TQFP) surface-mount package
  - — 2.7 V–3.6 V power supply
- 32 K x 16-bit Fast Static RAM for expansion program memory
- 32 K x 16-bit Fast Static RAM for expansion data memory
- 13-bit linear audio codec
- Command Converter
  - — Motorola MC68HC705C4 for high-speed JTAG/OnCE command conversion
  - — JTAG connector for use with the Application Development System (ADS) Command Converter card
- Connectors
  - — RS-232 serial interface with local microcontroller support for JTAG/OnCE port
  - — Two 70-pin connectors that allow access to all DSP56L811 pins
  - — Software Features

DSP56L811EVM—Evaluation Modules (continued)

- Motorola's DSP56xxx Cross Assembler
  - — Produces DSP56L811 binary code from source code using labels, sections, and macro definitions incorporating the DSP's complete instruction set, all addressing modes, and all memory spaces
  - — Offers macros, expression evaluation, and functions for strings, data conversion, and transcendentals
  - — Creates reports for cross-references, instruction cycle count, and memory usage
  - — Provides extensive error checking and reporting
- Domain Technologies debug software with Windows-based user interface
  - — Symbolic debugging
  - — Windows for data, code, DSP registers, commands, peripherals, etc.
  - — Data and registers displayed in fractional, decimal, or hexadecimal format
  - — Graphical display of memory segments
  - — Up to eight simultaneous software breakpoints
  - — Built-in-line Assembler and disassembler

MC68175FDB FLEX™ DEVELOPMENT BOARD

The MC68175FDB FLEX Development Board is designed as a flexible platform for developing FLEX paging devices using the MC68175 FLEX™ chip decoder in conjunction with the Motorola FLEX™ 2-bit Analog-to-Digital (A/D) converter (or equivalent).

This two-chip solution simplifies the implementation of a FLEX™ paging device by accepting four-level audio signals from a wide range of readily-available paging receiver devices, and communicating via the Serial Peripheral Interface (SPI) port with a wide range of standard microcontrollers and microprocessors.

The Motorola FLEX™ 2-bit A/D converter accepts the four-level audio signal from the RF front end, and converts it to a 2-bit encoded symbol format. The symbols are passed directly to the MC68175 FLEX chip decoder, which handles the FLEX protocol, assembles the message packets, and communicates with the host microcontroller or microprocessor via the SPI connector.

MC68175FDB Features

MC68175 FLEX™ Chip Decoder IC

- FLEX paging protocol signal processor
  - — Sixteen programmable user address words
  - — Sixteen fixed temporary addresses
  - — 1600-, 3200-, and 6400-bits-per-second decoding
  - — Any-phase or single-phase decoding
  - — Uses standard Serial Peripheral Interface (SPI) in Slave mode
  - — Interrupt-driven communication allows low-current Stop mode operation of host processor
  - — Highly programmable receiver control
  - — Real-time clock time base and over-the-air update support
  - — FLEX software fragmentation and group messaging support
  - — Compatible with synthesized receivers
  - — Low Battery Indication (external detector)
  - — 1.8 to 3.3 V low power operation
  - — 32-pin Thin Quad Flat Pack (TQFP) package
- Motorola FLEX™ 2-bit A/D Converter
  - — 8-bit DAC peak and valley detectors
  - — Pin-selectable 1 kHz or 2 kHz 2-pole Butterworth low pass filter
  - — 2-bit A/D Converter
  - — 600 mVp-p input voltage range
  - — 30°C to + 85°C operating temperature range
  - — 100 mA typical operating current at VADD = 2.7 V
  - — Three modes of operation
    - — Fast Track mode-fast approximation to signal peak and valley in one cycle
    - — Slow Track mode-precise peak and valley acquisition in five more cycles
    - — Hold Acquisition
  - — Standby mode for low power consumption
  - — 2 V and 3 V operation, ± 10%, for both VDDD and AVADD
  - — 14-pin SOIC package
- FLEX Development Board Configuration Options
  - — BNC Connector for audio (encoder) input
  - — Receiver Interface Connector
  - — 38.4 kHz clock output for RF module
  - — SPI connector for host communications
  - — Battery Low emulation switch
  - — 2 V and 3 V operation with independent analog and digital supply circuitry
  - — Microprocessor/microcontroller interface buffered for 3 V or 5 V emulation support

Software

The Motorola FLEXstack™ software package is available for free download from the Motorola World-wide Web site at http://www.mot.com/FLEXstack. This package is available as C source, and is written in ANSI C to compile easily for a wide variety of host processors.

DSP Development Software

The Simulator/Macro-Assembler/Linker/Librarian software package is a development system support tool. The Simulator program imitates the operation of the DSP on a clock-cycle by clock-cycle basis and gives an accurate measurement of code execution time. All on-chip peripheral operations, memory and register updates, and exception processing activities may be functionally simulated.

User Friendly

- GUI works native to three operation systems:
  - — SunOS
  - — Windows 3.1
  - — HPUX
- Multiple overlapping windows for the display of debugging information, command input registers, memory, and programs
- Pull down menus for ease of use:
  - — Dialog boxes for selecting options of complex commands
  - — Tool bar will provide fast access to commonly performed actions
  - — Keyboard accelerators will be defined for commonly executed commands
  - — Help viewer will be provided for viewing pre-defined help on selected topics

Debugging Capabilities for C Language and Assembly

- Assembly language symbolic or C Language source code debugging capabilities

The full-featured Macro Cross Assembler translates one or more source files containing instruction mnemonics, operands, and assembler directives into a Common Object File Format (COFF) file, which is directly loadable by the Simulator. It supports the full instruction set, memory spaces, and parallel transfer fields of the DSP.

The Linker relocates and links relocatable COFF object modules from the Assembler to create an absolute load file, which can be loaded directly into the Simulator. The Librarian utility will merge separate, relocatable object modules into a single file, allowing frequently used modules to be grouped for convenient linking and storing.

The Assembler and Linker now provide support for assembly language source-level debugging via the Simulator. Global symbols, symbols local to sections, and even underscore labels may be referenced with all scoping constructs intact. In addition, the Assembler generates information about included files and macros. The Assembler and Linker also support numbered counters ranging from 0 to 65535.

C Compiler Packages

A full ANSI C compliant Compiler, based on GNU technology, provides higher efficiency and implements more than twenty major optimization techniques. It has improved in-line assembly capability and an ANSI C preprocessor. The package includes the C Compiler, a new COFF Assembler, Linker, complete ANSI C Libraries, and a new C source level debugger, as well as expanded user's reference manual. The software package is available for various host computers listed.

The M68000 Family

. . . the Upward Compatible 8–/16–/32–Bit Microprocessor Family

In Brief . . .

An MPU For All Functions

To designers of the most advanced microcomputer systems, the Motorola M68000 Family of microprocessors needs no introduction. Products based on its members have become the standard for systems utilizing the UNIX operating system and for CAD/CAM engineering workstations. They are invading the next generation designs of personal computers and color graphics systems, and they find widespread implementation in multi–user/multi–tasking applications and in small business systems. M68000 MPUs are found in the leading products in fault–tolerant systems requiring high performance and parallel processing, and they are the preferred components for artificial intelligence engines requiring large linear addressing capabilities. Control applications include graphics, numerical controllers, robotics, telecommunications switching and PBX voice/data transmission.

Upward Compatibility

The M68000 MPU Family consists of a line of processors based on a 32–bit flexible register set, a large linear address space, a simple yet powerful instruction set and flexible addressing modes. The internal architecture of the 8–, 16–, and 32–bit MPU versions, and the common instruction set, provide software compatibility and offer an easy upward migration path for products requiring increasing levels of processing power.

A Host of Peripherals

A large selection of full–function peripheral chips complements the processor family. Compatible LSI and VLSI chips for memory management, data communications, DMA control, network control, system interfacing, general I/O and graphics, all simplify system design and reduce design and manufacturing cost while improving system performance.

	Page
Microprocessors	2.2–2
Embedded Controllers	2.2–5
Integrated Processors	2.2–7
Coprocessors	2.2–10
DMA Controllers	2.2–10
Network Devices	2.2–10
Data Communication Devices	2.2–12
General Purpose I/O	2.2–12
Fiber Distributed Data Interface	2.2–13
Support Software	2.2–13

Microprocessors

The 68K Family of Microprocessors has revolutionized virtually every segment of the electronic industry. They have set the standard for performance while still maintaining binary software compatibility from generation to generation. The combination of low cost and high performance (measured in $/system MIPS) makes every member of the Family a price performance leader. The M68000 Family provides the widest range of price and performance with choices from 1.6 MIPS to over 100 MIPS.

Table 1.

	68000	68020	68030	68040	68060
MIPS	1.6	5.5	12	35	100
MFLOPS	–	0.25	0.5	3.5	12
Address Range	16M Byte	4G Byte	4G Byte	4G Byte	4G Byte
Data Bus	16 bit	32 bit	32 bit	32 bit	32 bit
Clock Speed (MHz)	8–16	16–33	16–50	25–40	50–66
Instruction Cache	–	256 Byte	256 Byte	4K Byte	8K
Data Cache	–	–	256 Byte	4K Byte	8K
Burst Mode	–	–	16 Byte R	16 Byte R/W	16 Byte R/W
General Purpose Registers	16	16	16	16	16
Address Modes	14	18	18	18	18
On–Chip MMU	No	No	Yes	Yes*	Yes*
Floating–Point Solution	68881	68882	68882	On–Chip	On–Chip

*Separate Instruction/Data

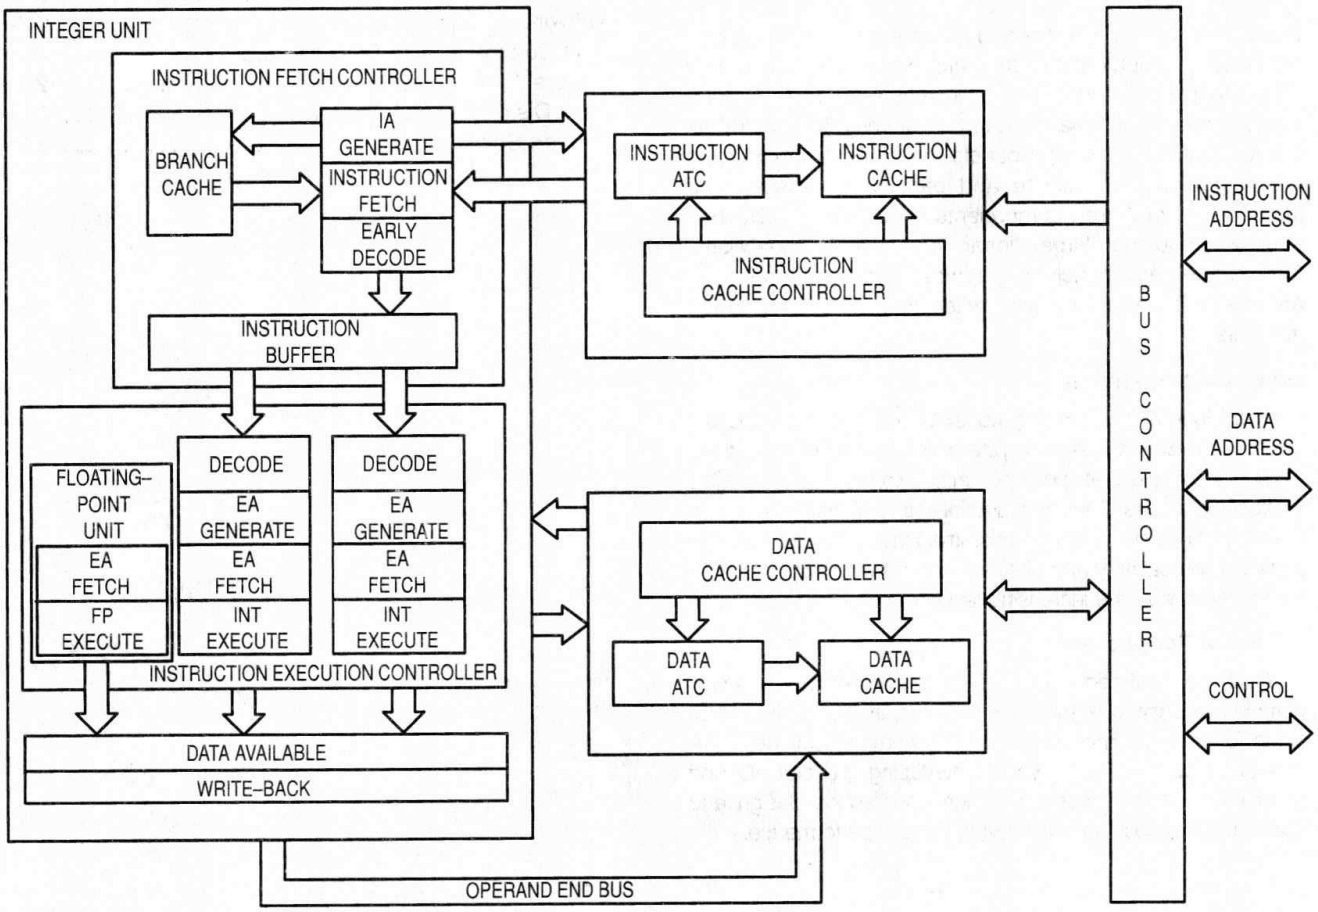

Figure 1. MC68060 Block Diagram

MC68060
Superscalar 32–Bit Microprocessor

The MC68060 is fully compatible with all previous members of the M68000 family. The MC68060 features dual on–chip caches, fully independent demand–paged memory management units (MMUs) for both instructions and data, dual integer execution pipelines, on–chip floating–point unit (FPU) and a branch target cache. A high degree of instruction execution parallelism is achieved through the use of a full internal Harvard architecture, multiple internal buses, independent execution units, and dual instruction issue within the instruction controller. Power management is also a key part of the MC68060 architecture. The MC68060 offers a low–power mode of operation that is accessed through the LPSTOP instruction, allowing for full power–down capability. The MC68060 design is fully static so that when circuits are not in use, they do not draw power. Each unit can be disabled so that power is used only when the unit is enabled and executing an instruction.

Complete code compatibility with the M68000 family allows the designer to draw on existing code and past experience to bring products to market quickly. There is also a broad base of established development tools, including real–time kernels, operating systems, languages and applications, to assist in product design. The functionality provided by the MC68060 makes it the ideal choice for a range of high–performance computing applications as well as many portable applications that require low power and high performance.

MC68040
Third–Generation 32–Bit Microprocessor

The MC68040 is Motorola's third generation of M68000–compatible, high–performance, 32–bit microprocessors. The MC68040 is a virtual memory microprocessor employing multiple, concurrent execution units and a highly integrated architecture to provide very high performance in a monolithic HCMOS device. On a single chip, the MC68040 integrates an MC68030–compatible integer unit, an IEEE 754–compatible floating–point unit (FPU), and fully independent instruction and data demand–paged memory management units (MMUs), including independent 4K–byte instruction and data caches. A high degree of instruction execution parallelism is achieved through the use of multiple independent execution pipelines, multiple internal buses, and a full internal Harvard architecture, including separate physical caches for both instruction and data accesses. The MC68040 also directly supports cache coherency in multimaster applications with dedicated on–chip bus snooping logic.

The MC68040 is an enhanced, 32–bit, HCMOS microprocessor that combines the integer unit processing capabilities of the MC68030 microprocessor with independent 4K–byte data and instruction caches and an on–chip FPU. The MC68040 maintains the 32–bit registers available with the entire M68000 Family as well as the 32–bit address and data paths, rich instruction set, and versatile addressing modes. Instruction execution proceeds in parallel with accesses to the internal caches, MMU operations, and bus controller activity. Additionally, the integer unit is optimized for high–level language environments. The MC68040 is user–object–code compatible with previous members of the M68000 Family and is specifically optimized to reduce the execution time of compiler–generated code. The MC68040 is implemented in Motorola's latest HCMOS technology, providing an ideal balance between speed, power, and physical device size.

Instruction execution is pipelined in both the integer unit and FPU. Independent data and instruction MMUs control the main caches and the address translation caches (ATCs). The ATCs speed up logical–to–physical address translations by storing recently used translations. The bus snooper circuit ensures cache coherency in multimaster and multiprocessing applications. The MC68040 FPU is user–object–code compatible with the MC68882 floating–point coprocessor. The FPU has been optimized to execute the most commonly used subset of the MC68882 instruction set, and includes additional instruction formats for single– and double–precision rounding of results.

The MMUs support multiprocessing, virtual memory systems by translating logical addresses to physical addresses using translation tables stored in memory. Each MMU has two transparent translation registers available that define a one–to–one mapping for address space segments ranging in size from 16 Mbytes to 4 Gbytes each. The instruction and data caches operate independently from the rest of the machine, storing information for fast access by the execution units. Each cache resides on its own internal address bus and internal data bus, allowing simultaneous access to both. The data cache provides writethrough or copyback write modes that can be configured on a page–by–page basis.

The MC68040 bus controller supports a high–speed, nonmultiplexed, synchronous external bus interface, which allows the following transfer sizes: byte, word (2 bytes), long word (4 bytes), and line (16 bytes). Line accesses are performed using burst transfers for both reads and writes to provide high data transfer rates.

MC68030
The Second Generation 32–Bit MPU

The 030 started with a high performance 020 core and added many performance improvement features including increased internal parallelism, dual on–chip caches with a burst fillable mode, dual internal data and address buses, improved bus interface, and on–chip paged memory management unit.

Two independent 32–bit address buses and two 32–bit data buses allow the CPU, caches, MMU, and the bus controller to operate in parallel, so the 030 can, for example, simultaneously access an instruction from the instruction cache, data from the data cache and instruction/data from external memory.

Performance is further enhanced by on–chip instruction and data caches. Separate 256–byte data and instruction caches reduce the access time and increase CPU throughput by providing data and instructions on–chip.

MC68030 (continued)

Overall bus requirements are reduced and multiple processors can run more efficiently thanks to increased bandwidth of the 030 bus, achieved by the enhanced bus controller allowing high speed fills of both data and instruction caches.

The on–chip paged memory management unit translates logical address to the corresponding physical address in 1/2 the time required by the 020 and MC68851 Paged Memory Management Unit. Pipelining permits this translation to be performed in parallel with other functions so that no translation time is added to any bus cycle.

MC68020

The Original 32–Bit Performance Standard

The MC68020, oh twenty, is the industry's leading 32–bit microprocessor because of high performance, architecture, ease of design–in, and long–range compatible growth path.

The 020 has a full 32–bit internal and 32–bit external, regular, symmetrical architecture designed with the customer in mind. It offers all the functionality of the other M68000 Family MPUs, and maintains software user–code compatibility which controls the expense of your product migration.

Programmers appreciate the large general purpose register set, simple yet powerful instruction set and the many flexible M68000 addressing modes. The unique on–chip instruction cache helps provide burst–mode operation to 12.5 MIPS.

The 020 is the proven leader in high performance systems in office automation, engineering workstations, fault tolerant computers, parallel processors, telephone switching systems, and intelligent controllers.

MC68010

A Virtual Memory Enhancement

The MC68010 offers the advantage of Virtual Memory. A high–speed loop mode operation executes tight software loops faster to enhance performance. Its instruction continuation feature has made it the choice for fault–tolerant and parallel processing systems. The MC68010 can support a governing operating system which handles the supervisory chores of any number of subordinate operating systems.

MC68HC000

A Micropower Alternative

HCMOS design gives the MC68HC000 all the functions and performance of its MC68000 predecessors . . . at one–tenth of the operating power requirements. With a maximum power dissipation of only 0.175 watts, the MC68HC000 is ideal for high–performance computer peripherals, industrial controllers, instrumentation and communications equipment.

MC68HC001

Low Power HCMOS 8–/16–/32–Bit Microprocessor

The MC68HC001 provides a functional extension of the MC68HC000 HCMOS 16–/32–bit microprocessor with the addition of statically selectable 8– or 16–bit data bus operation. The MC68HC001 is object–code compatible with the MC68HC000, and code written for the MC68HC001 can be migrated without modification to any member of the M68000 Family. This is possible because the user programming model is identical for all members of the M68000 Family and the instruction sets are proper subsets for the complete architecture.

MC68000

The 16–Bit Foundations

As the first member of the M68000 family, the state–of–the–art technology and advance circuit design concepts of the MC68000 16–bit MPU started a new trend in microprocessor architecture. Its seventeen 32–bit data and address registers permit rapid internal execution of its powerful yet simple instruction set. It is designed for large multiprocessing systems and realtime applications with vectored interrupts, seven priority levels and a 16 megabyte linear addressing space. It offers mainframe–like performance, supporting high–level languages and sophisticated operating systems.

The MC68000 MPU has been joined by more advanced products with even greater capabilities, yet it satisfies a large segment of the existing applications. It is extremely cost competitive and it remains one of the major growth products in the entire MPU line.

MC68008

An 8–Bit Compatible Competitor

With an 8–bit data bus and 32–bit internal architecture, the MC68008 offers performance that competes with a number of 16–bit MPUs. It has the same register set, same instructions, and the same functionality as the MC68000 with extensive exception processing. Large modular programs can be developed and executed efficiently because of the large, 1–megabit non–segmented, linear address space. It is the choice for high performance, cost effective, 8–bit designs, particularly those requiring a migration path to 16–bit or full 32–bit operation.

Embedded Controllers

The principle elements of this popular microprocessor family have now been redesigned specifically for embedded applications. The new 68EC0x0 family including the 68EC000, EC020, EC030 and EC040 MPUs are all optimized for cost–sensitive embedded control designs. The 68EC0x0 family offers the high performance of the 680x0 family, yet streamlines the feature sets for embedded applications. The 68EC0x0 family completes the triad forming the M68000 family of compatible products: the 680x0 family of computer–class central processing units; the 68300 family of integrated processors; and now, the 68EC0x0 family of embedded microprocessors.

Table 2.

	68EC000	68EC020	68EC030	68EC040/ LC040	68040V	68EC060/ LC060
MIPS	2.5	6.5	10.7	44	44	100
Address Range	16M Byte	16M Byte	4G Byte	4G Byte	4G Byte	46
Data Bus	16 bit	32 bit	32 bit	32 bit	32 bit	32 bit
Clock Speeds	8, 10, 12, 16 MHz	16, 25 MHz	25, 40, 50 MHz	20, 25, 33, 40 MHz	25, 33, 40 MHz	50, 60 MHz
Instruction Cache	–	256 Byte	256 Byte	4K Byte	4K Byte	8K Byte
Data Cache	–	–	256 Byte	4K Byte	4K Byte	8K Byte
Burst Fill Caches	–	–	16 Bytes	16 Bytes	16 Bytes	16 Bytes
General Purpose Registers	16	16	16	16	16	16
Address Modes	14	18	18	18	18	18
Floating Point Hardware	68881/68882	68881/68882	68881/68882	None	None	None
Packages	PLCC	PPGA, PQFP	PPGA, CQFP	PGA, CQFP	PGA, CQFP	PGA, CQFP

MC68EC/LC060

32–Bit High–Performance Embedded Controller

The 68EC060 is the newest addition to Motorola's embedded microprocessor family. It is the performance leader for top of the line embedded applications. The 68EC/LC060 offers 100 MIPS performance while maintaining complete backward compatibility with the 680x0 family. The 68LC060 offers a paged memory management unit while the 68EC060 has been optimized for embedded systems requiring lower–cost performance.

MC68EC040

32–Bit High–Performance Embedded Controller

The EC040 is capable of delivering 44 MIPS of sustained performance with a system cost that is unattainable by competing architectures. The LC040 offers all the features of the EC040 plus adds a paged memory management unit allowing more sophisticated operating systems features, including better memory protection.

This impressive performance is a result of a six–level pipelined integer unit, independent four–way set–associative instruction and data caches, and a very high level of on–chip parallelism. The EC040 also supports multimaster and multiprocessor systems with bus snooping.

By integrating all these features into the EC040, the microprocessor is able to perform the vast majority of work on–chip, limiting external memory accesses to allow for higher system performance with less expensive DRAMs. The result is virtual immunity to the effects of memory wait states.

MC68040V

Low–Power 32–Bit Embedded Controller

The 68040V is a low–power version of the MC68LC040. Using advanced static design techniques and 3.3 Volt supply, this part offers all the performance and features of the LC040, but requires much less power. The 040V instruction set is fully 040 compatible, but adds a low–power STOP instruction to allow for software power–down of the processor to save power.

MC68EC030

32–Bit Enhanced Embedded Controller

The MC68EC030 is a 32–bit embedded controller that streamlines the functionality of an MC68030 for the requirements of embedded control applications. The MC68EC030 is optimized to maintain performance while using cost–effective memory subsystems. The rich instruction set and addressing mode capabilities of the MC68020, MC68030, and MC68040 have been maintained, allowing a clear migration path for M68000 systems. The MC68EC030 is object–code compatible with the MC68020, MC68030, and earlier M68000 microprocessors. Burst–mode bus interface is provided for efficient DRAM access.

The MC68EC030 has an on–chip data cache and on–chip instruction cache with 256 bytes each. Dynamic bus sizing is available for direct interfacing to 8–, 16–, and 32–Bit Devices. The MC68EC030 includes 32–bit nonmultiplexed address and data buses, sixteen 32–bit general–purpose data and address registers, and two 32–bit supervisor stack pointers and eight special–purpose control registers. The EC030 provides complete support for coprocessors with the M68000 coprocessor interface. There are two access control registers that allow blocks to be defined for cacheability protection. The pipelined architecture, along with increased parallelism, allows internal caches accesses in parallel with bus transfers and overlapped instruction execution. The enhanced bus controller supports asynchronous bus cycles (three clocks minimum), synchronous bus cycles (two clocks minimum), and burst data transfers (one clock).

MC68EC020

32–Bit Embedded Controller

The 68EC020, with a complete 32–bit internal implementation, has a 32–bit data bus and an on–chip instruction cache to provide dramatically increased performance over 8– and 16–bit microprocessors. In addition, upward migration to the EC020 is made simple with dynamic bus sizing, allowing 8, 16 and 32–bit peripherals to communicate with the microprocessor.

Other performance features include advanced bit manipulation capabilities that provide multiple bit shift operations in a single instruction cycle. This capability greatly simplifies and accelerates the bit operations required in graphics processing and optical recognition applications.

MC68EC000

Low–Powered HCMOS Embedded Controller

The 68EC000 is a low–power HCMOS derivative of the 68000 optimized for cost–effective embedded processing. The EC000 has a flexible data bus that can operate in either 8– or 16–bit modes and a 24–bit address bus that provides 16 Mbytes of memory addressing capability. Electrical characteristics of the 68EC000 have been optimized to ensure easy access to low–cost memories.

The 68EC000 represents the lowest cost entry point to any 32–bit architecture. Coupled with efficient support for high–level languages and real–time operating systems, the 68EC000 provides unparalleled compatible migration paths to higher performance.

Integrated Processors

Powerful solutions to cost–, space–, and power–sensitive embedded applications are provided by the 68300 family of integrated microprocessors and microcontrollers. The 68300 family combines two of Motorola's greatest strengths — the 32–bit microprocessor architecture of the 68000 family and a proliferation of peripheral circuits offering a growing family of integrated solutions.

The 68000 family is based on a proven, expandable architecture that spans the performance range from 1 to over 29 MIPS. This architecture offers the industry's highest level of compatibility for both hardware and software. Motorola's single–chip microcomputers and microcontrollers provide the industry's broadest selection of peripheral combinations, insurance that one will fit the need of practically any application. The 68300 family embraces both of these concepts.

Each member of the 68300 family contains a core processor based on the 68000 family, a System Integration Module (SIM), an on–chip bus and various peripheral modules. The SIMs include support circuitry such as clock generation, external chip selects, system protection, timers and JTAG. The on–chip intermodule bus (IMB) on the CPU32–based 68300s creates a standard interface over which the CPU and each of the modules communicate. The peripheral modules include specialized processors, system controllers, traditional peripherals and memory. Because the peripheral modules are independent from each other, they can appear in multiple 68300 devices. With so many major features incorporated into a single 68300 device, a system designer can realize improved reliability along with significant savings in design time, power consumption, cost, board space, pin count and program development. In a 68300 device, the major functions and glue logic are all properly connected, internally timed with the same fast clock, fully tested and consistently documented.

Table 3.

	68302	**68306**	**68330**	**68331**	**68332**	**68333**	**68334**	**68340**	**68307**	**68322**	**68328**
Core Processor	68000	68EC00	CPU32	CPU32	CPU32	CPU32	CPU32	CPU32	EC000	EC000	EC000
Speeds (MHz)	16, 20	16, 20	16, 25	16	16	16	16	16, 25	16	16, 20	–
DMA	Yes	–	–	–	–	–	–	Yes	–	Yes	–
Serial Processor	Yes	–	–	–	–	–	–	–	–	–	–
Time Processor Unit	–	–	–	–	Yes	Yes	Yes	–	–	–	–
Flash EEPROM	–	–	–	–	–	64K	–	–	–	–	–
Serial I/O	Yes	Yes	–	Yes	Yes	Yes	–	Yes	Yes	–	Yes
Timers	1	–	–	1	–	–	–	2	2	1	2
A/D Converter	–	–	–	–	–	Yes	Yes	–	–	–	–
SRAM	1K	–	–	–	2K	4K	1K	–	–	–	–
DRAM Controller	–	Yes	–	–	–	–	–	–	–	Yes	–
Glue Logic (SIM)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
3.3 Volts Available	–	–	–	–	–	–	–	Yes	Yes	–	Yes
Graphic Processor	–	–	–	–	–	–	–	–	No	Yes	No

MC68302

Integrated Multiprotocol Processor

The MC68302 integrated multiprotocol processor (IMP) is a very large–scale integration (VLSI) device incorporating the main building blocks needed for the design of a wide variety of controllers used in the communications industry. The IMP is the first device to offer the benefits of a closely coupled, industry–standard M68000/MC68008 microprocessor core and a flexible communications architecture. The three–channel communications device may be configured to support a number of popular industry interfaces, including those for the Integrated Services Digital Network (ISDN) basic rate and terminal adaptor applications. Through a combination of architectural and programmable features concurrent operation of different protocols (HDLC/SDLC™, UART, BISYNC, DDCMP™, or transparent modes) can easily be achieved. Data concentrators, modems, line cards, bridges, and gateways are examples of suitable applications for this device.

The IMP is a Complementary Metal–Oxide Semiconductor (CMOS) device consisting of an M68000/MC68008 microprocessor core, a system integration block (SIB), and a Communications Processor (CP). By integrating the microprocessor core with the serial ports (in the CP) and the system peripherals (in the SIB), the IMP is capable of handling complex tasks such as all ISDN basic rate (2B+D) access tasks.

MC68306

Integrated 68EC000 Processor

The 68306 integrated EC000 processor includes many of the features commonly found in 68000–based designs. The 68306 includes a 68EC000 core processor, a 68681 Dual Universal Asynchronous Receiver Transmitter (DUART), system integration functions, and a DRAM controller. The on–chip DRAM controller gives the 68306 the family's simplest interface to DRAM–based designs. The DRAM controller easily accommodates 64 Mbytes of memory. The 68306 saves time in the design cycle by providing valuable 68000 system components pre–packaged in one chip.

MC68307

Integrated EC000 Processor

The 68307 is an integrated processor combining a static EC000 processor with multiple inter–chip bus interfaces. The 68307 is designed to provide optimal integration and performance for applications such as digital cordless telephones, portable measuring equipment, and POS terminals. By providing 3.3 V, static operation in a small package, the 68307 delivers cost effective performance to handheld battery–powered applications.

MC68322

Integrated EC000 Printer Processor

The 68322 is a high–performance integrated printer processor that combines a 68EC000 core, a RISC graphics processor, a print engine video controller and numerous system integration features on a single integrated circuit. It is the first of Motorola's M68000 family designed specifically for pinters. The 68322 provides a unique solution for new designs as well as an excellent migration path for existing M68000–powered printers.

MC68328

Integrated EC000 Processor

The 68328 processor provides key features that are suitable for many portable applications. Modules like a real–time clock, LCD controller, pulse–width modulator, timers, master and slave serial peripheral interface, UART and system integration give the engineer more flexibility and resource to design efficient and innovative products.

MC68330

Integrated CPU32 Processor

The 68330 is ideal for applications requiring 32–bit microprocessor performance without the additional expense inherent in 32–bit memory systems. The 68330 is the simplest and lowest priced member of the CPU32–based 68300 family. The 68330 allows the designer access to the high performance of the CPU32 along with minimized external glue logic, while allowing the greatest freedom in selecting needed peripherals, ASICs or gate arrays.

MC68331

32–Bit Microcontroller

The 68331 is well suited to applications requiring simple serial communications and general timing needs. The 68331 contains the CPU32, a SIM, a General Purpose Timer (GPT) and a Queued Serial Module (QSM). The general purpose timer is a simple yet flexible timer that provides four modes of operation with multiple channels for some operations. The QSM provides two modes of communication: an asynchronous channel that provides up to 524–Kbits per second transfer rate and a serial peripheral interface with separate 16–word receive/transmit queues.

MC68332

32–Bit Microcontroller

The 68332 is especially suited for high–performance timing applications such as automotive engine control, precision motor control and industrial robotics. The powerful Time Processor Unit (TPU) distinguishes the 68332 providing optimum performance in controlling time–related activity. It drastically reduces the need for CPU intervention with its dedicated execution unit, tri–level prioritized scheduler, data storage RAM and dual time bases. In addition to the TPU and CPU32, the 68332 features the QSM, a SIM and 2–Kbytes of standby static RAM.

MC68F333

32–Bit Microcontroller

The 68F333 provides the highest level of integration available to high–performance timing applications such as avionics and automotive engine control. The 68F333 contains the CPU32, the TPU and the QSM. It also adds two banks of flash EEPROM totaling 64–Kbytes, a total of 4–Kbytes of SRAM (512 bytes separately powered) and an 8–channel, 10–bit analog–to–digital converter. The Single–Chip Integration Module (SCIM) allows 18 of the external address and data pins to be converted to I/O pins, resulting in a single–chip solution suitable for many applications.

MC68334

32–Bit Microcontroller

The 68334 is a streamlined version of the 68332, taking advantage of the powerful TPU. The 68334 includes the CPU32 core processor, the TPU, a SIM, 1–Kbyte of SRAM, a 10–bit analog–to–digital converter and up to 47 discrete I/O lines.

MC68340

Integrated Multiprotocol Processor with DMA

The 68340 is excellent for applications requiring high–speed or block data transfers, such as disk drives and navigation systems. The combination of general peripherals and the extremely low power consumption possibilities of the 68340 make it ideal for many battery powered, portable applications such as hand held computers and data acquisition systems.

The most distinguishing 68340 feature is the high speed two channel, 32–bit Direct Memory Access (DMA) controller. Incorporating the CPU32 and DMA on the same chip eliminates the usual bus arbitration and synchronization delays, maximizing data throughout (25–Mbytes per second on a 16–bit bus).

In addition to the CPU32, a SIM and the DMA, the 68340 contains a 68681/2681–compatible DUART. The 68340 also has two identical, versatile counter/timers, each with a 16–bit counter and an 8–bit prescaler with 80 ns resolution.

Coprocessors

MC68851

Paged Memory Management Unit, PMMU

The PMMU is a 32–bit memory manager which provides full support for a demand paged virtual environment with the 68010 or MC68020. It supports a 4–gigabyte addressing space when used as a coprocessor with the MC68020. An on–chip address translation cache minimizes translation delays and maximizes system performance.

MC68881

A Floating Point Coprocessor

Designed specifically for arithmetic expansion of the MC68020 MPUI, this powerful coprocessor can also be used as a peripheral to all other M68000 family members, and with non–M68000 processors as well. It performs floating point math calculations in strict conformance to a full implementation of the IEEE Standard for Binary Floating Point Arithmetic (754) and, in addition to the basic add, subtract, multiply, and divide functions, it handles full selection of transcendental and non–transcendental operations. These operations include root values, trigonometric functions, exponentials, hyperbolics, and logs. All functions are calculated to 80 bits of extended precision in hardware.

MC68882

Enhanced Floating Point Coprocessor

The MC68882 is pin–to–pin hardware and software compatible with the MC68881 Floating Point Coprocessor and implements a variety of performance enhancements including dual–ported registers and an advanced pipeline. Additional circuitry allows execution of multiple instructions in parallel for more than twice the Floating Point performance of the trail–blazing MC68881. Where higher performance requirements indicate, the MC68882 is a drop–in replacement for the MC68881.

DMA Controllers

MC68450

DMA Controller, DMAC

The DMAC maintains high–performance data movement for complex M68000 MPU–based systems. While pin compatible with the MC68440 DDMA, the DMAC offers four completely independent DMA channels. In addition to all the features of the DDMA, the DMAC also provides very sophisticated manipulation of data through sequential and linked array–chained addressing capabilities.

MC68440

Dual Direct Memory Access Controller, DDMA

The DDMA complements the performance capabilities of M68000 microprocessors by moving blocks of data in a quick, efficient manner with a minimum of intervention from the MPU. The DDMA performs memory–to–memory, peripheral–to–memory, and memory–to–peripheral transfers through each of two completely independent DMA channels. The DDMA also offers two interrupt vectors per channel and supports both 8–bit and 16–bit data transfers.

Network Devices

MC68824

Token Bus Controller, TBC

The TBC is the industry's first single–chip VLSI device to implement the IEEE 802.4 Media Access Control Sublayer of the ISO Data Link Layer, as specified by General Motors Manufacturing Automation Protocol, MAP. The TBC supports serial data rates of 1, 5, and 10 Mbps and relieves the host processor of the frame formatting and token management functions. For efficient transfer of data frames, to and from memory, the TBC features an on–chip four–channel DMA with bus master capability, a 32–bit address range, an 8– or 16–bit data bus, and a 40–byte FIFO. The MC68824 also offers support options for network bridges, real–time support and network monitoring services.

MC68184

Broadband Interface Controller

The MC68184 Broadband Interface Controller (BIC) is a high–performance interface device for use with the MC68824 Token Bus Controller (TBC) to implement the digital portion of the physical layer of a broadband IEEE 802.4 token bus node. The BIC manipulates both data and control for RF transmitter circuitry and RF receiver circuitry. The CMOS BIC supports data rates up to 10 Mbps using a duo–binary modulation technique and provides 20 lines for receiver/transmitter control with 13 user–defined outputs.

The BIC performs the digital functions of the physical layer when implementing a broadband token bus node. The modem side of the BIC provides data and control for the RF transmitter/receiver circuitry. A standard serial interface is used to connect the BIC to the MC68824 TBC. The TBC performs the media access control (MAC) function. The MC68184 has the ability to scramble and descramble data.

MC68185

Twisted–Pair Modem

The MC68185 Twisted–Pair Modem (TPM) is used in conjunction with a MC68824 Token Bus Controller (TBC), an RS485 transceiver, and a twisted–pair media to implement a low–cost area network (LAN). The MC68824 TBC implements the layer 2 media access control (MAC) portion of the IEEE 802.4 LAN station and receiver portion for the IEEE 802.2 logical link control (LLC) type 3 as well as providing support for LLC type 1 and type 2. The TPM interfaces directly to the TBC, providing physical layer management, including MAC symbol encoding/decoding at data rates up to 2 Mbps.

The TPM contains an 32 kHz to 20 MHz on–chip crystal oscillator that generates a transmit clock without external circuitry. The physical layer management includes local loopback mode, transmitter enable, and reset. An on–chip digital filter provides for noise reduction of received data.

MC68194

Carrierband Modem

The bipolar LSI MC68194 Carrierband Modem (CBM), when combined with the MC68824 Token Bus Controller (TBC), provides an IEEE 802.4 single–channel, phase–coherent carrierband, Local Area Network (LAN) connection. The CBM performs the physical layer function, including symbol encoding/decoding, signal transmission and reception, and physical management.

The CBM provides the three basic functions of the physical layer: data transmission to the coaxial cable, data reception from the cable, and management of the physical layer. For standard data mode (also called MAC mode), the CBM receives a serial transmit data stream from the TBC (called symbols or atomic symbols), encodes, modulates the carrier, and transmits the signal to the coaxial cable. Also in the data mode, the CBM receives a signal from the cable, demodulates the signal, recovers the data, and sends the received data symbols to the TBC. End–of–transmission receiver blanking as required by IEEE 802.4 is supported. Communication between the TBC and CBM is through a standardized serial interface consistent with the IEEE 802.4 DTE–DCE interface.

MC68195

Local Talk Adaptor

The MC68195 LocalTalk adaptor (LA) is used in conjunction with the MC68302 Integrated Multiprotocol Processor (IMP) to build a network interface to LocalTalk™, also known as AppleTalk™. LocalTalk refers to the 230.4–kbps Local Area Network (LAN) that connects multiple MacIntosh™ computers and printers.

The LA provides LocalTalk support for any two of the three IMP serial channels. Combinations of multiple LA and/or IMP devices may be used to support additional LocalTalk channels. Non–LocalTalk applications can use the LA device with the IMP to build proprietary HDLC–based LANs at up to 2.5 Mbps using bi–phase space (FMO) encoding.

MC68605

X.25 Protocol Controller, XPC

The XPC implements the 1984 CCITT X.25 Recommendation Data Link Procedure (level 2) LAPB. In addition to handling the lower level communications functions (HDLC framing, CRC generation/checking, and zero insertion/deletion), the XPC also independently handles higher level communications functions (frame sequencing, retransmission, flow control, retries limit and timeout conditions). This allows the host to operate almost totally isolated from the task of ensuring error–free transmission and reception of data.

MC68606

Multi–Link LAPD Controller CCITT Q.920/Q.921, LAPD

The MC68606 Multi–link LAPD (MLAPD) Protocol Controller fully implements CCITT Recommendation Q.920/Q.921 Link Layer Access Procedure (LAPD) protocol for ISDN networks. The MLAPD is designed to handle both signalling and data links in high–performance ISDN primary rate applications.

This VLSI device provides a cost–effective solution to ISDN link–level processing with simultaneous support for up to 8K logical links. The MC68606 is an intelligent communications protocol controller compatible with AT&T specifications for ISDN devices and features low power consumption and high performance, with an aggregate data rate in excess of 2.048 Mbps.

Data Communication Devices

MC68HC681
MC68HC2681

Dual Universal Asynchronous Receiver/Transmitter, DUART

The MC68HC681 features two completely independent full–duplex asynchronous receiver/transmitter channels that interface directly to the M68000 microprocessor bus. Receiver data registers are quadruple buffered and transmitter data registers are double buffered for minimum MPU intervention. Each has its own independently selectable baud rate. Multifunction 6–bit input port and 8–bit output port, a 16–bit programmable counter/timer, interrupt handling capabilities, and a maximum one–megabyte per second transfer rate make the DUART an extremely powerful device for complex data communication applications. Full device functionality with an M6800 bus interface is provided by the MC68HC2681.

General Purpose I/O

MC68230

Parallel Interface/Timer, PI/T

The PI/T provides versatile double–buffered parallel interfaces and a system–oriented timer for M68000 systems. The parallel interfaces operate either in a unidirectional or bidirectional mode, either 8– or 16–bit wide. The timer is 24 bits with full programmability and a 5–bit prescaler. The PI/T has a complete M68000 bus interface and is fully compatible with the MC68450 DMAC.

MC68HC901

Multifunction Peripheral, MFP

The MFP provides basic microcomputer function requirements as a single companion chip to the M68000 Family of Microprocessors. Features provided via a direct M68000 system bus interface include a full–function, single–channel Universal Serial Asynchronous Receiver/Transmitter (USART) for data communication, an 8–source interrupt controller, eight parallel I/O lines, and four 8–bit timers.

Fiber Distributed Data Interface

Fiber Distributed Data Interface (FDDI) is defined as a dual fiber–optic token ring LAN (Local Area Network) that can support rates up to 100 Mbps. It can accommodate rings with 1,000 stations. Two kilometers between stations, and up to 200 kilometers in total length. This technology is driven by the need to support high performance distributed computer systems which are becoming faster and more powerful, thus imposing a greater need for network speed and bandwidth. Other uses for FDDI include backbone networks connecting Ethernet, Token Bus, and Token Ring segments and back end networks connecting high–speed peripherals. FDDI is an American National Standards Institute (ANSI) standard. Motorola's FDDI chip set includes the MC68836, MC68837, MC68838, and MC68839.

MC68836

FDDI Clock Generator

The MC68836 FDDI Clock Generator (FCG) implements part of the Physical Layer (PHY) functions of the FDDI standard including clock recovery, data recovery, and NRZI conversions. The FCG also does a five–bit parallel to serial conversion during transmission, and a serial to five–bit parallel conversion during reception. The FCG uses the five–bit parallel interface to communicate with the MC68837 device. The FCG directly connects to fiber optic modules through differential driver/receiver pins. Features include full duplex operations, 125 MHz clock recovery from incoming serial NRZI data stream, and 125 MHz transmit clock generation.

MC68837

Elasticity Buffer and Link Manager

The Elasticity Buffer and Link Manager (ELM) implements the remaining of the PHY functions of the FDDI standard including data framing, elasticity buffer, encoding, decoding, smoothing, line state detection, and repeat filter. The ELM also implements some Station Management (SMT) functions such as the Connection Management (CMT), Physical Connection Management (PCM), Physical Connection Insertion (PCI), and Link Error Monitor (LEM).

MC68838

Media Access Controller

The Media Access Controller (MAC) implements the MAC portion of the FDDI standard. The MAC protocol is the lower sub–layer of the ISO OSI data link layer and provides for fair and deterministic sharing of the physical medium, address recognition, frame check sequence generation and verification, frame insertion, frame repetition, frame removal, token generation, and certain error recovery procedures. Features on the MC68838 include independent receive and transmit data paths and state machines, bridging support including a bit order reversal option, a count and void frame bridge stripping algorithm, and CRC appendage on a per frame basis. The MAC also contains an interface to Content Addressable Memory (CAM) for individual and multicast address recognition.

MC68839

FDDI System Interface

The FDDI System Interface (FSI) is a high performance interface device which can easily connect to any bus including high speed processors, little– and big–endian busses, and multiplexed/non–multiplexed address data busses. Its primary purpose is to interface the FDDI protocol devices to the user system bus. FSI features include support for a ring buffer structure, addressing flexibility, programmable partitioned 8K bytes internal RAM for temporary data storage, two 32–bit ports, the ability to sustain up to 250 µs bus latencies, support for synchronous and asynchronous frames, and the ability to chain multiple buffers per frame.

Support Software

M68KESW–PC1

This Intermetrics software package is for the 68K Family (68000, 68008, 68HC001, 68010, 68020, 68030, 68EC030, 68040, 683xx). The MC68KESW InterTools package includes C compiler, assembler/linker, run–time libraries, and one year of support from Intermetrics.

M68040FPSP

This software provides 68040 floating point emulation of unimplemented 68881/68882 functions. Contact factory for license agreement.

The M88000 RISC Family

In Brief . . .

Motorola's 88000 Family comes from the only company committed to long–term upward software compatibility through such features as hardware interlocked and protected pipelines. Our goal is to make sure each generation of the 88000 RISC family delivers a high performance level while maintaining software compatibility.

	Page
Architecture, Performance, and Software Compatibility	2.3–2
Microprocessors	2.3–2
Cache/Memory Management Units	2.3–3

Motorola's 88000 RISC Microprocessors

. . . a performance architecture

Architecture, Performance, and Software Compatibility

The 88000 RISC was designed from the start for superscaler implementations. In fact, the design of the second generation 88110 microprocessor is a unique superscaler implementation called Symmetric Superscalar™. The Symmetric Superscaler design allows you to execute multiple instructions in a single clock cycle without any restrictions on instruction ordering. So there are no wait states or performance penalties because of out of order instructions.

Also, while other RISC microprocessors may be limited in the instructions they can execute in a single clock cycle, members of the 88000 are able to execute multiple instructions per clock cycle, thus providing the performance edge required for next generation system designs.

Performance Plus Software Compatibility

Although high performance is recognized as a key feature for systems design, software compatibility is also important. Motorola's 88000 Family comes from the only company committed to long term upward software compatibility through such features as hardware interlocked and protected pipelines. Our goal is to make sure each generation of the 88000 RISC family delivers a high performance level while maintaining software compatibility. This gives the opportunity for designing one of the industry's highest performance systems, while leveraging your largest dollar investment in new systems, your software.

Software compatibility is also promoted through standards to provide an open systems environment benefitting system companies, software developers, and end users because 88000 based systems from different vendors will run all of the same software.

Microprocessors

MC88100RC
32–Bit RISC Microprocessor

The MC88100 is the first processor in the 88000 Family of RISC (reduced instruction set computer) microprocessors. Implemented with Motorola's HCMOS technology, the MC88100 incorporates 32–bit registers, data paths, and addresses. In designing the MC88100, Motorola has incorporated a high degree of fine–grain parallelism; four independent execution units maintain separate, fully concurrent execution pipelines. Most instructions operate in one machine cycle or effective concurrent execution can be accomplished through internal pipelines in one machine cycle. A common register file provides data sharing and synchronization control among the execution units through register scoreboarding.

The MC88100 addresses a variety of applications requiring high operational speeds and efficient, fast–execution architectures. All data manipulation instructions are nondestructive register to register or register with immediate operations, allowing both fast operand access and operand reuse. IEEE 754 floating–point arithmetic is supported in the processor. Instruction and data memory space are accessed through separate memory ports, allowing simultaneous access to dedicated memory areas. The 88000 Family includes the MC88200 CMMU (cache/memory management unit), which adds high–speed memory caching, two–level, demand–paged memory management, and support for shared–memory multiprocessing. The 88000 Family also includes a full line of highly optimizing compilers, operating systems, development boards, and development tools.

MC88110RC
32–Bit RISC Microprocessor

The MC88110 is the second implementation of the 88000 family of reduced instruction set computer (RISC) microprocessors. The MC88110 is a Symmetric Superscalar machine capable of issuing and retiring two instructions per clock without any special alignment, ordering, or type restrictions on the instruction stream. Instructions are issued to multiple execution units, execute in parallel, and can complete out of order, with the machine automatically keeping results in the correct program sequence. The Symmetric Superscalar design allows sustained performance to approach the peak performance capability.

The MC88110 uses dual instruction issue and simple instructions with extremely rapid execution times to yield maximum efficiency and throughput for 88000 systems. Instructions either execute in one clock cycle, or effective one clock cycle execution is achieved through internal pipelining. Ten independent execution units communicate with a general register file and an extended register file through multiple 80–bit internal buses. Each of the register files has sufficient bandwidth to supply four operands and receive two results per clock cycle. Each of the pipelined execution units, including those that execute floating–point and data movement instructions, can accept a new instruction and retire a previous instruction on every clock cycle.

In a single chip implementation, the MC88110 integrates the central processing unit, floating point unit, graphics processing unit, virtual memory address translation, instruction cache, and data cache. The MC88110 maintains compatibility with MC88100 user application software.

Cache/Memory Management Units

MC88200RC

16–Kilobyte Cache/Memory Management Unit (CMMU)

The MC88200 CMMU is a high–performance, HCMOS VLSI device providing zero–wait–state memory management and data caching. The MMU (memory management unit) efficiently supports a demand–paged virtual memory environment with two logical address ranges (user/supervisor) of 4 gigabytes each. Translated addresses are provided by one of two ATCs (address translation caches), providing address translation in one clock cycle for most memory accesses. The PATC (page address translation cache) is a 56–entry, fully associative cache containing recently used translations for 4–kilobyte memory pages and is maintained by MC88200 hardware. The BATC (block address translation cache) is a 10–entry cache, loaded by software, containing translations for 512–kilobyte memory blocks. The BATC translations are used for operating system software or for other memory–resident instructions and data. In addition, the MMU provides access control for the two logical address spaces. The CMMU data cache is a 16–kilobyte, four–way, set–associative cache for instruction or data storage. The cache incorporates memory–update policies and cache–coherency mechanisms that support multiprocessor applications. The MC88200 CMMU also includes an MC88100–compatible P bus (processor bus) interface and an M bus (memory bus) interface. A processor may use two or more CMMUs for increased data cache and ATC sizes.

MC88204RC

64K–Byte Cache/Memory Management Unit (CMMU)

The MC88204 CMMU is a high–performance, HCMOS VLSI device providing zero–wait–state memory management and data caching. The memory management unit (MMU) efficiently supports a demand–paged virtual memory environment with two logical address ranges (user/supervisor) of 4 Gbytes each. Translated addresses are provided by one of two address translation caches (ATCs), providing address translation in one clock cycle for most memory accesses. The page address translation cache (PATC) is a 56–entry, fully associative cache containing recently used translations for 4K–byte memory pages and is maintained by MC88204 hardware. The block address translation cache (BATC) is a 10–entry cache, loaded by software, containing translations for 512K–byte memory blocks. The BATC translations are used for operating system software or for other memory–resident instructions and data. In addition, the MMU provides access control for the two logical address spaces. The CMMU data cache is a 64K–byte, four–way set–associative cache for instruction or data storage. The cache incorporates memory–update policies and cache–coherency mechanisms that support multiprocessor applications. The MC88204 CMMU also includes an MC88100–compatible processor bus (P bus) interface and memory bus (M bus) interface.

The MC88204 CMMU is completely software and pin–level compatible with the MC88200 16K–byte CMMU. The functionality of the MC88204 is identical to that of the MC88200. With board layout constraints in mind, a central processing unit (CPU) may use up to two MC88204 CMMUs on the data P bus and up to two MC88204 CMMUs on the instruction P bus to increase data cache and ATC sizes.

MC88410

Secondary Cache Controller

The MC88410 is a highly integrated secondary cache controller for the MC88110 microprocessor that reduces memory latency and extends multiprocessing capability for those seeking the highest level of system performance. Used with the MCM62110 Fast Static RAM, it provides a functionally complete secondary cache solution for both uniprocessor and multiprocessor environments. The MC88410 provides tag, control and buffering for 1/4, 1/2, and 1 Mbyte secondary cache configurations, all in a single chip cache controller. The MC88410 eliminates external logic between the processor and the secondary cache, provides bus arbitration for the MC88110, and requires no external programming.

The MC88410 and MCM62110 are optimized to provide low latency memory access to the MC88110 processor. Initial accesses incur only one wait state. Subsequent transactions in a burst incur zero wait states. Data streaming to the processor reduces the penalty on secondary cache misses.

The MC88410 expands the MC88110's system flexibility by providing a choice of secondary cache line size, burst byte ordering, and system clock frequency. The MC88410 extends the MC88110 multiprocessing capability by significantly reducing system bandwidth consumption. This increased available bandwidth, along with the MC88410's hardware enforced cache coherency protocol, enable the implementation of dual bus systems and scalable shared–bus multiprocessing systems.

The PowerPC™ RISC Family Microprocessors

In Brief . . .

The PowerPC architecture is derived from the IBM Performance Optimized with Enhanced RISC (POWER) architecture. The PowerPC architecture shares all of the benefits of the POWER architecture but is optimized for single–chip implementations. The architecture design emphasizes parallel instruction execution and high throughput and allows for exceptional floating–point performance. The PowerPC architecture is powerful today and is scalable from palmtops to mainframes.

	Page
PowerPC™ RISC Microprocessors	2.4–2
MPC601 RISC Microprocessor	2.4–2
MPC602 RISC Microprocessor	2.4–3
MPC603 RISC Microprocessor	2.4–3
MPC603e RISC Microprocessor	2.4–6
MPC604 RISC Microprocessor	2.4–9
MPC604e RISC Microprocessor	2.4–9
MPC620 RISC Microprocessor	2.4–13
MPC105 PCI Bridge/Memory Controller	2.4–15
MPC106 PCI Bridge/Memory Controller	2.4–16

PowerPC™ RISC Microprocessors

The PowerPC Architecture™, developed jointly by Motorola, IBM, and Apple, is based on the POWER Architecture™ implemented by the RISC System/6000™ family of computers. The PowerPC architecture takes advantage of recent technological advances in such areas as process technology, compiler design, and RISC (reduced instruction set computer) microprocessor design to provide software compatibility across a diverse family of implementations, primarily single–chip microprocessors, intended for a wide range of systems, including battery–powered personal computers, embedded controllers, high–end scientific and graphics workstations, and multiprocessing, microprocessor–based mainframes.

To provide a single architecture for such a broad assortment of processor environments, the PowerPC architecture is both flexible and scalable.

The flexibility of the PowerPC architecture offers many price/performance options. Designers can choose whether to implement architecturally–defined features in hardware or in software. For example, a processor designed for a high–end workstation has greater need for the performance gained from implementing floating–point normalization and denormalization in hardware than a battery–powered, general–purpose computer might.

The PowerPC architecture is scalable to take advantage of continuing technological advances — for example, the continued miniaturization of transistors makes it more feasible to implement more execution units and a richer set of optimizing features without being constrained by the architecture.

The PowerPC architecture defines the following features:

- Separate 32–entry register files for integer and floating–point instructions. The general–purpose registers (GPRs) hold source and target data for integer arithmetic instructions, and the floating–point registers (FPRs) hold source and target data for floating–point arithmetic instructions.
- Instructions for loading and storing data between the memory system and either the FPRs or GPRs.
- Uniform–length instructions to allow simplified instruction pipelining and parallel processing instruction dispatch mechanisms.
- Nondestructive use of registers for arithmetic instructions in which the second, third, and sometimes the fourth operand, typically specify source registers for calculations whose results are typically stored in the target register specified by the first operand.
- A precise exception model (with the option of treating floating–point exceptions imprecisely).
- Floating–point support that includes IEEE–754 floating–point operations.
- The ability to perform both single– and double–precision floating–point operations.
- A flexible architecture definition that allows certain features to be performed in either hardware or with assistance from implementation–specific software depending on the needs of the processor design.
- User–level instructions for explicitly storing, flushing, and invalidating data in the on–chip caches. The architecture also defines special instructions (cache block touch instructions) for speculatively loading data before it is needed, potentially reducing the effect of memory latency.
- Definition of a memory model that allows weakly–ordered memory accesses. This allows bus operations to be reordered dynamically, which improves overall performance and in particular reduces the effect of memory latency on instruction throughput.
- Support for separate instruction and data caches (Harvard architecture) and for unified caches.
- Support for both big– and little–endian addressing modes.
- Support for 64–bit addressing. The architecture supports both 32–bit or 64–bit implementations. This document typically describes the architecture in terms of the 64–bit implementations in those cases where the 32–bit subset can be easily deduced.

MPC601 RISC Microprocessor

The MPC601 is the first implementation of the PowerPC architecture. The MPC601 implements the 32–bit portion of the PowerPC architecture, which provides 32–bit effective (logical) addresses, integer data types of 8, 16, and 32 bits, and floating–point data types of 32 and 64 bits. For 64–bit PowerPC implementations, the PowerPC architecture provides 64–bit integer data types, 64–bit addressing, and other features required to complete the 64–bit architecture.

The MPC601 is a superscalar processor capable of issuing and retiring three instructions per clock, one to each of three execution units. Instructions can complete out of order for increased performance; however, the MPC601 makes execution appear sequential.

The MPC601 integrates three execution units — an integer unit (IU), a branch processing unit (BPU), and a floating–point unit (FPU). The ability to execute three instructions in parallel and the use of simple instructions with rapid execution times yield high efficiency and throughput for MPC601–based systems. Most integer instructions execute in one clock cycle. The FPU is pipelined so a single–precision multiply–add instruction can be issued every clock cycle.

The MPC601 includes an on–chip, 32–Kbyte, eight–way set–associative, physically addressed, unified instruction and data cache and an on–chip memory management unit (MMU). The MMU contains a 256–entry, two–way set–associative, unified translation look–aside buffer (UTLB) and provides support for demand paged virtual memory address translation and variable–sized block translation. Both the UTLB and the cache use least recently used (LRU) replacement algorithms.

The MPC601 has a 64–bit data bus and a 32–bit address bus. The MPC601 interface protocol allows multiple masters to compete for system resources through a central external arbiter. Additionally, on–chip snooping logic maintains cache coherency in multiprocessor applications. The MPC601 supports single–beat and burst data transfers for memory accesses; it also supports both memory–mapped I/O and I/O controller interface addressing.

The MPC601 uses an advanced, 3.6–volts (601) or 2.5 volts (601v) CMOS process technology and maintains full interface compatibility with TTL devices.

Block Diagram

Figure 1 provides a block diagram of the MPC601 that illustrates how the execution units — IU, FPU, and BPU — operate independently and in parallel.

MPC602 RISC Microprocessor

The MPC602 is a low–cost, low–power implementation of the PowerPC RISC architecture. The MPC602 implements the 32–bit portion of the PowerPC architecture, which provides 32–bit effective addresses, integer data types of 8, 16, and 32 bits, and floating–point data types of 32 and 64 bits. Floating–point operations involving either 32– or 64–bit data types in single–precision format are supported; however, floating–point operations involving 64–bit data types in double–precision format are not implemented in hardware and are instead trapped for emulation in software.

The MPC602 has four execution units—an integer unit (IU), a floating–point unit (FPU), a branch processing unit (BPU), and a load/store unit (LSU). The ability to execute four instructions in parallel and the use of simple instructions with rapid execution times yield high efficiency and throughput for MPC602–based systems. Most integer instructions execute in one clock cycle. The FPU is pipelined such that typically when the FPU pipeline is full, a single–precision instruction can complete every clock cycle.

The MPC602 provides dynamic and static power–saving modes. The three static modes — nap, doze, and sleep — progressively reduce the amount of power dissipated by the processor.

The MPC602 provides independent on–chip, 4–Kbyte, two–way set–associative, physically addressed caches for instructions and data and on–chip instruction and data memory management units (MMUs). The MPC602 MMUs contain 32–entry, two–way set–associative, data and instruction translation lookaside buffers (DTLB and ITLB). The MPC602 provides an additional memory protection mechanism not defined by the PowerPC architecture. The 602's protection–only mode can control whether instructions can be fetched from 4–Kbyte instruction pages and whether data can be written to 4–Kbyte data pages.

The MPC602 has a single bus interface used for transferring both 32–bit addresses and either 32– or 64–bit data. This bus is time–multiplexed. The MPC602 interface protocol allows multiple masters to compete for system resources through a central external arbiter. The MPC602 provides a three–state coherency protocol that supports the modified, exclusive, and invalid (MEI) cache states. This protocol is a compatible subset of the MESI (modified/exclusive/shared/invalid) four–state protocol and operates coherently in systems that contain four–state caches.

The MPC602 uses an advanced, 3.3–V CMOS process technology and maintains full interface compatibility with TTL devices.

Block Diagram

The MPC602 block diagram in Figure 2 illustrates how the execution units — IU, FPU, BPU, and LSU — operate independently and in parallel.

MPC603 RISC Microprocessor

The MPC603 is the first low–power implementation of the PowerPC architecture. The MPC603 implements the 32–bit portion of the PowerPC architecture, which provides 32–bit effective (logical) addresses, integer data types of 8, 16, and 32 bits, and floating–point data types of 32 and 64 bits. For 64–bit PowerPC implementations, the PowerPC architecture provides 64–bit integer data types, 64–bit addressing, and other features required to complete the 64–bit architecture.

The MPC603 provides four software controllable power–saving modes. Three of the modes (the nap, doze, and sleep modes) are static in nature, and progressively reduce the amount of power dissipated by the processor. The fourth is a dynamic power management mode that causes the functional units in the MPC603 to automatically enter a low–power mode when the functional units are idle without affecting operational performance, software execution or any external hardware.

The MPC603 is a superscalar processor capable of issuing and retiring a maximum of three instructions per clock. Instructions can execute out of order for increased performance; however, the MPC603 makes completion appear sequential.

The MPC603 integrates five execution units — an integer unit (IU), a floating–point unit (FPU), a branch processing unit (BPU), a load/store unit (LSU) and a system register unit (SRU). The ability to execute five instructions in parallel and the use of simple instructions with rapid execution times yield high efficiency and throughput for MPC603–based systems. Most integer instructions execute in one clock cycle. The FPU is pipelined so a single–precision multiply–add instruction can be issued every clock cycle.

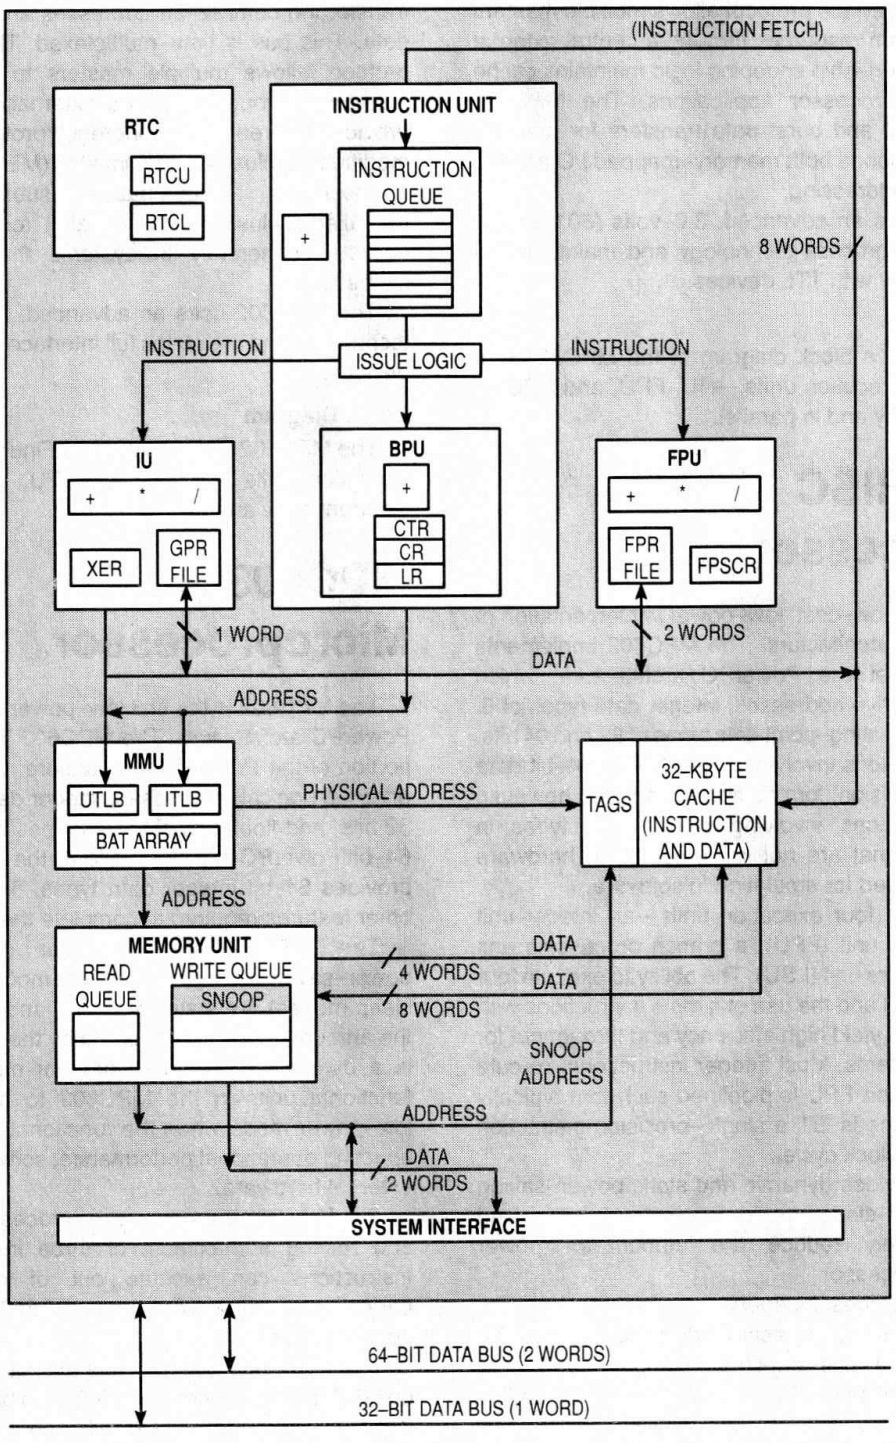

Figure 1. MPC601 Block Diagram

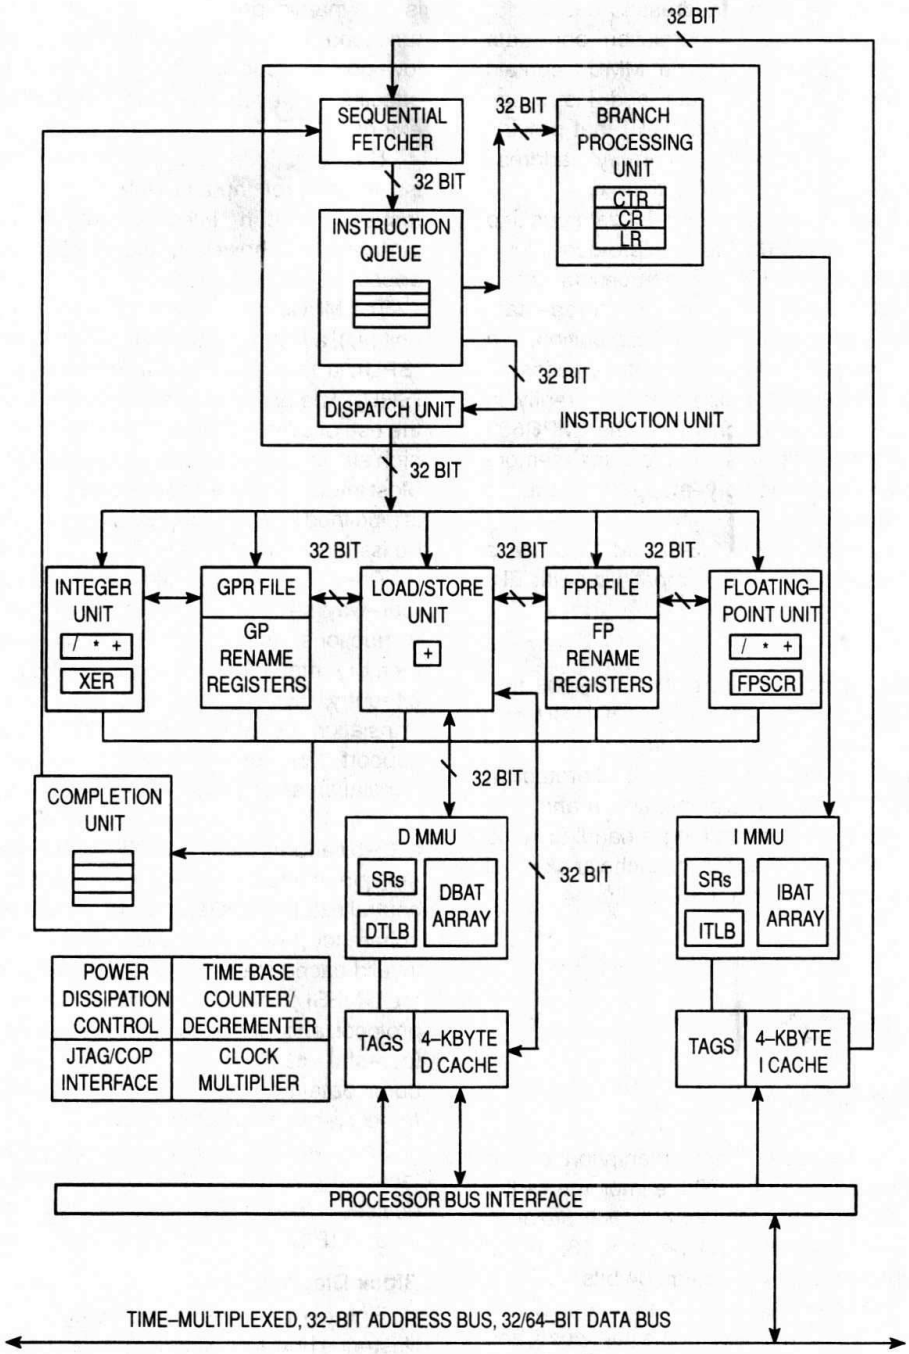

Figure 2. MPC602 Block Diagram

The MPC603 provides independent on–chip, 8–Kbyte, two–way set–associative, physically addressed caches for instructions and data and on–chip instruction and data memory management units (MMUs). The MMUs contain 64–entry, two–way set–associative, data and instruction translation lookaside buffers (DTLB and ITLB) that provide support for demand–paged virtual memory address translation and variable–sized block translation.

The MPC603 has a selectable 32– or 64–bit data bus and a 32–bit address bus. The MPC603 interface protocol allows multiple masters to compete for system resources through a central external arbiter. The MPC603 provides a three–state coherency protocol that supports the Exclusive, Modified, and Invalid cache states. This protocol is a compatible subset of the MESI four–state protocol and operates coherently in systems that contain four–state caches. The MPC603 supports single–beat and burst data transfers for memory accesses; it also supports both memory–mapped I/O and I/O controller interface addressing.

The MPC603 uses an advanced, 3.3–V CMOS process technology and maintains full interface compatibility with TTL devices.

Block Diagram

Figure 3 provides a block diagram of the MPC603 that illustrates how the execution units — IU, FPU, BPU, LSU, and SRU — operate independently and in parallel.

The MPC603 provides address translation and protection facilities, including an ITLB, DTLB, and instruction and data BAT arrays. Instruction fetching and issuing is handled in the instruction unit. Translation of addresses for cache or external memory accesses are handled by the MMUs.

MPC603e RISC Microprocessor

The MPC603e is a low–power implementation of the PowerPC RISC architecture. The MPC603e implements the 32–bit portion of the PowerPC architecture, which provides 32–bit effective addresses, integer data types of 8, 16, and 32 bits, and floating–point data types of 32 and 64 bits.

The MPC603e provides four software controllable power–saving modes. Three of the modes (the nap, doze, and sleep modes) are static in nature, and progressively reduce the amount of power dissipated by the processor. The fourth is a dynamic power management mode that causes the functional units in the MPC603e to automatically enter a low–power mode when the functional units are idle without affecting operational performance, software execution, or any external hardware.

The MPC603e is a superscalar processor capable of issuing and retiring as many as three instructions per clock. Instructions can execute out of order for increased performance; however, the MPC603e makes completion appear sequential.

The MPC603e integrates five execution units — an integer unit (IU), a floating–point unit (FPU), a branch processing unit (BPU), a load/store unit (LSU), and a system register unit (SRU). The ability to execute five instructions in parallel and the use of simple instructions with rapid execution times yield high efficiency and throughput for MPC603e–based systems. Most integer instructions execute in one clock cycle. The FPU is pipelined so a single–precision multiply–add instruction can be issued every clock cycle.

The MPC603e provides independent on–chip, 16–Kbyte, four–way set–associative, physically addressed caches for instructions and data and on–chip instruction and data memory management units (MMUs). The MMUs contain 64–entry, two–way set–associative, data and instruction translation lookaside buffers (DTLB and ITLB) that provide support for demand–paged virtual memory address translation and variable–sized block translation.

The MPC603e has a selectable 32– or 64–bit data bus and a 32–bit address bus. The MPC603e interface protocol allows multiple masters to compete for system resources through a central external arbiter. The MPC603e provides a three–state coherency protocol that supports the exclusive, modified, and invalid cache states. This protocol is a compatible subset of the MESI (modified/exclusive/shared/invalid) four–state protocol and operates coherently in systems that contain four–state caches. The MPC603e supports single–beat and burst data transfers for memory accesses, and supports memory–mapped I/O accesses.

The MPC603e uses an advanced CMOS process technology and maintains full interface compatibility with TTL devices. The MPC603e is implemented in both a 2.5–V version (PID7V–603e) and a 3.3–V version (PID6–603e).

Block Diagram

Figure 4 provides a block diagram of the MPC603e that illustrates how the execution units — IU, FPU, BPU, LSU, and SRU — operate independently and in parallel.

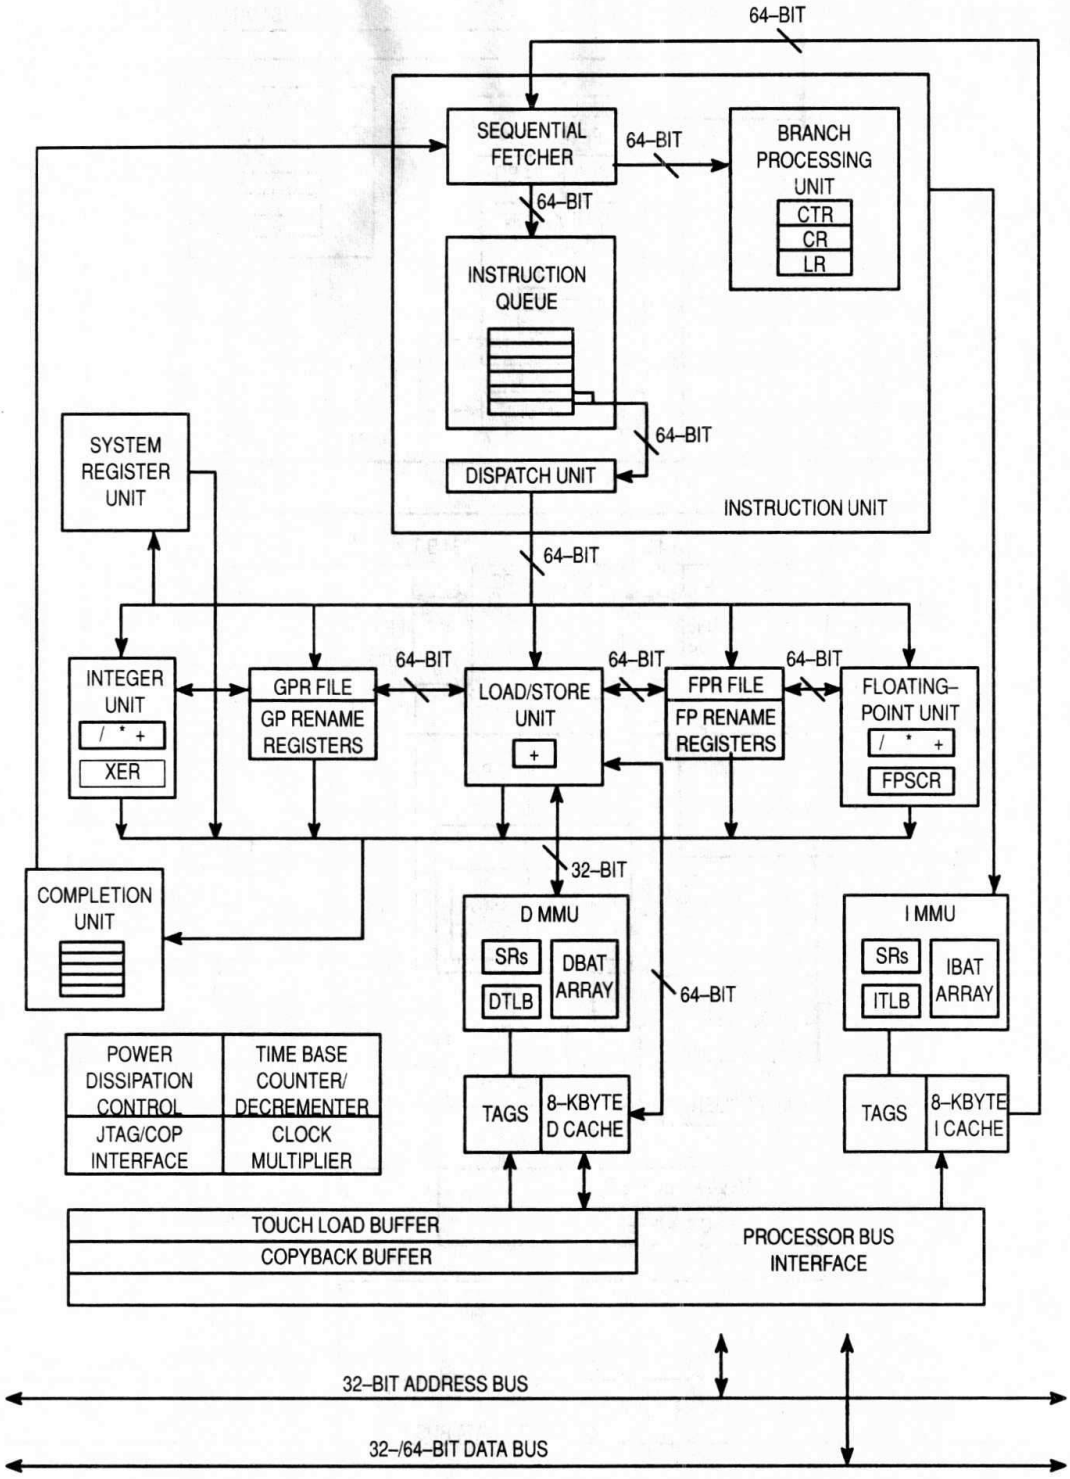

Figure 3. MPC603 Block Diagram

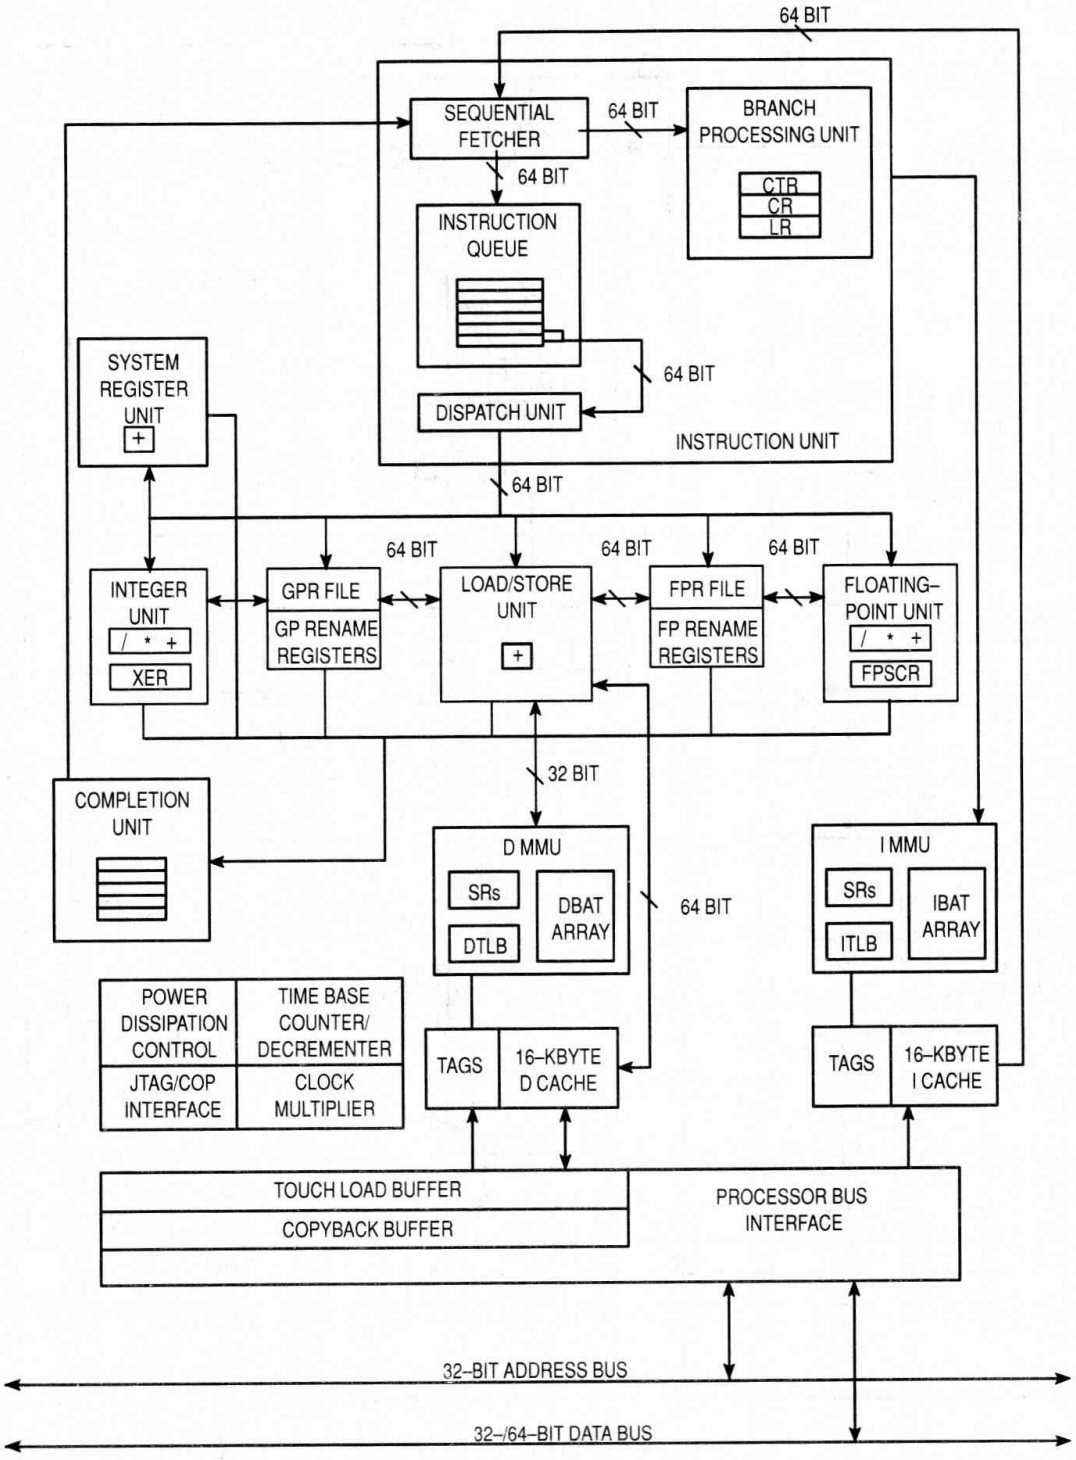

Figure 4. MPC603e Block Diagram

MPC604 RISC Microprocessor

The MPC604 is an implementation of the PowerPC family of RISC microprocessors. The MPC604 implements the PowerPC architecture as it is specified for 32–bit addressing, which provides 32–bit effective (logical) addresses, integer data types of 8, 16, and 32 bits, and floating–point data types of 32 and 64 bits (single–precision and double–precision). For 64–bit PowerPC implementations, the PowerPC architecture provides additional 64–bit integer data types, 64–bit addressing, and related features.

The MPC604 is a superscalar processor capable of issuing four instructions simultaneously. As many as six instructions can finish execution in parallel. The MPC604 has six execution units that can operate in parallel—floating–point unit (FPU), branch processing unit (BPU), load/store unit (LSU), two single–cycle integer units (SCIUs), and one multiple–cycle integer unit (MCIU).

This parallel design, combined with the PowerPC architecture's specification of uniform instructions that allows for rapid execution times, yields high efficiency and throughput. The MPC604's rename buffers, reservation stations, dynamic branch prediction, and completion unit increase instruction throughput, guarantee in–order completion, and ensure a precise exception model. (Note that the PowerPC architecture specification refers to all exceptions as interrupts.)

The MPC604 has separate memory management units (MMUs) and separate 16–Kbyte on–chip caches for instructions and data. The MPC604 implements two 128–entry, two–way set (64–entry per set) associative translation lookaside buffers (TLBs), one for instructions and one for data, and provides support for demand–paged virtual memory address translation and variable–sized block translation. The TLBs and the cache use least–recently used (LRU) replacement algorithms.

The MPC604 has a 64–bit external data bus and a 32–bit address bus. The MPC604 interface protocol allows multiple masters to compete for system resources through a central external arbiter. Additionally, on–chip snooping logic maintains data cache coherency for multiprocessor applications. The MPC604 supports single–beat and burst data transfers for memory accesses and memory–mapped I/O accesses.

The MPC604 uses an advanced, 3.3–V CMOS process technology and is fully compatible with TTL devices.

Block Diagram

Figure 5 provides a block diagram showing features of the MPC604. Note that this is a conceptual block diagram intended to show the basic features rather than an attempt to show how these features are physically implemented on the chip.

MPC604e RISC Microprocessor

The MPC604e is an implementation of the PowerPC family of RISC microprocessors. The MPC604e implements the PowerPC architecture as it is specified for 32–bit addressing, which provides 32–bit effective (logical) addresses, integer data types of 8, 16, and 32 bits, and floating–point data types of 32 and 64 bits (single–precision and double–precision). For 64–bit PowerPC implementations, the PowerPC architecture provides additional 64–bit integer data types, 64–bit addressing, and related features.

The MPC604e is a superscalar processor capable of issuing four instructions simultaneously. As many as seven instructions can finish execution in parallel. The MPC604e has seven execution units that can operate in parallel — floating–point unit (FPU), branch processing unit (BPU), condition register unit (CRU), load/store unit (LSU), two single–cycle integer units (SCIUs), and one multiple–cycle integer unit (MCIU).

This parallel design, combined with the PowerPC architecture's specification of uniform instructions that allows for rapid execution times, yields high efficiency and throughput. The MPC604e's rename buffers, reservation stations, dynamic branch prediction, and completion unit increase instruction throughput, guarantee in–order completion, and ensure a precise exception model. (Note that the PowerPC architecture specification refers to all exceptions as interrupts.)

The MPC604e has separate memory management units (MMUs) and separate 32–Kbyte on–chip caches for instructions and data. The MPC604e implements two 128–entry, two–way set associative translation lookaside buffers (TLBs), one for instructions and one for data, and provides support for demand–paged virtual memory address translation and variable–sized block translation. The TLBs and the cache use least–recently used (LRU) replacement algorithms.

The MPC604e has a 64–bit external data bus and a 32–bit address bus. The MPC604e interface protocol allows multiple masters to compete for system resources through a central external arbiter. Additionally, on–chip snooping logic maintains data cache coherency for multiprocessor applications. The MPC604e supports single–beat and burst data transfers for memory accesses and memory–mapped I/O accesses.

The MPC604e uses an advanced, 2.5–V CMOS process technology and is fully compatible with TTL devices.

Block diagram

Figure 6 provides a block diagram of the MPC604e.

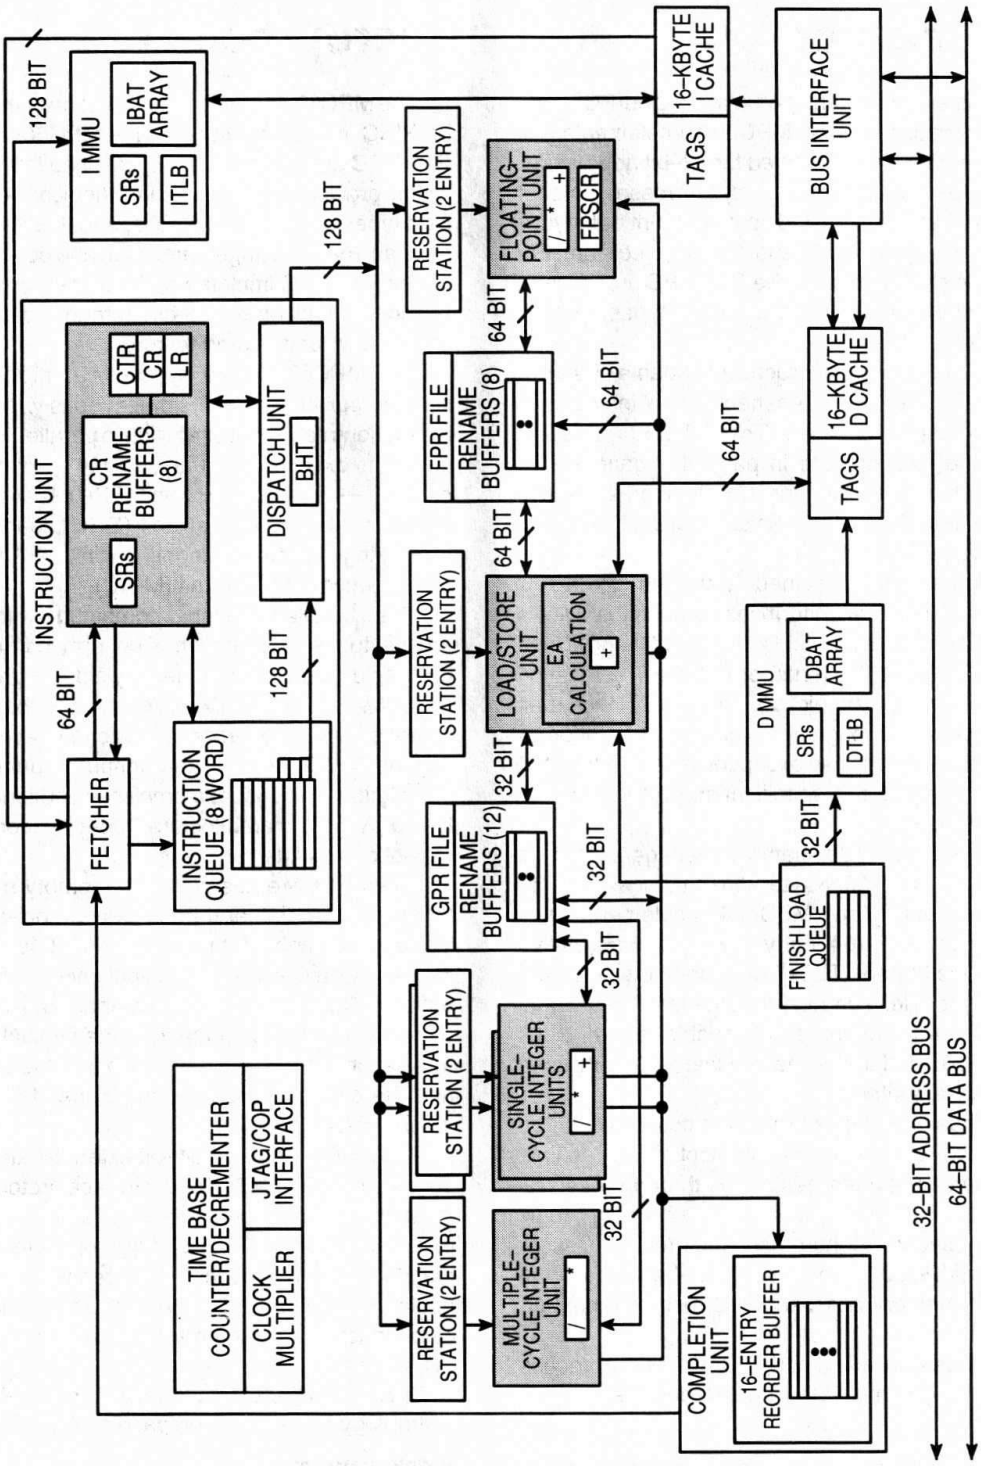

Figure 5. MPC604 Block Diagram

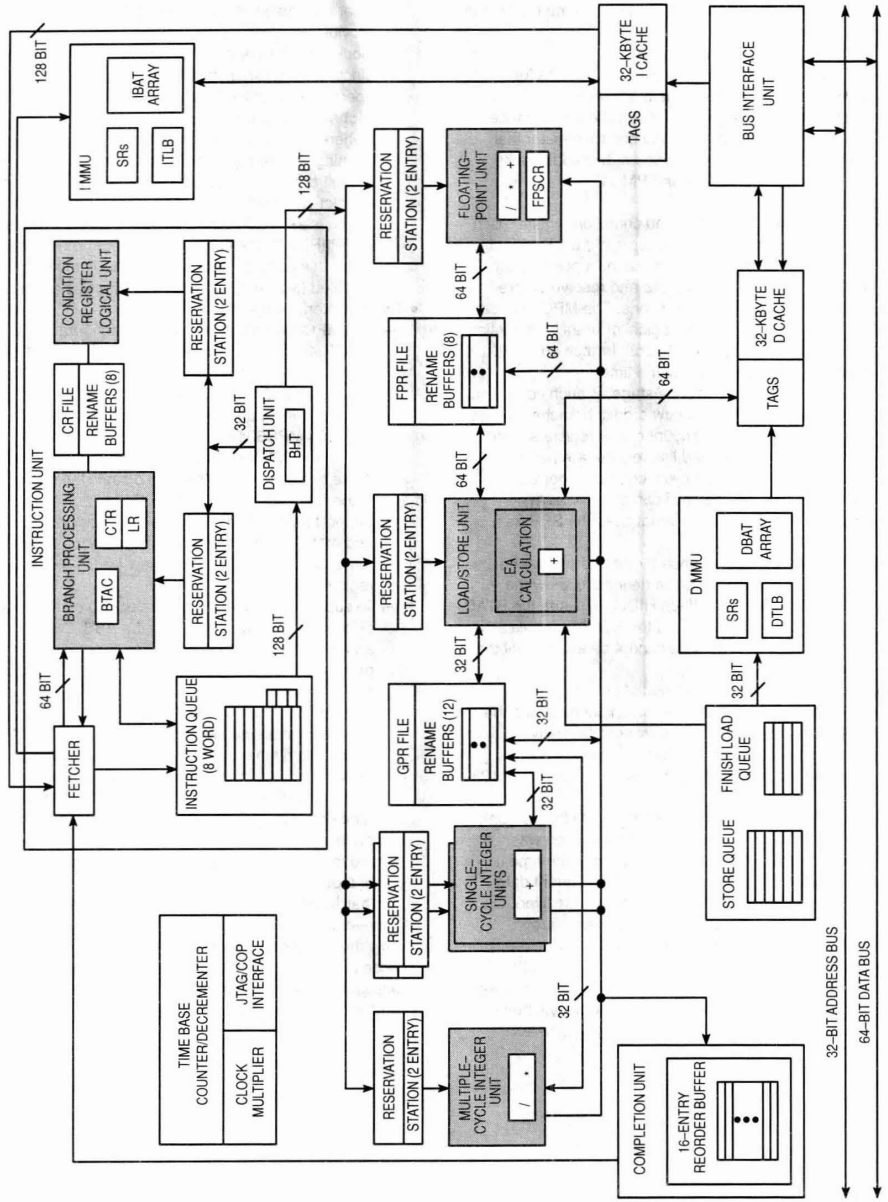

Figure 6. MPC604e Block Diagram

New Features of the MPC604e

Features of the MPC604e that are not implemented in the MPC604 are as follows:

- Additional special–purpose registers
  - — HID1 provides four read–only PLL_CFG bits for indicating the processor/bus clock ratio.
  - — Three additional registers support the performance monitor—MMCR1 is a second control register that includes bits to support the use of two additional counter registers, PMC3 and PMC4.
- Instruction execution
  - — Separate units for branch and condition register (CR) instructions. The BPU is now split into a CR logical unit and a branch unit, which makes it possible for branch instructions to execute and resolve before preceding CR logical instructions. The MPC604e can still only dispatch one CR logical or branch instruction per cycle, but it can execute both branch and CR logical instructions at the same time.
  - — Branch correction in decode stage. Branch correction in the decode stage can now predict branches whose target is taken from the count or link registers if no updates of the count and link register are pending. This saves at least one cycle on branch correction when the **mtspr** instruction can be sufficiently separated from the branch that uses the SPR as a target address.
  - — Ability to disable the branch target address cache (BTAC)—HID0[30] has been defined to allow the BTAC to be disabled. When HID0[30] is set, the BTAC contents are invalidated and the BTAC behaves as if it were empty. New entries cannot be added until the BTAC is enabled.
- Improvements to cache implementation
  - — 32–Kbyte split data and instruction caches. Like the 604, both caches are four–way set associative; however, each cache has twice as many sets, logically separated into 128 sets of odd lines and 128 sets of even lines.
  - — Data cache line–fill buffer forwarding. In the 604 only the critical double word of a burst operation was made available to the requesting unit at the time it was burst into the line–fill buffer. Subsequent data was unavailable until the cache block was filled. On the MPC604e, subsequent data is also made available as it arrives in the line–fill buffer.
  - — Additional cache copyback buffers. The MPC604e implements three copyback write buffers (as opposed to one in the 604). Having multiple copyback buffers provides the ability for certain instructions to take fuller advantage of the pipelined system bus to provide more efficient handling of cache copyback, block invalidate operations caused by the data cache block flush (**dcbf**) instruction, and cache block clean operations resulting from the data cache block store (**dcbst**) instruction.
  - — Coherency support for instruction fetching. Instruction fetching coherency is controlled by HID0[23]. In the default mode, HID0[23] is 0, $\overline{\text{GBL}}$ is not asserted for instruction accesses, as is the case with the 604. If the bit is set, and instruction translation is enabled (MSR[IR] = 1), the $\overline{\text{GBL}}$ signal is set to reflect the M bit for this page or block. If instruction translation is disabled (MSR[IR] = 0), the $\overline{\text{GBL}}$ signal is asserted.
- System interface operation
  - — The MPC604e has the same pin configuration as the MPC604; however, on the MPC604e V_{DD} and AV_{DD} must be connected to 2.5 Vdc and OV_{DD} must be connected to 3.3 Vdc. The MPC604e uses split voltage planes, and for replacement compatibility, MPC604/MPC604e designs should provide both 2.5–V and 3.3–V planes and the ability to connect those two planes together and disable the 2.5–V plane for operation with an MPC604.
  - — Support for additional processor/bus clock ratios (5:2 and 4:1). Configuration of the processor/bus clock ratios is displayed through a new MPC604e–specific register, HID1.
  - — To support the changes in the clocking configuration, different precharge timings for the $\overline{\text{ABB}}$, $\overline{\text{DBB}}$, $\overline{\text{ARTRY}}$, and $\overline{\text{SHD}}$ signals are implemented internally by the processor. The precharge timings for $\overline{\text{ARTRY}}$ and $\overline{\text{SHD}}$ can be disabled by setting HID0[7].
  - — No–DRTRY mode. In addition to the normal and fast L2 modes implemented on the 604, a no–DRTRY mode is implemented on the MPC604e that improves performance on read operations for systems that do not use the $\overline{\text{DRTRY}}$ signal. No–DRTRY mode makes read data available to the processor one bus clock cycle sooner than in normal mode. In no–DRTRY mode, the $\overline{\text{DRTRY}}$ signal is no longer sampled as part of a qualified bus grant.
- Full hardware support for little–endian accesses. Little–endian accesses take alignment exceptions for only the same set of causes as big–endian accesses. Accesses that cross a word boundary require two accesses with the lower–addressed word accessed first.
- Additional enhancements to the performance monitor.

MPC620 RISC Microprocessor

The MPC620 is an implementation of the PowerPC™ family of RISC microprocessors. The MPC620 implements the PowerPC architecture as it is specified for 64–bit addressing, which provides 64–bit effective (logical) addresses, integer data types of 8, 16, 32, and 64 bits, and floating–point data types of 32 and 64 bits (single–precision and double–precision). The MPC620 is software compatible with the 32–bit versions of the PowerPC microprocessor family.

The MPC620 is a superscalar processor capable of issuing four instructions simultaneously. As many as six instructions can finish execution in parallel. The MPC620 has six execution units that can operate in parallel — floating–point unit (FPU), branch processing unit (BPU), load/store unit (LSU), two single–cycle integer units (SCIUs), and one multiple–cycle integer unit (MCIU).

This parallel design, combined with the PowerPC architecture's specification of uniform instructions that allows for rapid execution times, yields high efficiency and throughput. The MPC620's rename buffers, reservation stations, dynamic branch prediction, and completion unit increase instruction throughput, guarantee in–order completion, and ensure a precise exception model.

The MPC620 has separate memory management units (MMUs) and separate 32–Kbyte on–chip caches for instructions and data. The MPC620 implements a 128–entry, two–way set–associative translation lookaside buffer (TLB) for instructions and data, and provides support for demand–paged virtual memory address translation and variable–sized block translation. The TLB and the cache use least–recently used (LRU) replacement algorithms.

The MPC620 has a 40–bit address bus, and can be configured with either a 64– or 128–bit data bus. The MPC620 interface protocol allows multiple masters to compete for system resources through a central external arbiter. Additionally, on–chip snooping logic maintains data cache coherency for multiprocessor applications. The MPC620 supports single–beat and burst data transfers for memory accesses and memory–mapped I/O accesses.

The MPC620 uses an advanced, 3.3–V CMOS process technology and is compatible with 3.3–V CMOS devices.

Block Diagram

Figure 7 provides a block diagram showing features of the MPC620. Note that this is a conceptual block diagram intended to show the basic features rather than an attempt to show how these features are physically implemented on the chip.

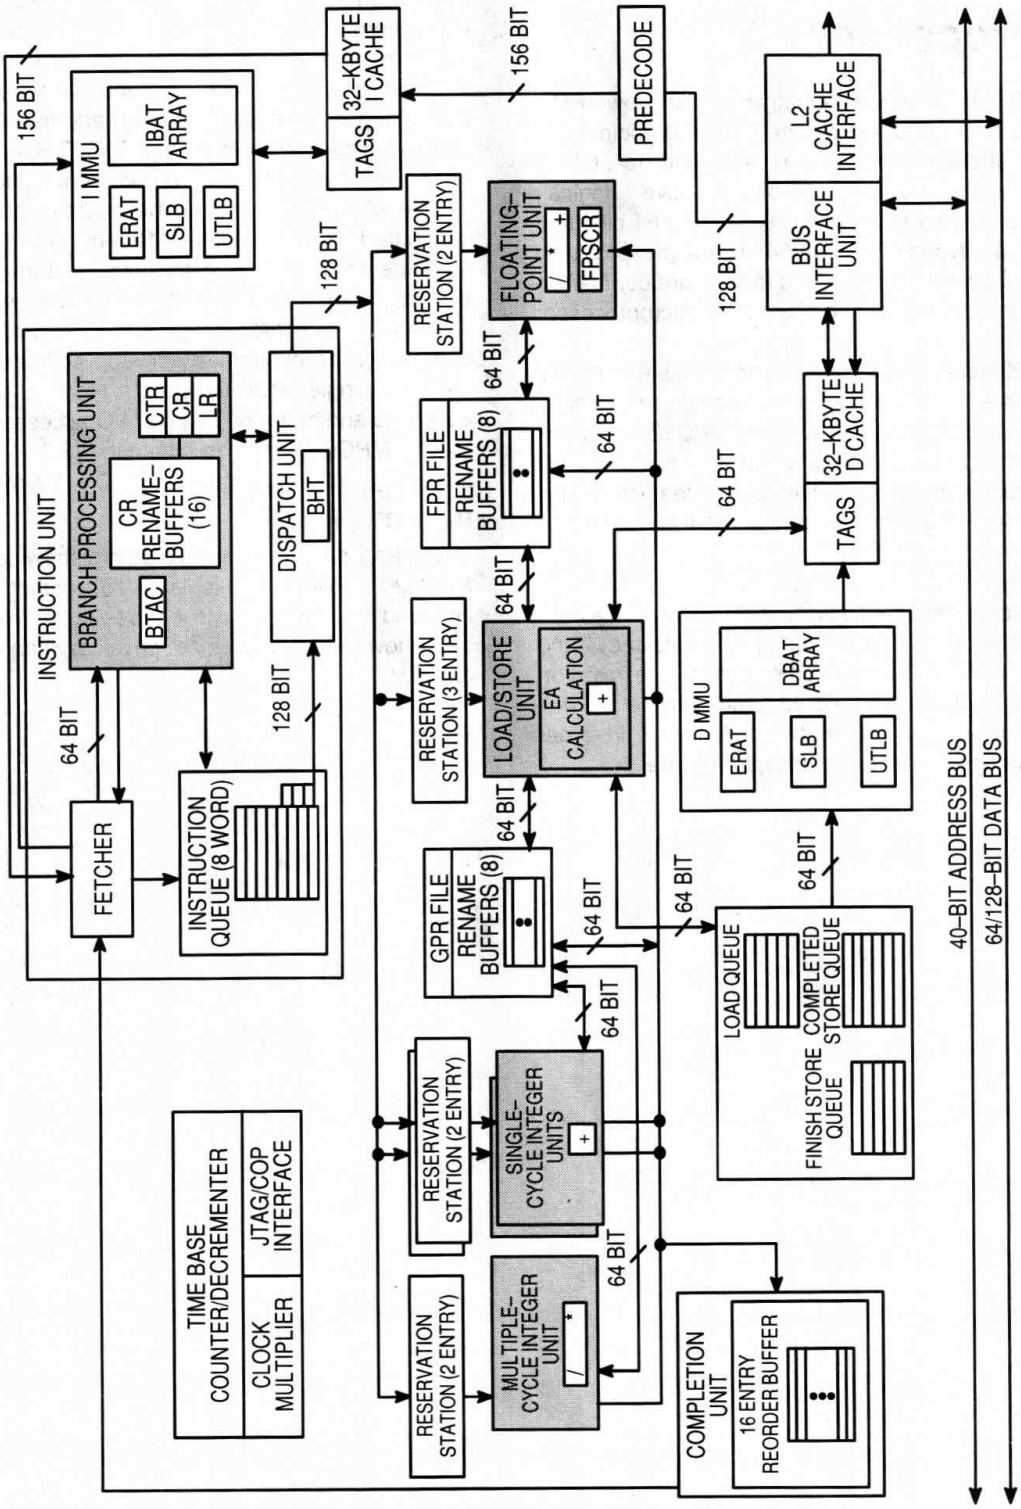

Figure 7. MPC620 Block Diagram

MPC105 PCI Bridge/Memory Controller

The MPC105 PCI bridge/memory controller (PCIB/MC) provides a PowerPC reference platform–compliant bridge between the PowerPC microprocessor family and the peripheral component interconnect (PCI) bus. PCI support allows system designers to rapidly design systems using peripherals already designed for PCI and the other standard interfaces available in the personal computer hardware environment. The MPC105 integrates secondary cache control and a high–performance memory controller that supports DRAM, SDRAM, ROM, and Flash ROM. The MPC105 uses an advanced, 3.3–V CMOS process technology and is fully compatible with TTL devices.

The MPC105 provides an integrated high bandwidth, high performance, TTL–compatible interface between a 60x processor, a secondary (L2) cache or secondary 60x processor, the PCI bus, and main memory.

The MPC105 supports a programmable interface to a variety of PowerPC microprocessors operating at various bus speeds. The 60x processor interface uses a subset of the 60x bus protocol, which enables the interface between the processor and MPC105 to be optimized for performance. The MPC105's 60x interface allows for a variety of system configurations by providing support for either a direct–mapped, lookaside, L2 cache or a secondary 60x processor. The L2 cache interface generates the arbitration and support signals necessary to maintain a write–through or write–back L2 cache. The L2 cache interface supports either burst SRAMs or asynchronous SRAMs, and L2 data a per–byte basis. The MPC105 features on–chip byte decoding for L2 data write enables or can be configured to use external logic for data write enable generation.

The PCI interface connects the processor and memory buses to the PCI bus, to which I/O components are connected, without the need for "glue" logic. This interface acts as both a master and slave device.

The memory interface controls processor and PCI interactions to main memory. It is capable of supporting a variety of DRAM or SDRAM, and ROM or Flash ROM configurations as main memory. The maximum supported memory size is 1 Gbyte of DRAM or SDRAM, with 16 Mbytes of ROM or 1 Mbyte of Flash ROM.

The MPC105 provides hardware support for four levels of power reduction; the doze, nap, and sleep modes are invoked by register programming, and the suspend mode is invoked by assertion of an external signal. The design of the MPC105 is fully static, allowing internal logic states to be preserved during all power saving modes. The following sections describe the programmable power modes provided by the MPC105.

Block Diagram

Figure 8 shows the MPC105 in a typical system implementation. The major functional units within the MPC105 are also shown in Figure 1. Note that this is a conceptual block diagram intended to show the basic features rather than an attempt to show how these features are physically implemented on the device.

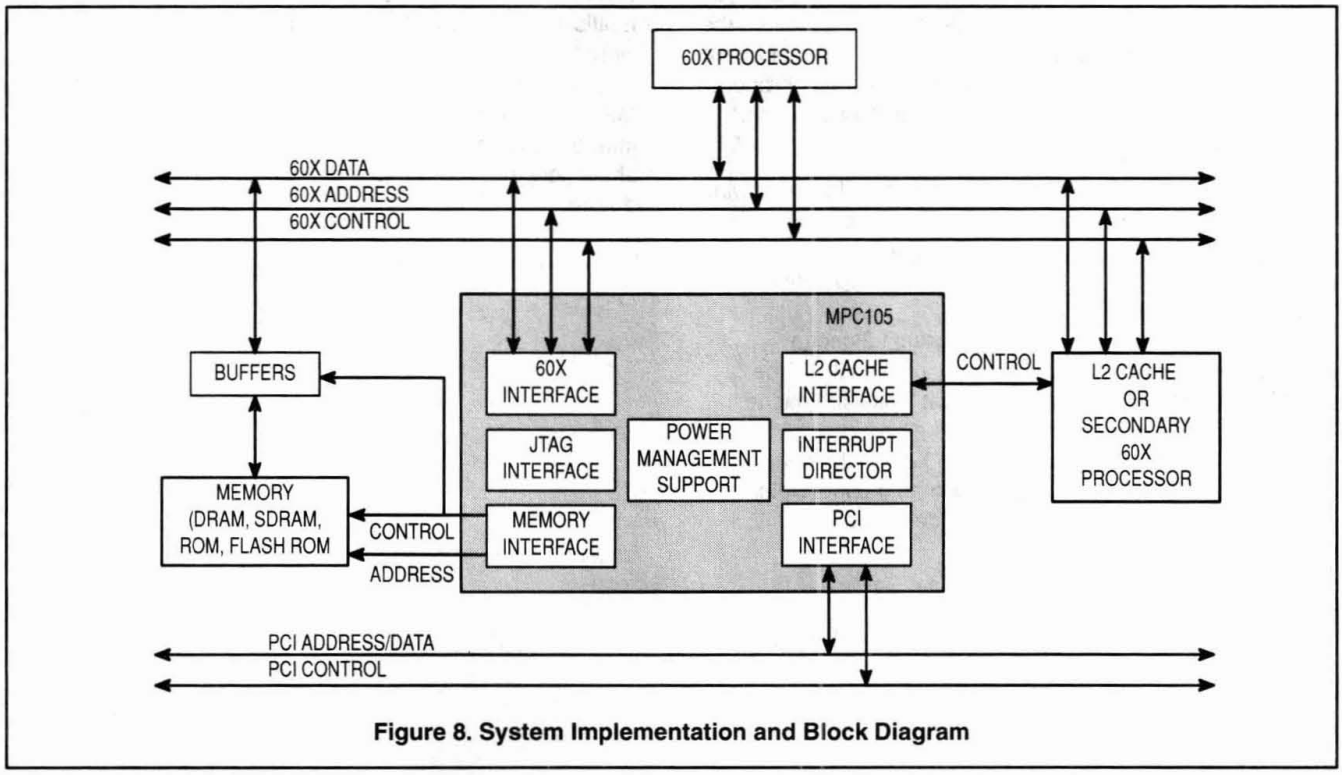

Figure 8. System Implementation and Block Diagram

MPC106 PCI Bridge/Memory Controller

The MPC106 provides a PowerPC common hardware reference platform (CHRP) compliant bridge between the PowerPC microprocessor family and the Peripheral Component Interconnect (PCI) bus. PCI support allows system designers to rapidly design systems using peripherals already designed for PCI and the other standard interfaces available in the personal computer hardware environment. The MPC106 integrates secondary cache control and a high–performance memory controller. The MPC106 uses an advanced, 3.3–V CMOS process technology and is fully compatible with TTL devices.

The MPC106 provides an integrated high–bandwidth, high–performance, TTL–compatible interface between a 60x processor, a secondary (L2) cache or secondary 60x processor, the PCI bus, and main memory.

60x Processor Interface

The MPC106 supports a programmable interface to a variety of PowerPC microprocessors operating at select bus speeds. The 60x processor interface of the MPC106 uses a subset of the 60x bus protocol, supporting single–beat and burst data transfers. The address bus is 32 bits wide and the data bus is 64 bits wide. The address and data buses are decoupled to support pipelined transactions. PCI bus accesses to system memory space are passed to the 60x processor bus for snooping purposes. Two signals on the MPC106, $\overline{\text{LBCLAIM}}$, and $\overline{\text{DBGLB}}$, are provided for an optional local bus slave. The local bus slave must be capable of generating $\overline{\text{AACK}}$ and $\overline{\text{TA}}$ signals to interact with the 60x processor(s). Depending on the system implementation, the processor(s) may operate at the PCI bus clock rate, or at two or three times the PCI bus clock rate. The bus is synchronous, with all timing relative to the rising edge of the bus clock.

L2 Cache/Multiple Processor Interface

The MPC106 provides support for the following configurations of 60x processors and L2 cache:

- A single 60x processor with no L2 cache
- A single 60x processor plus a direct–mapped, lookaside, L2 cache
- A single 60x processor plus an external L2 cache controller or integrated L2 cache module such as the Motorola MPC2604GA integrated L2 lookaside cache
- Two 60x processors with no L2 cache
- Two 60x processors plus an external L2 cache controller or integrated L2 cache module such as the Motorola MPC2604GA integrated L2 lookaside cache

The internal L2 cache controller generates the arbitration and support signals necessary to maintain a write–through or write–back L2 cache. The internal L2 cache controller supports either asynchronous SRAMs, pipelined burst SRAMs, or synchronous burst SRAMs, using byte parity for data error detection. When a second 60x processor is used, three signals of the L2 interface ($\overline{\text{BR1}}$, $\overline{\text{BG1}}$, and $\overline{\text{DBG1}}$) change their functions to allow for arbitration between the 60x processors. All 60x interface signals of the MPC106, except the bus request, bus grant, and data bus grant signals, are shared by the 60x processors. When an external L2 controller (or integrated L2 cache module) is used, three signals of the L2 interface ($\overline{\text{BRL2}}$, $\overline{\text{BGL2}}$, and $\overline{\text{DBGL2}}$) change their functions to allow the MPC106 to arbitrate between the external cache and the 60x processor(s).

Memory Interface

The memory interface controls processor and PCI interactions to main memory and is capable of supporting a variety of DRAM, or extended data–out (EDO) DRAM and ROM or Flash ROM configurations as main memory. The maximum supported memory size is 1 Gbyte of DRAM or EDO DRAM, with 16 Mbytes of ROM or Flash ROM. The memory controller of the MPC106 supports the various memory sizes through software initialization of on–chip configuration registers. Parity or ECC is provided for error detection.

PCI Interface

The MPC106's PCI interface is compliant with the PCI *Local Bus Specification, Revision 2.1,* and follows the guidelines in the *PCI System Design Guide, Revision 1.0* for host bridge architecture. The PCI interface connects the processor and memory buses to the PCI bus, to which I/O components are connected. The PCI bus uses a 32–bit multiplexed address/data bus, plus various control and error signals.

Figure 9 shows the major functional units within the MPC106. Note that this is a conceptual block diagram intended to show the basic features rather than an attempt to show how these features are physically implemented on the device.

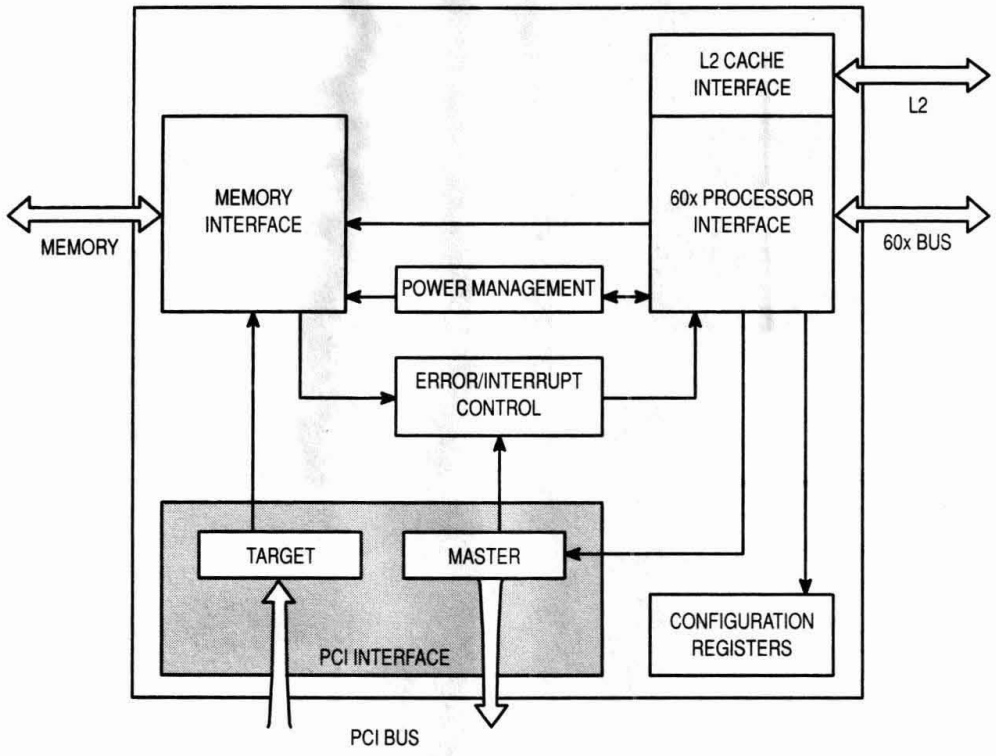

Figure 9. MPC106 Block Diagram

Single–Chip Microcontrollers (CSIC)

In Brief . . .

Motorola offers the most comprehensive selection of high–performance single–chip control systems available from a single source. Microcontroller device families range from industry–standard 8–bit controllers to state–of–the–art 16– and 32–bit modular controllers. Within the price and performance categories of each family, there are a variety of on–chip capabilities to match specific applications.

Motorola device families are structured so that upward migration need not involve complete code development. The M68HC11 Family is upward code compatible with M6800 and M6801 software, while the M68HC16 family is source–code compatible with the M68HC11 family. Motorola's newest 8–bit MCU product line, the M68HC08 family, is fully upward object code compatible with the M68HC05 and M6805 families. In addition, M68300 and M68HC16 devices share standard internal modules and bus configurations.

	Page
M68HC05 CSIC Family	2.5–2
M68HC08 Family	2.5–12
Development Tools	2.5–13
On–Line Help	2.5–22

M68HC05 CSIC Family

It all started with the 68HC05 Family, and Motorola's CSIC (Customer–Specified Integrated Circuits) approach to microcontroller design. Today, customers can select from over 70 mask ROM 68HC05 devices and over 30 one–time programmable (OTP) 68HC705 devices — and that number is growing all the time, as Motorola continues to develop derivatives of the 68HC05 based on customer demand.

With so many standard 68HC05 microcontrollers from which to choose, most customers will find the right device for an application among these existing devices. For some high–volume applications, however, a customer may opt for Motorola to develop a new derivative to meet an application's precise requirements. The result is a new microcontroller which can then be added to the selection of standard devices.

M68HC05 Industry Solutions

Motorola's 68HC05 and 68HC08 Families consist of a variety of microcontroller designs to meet the requirements of a broad range of applications. The 68HC05 Family, already over 100 devices strong, offers a wide range of standard products from which to choose, while the flagship 68HC08 offers a large library of modules from which derivatives can be developed.

68HC05 General–Purpose Microcontrollers

68HC05 C–Family. These flexible, general–purpose devices feature a wide variety of memory options capable of handling complex programs. On–chip SCI provides asynchronous communications, with software–selectable baud rates from 75 Hz to 131 kHz. The high–speed, synchronous 4–wire serial system SPI is ideal for driving off–chip displays and peripherals.

All C–Family devices include a powerful 16–bit free–running programmable counter in conjunction with input capture and output compare functions for simultaneous input waveform measurement and output waveform generation. A watchdog timer guards against runaway software in noisy environments.

The high–packing density of Motorola's HCMOS process allows standard devices to run at bus frequencies up to 2.1 MHz. Motorola also offers high–speed versions which run at frequencies up to 4.2 MHz from an 8.4 MHz crystal or external clock. Low–voltage versions are available for applications requiring extremely low power consumption to extend battery life or minimize heat dissipation.

68HC05 J–Family. This 20–pin family provides a low–cost, low pin count, 8–bit upgrade for existing 4–bit applications. It combines a powerful 68HC05 CPU with a flexible, 15–stage multifunction timer and real–time interrupt capability.

68HC05 K–Family. Our lowest–cost family offers a 16–pin count and is appropriate for logic replacement.

68HC05 P–Family. Born out of the CSIC design concept, this family offers an extremely cost–competitive 28–lead family of microcontrollers with a variety of ROM sizes and special features such as Serial Input/Output Port (SIOP) to control display drivers and communicate with other peripherals. Other options include A/D input and on–chip EEPROM for non–volatile data storage. Low–voltage and high–speed versions are also available.

The flagship 68HC(7)08XL36 OTP and ROM versions are the first two devices in the 68HC08 Family and are intended for general purpose uses.

Low–Voltage Microcontrollers

The 68HC05 Family has been capable of 3.0 V operation since 1980 and includes some 2.2 V selections. Recently, Motorola announced several 68HC05 microcontrollers capable of 1.8 Vdc and 500 kHz operation. This new low–voltage capability affords a greater than threefold power savings over 3.0 V versions of the same chips, a significant design consideration for any portable electronic application. The new devices are collectively designated 68HCL05 and include the following versions: 68HCL05C4, C8, C12, J1A, K0, P1, and P4. They are designed to provide lower–power control technology to accommodate trends in portable applications toward compactness, lightweight design, and extended battery life.

Automotive

68HC05 B–Family. EEPROM memory in these devices makes it possible to store information that must be retained after the power is removed. Applications include electric seat control (storage of seat positions) and audio systems (storage of radio stations).

68HC05 C– and D–Families. These general–purpose microcontrollers are used for cruise control, ignition systems, and in–car entertainment systems.

68HC05 J–, K–, and P–Families. With their low pin count and low cost, these devices are ideal for automotive applications such as car alarms, power windows, keyless entry, and air bags.

68HC05 V– and X–Families. Both these groups contain integrated automotive multiplex interfaces that allow them to talk to other electronic modules within a vehicle. The V series adds an on–chip voltage regulator.

Computer

68HC05 BD–Family. These devices are ideal for computer monitor applications. They include a horizontal and vertical sync processor as well as 16 channels of pulse–width modulation.

68HC05 C–Family. These are general purpose devices for keyboard and monitor control.

68HC05 J–, P–, and E–Families. These low–cost, low pin count devices are appropriate for applications like a cordless PC mouse and trackball.

Consumer

68HC05 C– and D–Families. The multiple communication lines (I/O ports, SCI and SPI) and free–running timer in this group of devices make it possible to execute several tasks in parallel. These features are used in consumer products like CD players, automotive entertainment systems, and remote controls.

68HC05 J–, K–, and P–Families. The free–running timer in these cost–effective microcontrollers allows multitasking in applications such as washing machines, oven controls, and remote controls.

68HC05 L–Family. These low–power, small–footprint devices can drive large LCD displays, making them ideal for hand–held consumer products like portable CD players.

Industrial

68HC05 B–Family. On–chip features include EEPROM; 8–channel, 8–bit A/D converter; and Pulse Length Modulated outputs. Typical industrial applications include Programmable Logic Controllers (PLC) and data acquisition systems.

68HC05 C– and D–Families. These general–purpose devices can be used in applications such as process control systems where multiple I/O lines and LED outputs are required.

68HC05 J– and P–Families. These devices are popular in low–cost industrial applications such as smoke detectors, security devices, thermostats, and furnace ignition systems.

68HC05 L–Family. Multi–port controllers with LCD driver, 16–bit timer and watchdog timer on board. Excellent for display panels requiring tone output and low power consumption such as thermostats and alarms.

68HC705MC4. This device is intended for use in industrial motor control and power supply applications.

68HC05 X–Family. These devices have Controlled Area Network (CAN) controllers with 4K thru 32K ROM for integrated messaging on factory automation, sensor, and switch applications.

Telecommunications

68HC05 B–Family. These devices can store user–programmable telephone numbers in 256 bytes of non–volatile EEPROM memory. They can also communicate with analog inputs like battery life in hand–held equipment, using the A/D module. The D/A module can be used to control analog outputs such as telephone volume and line cards.

68HC05 C–Family. This group of microcontrollers has proven useful as a general–purpose device for communications applications.

68HC05 E–Family. Like the 68HC05 B–Series devices, E–Series devices are ideal for number storage and keyboard interrupt applications.

68HC05 F–Family. These devices — except for the F5, which features an integrated DTMF receiver — include an on–chip Dual–Tone Multi–Frequency Generator (DTMG) for digital transmission and reception, as well as an LED drive for user information. These features make the F–Family suitable for a number of telecommunications applications, including auto dialing, number storage, and display control.

68HC05 J– and P–Families. These low pin count, low–cost microcontrollers have a variety of telecommunications uses, with features ranging from EEPROM to multifunction timers.

68HC05 L–Family. With its large LCD driving capability and low power consumption, this series is well–suited to applications in hand–held communication equipment. The on–chip tone generator and display functions can be used in pager systems to alert users to incoming messages.

Television and Video

68HC05 B–Family. These devices are ideal for EEPROM storage, with 256 bytes of EEPROM to store TV or satellite channel frequencies and preset volume or brightness levels. Features include Analog–to–Digital (A/D) conversion and PWM.

68HC05 C– and D–Families. With up to 32K of user ROM, these devices can be used in the television and video market as general–purpose microcontrollers.

68HC05 CC–Family. Evolved from the T–Series, CC–Series devices feature closed–caption Data Slicer (DSL) and enhanced OSD features for decoding and displaying closed captions.

68HC05CO. This device has no on–chip user ROM, but is capable of addressing up to 64K of external memory, making it ideal for applications that require large amounts of operating code, like televisions. The I^2C bus module and 4 MHz internal bus speed also allow interconnection with standard TV peripherals.

68HC05 K– and RC–Families. These devices are used in remote control applications.

68HC05 T–Family. All T–Family devices have On Screen Display (OSD) modules that can overlay graphical images onto television screens. They also contain D/A converters that can drive analog outputs like volume control, and A/D converters that can be used to automatically adjust the fine tuning. Some members of the T–Series have I^2C interfaces that can communicate with industry–standard TV peripherals.

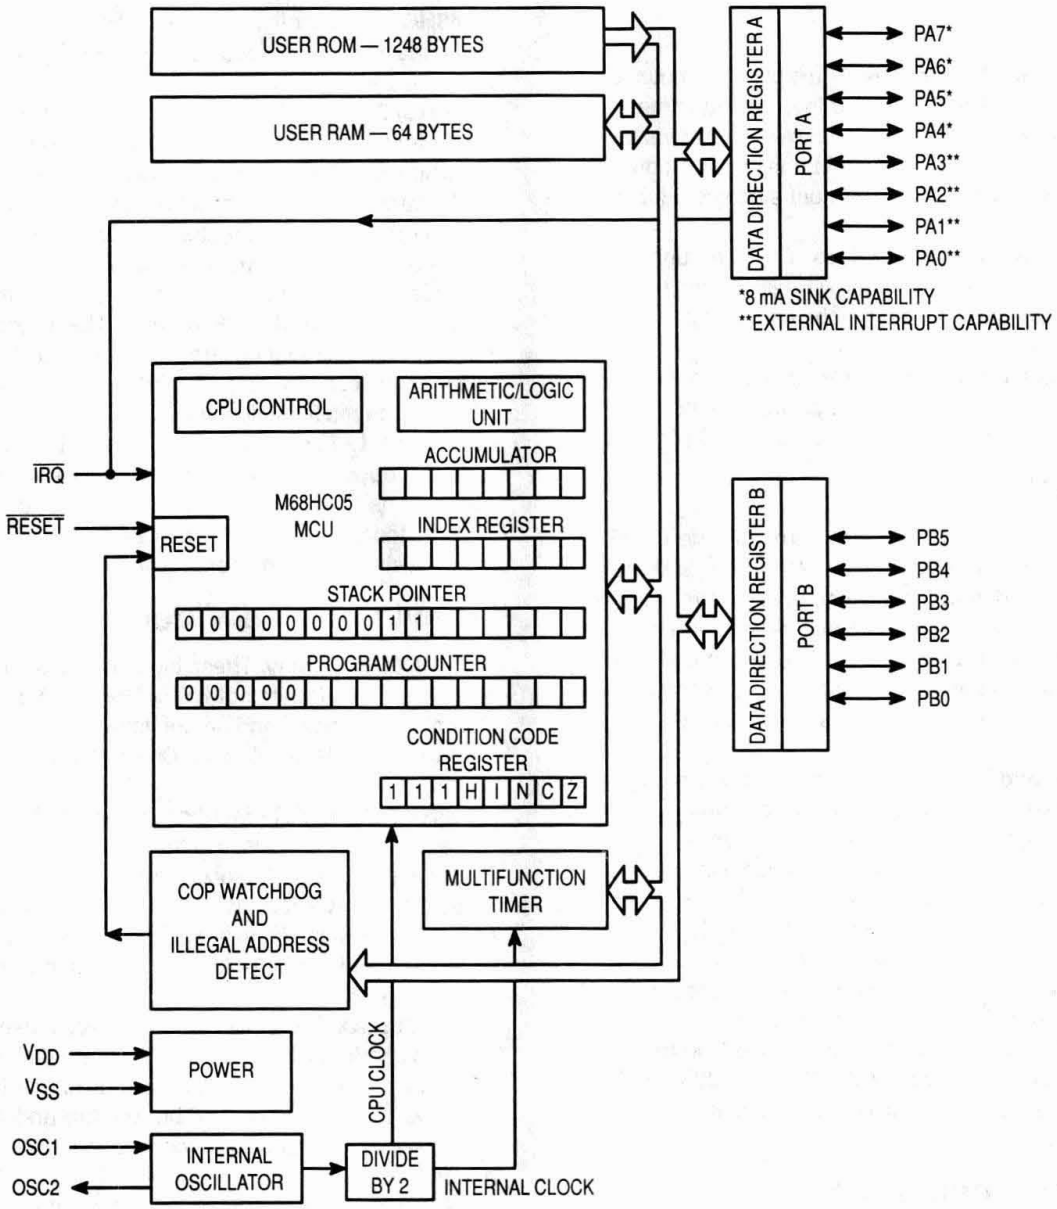

Figure 1. MC68HC05J1A Block Diagram

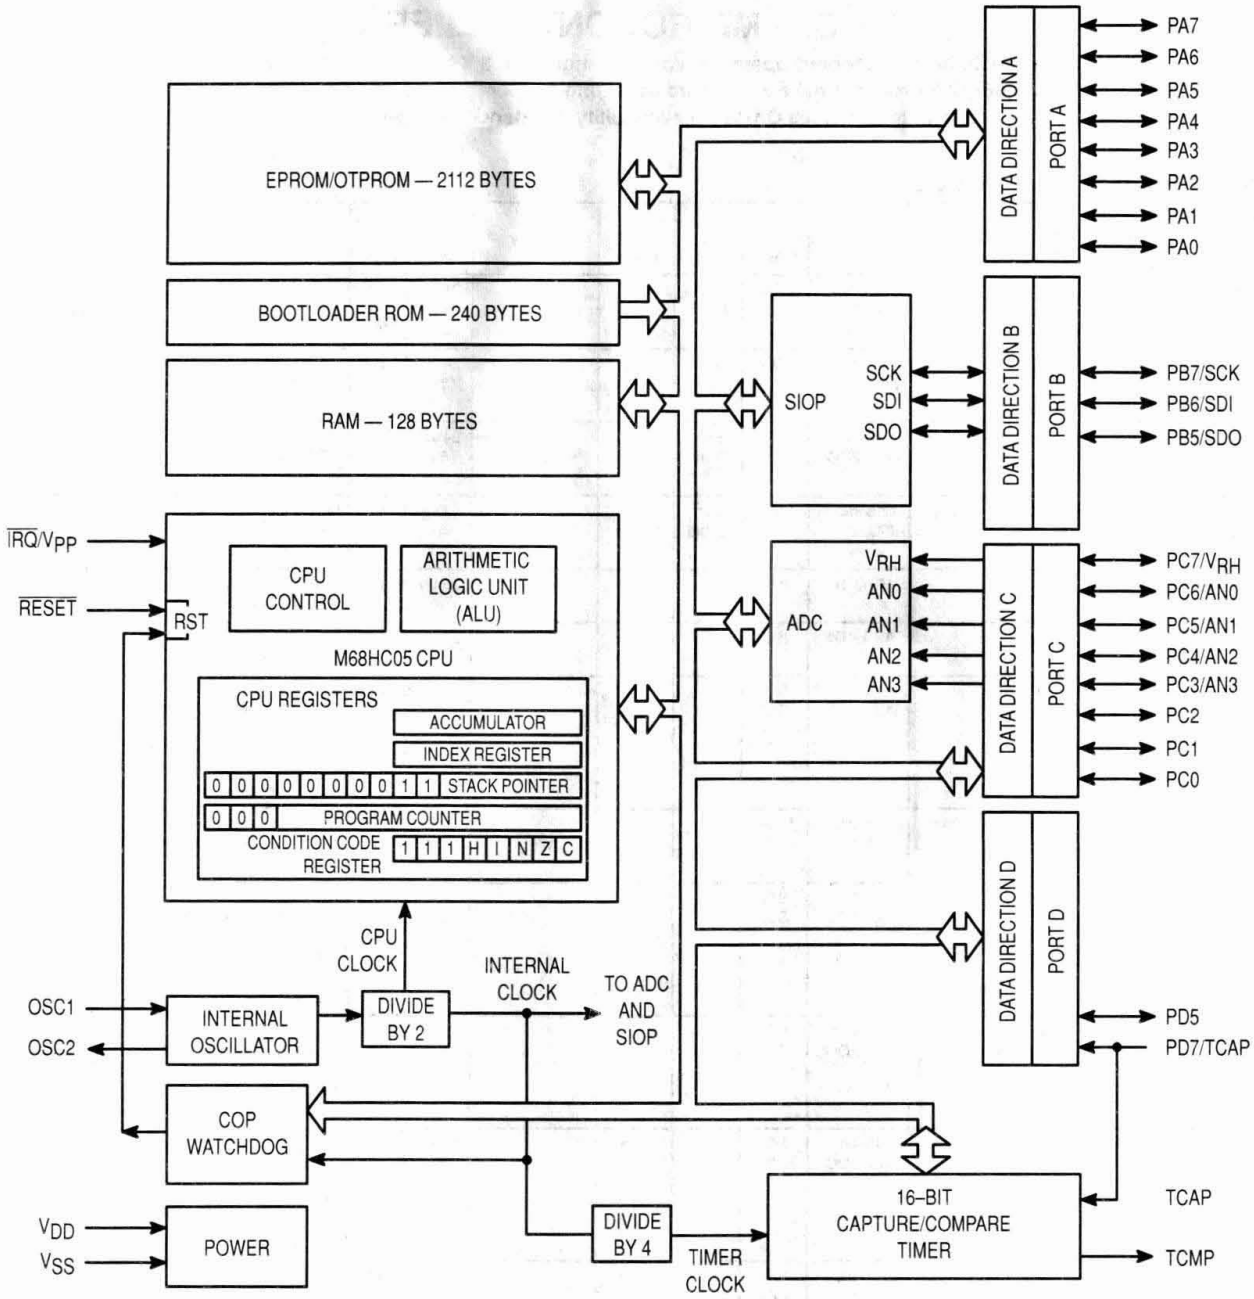

Figure 2. MC68HC705P9 Block Diagram

68HC05 MICROCONTROLLERS

All 68HC05 products have a standard operating voltage range from 3 V to 5.5 V unless noted in Comments.
All 68HC05 products have a standard operating temperature range from 0 – 70°C.
Contact a Motorola Sales Office for availability of extended temperature versions.

Table 1. 68HC05 Microcontrollers

Motorola Part Number	ROM (Bytes)	RAM (Bytes)	EEPROM (Bytes)	Timer	Serial	A/D	PWM	Display Drive	I/O	COP	Comments	Packages
MC68HC05B4	4K	176		16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		24 i/o 8 i 2 o	✔		56 SDIP – B 52 PLCC – FN 64 QFP – FU
MC68HC05B6	6K	176	256	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		24 i/o 8 i 2 o	✔	On–Chip Charge Pump EEPROM Write Protect	56 SDIP – B 52 PLCC – FN 64 QFP – FU
MC68HC05B8	7.25K	176	256	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		24 i/o 8 i 2 o	✔	On–Chip Charge Pump EEPROM Write Protect	56 SDIP – B 52 PLCC – FN 64 QFP – FU
MC68HC05B16	15K	352	256	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		24 i/o 8 i 2 o	✔	On–Chip Charge Pump EEPROM Write Protect	56 SDIP – B 52 PLCC – FN 64 QFP – FU
MC68HC05BD3	3.75K	128		MFT, RTI	I^2C		16 ch (8–bit)		24 i/o	✔	Horizontal and Vertical Sync Signal Processor	40 DIP – P 42 SDIP – B
MC68HC05BD5	7.75K	256		MFT, RTI	I^2C		16 ch (8–bit)		24 i/o	✔	Horizontal and Vertical Sync Signal Processor	40 DIP – P 42 SDIP – B
MC68HC05C4A	4K	176		16–bit: (1IC, 1OC)	SPI SCI				24 i/o 7 i	✔	KBI (8 pins) 1 High Current Pin (5 mA sink) Mask Option Pullups High Speed Option (HSC05C4A) Low Power Option (HCL05C4A) (1.8 V minimum)	40 DIP – P 44 PLCC – FN 44 QFP – FB 42 SDIP – B
MC68HC05C5	5K	176	128	16–bit: (1IC, 1OC)	SIOP				32 i/o	✔	8 High Current Pins (10 mA sink) LVPI, On–Chip Charge Pump	40 DIP – P 44 PLCC – FN
MC68HC05C8A	8K	176		16–bit: (1IC, 1OC)	SPI SCI				24 i/o 7 i	✔	KBI (8 pins) 1 High Current Pin (5 mA sink) Mask Option Pullups High Speed Option (HSC05C8A) Low Power Option (HCL05C8A) (1.8 V minimum)	40 DIP – P 44 PLCC – FN 44 QFP – FB 42 SDIP – B
MC68HC05C9A	16K	352		16–bit: (1IC, 1OC)	SPI SCI				24 i/o 7 i	✔	KBI (8 pins) 1 High Current Pin (5 mA sink) Mask Option Pullups High Speed Option (HSC05C9A) Low Power Option (HCL05C9A)	40 DIP – P 44 PLCC – FN 44 QFP – FB 42 SDIP – B
MC68HC05C12	12K	176		16–bit: (1IC, 1OC)	SCI SPI				24 i/o 7 i	✔	1 High Current Pin (20 mA sink) KBI (8 pins) Mask Option Pullups (8 pins) High Speed Option (HSC05C12) Low Power Option (HCL05C12): (1.8 V minimum)	40 DIP – P 44 PLCC – FN 44 QFP – FB 42 SDIP – B
MC68HC05CJ4	4K	224		16–bit: (1IC, 1OC) MFT	SPI SCI I^2C				24 i/o	✔	I^2C (Slave Only)	44 QFP – FB
MC68HC05D9	16K	352		16–bit: (1IC, 1OC)	SCI		5 ch (6–bit)		31 i/o	✔	8 High Current Pins (25 mA sink) 30 kHz PWM	40 DIP – P 44 PLCC – FN
MC68HC05D24	24K	352		16–bit: (1IC, 1OC)	SCI		5 ch (6–bit)		31 i/o	✔	8 High Current Pins (24 mA sink) 30 kHz PWM	40 DIP – P 44 PLCC – FN
XC68HC05D32	32K	352		16–bit: (1IC, 1OC)	SCI		5 ch (6–bit)		31 i/o	✔	8 High Current Pins (24 mA sink) 30 kHz PWM	40 DIP – P 44 PLCC – FN
MC68HC05E1	4K	368		MFT, RTI					20 i/o	✔	32 kHz PLL Clock Synthesizer	28 DIP – P 28 SOIC – DW
MC68HC05E6	6K	128	160	16–bit: (1IC, 1OC) MFT, RTI		4 ch (8–bit)			32 i/o 4 i	✔	KBI (8 pins) Pin for External LVI	44 QFP – FB 28 SOIC – DW
MC68HC05E16	16K	352	320	16–bit: (2IC, 2OC) MFT, RTI	Dual I^2C	4 ch (8–bit)			47 i/o 2 i	✔	KBI (8 pins) LVI 32 kHz Programmable PLL Periodic Interrupt (.25, .5, 1s)	44 QFP – FB 64 QFP – FU 56 SDIP – B
MC68HC05F5	5K	224		MFT, RTI					30 i/o 1 i	✔	DTMF Receiver Mask IRQ	40 DIP – P 44 PLCC – FN
MC68HC05F6	4K	320		16–bit: (1IC, 1OC)	SPI				26 i/o 4 i 2 o		DTMF Generator 8 High Current Pins (10 mA sink) KBI (6 pins)	42 SDIP – B 44 QFP – FB

Table 1. 68HC05 Microcontrollers (continued)

Motorola Part Number	ROM (Bytes)	RAM (Bytes)	EEPROM (Bytes)	Timer	Serial	A/D	PWM	Display Drive	I/O	COP	Comments	Packages
MC68HC05F8	8K	320		16–bit: (1IC, 1OC) 16–bit: auto	SPI				50 i/o 2 o	✔	DTMF Generator KBI (8 pins) Manchester Encoder/Decoder 8 High Current Pins (10 mA sink)	64 QFP – FU
MC68HC05G1	8K	176		16–bit: (1IC, 1OC) RTC	SPI	4 ch (8–bit)			40 i/o 8 i	✔	32 kHz PLL – Standby modes	56 SDIP – B 64 QFP – FU
MC68HC05G3	24K	768		16–bit: (1IC, 1OC) 8–bit: Event Cntr	Dual SPI	8 ch (8–bit)	4 ch (8–bit)		48 i/o 16 i 4 o	✔	KBI (8 pins) Dual Oscillators – Selectable Clock Dual IRQ	80 QFP – FU
MC68HC05J1A	1.2K	64		MFT, RTI					14 i/o	✔	KBI (4 pins) 4 High Current Pins (8 mA sink) Mask Option Pulldowns (14 pins) High Speed Version (HSC05J1A) Low Power Version (HCL05J1A): (1.8 V minimum)	20 DIP – P 20 SOIC – DW
MC68HC05J3	2K	128		16–bit: (1IC, 1OC) MFT, RTI					14 i/o	✔	14 High Current Pins (8 mA sink) KBI (4 pins)	20 DIP – P 20 SOIC – DW
MC68HC05K0	0.5K	32		MFT, RTI					10 i/o	✔	4 High Current Pins (8 mA sink) Programmable Pulldowns (10 pins) Low Voltage Reset Mask Option Low power version (HCL05K0): (1.8 V minimum)	16 DIP – P 16 SOIC – DW
MC68HC05K1	0.5K	32		MFT, RTI					10 i/o	✔	4 High Current Pins (8 mA sink) PEP (64 bits) Programmable Pulldowns (10 pins) Low Voltage Reset Mask Option	16 DIP – P 16 SOIC – DW
MC68HC05K3	920	64	16 PEEP	MFT, RTI					10 i/o	✔	KBI (4 pins), Programmable Pulldowns (10 pins) 4 High Current Pins (8 mA sink) On–Chip Charge Pump 1.8 V Operating Voltage	16 DIP – P 16 SOIC – DW
MC68HC05L1	4K	128		16–bit: (2IC, 2OC)		6 ch (8–bit)		64 Segment LCD: (3/4 x 12/16)	17 i/o 15 i 2 o			56 SDIP – B 64 QFP – FU
MC68HC05L5	8K	256		16–bit: (1IC, 1OC) RTI 8–bit: (1IC, 1OC)	SIOP			156 Segment LCD: (1–4 x 27–39)	14 i/o 10 i 15 o	✔	KBI (8 pins), Dual Oscillators 8 High Current Pins (10 mA sink) Programmable Pullups (24 pins), Open Drain (31 pins), 2.2 V	80 QFP – FU
MC68HC05L16	16K	512		16–bit: (1IC, 1OC) RTI 8–bit: (1IC, 1OC)	SIOP			156 Segment LCD: (1–4 x 27–39)	16 i/o 8 i 15 o	✔	KBI (8 pins), Dual Oscillators 8 High Current Pins (10 mA sink) Programmable Pullups (24 pins) Open Drain (31 pins), 2.2 V Operation	80 QFP – FU
MC68HC05P1A	2K	128		16–bit: (1IC, 1OC)					20 i/o 1 i	✔	KBI (8 pins) Mask Option Pullups (8 pins) 2 High Current Pins (20 mA)	28 DIP – P 28 SOIC – DW
MC68HC05P3	3K	128	128	16–bit: (1IC, 1OC) MFT, RTI					22 i/o	✔	KBI (6 pins) On–Chip Charge Pump	28 DIP – P 28 SOIC – DW
MC68HC05P4	4K	176		16–bit: (1IC, 1OC)	SIOP				20 i/o 1 i	✔	High Speed Option (68HSC05P4) Low Power Option (68HCL05P4): (1.8 V minimum)	28 DIP – P 28 SOIC – DW
MC68HC05P6	4.5K	176		16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o 1 i	✔		28 DIP – P 28 SOIC – DW
MC68HC05P7	2K	128		16–bit: (1IC, 1OC)	SIOP				20 i/o 1 i	✔		28 DIP – P 28 SOIC – DW
MC68HC05P8	2K	112	32	MFT, RTI		4 ch (8–bit)			16 i/o 4 i	✔	LVPI Option on EEPROM On–Chip Charge Pump	28 DIP – P 28 SOIC – DW
MC68HC05P9	2K	128		16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o 1 i	✔		28 DIP – P 28 SOIC – DW
XC68HC05P18	8K	192	128	16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o	✔	2 High Current Pin KBI (8 pins) Mask Option Pullups (8 pins) LVR, Mask option clock out	28 DIP – P 28 SOIC – DW

Table 1. 68HC05 Microcontrollers (continued)

Motorola Part Number	ROM (Bytes)	RAM (Bytes)	EEPROM (Bytes)	Timer	Serial	A/D	PWM	Display Drive	I/O	COP	Comments	Packages
MC68HC05PE0	2K	128		16–bit: (1IC, 1OC)					20 i/o	✔	1 High Current Pin (20 mA sink) PEP (64 bits), KBI (8 pins) Mask Option Pulldowns (8 pins) RC Oscillator Option	28 DIP – P 28 SOIC – DW
XC68HC05RC16	16K	350		Infrared Timer					12 i/o	✔	Mask Option Pullups (12 pins) KBI (12 pins), Low Power Stop Pin	28 DIP – P 28 SOIC – DW
MC68HC05SC11	6K	128							5 i/o		Security Features, 8K EPROM Smartcard Applications, 5 V Only	Die 16 DIP – P 20 SOIC – DW
MC68HC05SC21	6K	128	3K						5 i/o		Security Features On–Chip Charge Pump Smartcard Applications	Die 16 DIP – P 20 SOIC – DW
MC68HC05SC24	3K	128	1K						5 i/o		Security Features On–Chip Charge Pump Smartcard Applications	Die 16 DIP – P 20 SOIC – DW
MC68HC05SC26	6K	224	1024						5 i/o	✔	Smartcard Security Features On–Chip Charge Pump High Speed Option	Die 44 PLCC – FN
MC68HC05SC27	16K	240	3K						5 i/o	✔	Security Features On–Chip Charge Pump Smartcard Applications High Speed Option	Die 16 DIP – P 20 SOIC – DW
XC68HC05SC28	12K	256	8K						5 i/o	✔	Security Features, On–Chip Charge Pump Smartcard Applications High Speed Option	Die 44 PLCC – FN
MC68HC05T1	8K	320		16–bit: (1IC, 1OC)	SIOP	1 ch (6–bit)	9 ch (6–bit)	OSD (64 Char ROM)	29 i/o 1 i	✔	Open Drain PWM Outputs 5 V Only	40 DIP – P 42 SDIP – B
XC68HC05T2	15K	320		16–bit: (1IC, 1OC)	SIOP	1 ch (6–bit)	9 ch (6–bit)	OSD (64 Char ROM)	29 i/o 1 i	✔	Open Drain PWM Outputs 5 V Only	40 DIP – P 42 SDIP – B
MC68HC05T10	12K	320		16–bit: (1IC, 1OC) RTC	I^2C	1 ch (8–bit)	8 ch (6–bit) 1 ch (14–bit)	OSD (64 Char ROM)	20 i/o 4 i		Open Drain PWM Outputs KBI (8 pins) 5 V Only	56 SDIP – B
MC68HC05T16	24K	320		16–bit: (1IC, 2OC) 8–bit PAC	I^2C	2 ch (5–bit)	9 ch (7–bit) 1 ch (14–bit)	OSD (128 Char EPROM)	40 i/o	✔	12 V Open Drain I/O lines (up to 22) 4 row OSD buffer Timer output compare functions do not have output pins	56 SDIP – B
MC68HC05X1	12K	336		16–bit: (1IC, 2OC) MFT, RTI	SSI				24 i/o	✔	KBI (8 pins) SAE J1850 Serial Mux Interface 5 V Operation Only	44 PLCC – FN
MC68HC05X4	4K	176		16–bit: (1IC, 1OC) MFT, RTI					16 i/o	✔	CAN (Controller Area Network) KBI (16 pins)	28 SOIC – DW
MC68HC05X16	15K	352	255	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		32 i/o	✔	CAN (Controller Area Network) KBI (8 pins) EEPROM Write Protect On–Chip Charge Pump	64 QFP – FU
MC68HC05X32	32K	528	255	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		32 i/o	✔	CAN (Controller Area Network) KBI (8 pins) EEPROM Write Protect On–Chip Charge Pump	64 QFP – FU

ONE–TIME PROGRAMMABLE (OTP) / EMULATOR MCUs

All 68HC705 products have a standard operating voltage range from 3 V to 5.5 V unless noted in Comments.
All 68HC705 products have a standard operating temperature range from 0 – 70°C.
Contact a Motorola Sales Office for availability of extended temperature versions.

Table 2. One–Time Programmable (OTP)/Emulator MCUs

Motorola Part Number	EPROM (Bytes)	RAM (Bytes)	EEPROM (Bytes)	Timer	Serial	A/D	PWM	Display Drive	I/O	COP	Comments	Packages
MC68HC705B5	6K	176		16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		24 i/o 8 i 2 o	✔	Programmable Pulldowns (16 pins) EPROM Write Protect	56 SDIP – B 52 PLCC – FN
MC68HC705B16	15K	352	255	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		32 i/o 2 o	✔	On–Chip Charge Pump EEPROM Write Protect	52 PLCC – FN *52 Cerquad–FS 64 QFP – FU
XC68HC705B32	32K	528	255	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		32 i/o	✔	On–Chip Charge Pump EEPROM Write Protect	52 PLCC – FN 56 SDIP – B 64 QFP – FU
MC68HC705BD3	7.75K	256		MFT, RTI	I^2C		16 ch (8–bit)		24 i/o	✔	Horizontal and Vertical Sync Signal Processor	42 SDIP – B *42 Cersdip – K 40 DIP – P *40 Cerdip – S
MC68HC705C4A	4K	176		16–bit: (1IC, 1OC)	SPI SCI				24 i/o 7 i	✔	Mask Option Register Pullups (8 pins) KBI (8 pins) 1 High Current Pin (20 mA sink) EPROM Security	40 DIP – P 44 PLCC – FN 42 SDIP – B 44 QFP – FB
MC68HC705C8A	8K	304		16–bit: (1IC, 1OC)	SPI SCI				24 i/o 7 i	✔	Mask Option Pullups (8 pins) KBI (8 pins) 1 High Current Pin (20 mA sink) High Speed Option (HSC705C8A) Superset of ROM C8A with more RAM EPROM Security	40 DIP – P 44 PLCC – FN *40 Cerdip – S 42 SDIP – B 44 QFP – FB *44 Cerquad – FS
MC68HC705C9A	16K	352		16–bit: (1IC, 1OC)	SPI SCI				31 i/o	✔	Mask Option Pullups (8 pins) KBI (8 pins) 1 High Current Pin (20 mA sink) EPROM Security	40 DIP – P *40 Cerdip – S *44 Cerquad–FS 44 PLCC – FN 42 SDIP – B 44 QFP – FB
MC68HC705CJ4	4K	224		16–bit: (1IC, 1OC) MFT	SPI SCI I^2C				29 i/o 3 i	✔	8 High Current Pins (10 mA sink) I^2C (Slave Only)	44 QFP – FB
XC68HC705D9	16K	352		16–bit: (1IC, 1OC)	SCI		5 ch (6–bit)		31 i/o	✔	8 High Current Pins (25 mA sink) 30 kHz PWM	40 DIP – P *44 Cerquad–FS 44 PLCC – FN
MC68HC705E1	4K	368		MFT, RTC RTI					20 i/o	✔	32 kHz PLL Clock Synthesizer	*28 Cerdip – S 28 DIP – P 28 SOIC – DW
XC68HC705F6	4K	320		16–bit: (1IC, 1OC)	SPI				26 i/o 4 i		DTMF Generator 8 High Current Pins (10 mA sink) KBI (6 pins)	42 SDIP – B *42 Cersdip – K 64 QFP – FU *64 CQFP – FZ
MC68HC705F8	8K	320		16–bit: (1IC, 1OC) 16–bit: auto	SPI				50 i/o 2 o	✔	DTMF Generator KBI (8 pins) 8 High Current Pins (10 mA sink) Manchester Encoder/Decoder	64 QFP – FU *64 CQFP – FZ
MC68HC705G1	12K	176		16–bit: (1IC, 1OC) RTC	SPI	4 ch (8–bit)			40 i/o 8 i	✔	32 kHz PLL	56 SDIP – B *56 Cersdip – K 64 QFP – FU *64 CQFP – FZ
MC68HC705G4	32K	1024		16–bit: (1IC, 1OC) 8–bit: Event Cntr	Dual SPI	8 ch (8–bit)	4 ch (8–bit)		48 i/o 16 i 4 o	✔	KBI (8 pins) Dual IRQ Dual Oscillators, Selectable Clock	80 QFP – FU *80 CQFP – FZ
MC68HC705J1A	1.2K	64		MFT, RTI					14 i/o	✔	KBI (4 pins), EPROM Security Feature 4 High Current Pins (8 mA sink) Mask Option Pulldowns (14 pins)	20 DIP – P 20 SOIC – DW *20 Cerdip – S
MC68HC705J2	2K	112		MFT, RTI					14 i/o	✔		20 DIP – P 20 SOIC – DW *20 Cerdip – S
MC68HC705K1	0.5K	32		MFT, RTI					10 i/o	✔	4 High Current Pins (8 mA sink) PEP (64 bits) Programmable Pulldowns (10 pins) Low Voltage Reset Mask Option	16 DIP – P 16 SOIC – DW *16 Cerdip – S

Table 2. One–Time Programmable (OTP)/Emulator MCUs (continued)

Motorola Part Number	EPROM (Bytes)	RAM (Bytes)	EEPROM (Bytes)	Timer	Serial	A/D	PWM	Display Drive	I/O	COP	Comments	Packages
XC68HC705L1	6K	128		16–bit: (2IC, 2OC)		6 ch (8–bit)		64 Segment LCD: (3/4 x 12/16)	17 i/o 15 i 2 o			56 SDIP – B 64 QFP – FU *64 CQFP – FZ *56 Cersdip – K
MC68HC705L5	8K	256		16–bit: (1IC, 1OC) RTI 8–bit: (1IC, 1OC)	SIOP			156 Segment LCD: (1–4 x 27–39)	14 i/o 10 i 15 o		KBI (8 pins), Dual Oscillators 8 High Current Pins (10 mA sink) Programmable Pullups (24 pins) Open Drain (31 pins)	80 QFP – FU *80 CQFP – FZ
MC68HC705L16	16K	512		16–bit: (1IC, 1OC) RTI 8–bit: (1IC, 1OC)	SIOP			156 Segment LCD: (1–4 x 27–39)	16 i/o 8 i 15 o	✔	KBI (8 pins), Dual Oscillators 8 High Current Pins (10 mA sink) Programmable Pullups (24 pins) Open Drain (31 pins)	80 QFP – FU *80 CQFP – FZ
MC68HC705P6	4.5K	176		16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o 1 i	✔		28 DIP – P 28 SOIC – DW *28 Cerdip – S
MC68HC705P9	2K	128		16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o 1 i	✔		28 DIP – P 28 SOIC – DW *28 Cerdip – S
MC68HC705SR3	3.75K	192		8–bit Timer (7–bit prescaler)		4 ch (8–bit)			32 i/o		Programmable Pullups (24 pins) KBI (8 pins), LED drive (8 pins) LVR	40 DIP – P *40 Cerdip – S 42 SDIP – B 44 QFP – FB
MC68HC705T10	12K	320		16–bit: (1IC, 1OC) RTC	I^2C	1 ch (8–bit)	8 ch (6–bit) 1 ch (14–bit)	OSD (64 Char EPROM)	20 i/o 4 i		Open Drain PWM Outputs KBI (8 pins) 5 V Only	56 SDIP – B *56 Cersdip – K
MC68HC705T16	24K	320		16–bit: (1IC, 2OC) 8–bit PAC	I^2C	2 ch (5–bit)	9 ch (7–bit) 1 ch (14–bit)	OSD (128 Char EPROM)	40 i/o	✔	12 V Open Drain I/O Lines (Up to 22) 4 Row OSD Buffer Timer output compare functions do not have output pins	56 SDIP – B *56 Cersdip – K
XC68HC705V8	12K	512	128	16–bit: (1IC, 1OC) MFT, RTI	SPI	8 ch (8–bit)	1 ch (6–bit)		22 i/o	✔	LVR, On Chip Charge Pump, MDLC (Message Datalink Control) 5 V Regulator, KBI (16 pins)	56 SDIP – B 68 PLCC – FN 68 CLCC – FS 56 Cersdip – K
XC68HC705X4	4K	176		16–bit: (1IC, 1OC) MFT, RTI					16 i/o	✔	CAN (Controller Area Network) KBI (16 pins)	28 SOIC – DW

*Windowed packages available only in sample quantities.

Definitions

CAN – Controller Area Network
CCTV – Closed Caption Television
COP – Computer Operating Properly (Watch Dog Timer)
DTMF – Dual–Tone Multi–Frequency
EBI – External Bus Interface
IC – Input Capture
I^2C – Inter–Integrated Circuit
IDE – Integrated Device Electronics (IBM PC/AT Type)
i/o – Bidirectional Input and Output Port Pins
i – Input Only Port Pins
KBI – Key Board Interrupt
LCD – Liquid Crystal Display
LVI – Low Voltage Interrupt
LVPI – Low Voltage Program Inhibit
LVR – Low Voltage Reset
MDLC – Message Data Link Controller (J1850)
MFT – Multi Function Timer
o – Output Only Port Pins
OC – Output Compare
OSD – On–Screen Display
PEEP – Personality EEPROM
PEP – Personality EPROM
PIO – Parallel Input Output (IBM PC/AT Type)
PLL – Phase–Lock Loop
PWM – Pulse–Width Modulation
RTC – Real–Time Clock
RTI – Real–Time Interrupt
SCI – Serial Communications Interface (asynchronous)
SCI+ – Serial Communications Interface (async. and sync.)
SIO – Serial Input Output (IBM PC/AT Type)
SIOP – Simple Serial I/O Port
SPI – Serial Peripheral Interface
VFD – Vacuum Fluorescent Display
VREG – Voltage Regulator
WDOG – Watch Dog Timer

Package Definitions

B – Shrink DIP (70 mil spacing)
DW – Small Outline (Wide–Body SOIC)
FA – 7 x 7 mm Quad Flat Pack (QFP)
FB – 10 x 10 mm Quad Flat Pack (QFP)
FE – CQFP (windowed) – Samples Only
FN – Plastic Quad (PLCC)
FS – CLCC (windowed) – Samples Only
FT – 28 x 28 mm Quad Flat Pack (QFP)
FU – 14 x 14 mm Quad Flat Pack (QFP)
FZ – CQFP (windowed) – Samples Only
K – Cersdip (windowed) – Samples Only
L – Ceramic Sidebraze
P – Dual–in–Line Plastic
S – Cerdip (windowed) – Samples Only

MCU NEW PRODUCTS

All 68HC05 and 68HC705 products have a standard operating voltage range from 3 V to 5.5 V unless noted in Comments.
All 68HC05 and 68HC705 products have a standard operating temperature range from 0 to 70°C.
Contact a Motorola Sales Office for availability of the following MCUs:

Table 3. MCU New Products

Motorola Part Number	ROM/ EPROM (Bytes)	RAM (Bytes)	EEPROM (Bytes)	Timer	Serial	A/D	PWM	Display Drive	I/O	COP	Comments	Packages
68HC05B32	32K	528	256	16–bit: (2IC, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		32 i/o	✔	On–Chip Charge Pump EEPROM Write Protect	52 PLCC – FN 56 SDIP – B 64 QFP – FU
68HC05C0	0	512		16–bit: (1IC, 1OC) MFT	SCI+				18 i/o	✔	Mux or Non–Mux EBI (16–bit) 3 Chip Selects, KBI (8 pins) Programmable Pullups (8 pins) 1 High Current Pin (20 mA sink)	40 DIP – P *40 Cerdip – S 44 PLCC – FN *44 Cerquad – FS
68HC705D32A	32K	352		16–bit: (1IC, 1OC)	SCI		5 ch (6–bit)		31 i/o	✔	8 High Current Pins (24 mA sink) 30 kHz PWM, KBI (8 pins)	40 DIP – P *40 Cerdip – S 44 PLCC – FN *44 Cerquad –FS
68HC705E5	5K	384		MFT, RTI	I^2C				20 i/o	✔	32 kHz PLL Clock Synthesizer	28 DIP – P *28 Cerdip – S 28 SOIC – DW
68HC705JP7	6K + 64–bit PEP	224		16–bit: (1IC, 1OC) MFT, RTI	SIOP	See Com–ments			14 i/o	✔	Two voltage comparators used with timer to create 4 channel A/D, KBI (4 pins), Programmable Pulldowns (14 pins), 6 Hi Current Pins (10 mA sink), EPROM security feature, LVI	20 DIP – P 20 SOIC – DW
68HC805K3		64	920 16PEEP	MFT, RTI					10 i/o	✔	KBI (4 pins), Programmable Pulldowns (10 pins), 4 High Current Pins (8 mA sink), On–Chip Charge Pump, 1.8 V EE Read	16 DIP – P 16 SOIC – DW
68HC705MC4	3.5K	176		16–bit: (2IC or 1IC, 1OC) MFT, RTI	SCI	6 ch (8–bit)	2 hi sp (8–bit 24 kHz Max)		22 i/o	✔	One 8–bit High Current Port (10 mA Source Pin, 20 mA Max/Port) Low EMI Pinout 1 High Sink Current Pin (10 mA) Commutation Mux for PWM	28 DIP – P *28 Cerdip – S 28 SOIC – DW
68HC05MC4	3.5K	176		16–bit: (2IC or 1IC, 1OC) MFT, RTI	SCI	6 ch (8–bit)	2 hi sp (8–bit 24 kHz Max)		22 i/o	✔	One 8 bit High Current Port (10 mA Source Pin, 20 mA Max/Port) Low EMI Pinout 1 High Sink Current Pin (10 mA) Commutation Mux for PWM	28 DIP – P 28 SOIC – DW
68HC705P6A	4K	176		16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o	✔	KBI (8 pins) 2 High Current Pins (15 mA sink)	28 DIP – P 28 SOIC – DW
68HC05P9A	2K	128		16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o	✔	KBI (8 pins) 2 High Current Pins (15 mA sink)	28 DIP – P 28 SOIC – DW
68HC05P18		192	8K + 128	16–bit: (1IC, 1OC)	SIOP	4 ch (8–bit)			20 i/o	✔	KBI (8 pins), LVR 2 High Current Pins Pullups (8 pins), clock out option	28 DIP – P 28 SOIC – DW
68HC705RC16	16K	350		Infrared Timer					12 i/o	✔	Mask Option Pullups (12 pins) KBI (12 pins)	28 DIP – P *28 Cerdip – S 28 SOIC – DW
68HC705RC17	16K	350		Infrared Timer					12 i/o	✔	Mask Option Pullups (12 pins) KBI (12 pins) Phase–Locked Loop (PLL)	28 DIP – P *28 Cerdip – S 28 SOIC – DW
68HC05RC17	16K	350		Infrared Timer					12 i/o	✔	Mask Option Pullups (12 pins) KBI (12 pins) Phase–Locked Loop (PLL)	28 DIP – P 28 SOIC – DW
68HC05SR3	3.75K	192		8–bit Timer (7–bit prescaler)		4 ch (8–bit)			32 i/o		Mask Option Pullups (24 pins) KBI (8 pins), LED Drive (8 pins), LVR	40 DIP – P 42 SDIP – B 44 QFP – FB
68HC05V7	10K	384	128	16–bit: (1IC, 1OC) MFT, RTI	SPI	8 ch (8–bit)	1 ch (6–bit)		22 i/o 16 i	✔	MDLC (Message Datalink Control) 5 V Power Regulator KBI (16 pins), LVR	56 SDIP – B 68 PLCC – FN
68HC705X32	32K	528	255	16–bit: (21C, 2OC)	SCI+	8 ch (8–bit)	2 ch (8–bit)		32 i/o	✔	CAN (Controller Area Network)	64 QFP – FU
68HC08XL36	36K	1K		4 ch 16–bit: (IC, OC, or PWM)	SCI SPI				43 i/o	✔	8 MHz Internal Bus (5 V) Direct Memory Access Module (3 ch) Programmable PLL, LVI/LVR KBI (8 pins), Programmable Pullups (8 pins)	56 SDIP – B 64 QFP – FU
68HC708XL36	36K	1K		4 ch 16–bit: (IC, OC, or PWM)	SCI SPI				43 i/o	✔	8 MHz Internal Bus (5 V) Direct Memory Access Module (3 ch) Programmable PLL, LVI/LVR KBI (8 pins), Programmable Pullups (8 pins)	56 SDIP – B *56 Cerdip – K 64 QFP – FU *64 CQFP – FE

M68HC08 Family

The M68HC08 Family offers a unique combination of high–speed, low–power, enhanced processing performance for cost–sensitive 8–bit applications. Full upward object code compatibility with the world's leading 8–bit microcontroller allows current M68HC05 users to leverage their resource and time investment. M68HC08 modular design utilizes a growing library of on–chip peripherals. The flagship 68HC(7)08X36 OTP and ROM versions for general purpose use are the first two devices in the family.

Features

- Architecturally Enhanced 8–Bit CPU
  - 8 MHz bus speed yields 125 ns minimum instruction cycle
  - 16–bit stack with stack pointer operations and addressing modes
  - 16–bit index register
  - 78 new instructions including advanced looping control
  - Eight new addressing modes
- Fully upward object code compatible with the M68HC05 and M6805 families
- Direct Memory Access Module
  - Memory–to–memory transfer
  - Peripheral–to–memory and memory–to–peripheral transfer
- Timing Interface Module
  - Four independently programmable channels
  - Input capture, output compare, buffered, and unbuffered PWM configurations
- Interface Modules
  - Serial Communications Interface (UART)
  - Serial Peripheral Interface
  - System Interface Module
- System Control Modules
  - Low Voltage Inhibit, PLL, COP, and System Integration Module
- Clock Generator Module
  - Generates two different clock signals from a user–selected source

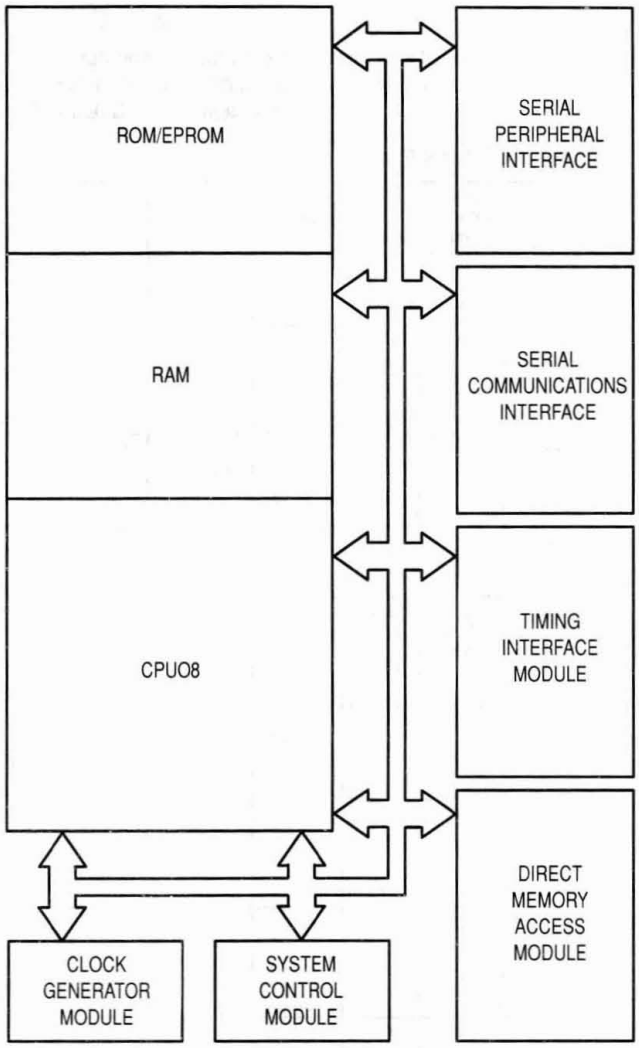

Figure 3. Block Diagram of Typical M68HC08 MCU

M68HC05 Microcontroller Development Tools

Motorola now offers two fully modular development system choices: the new Motorola Modular Evaluation System (MMEVS) and our popular, high–performance Motorola Modular Development System (MMDS). You can now build a customized MMEVS or MMDS to emulate the MCU in your target design in four simple steps. First, order the MMEVS or MMDS system platform (M68MMPFB0508 or M68MMDS05). Second, select and order the emulation module (EM) that contains circuitry specific to emulating the particular HC05/08 MCU in your target application. Third, complete the system by ordering target cable accessories to connect the MMEVS or MMDS to your target MCU socket. Finally, select the appropriate parallel programmer to program your prototype devices.

Choosing Between the MMEVS and MMDS

Build an economical MMEVS system to perform traditional debugging activities such as executing code in run or step mode; setting breakpoints; monitoring or modifying CPU registers, memory and application variables; and creating log or script files to record test results or automate the testing process. Or, create an MMDS system to add high–performance, advanced emulation features such as real–time, dual–ported memory and a real–time bus state analyzer with an 8K trace buffer. In addition, the MMDS includes a built–in power supply and is fully enclosed in a metal case. Both the MMEVS and MMDS include a host–based Integrated Development Environment (IDE) comprised of an editor, assembler, and hardware debugger.

Modular Architecture Benefits

The MMEVS replaces Motorola's older–style EVS and EVM development tool products. A proper subset of the MMDS architecture, the new MMEVS is fully compatible with all EM products supported by the MMDS. The MMEVS extends the emulation performance beyond that of the EVS and EVM by supporting full, real–time, non–intrusive, in–circuit emulation for the new high–speed devices (68HSC05) in the HC05 Family and the new HC08 architecture. The MMEVS also extends emulation support to all low–voltage HC05/HC08 derivatives. The common hardware, firmware, and software design of the MMEVS and MMDS also provide greater flexibility in mixing and matching Motorola hardware tools with the ever–increasing variety of C compilers, assemblers, and integrated development environment product offerings from Motorola's third party developer companies.

CONFIGURATION AND ORDER INFORMATION FOR MMDS/MMEVS

Table 4. Configuration and Order Information for MMDS/MMEVS

Devices	Platform	Emulation Modules	Package Type	In–Circuit Target Cable		
				Low Noise Flexcable	Target Head Adapter	Surface Mount Adapter
68HC05A16 68HC705A24	M68MMPFB0508 OR M68MMDS05	M68EM05A24	56 SDIP – B	M68CBL05B	M68TB05A24B56	
68HC05B4/B6/B8/B16/B32 68HC705B5/B16/B32	M68MMPFB0508 OR M68MMDS05	M68EM05B32	56 SDIP – B	M68CBL05B	M68TB05B32B56	
			64 QFP – FU	M68CBL05C	M68TC05B32FU64	M68TQS064SAG1† M68TQP064SA1†
			52 PLCC – FN	M68CBL05C	M68TC05B32FN52	
68HC05BD3/BD5 68HC705BD3/BD5	M68MMPFB0508 OR M68MMDS05	M68EM05BD3	40 DIP – P	M68CBL05B	M68TB05BD3P40	
			42 SDIP – B	M68CBL05B	M68TB05BD3B42	
68HC05BS8 68HC705BS8	M68MMPFB0508 OR M68MMDS05	M68EM05BS8	44 QFP – FB	M68CBL05C	M68TC05BS8FB44	M68TQS044SAG1† M68TQP044SAMO1†
			52 PLCC – FN	M68CBL05B	M68TB05BS8FN52	
68HC05C0	M68MMPFB0508 OR M68MMDS05	M68EM05C0	40 DIP – P	M68CBL05B	M68TB05C0P40	
			42 SDIP – B	M68CBL05B	M68TB05C0B42	
			44 PLCC – FN	M68CBL05	M68TC05C0FN44	
			44 QFP – FB	M68CBL05C	M68TC05C0FB44	M68TQS044SAG1† M68TQP044SAMO1†
68HC05C5 68HC705C5	Refer to the Configuration and Order Information for Other Motorola Development Tools Section to select a development tool for the 68HC05C5/68HC705C5.					
68HC05C4/C4A/C8A/C12A 68HC705C4A/705C8A	M68MMPFB0508 OR M68MMDS05	M68EM05C9	40 DIP – P	M68CBL05B	M68TB05C9P40	
			44 PLCC – FN	M68CBL05C	M68TC05C4FN44	
			44 QFP – FB	M68CBL05C	M68TC05C9FB44	M68TQS044SAG1† M68TQP044SAMO1†
			42 SDIP – B	M68CBL05B	M68TB05C9B42	

Table 4. Configuration and Order Information for MMDS/MMEVS (continued)

Devices	Platform	Emulation Modules	Package Type	In–Circuit Target Cable		
				Low Noise Flexcable	Target Head Adapter	Surface Mount Adapter
68HC05C9/C9A 68HC705C9/705C9A	M68MMPFB0508 OR M68MMDS05	M68EM05C9	40 DIP – P	M68CBL05B	M68TB05C9P40	
			44 PLCC – FN	M68CBL05C	M68TC05C9FN44	
			42 SDIP – B	M68CBL05B	M68TB05C9B42	
			44 QFP – FB	M68CBL05C	M68TC05C9FB44	M68TQS044SAG1† M68TQP044SAMO1†
68HC05CCV 68HC705CCV	Refer to the Configuration and Order Information for Other Motorola Development Tools Section to select a development tool for the 68HC05CCV/68HC705CCV.					
68HC05CJ4 68HC705CJ4	M68MMPFB0508 OR M68MMDS05	M68EM05CJ4	44 QFP – FB	M68CBL05C	M68TC05CJ4FB44	M68TQS044SAG1† M68TQP044SAMO1†
68HC05D9/D24/D32 68HC705D9/D32A	M68MMPFB0508 OR M68MMDS05	M68HC05D32EM	40 DIP – P	M68CBL05B	M68TB05C9P40	
			44 PLCC – FN	M68CBL05C	M68TC05C9FN44	
			44 QFP – FB	M68CBL05C	M68TC05C9FB44	M68TQS044SAG1† M68TQP044SAMO1†
68HC05E6 68HC705E6	M68MMPFB0508 OR M68MMDS05	M68EM05E6	28 SOIC – DW	M68CBL05C	M68TC05E6P28	M68DIP28SOIC
			44 QFP – FB	M68CBL05C	M68TC05E6FB44	M68TQS044SAG1† M68TQP044SAMO1†
68HC05F4 68HC705F4	M68MMPFB0508 OR M68MMDS05	M68EM05F4	28 DIP – P	M68CBL05C	M68TC05E6P28	
			28 SOIC – DW	M68CBL05C	M68TC05E6P28	M68DIP28SOIC
			44 QFP – FB	M68CBL05C	M68TC05E6FB44	M68TQS044SAG1 M68TQP044SAMO1†
68HC05F6 68HC705F6	M68MMPFB0508 OR M68MMDS05	M68EM05F6	42 SDIP – B	M68CBL05B	M68TB05F6B42	
			44 QFP – FB	M68CBL05C	M68TC05F6FB44	M68TQS044SAG1† M68TQP044SAMO1†
			64 QFP – FU	M68CBL05C	M68TC05F6FU64	M68TQS064SAG1† M68TQP064SAMO1†
68HC05F8 68HC705F8	Refer to the Configuration and Order Information for Other Motorola Development Tools Section to select a development tool for the 68HC05F8/68HC705F8.					
68HC05G1 68HC705G1	M68MMPFB0508 OR M68MMDS05	M68EM05G1	56 SDIP – B	M68CBL05B	M68TB05G1B56	
			64 QFP – FU	M68CBL05C	M68TC05G1FU64	M68TQS064SAG1† M68TQP064SAMO1†
68HC05G3 68HC705G4	M68MMPFB0508 OR M68MMDS05	M68EM05G4	80 QFP – FU	M68CBL05E	M68TE05G4FU80	M68TQS080SBG1† M68TQP080SBMO1†
68HC05J1 68HC705J2	M68MMPFB0508 OR M68MMDS05	M68HC05JPEM	20 DIP – P	M68CBL05A	M68TA05J2P20	
			20 SOIC – DW	M68CBL05A	M68TA05J2P20	M68DIP20SOIC
68HC05J1A 68HC705J1A	M68MMPFB0508 OR M68MMDS05	M68EM05J1A	20 DIP – P	M68CBL05A	M68TA05J2P20	
			20 SOIC – DW	M68CBL05A	M68TA05J2P20	M68DIP20SOIC
68HC05J3 68HC705J3	M68MMPFB0508 OR M68MMDS05	M68EM05J3	20 DIP – P	M68CBL05A	M68TA05J2P20	M68DIP20SOIC
			20 SOIC – DW	M68CBL05A	M68TA05J2P20	
68HC05K0/K1/K3 68HC705K1	M68MMPFB0508 OR M68MMDS05	M68EM05K3	16 DIP – P	M68CBL05A	M68TA05K1P16	
			16 SOIC – DW	M68CBL05A	M68TA05K1P16	M68DIP16SOIC
68HC05L1 68HC705L1	M68MMPFB0508 OR M68MMDS05	M68EM05L1	56 SDIP – B	M68CBL05B	M68TB05L1B56	M68TQS064SAG1†
			64 QFP – FU	M68CBL05C	M68TC05L1FU64	M68TQP064SAMO1†
68HC05L2 68HC705L2	M68MMPFB0508 OR M68MMDS05	M68HC05L2EM	42 SDIP – B	42–SDIP ribbon cable assembly included with M68HC05L2EM.		
68HC05L5/L16 68HC705L5/L16	M68MMPFB0508 OR M68MMDS05	M68EML05L16	80 QFP – FU	M68CBL05E	M68TE05L16FU80	M68TQS080SBG1† M68TQP080SBMO1†
68HC05L7/L9/L11 68HC705L10 68HC05M4	Refer to the Configuration and Order Information for Other Motorola Development Tools Section to select a development tool for the 68HC05L7/L9, 68HC05L10, 68HC05L11, or 68HC05M4.					
68HC05MC4 68HC705MC4	M68MMPFB0508 OR M68MMDS05	M68EM05MC4	28 DIP – P 28 SOIC – DW	M68CBL05A M68CBL05A	M68TA05MC4P28* M68TA05MC4P28*	M68DIP28SOIC
68HC05P3	M68MMPFB0508 OR M68MMDS05	M68EM05P3	28 DIP – P	M68CBL05A	M68TA05X4P28	
			28 SOIC – DW	M68CBL05A	M68TA05X4P28	M68DIP28SOIC

Table 4. Configuration and Order Information for MMDS/MMEVS (continued)

Devices	Platform	Emulation Modules	Package Type	In–Circuit Target Cable		
				Low Noise Flexcable	Target Head Adapter	Surface Mount Adapter
68HC05P8	M68MMPFB0508	M68HC05JPEM	28 DIP – P	M68CBL05A	M68TA05P8P28	
			28 SOIC – DW	M68CBL05A	M68TA05P8P28	M68DIP28SOIC
68HC05P1/P4/P6/P7/P9 68HC705P6/705P9	M68MMPFB0508 OR M68MMDS05	M68HC05P9EM (Included with MMDS)	28 DIP – P	M68CBL05A	M68TA05P9P28	
			28 SOIC – DW	M68CBL05A	M68TA05P9P28	M68DIP28SOIC
68HC05P18 68HC805P18	M68MMPFB0508 OR M68MMDS05	M68EM05P18*	28 DIP – P 28 SOIC – DW	M68CBL05A M68CBL05A	M68TA05P9P28 M68TA05P9P28	M68DIP28SOIC
68HC05RC16 68HC705RC16	M68MMPFB0508 OR M68MMDS05	M68EM05RC16	28 DIP – P	M68CBL05A	M68TA05RC16P28	
			28 SOIC – DW	M68CBL05A	M68TA05RC16P28	M68DIP28SOIC
68HC05SC11/SC21/SC24/ SC27		CONTACT SALES OFFICE	die/card	ISO Adapter Included w/EM.		
68HC05SR3 68HC705SR3	M68MMPFB0508 OR M68MMDS05	M68EM05SR3	40 DIP – P	M68CBL05B	M68TB05SR3P40	
			44 QFP – FB	M68CBL05C	M68TC05SR3FB44	M68TQS044SAG1† M68TQP044SAMO1†
			42 SDIP – B	M68CBL05B	M68TB05SR3B42	
68HC05T1/T2	Refer to the Configuration and Order Information for Other Motorola Development Tools Section to select a development tool for the 68HC05T1/T2.					
68HC05T10 68HC705T10	M68MMPFB0508 OR M68MMDS05	M68EM05T7	56 SDIP – B	M68CBL05B	M68TB05T7B56	
68HC05V7 68HC705V8	M68MMPFB0508 OR M68MMDS05	M68EM05V8	56 SDIP – B	M68CBL05B	M68TB05V8B56	
68HC05V12 68HC705V12	M68MMPFB0508 OR M68MMDS05	M68EM05V12*	68 PLCC – FN	M68CBL05C	M68TC05V12FN68*	
68HC05X4 68HC705X4	M68MMPFB0508 OR M68MMDS05	M68EM05X4	28 DIP – P	M68CBL05A	M68TA05X4P28	
			28 SOIC – DW	M68CBL05A	M68TA05X4P28	M68DIP28SOIC
68HC05X16/X32 68HC705X32	M68MMPFB0508 OR M68MMDS05	M68EML05X32	64 QFP – FU	M68CBL05E	M68TE05X32FU64	M68TQS064SAG1† M68TQP064SA1†
68HC08XL36 68HC708XL36	M68MMPFB0508 OR M68MMDS05	M68EML08XL36	64 QFP – FU 56 SDIP – B	M68CBL05C M68CBL05B	M68TC08XL36FU64* M68TB08XL36B56*	M68TQS064SAG1† M68TQP064SAM01†

* Development tools that are scheduled for availability during 1Q96.

† To support more than one QFP target system, separate purchase of additional TQPACKs is required. Contact your Motorola representative for details.
Each QFP target head includes one TQSOCKET with guides (M68TQS0xxSyG1) and one TQPACK disposable surface mount adapter (M68TQP0xxSy1 (1.2 mm lead length) or M68TQP0xxSyMO1 (1.6 mm lead length)). Order additional TQSOCKETs and TQPACKs using part numbers referenced in the Surface Mount Adapters column to support multiple target systems. Contact your Motorola representative for details.

CONFIGURATION AND ORDER INFORMATION FOR OTHER MOTOROLA DEVELOPMENT TOOLS (EVM/EVS/ICS)

Table 5. Configuration and Order Information for Other Motorola Development Tools (EVM/EVS/ICS)

Devices	Development Tool	Package Type	In–Circuit Target Cable			Comments
			Low Noise Flexcable	Target Head Adapter	Surface Mount Adapter	
68HC05C5 68HC705C5	M68HC05C5EVS	40 DIP – P	Not Available			For DIP package user must supply a ribbon cable assembly to interface to user's target system.
		44 PLCC – P	Not Available			For PLCC package, user has the option to order 44PLCC05M, which is the old–style ribbon cable assembly with PLCC target adapter.
68HC05CCV 68HC705CCV	Order M68HC05CCVEM and M68HC05PFB	42 SDIP – B	M68CBL05B	M68TB05CCVB42		
		44 QFP – FB	M68CBL05C	M68TC05CCVFB44	M68TQS044SAG1† M68TQP044SAMO1†	
68HC05J1A 68HC705J1A	M68HC705JICS	20 DIP – P	20 DIP Ribbon Cable Assembly Included With M68HC705JICS			M68HC705KICS In–Circuit Simulator
		20 SOIC – DW	See Above		M68DIP20SOIC	For the SOIC package, user may order M68DIP20SOIC, which is a 20–pin DIP to SOIC adapter.
68HC05K0/K1 68HC705K1	M68HC705KICS	16 DIP – P	16 DIP Ribbon Cable Assembly Included With M68HC705KICS			M68HC705KICS In–Circuit Simulator
		16 SOIC – DW	See Above		M68DIP16SOIC	For the SOIC package, user may order M68DIP16SOIC, which is a 16 pin DIP to SOIC adapter.
68HC05L7/L9	M68HC05L9EVM2	128 QFP – FT	Not Available			
68HC05L10	M68HC05L10EVM	128 QFP – FT	Not Available			
68HC05L11	M68HC05L11EVM	100 QFP – FU	Not Available			
68HC05M4	M68HC05M4EVM	52 PLCC – FN	Not Available			For PLCC package, user has the option to order 52PLCCU, which is the old–style ribbon cable assembly with PLCC target adapter.
68HC05T1/T2	M68HC05T2EVS	40 DIP – P	Not Available			For DIP/SDIP package, user must supply a ribbon cable assembly to interface to user's target system.
		42 SDIP – B	Not Available			
		44 PLCC – FN	Not Available			For PLCC package, user has the option to order 44PLCC05M, which is the old–style ribbon cable assembly with PLCC target adapter.

CONFIGURATION AND ORDER INFORMATION FOR PROGRAMMERS

Table 6. Configuration and Order Information for Programmers

Devices	Packages Supported	Programmer Boards	Comments
68HC705A24	56 SDIP – B	M68HC05UPGMR	M68HC705UPGMR requires package adapter, M68UPA05A24B56.
68HC705B5/B16/B32	52 PLCC – FN 56 SDIP – B	M68HC05BPGMR	For QFP package, order M68HC705X32PGMR.
68HC705BD3/BD5	40 DIP – P 42 SDIP – B	M68HC705UPGMR	M68HC705UPGMR requires package adapter. For 40 DIP – P, order M68UPA05BD3P40. For 42 SDIP – B, order M68UPA05BD3B42.
68HC705C4A/C5/C8/C8A/C9	40 DIP – P/S 44 PLCC – FN/FS	M68HC05PGMR–2	Order M68ADT05P40FB44 adapter to program 44 QFP – FB.
68HC705D9	40 DIP – P/S 44 PLCC – FN/FS	M68HC05PGMR–2	Order M68ADT05P40FB44 adapter to program 44 QFP – FB.
68HC705E6	44 QFP – FB 28 SOIC – DW	M68HC705E6PGMR	
68HC705F4	28 DIP – P 28 SOIC – DW 44 QFP – FB	M68HC705F4PGMR	
68HC705F6	64 QFP – FU/FZ 42 SDIP – B/K	M68HC705F6PGMR64	
68HC705F8	64 QFP – FU/FZ	M68HC705F8PGMR	
68HC705G1	56 SDIP – B 64 QFP – FU	M68HC705G1PGMR	
68HC705J1A	20 DIP – P	M68HC705JICS	M68HC705JICS In–circuit simulator. SOIC requires user–supplied socket or adapter. (Available from Yamaichi, part number IC51–0282–334–1)
68HC705J2/J3	20 DIP – P/S	M68HC705J2PGMR	SOIC requires user–supplied socket or adapter. (Available from Yamaichi, part number IC51–0282–334–1)
68HC705K1	16 DIP – P/S	M68HC705KICS M68HC705K1GANG	M68HC705K1GANG Programs up to 8 68HC705K1S or P.
	16 SOIC – DW**	M68HC705K1GANGY	M68HC705K1GANGY Programs up to 8 68HC705K1S, P, or DW.
68HC705L1	56 SDIP – B/K 64 QFP – FU/FZ	M68HC705L1PGMR	
68HC705L2	42 SDIP – B	M68HC705L2PGMR	
68HC705L5/L16	80 QFP – FU/FZ	M68HC705L5PGMR	
68HC705MC4	28 DIP – P 28 SOIC – DW	M68HC705MC4PGMR	
68HC705P3	28 DIP – P 28 SOIC – DW	M68HC705E6PGMR	
68HC705P6/P9	28 DIP – P/S	M68HC705P9PGMR	SOIC requires user–supplied socket or adapter.
68HC805P18	28 DIP – P/S	M68HC805P18PGMR*	SOIC requires user–supplied socket or adapter.
68HC705SR3	40 DIP – P 42 SDIP – B 44 QFP – FB	M68HC05SR3PGMRSG	M68HC05SR3PGMRSG requires package adapter. For 40 DIP – P, order M68HC05SR3PAP40. For 42 SDIP – B, order M68HC05SR3PAB42. For 44 QFP – FB, order M68HC05SR3PAFB44.
68HC705T10	56 SDIP – B/K	M68HC705T10PGMR	
68HC705V8	56 SDIP – B 68 PLCC – FN	M68HC705V8PGMR	
68HC705V12	68 PLCC – FN	M68HC705V12PGMR*	
68HC705X4	28 DIP – P/S 28 SOIC – DW	M68HC705X4PGMR	
68HC705X32	64 QFP – FU 68 PLCC – FN	M68HC705X32PGMR	
68HC708XL36	64 QFP – FU 56 SDIP – B/K	M68SPGMR08*	

*Development tools that are scheduled for availability during 1Q96.
**SOIC on M68HC705K1GANGY only.

THIRD PARTY DEVELOPERS FOR 68HC05 AND 68HC705 FAMILY MCUs

Table 7. Third Party Developers for 68HC05 and 68HC705 Family MCUs

Programmers		
Advin Systems Inc.	USA	(408) 243–7000 (800) 627–2456
	Canada:	
	Eastern	(514) 337–0723
	Western	(604) 986–1286
	France	+33 13961–1414
	Germany	+49 7459–1271
	UK	+44 1332–32651
	Hong Kong	(852) 833–5188
Ascend Systems Inc.	USA	(510) 606–2000 (800) 541–3526
	Austria/ Germany	+43 2772–54581
	France	+33 148619528
BP Microsystems	USA	(800) 225–2102 (713) 688–4600
	Canada	(905) 602–8550
	UK	+44 1280–700262
	France	+33 16941–2801
	Germany	+49–8856–932616
	Hong Kong	852–234–166–11
	Tokyo	81–3–3817–4980
Bytek	USA	(407) 994–3520
	Netherlands, UK, Belgium	+31 16248–0100
	France	+33 16930–2880
	Germany	49 6181–75041
	Hong Kong	852 29198282
Circuit Equipment Corporation	USA	(216) 951–8840
	UK	+44 1734–575666
	France	+33 6185–5767
Data I/O	USA	(206) 881–6444 (800) 426–1045
	Canada	(905) 678–0761
	France	+35 80502–3300
	Germany	+33–31956–8131
	Hong Kong	49–89–858–580
	Japan	81–3–3779–2151
	Netherlands	+31–402–582–911
	UK	+44–1734–440011
E.E. Tools Inc.	USA Canada	(408) 734–8184
	Mexico	52–5–705–7422
	France	+33 16930–2880
	Germany	+49 89834–3047
	Japan	81–538–322822
Emulation Technology, Inc.	France	+33 16941–2801
	USA	(408) 982–0660
	UK	+44 1234 266455 +44 1962–733140
	Germany	+49 89–4602071 +49 81–047044
Logical Devices	USA	(800) 331–7766
Micro Enhanced Technology (PEP) Programmers	USA	(708) 352–3910
Nash Electronics	USA	(501) 289–6111
Needham's Electronics	USA	(916) 924–8037
Stag Programmers Ltd.	UK	+44–1707–332148
	USA	(800) 331–7766 (Logical Devices)
Sunrise Electronics	USA	(909) 595–7774
System General Corporation	USA	(800) 967–4776 (408) 263–6667
	Japan	81–3–3441–1510
	France	+33 2015–1133
	Germany	+41 1982–2050
TECI (The Engineers Collaborative Inc.)	USA	(800)–336–8321 (802) 525–3458
Tribal Microsystems, Inc.	USA	(510) 623–8859
	Asia	886–2–764–0215
Vel Electronic	Germany	+49 851–751427

ICE/Evaluation Boards		
American Arium	USA	(714) 731–1661
Ashling Microsystems	USA	(508) 366–3220 (Eastern Systems)
	UK	+44 1628–773070
	France	+33 14666–2750
	Germany	+49 8233–32681
Dr. Krohn & Stiller	Germany	+49 896100–0022
	UK	+44 1235–861461
	USA	(320) 617–9400
Emulation Technology, Inc.	France	+33 16941–2801
	USA	(408) 982–0660
	UK	+44 1234–266455 +44 1962–733140
	Germany	+49 89460–2071 +49 8104–7044
iSystem GmbH	Germany	+49 8131–25083
	USA	(408) 982–0660 (Emulation Technology Inc)
	France	+33 62–072–954 (ISIT Societe)
Lauterbach, Inc	USA	(508) 620–4521
	UK	(01254) 682092 (Noral Micrologics Ltd.)
	Australia	(2) 6541873 (Electro Optics)
	Germany	(08104) 8943–28
	France	(1) 39899622 (Logic Instrument)
MetaLink Corporation	USA	(602) 926–0797
	UK	+44 1491–455907
	Canada	(613) 226–2365
	Hong Kong	896–2–501–6699
	Germany	+49 8091–55950
	France	+33 1–39–3956–8131

Orion Instruments	USA	(408) 747–0440
	Canada	(416) 609–8396 (Multitest Elect. Inc.)
	France	+33 1–30–54–2222 (BSO France S.A.)
Pentica Systems	USA	(800) PENTICA (617) 275–4419
	UK	+44 0734–792101
	Germany	+49 7147–3085
Sophia Systems	Japan	(044) 989–7000
	USA	(800) 824–9294
Vel Electronic	Germany	+49 85175–1427
Yokogawa Digital Computer Corp	Japan	81–422–56–9101
	USA	(408) 747–0400 (Orion Instruments)

Assemblers/Linkers/Debuggers

2500 Software Inc.	USA	(719) 395–8683
	France	+33 7443–8045 (CK Electronique)
		+33 6185–1914 (Societe L.S.I.T.)
	UK	+44 1364–654100 (Greymatter)
		+44 17183–31022 (System Science)
American Arium	USA	(714) 731–1661
Archimedes Software, Inc.	USA	(206) 822–6300
Avocet Systems, Inc.	USA	(207) 236–9055
		(800) 448–8500
BSO Tasking	USA	(617) 894–7800
		(800) 458–8276
	France	+33 1–3054–2222
	UK	+44 1252–510014
	Germany	+49 71–5222090
Byte Craft Ltd.	USA	(519) 888–6511
Cosmic Software	USA	(617) 932–2556
	Europe/Intnl	+33 143–995390
	UK	+44 1734–880241
HIWARE	USA	(206) 827–4832 (Archimedes)
	France	+33 16013–3668 (CK Electronique Avnet Group)
	Germany	+41 61331–7151 (HIWARE)
		+49 7031–2895–38 (Diessner)
	UK	+44 1734–792101 (Pentica)
		+44 1962–733140 (Nohau)
	Japan	81 3–3293–4716 (Lifeboat)
IAR Systems	USA/ Canada	(415)–765–5500
	Germany	+49 89470–6022
	UK	+44 171924–3334
	France	+1–39–61–14–14
	Hong Kong	2687–1931
	Japan	03–293–4711 (Lifeboat)
Introl Corp.	USA	(414) 327–7171
		(800) 327–7171
	UK	+44 171–8331022 (System Science)
	France	+33 7443–8045 (CK Electronique)
		+33 14622–9988 (Micro Sigma S.A.)
	Japan	(81) 3 256 5881 (Soft Mart Inc.)
	Germany	+49 8104–9074 (Lauterbach GmbH)
P & E Microcomputer Systems, Inc	USA	(617) 353–9206
PseudoCorp	USA	(541) 683–9173
Software Development Systems (SDS)	USA	(708) 368–0400
	UK	+44 1442–876065
	Japan	+81 (0) 3 3493 7981
	Asia–Pac.	+61 (0) 3 720 5344
	Germany	+49 2534–800170 (H S P GmbH)
TECI (The Engineers Collaborative Inc.)	USA	(802) 525–3458
		(800) 336–8321

Compiler/Real–Time Kernel

Archimedes Software, Inc.	USA	(206) 822–6300
Avocet Systems, Inc.	USA	(207) 236–9055
		(800) 448–8500
BSO Tasking	USA	(617) 894–7800
		(800) 458–8276
	France	+33 1–30542222
	UK	+44 1252–510014
	Germany	+49 71–5222090
Byte Craft Ltd.	USA	(519) 888–6511
Cosmic Software	USA	(617) 932–2556
	Europe/Intnl	+33 143–995390
	UK	+44 1734–880241
Embedded System Products, Inc.	USA	(713) 728–9688
	Europe	+33–143–995–390 (Cosmic Software)
Hi–Tech (distributed by Avocet in USA)	UK	+44–0734–792–101 (Pentica)
	Germany	+49–7147–3085 (Pentica)
HIWARE	USA	(206) 827–4832 (Archimedes)
	France	+33 16013–3668 (CK Electronique Avnet Group)
	Germany	+41 61331–7151 (HIWARE)
		+49 7031–2895–38 (Diessner)
	UK	+44 1734–792101 (Pentica)
		+44 1962–733140 (Nohau)
	Japan	81 33293–4716 (Lifeboat)

Miscellaneous Software and Hardware Support

AMP Incorporated (sockets)	USA	(717) 564–0100 (800) 522–6752
	Canada	(905) 475–6222
	Mexico	(525) 729–0400
	Europe	+44 1753–676–800
	Asia/Pacific	(81) 44–813–8502
McKenzie (now part of Berg Electronics) (adapters, sockets)	USA	(510) 6512700
	Germany	+49 89150–1001 (Infratron GmbH)
	France	+33 14594–1424 (Green Components)
	UK	+44 1295–271777 (Toby Electronics) +44 1501–44434 (Neltronic Ltd.)
Emulation Technology, Inc. (adapters)	France	+33 16941–2801
	USA	(408) 982–0660
	UK	+44 1234 266455 +44 1962–733140
	Germany	+49 89–4602071 +49 81–047044
USAR Incorporated (keyboard encoders)	USA	(212) 226–2042
Yamaichi Elec. Inc. (sockets)	USA	(408) 456–0797

On–Line Help

CSIC Microcontroller Division World Wide Web Site

http://design–net.com/csic/CSIC_home.html

The CSIC WWW pages provide a direct line to the latest information and software for 68HC05 and 68HC08 microcontrollers. The web site provides access to:

The Latest News and Press Releases

Product, Market, and Development Tool Overviews

On–Line MCU and Development Tool Selector Guides

On–Line Datasheets and Application Notes

Development Tool Software Upgrades

Free Development Software

Applications Software

3rd Party Development Tool Information

On–Line Technical Support

Freeware Bulletin Board

The Freeware Data Services are now mirrored on the CSIC WWW site for easy access. Customers unable to access the Internet can still access the Freeware development software and applications software by dial–up modem at 2400 to 9600 baud. To log in:

1. Make sure to set character format to 8–bits, no parity, 1 stop bit
2. Dial (512) 891–FREE (512–891–3733)
3. Follow directions from the system

The Freeware files are also accessible by anonymous FTP server:

freeware.aus.mot.com
(use email address for password)

Single–Chip Microcontrollers (AMCU)

In Brief . . .

Motorola offers the most comprehensive selection of high–performance single–chip control systems available from a single source. Microcontroller device families range from industry–standard 8–bit controllers to state–of–the–art 16– and 32–bit modular controllers. Within the price and performance categories of each family, there are a variety of on–chip capabilities to match specific applications.

Motorola device families are structured so that upward migration need not involve complete code development. The M68HC11 Family is upward code compatible with M6800 and M6801 software, while the M68HC16 family is source–code compatible with the M68HC11 family. Motorola's newest 8–bit MCU product line, the M68HC08 family, is fully upward object code compatible with the M68HC05 and M6805 families. In addition, M68300 and M68HC16 devices share standard internal modules and bus configurations.

	Page
M68HC11 Family	2.6–2
Modular Microcontroller	2.6–12
The M68HC16 Family	2.6–14
The M68300 Family	2.6–19
Development Tools	2.6–23
Fuzzy Logic	2.6–26
On–Line Help	2.6–26
Third–Party Support	2.6–27

M68HC11 Family

The M68HC11 Family incorporates a flexible central processing unit and a large number of control–oriented on–chip peripherals. M68HC11 MCU are upward code compatible with M6800, M6801, and M68HC05 software.

Central Processing Unit

The M68HC11 CPU is optimized for low power consumption and high–performance operation at bus frequencies up to 4 MHz. Key features include:

- Two 8–bit or one 16–bit accumulator
- Two 16–bit index registers
- Powerful bit–manipulation instructions
- Six powerful addressing modes
  - Immediate, Extended, Direct, Indexed, Inherent, and Relative
- Power saving STOP and WAIT modes
- Memory mapped I/O and special functions
- 16x16 Integer and Fractional Divides
- 8x8 Multiply

Timer

M68HC11 timer architecture is based on a 16–bit free running counter driven through a software–programmable prescaler. Features include multiple Input Captures, Output Compares, Real–Time Interrupt, Pulse Accumulator, and Watchdog functions.

On–Chip Memory

Since its introduction, the M68HC11 Family has provided versatile combinations of popular memory technologies, including the first EEPROM on a CMOS microcontroller. The family has a memory option to fit virtually any application.

- ROM sizes range from 0 to 32K bytes. ROM is typically factory programmed to contain custom software. ROMless versions of most M68HC11 Family members are also available.
- RAM sizes range from 192 bytes to 1.25K bytes. M68HC11 RAM utilizes a fully static design, and all devices feature a standby power supply pin for battery back–up of RAM contents.
- EPROM sizes range from 4K to 32K bytes. EPROM is especially suited to prototype development and small production runs. EPROM versions are available in both windowed and OTP packaging.
- EEPROM sizes range from 0 to 2K bytes. EEPROM is ideal for storage of calibration, diagnostic, data logging, and security information. Each M68HC11 device with EEPROM includes an on–chip charge pump to facilitate single–supply programming and erasing.

Digital–to–Analog Conversion

The M68HC11 Family provides powerful, on–chip, multi–channel A/D converter systems. Multi–conversion and multi–channel options allow single or continuous conversion on single or multiple channels. M68HC11 A/D systems have eight input channels, and most offer 8–bit resolution, although some provide 10–bit resolution. A 2 channel, 8–bit D/A is also available.

Pulse–Width Modulation

Some M68HC11 Family members have up to six channels of 8–bit PWM. At a 4 MHz bus frequency, signals can be produced from 40 KHz to less than 10 Hz. PWM signals with a period greater than one minute are possible in the 16–bit mode.

Serial Communication

All members of the M68HC11 Family include a Serial Peripheral Interface (SPI) and a Serial Communications Interface (SCI). These on–chip peripherals are designed to minimize CPU intervention during data transfer.

- The SCI is a full duplex UART–type asynchronous system that uses standard Non–Return–to–Zero (NRZ) data format. An on–chip Baud rate generator derives standard rates from the microcontroller oscillator. Both transmitter and receiver are double buffered.
- The SPI is a four–wire synchronous communications interface used for high–speed communication with specialized peripheral devices and other microcontrollers. Data is transmitted and received simultaneously; the Baud rate is software programmable.

Digital I/O and Special Functions

M68HC11 Family I/O is extremely flexible, allowing pins to be configured to match application requirements. Most I/O lines are controlled by bits in a Data Direction Register (DDR) which can configure pins for either input or output. Most lines have a dedicated port data latch.

Some M68HC11 Family members include a 4–channel Direct Memory Access (DMA) and a Memory Management Unit (MMU). The DMA provides fast data transfer between memories and registers, and includes externally mapped memory in the expanded mode. The MMU allows up to 1 megabyte of address space in a physical 64 kbyte allocation. Integrated chip selects help to reduce glue logic.

Several members of the M68HC11 Family also include programmable chip select circuits. These circuits can be used to enable external peripherals whenever an access to a predefined block of memory addresses is made. These circuits help to reduce external logic requirements.

Math Coprocessor

New M68HC11 Family members offer a 16–bit on–chip math coprocessor that accelerates multiply and divide operations by as much as 10 times. The coprocessor functions independently of the CPU and requires no special instructions. The coprocessor is well–suited to low–bandwidth DSP functions such as closed loop control, servo positioning, and signal conditioning.

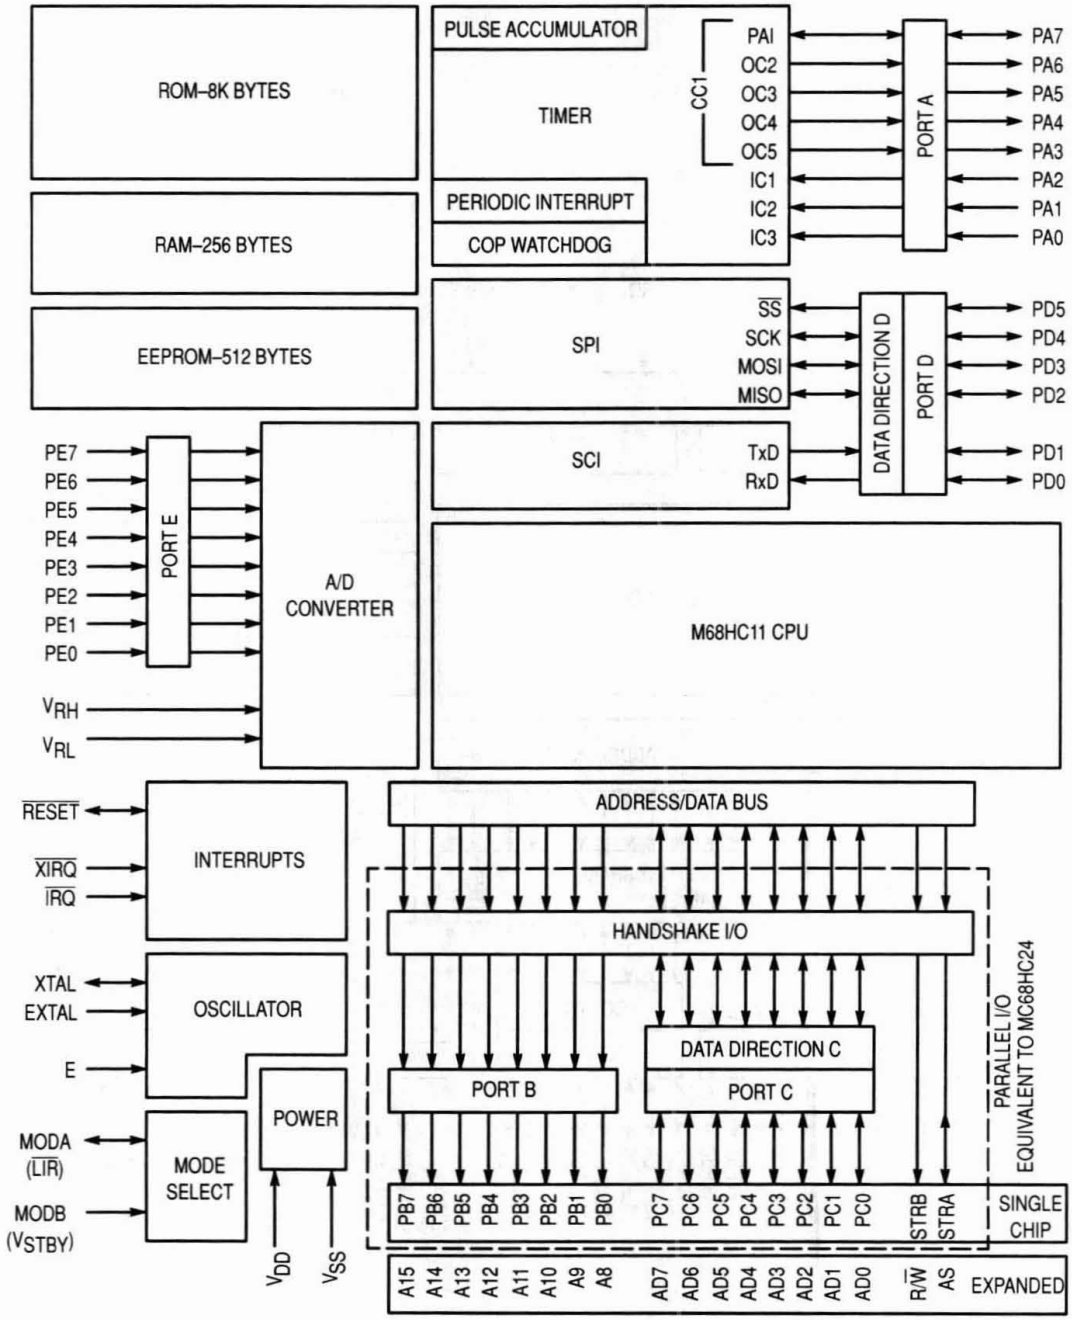

Figure 1. MC68HC11A8 Block Diagram

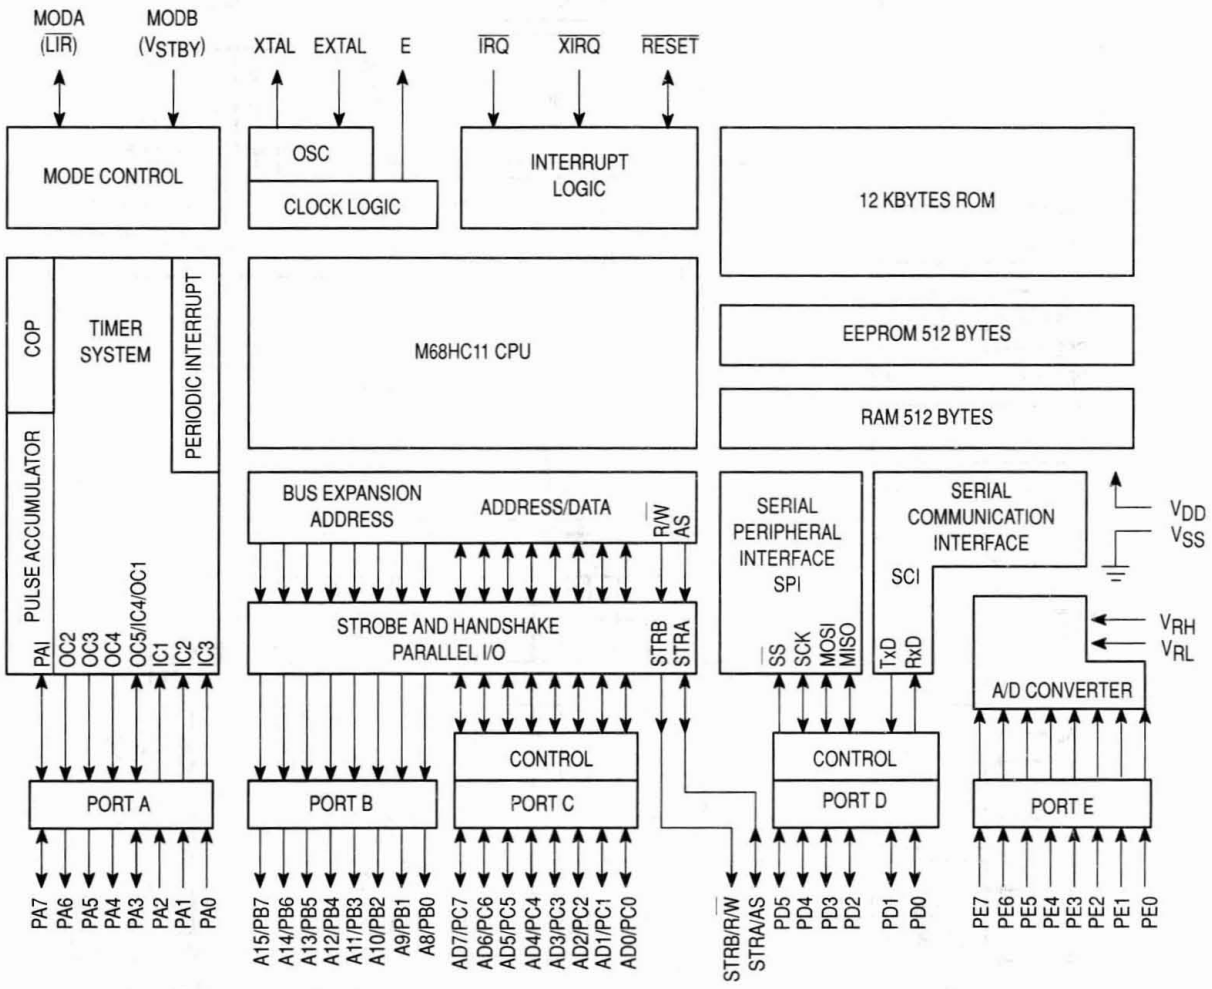

Figure 2. MC68HC11E9 Block Diagram

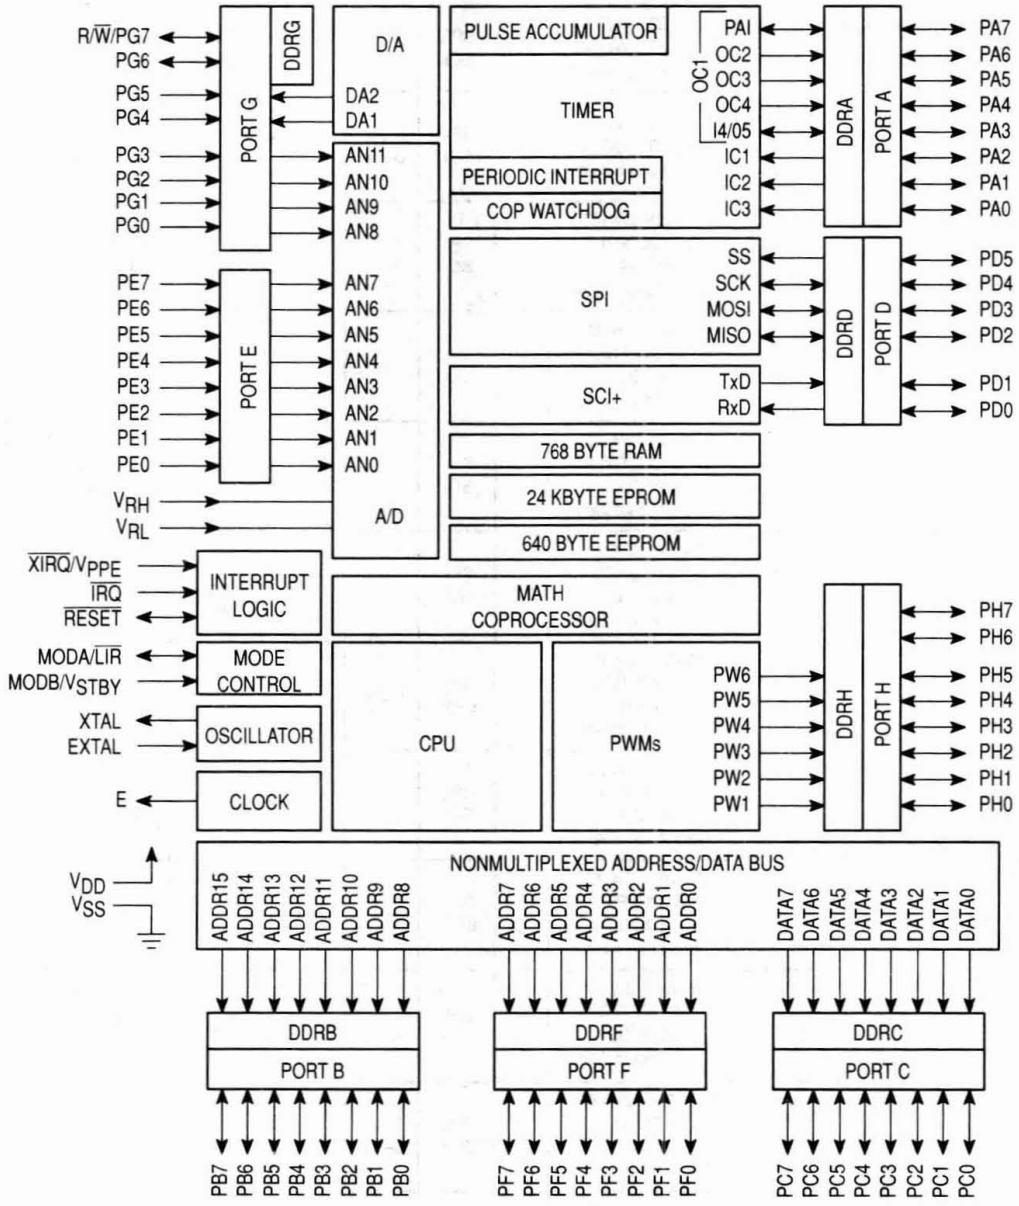

Figure 3. MC68HC711N4 Block Diagram

Table 1. M68HC11 Family Microcontrollers

Part Number	EPROM	RAM	EEPROM	Timer	I/O	Serial	A/D	PWM	Package	Comments
MC68HC11A0	–	256	–	16–Bit – 3 IC, 5 OC, RTI, WDOG Pulse Accumulator	22	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU 48–P	64K External Address Bus, 68HC24 PRU, 3.0 V Version Available
MC68HC11A1	–	256	512	16–Bit – 3 IC, 5 OC, RTI, WDOG Pulse Accumulator	22	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU 48–P	64K External Address Bus, 68HC24 PRU, 3.0 V Version Available
MC68HC11A7	8K	256	–	16–Bit – 3 IC, 5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU 48–P	3 MHz Version Available, 64K External Address Bus, 68HC24 PRU, 3.0 V Version Available
MC68HC11A8	8K	256	512	16–Bit – 3 IC, 5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN 48–P	3 MHz Version Available, Low Voltage Version (3.0–5.5V) at 2 MHz, 64KExternal Address Bus, 68HC24 PRU
XC68HC11C0	–	256	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	36	SPI, SCI	4 Ch, 8–Bit	2 Ch, 8–Bit	68–FN 64–FU	256K Externed Memory, 6 Chip Selects
MC68HC11D0	–	192	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	14	SPI, SCI	–	–	44–FB 44–FN 40–P	64K External Address Bus, 68HC27 PRU, 3.0V Version Available
MC68HC11D3	4K	192	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	32	SPI, SCI	–	–	44–FB 44–FN 40–P	3 MHz Version Available, Low Voltage Version (3.0–5.5V) at 2 MHz, 64K External Address Bus, 68HC27 PRU
MC68HC11ED0	–	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	30	SPI, SCI	–	–	44–FB 44–FN 40–P	Pin Compatible with 68HC11D3
MC68HC11E0	–	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	22 SCI	SPI, 8–Bit	8 Ch,	–	52–FN	64K External Address Bus, 68HC24 PRU, 3.0 V Version Available
MC68HC11E1	–	512	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	22	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU	64K External Address Bus, EEPROM Block Protect, 68HC24 PRU, 3.0 V Version Available
MC68HC11E8	12K	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38 SCI	SPI, 8–Bit	8 Ch,	–	52–FN	3 MHz Version Available, 64K External Address Bus, 3.0 V Version Available
MC68HC11E9	12K	512	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU	EEPROM Block Protect, 3 MHz Version Available, Low Voltage Version (3.0–5.5V) at 2 MHz, 64K External Address Bus
XC68HC11E20	20K	768	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU	3 MHz Mux Bus
MC68HC811E2	–	256	2048	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN	EEPROM Block Protect, 64K External Address Bus, 68HC24 PRU
MC68HC11F1	–	1K	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	54	SPI, SCI	8 Ch, 8–Bit	–	68–FN 80–FU	Programmable Chip Selects, EEPROM Block Protect, 64K External Address Bus, 68HC27 PRU, 4 MHz Non–Mux Address/Data Bus
PC68HC11G0	–	–	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 10–Bit	4 Ch, 8–Bit	84–FN 80–FU	

Table 1. M68HC11 Family Microcontrollers (continued)

Part Number	EPROM	RAM	EEPROM	Timer	I/O	Serial	A/D	PWM	Package	Comments
PC68HC11G5	16K	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	66	SPI, SCI	8 Ch, 10–Bit	4 Ch, 8–Bit	84–FN 80–FU	
PC68HC11G7	24K	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	66	SPI, SCI	8 Ch, 10–Bit	4 Ch, 8–Bit	84–FN 80–FU	
PC68HC11J6	16K	–	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	29	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	
MC68HC11K0	–	768	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	37	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	4 MHz Non–Mux Address/Data Bus, Chip Selects, Extended Memory Map, 68HC27 PRU, 3.0 V Version Available
MC68HC11KA0	–	768	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	26	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	68–FN 64–FU	4 MHz Non–Mux Address/Data Bus, Chip Selects, Extended Memory Map, 68HC27 PRU
MC68HC11K1	–	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI,WDOG, Pulse Accumulator	37	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	4 MHz Non–MuxBus,Chip Selects, EEPROM Block Protect, Extended Memory Map, 68HC27 PRU, 3.0 V Version Available
MC68HC11KA1	–	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI,WDOG, Pulse Accumulator	26	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	68–FN 64–FU	4 MHz Non–Mux Address/Data Bus, Chip Selects,EEPROM Block Protect, Extended Memory Map, 68HC27 PRU
MC68HC11K3	24K	768	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	4 MHz Non–Mux Address/Data Bus, Chip Selects, Extended Memory Map, 68HC27 PRU, 3.0V Version Available
MC68HC11KA3	24K	768	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	51	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	68–FN 64–FU	4 MHz Non–Mux Address/Data Bus, Chip Selects, Extended Memory Map, 68HC27 PRU
MC68HC11K4	24K	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	4 MHz Non–Mux Bus, Low Voltage Version (3.0–5.5V) at 3 MHz, Chip Selects, EEPROM Block Protect, Extended Memory Map, 68HC27 PRU
MC68HC11KA4	24K	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	51	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	68–FN 64–FU	4 MHz Non–Mux Address/Data Bus, Chip Selects, EEPROM Block Protect
MC68HC11L0	–	512	–	16–Bit – 3/4 IC, 4/5 OC,RTI, WDOG, Pulse Accumulator	30	SPI, SCI	8 Ch, 8–Bit	–	68–FN 64–FU	64K External Address Bus, 68HC24 PRU, 3.0 V Version Available
MC68HC11L1	–	512	512	16–Bit – 3/4 IC, 4/5 OC,RTI, WDOG, Pulse Accumulator	46	SPI, SCI	8 Ch, 8–Bit	–	68–FN 64–FU	64K External Address Bus, EEPROM Block Protect, 68HC24 PRU, 3.0 V Version Available
MC68HC11L5	16K	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	46	SPI, SCI	8 Ch, 8–Bit	–	68–FN 64–FU	64K External Address Bus, 68HC24 PRU, 3.0 V Version Available
MC68HC11L6	16K	512	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	46	SPI, SCI	8 Ch, 8–Bit	–	68–FN 64–FU	3 MHz Version Available, Low Voltage Version (3.0–5.5V) at 2 MHz, 64K External Address Bus, 68HC24 PRU

Table 1. M68HC11 Family Microcontrollers (continued)

Part Number	EPROM	RAM	EEPROM	Timer	I/O	Serial	A/D	PWM	Package	Comments
MC68HC11M2	32K	1.25K	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, 2–SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	16–Bit Math Coprocessor, 4 MHz Non–Mux Bus, 4 Ch DMA Controller
XC68HC11N4	24K	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	12 Ch, 8–Bit	6 Ch, 8–Bit	84–FN 80–QFP	16–Bit Math Coprocessor, 4 MHz Non–Mux Bus, 2 Ch 8–Bit D/A
XC68HC11P2	32K	1K	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, 3–SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 80–FU	PLL Clock Option

Table 2. M68HC11 One–Time Programmable/Emulator Microcontrollers

Part Number	EPROM	RAM	EEPROM	Timer	I/O	Serial	A/D	PWM	Package	Comments
PC68HC711D3	4K	192	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	32	SPI, SCI	–	–	44–FB 44–FN 40–P	64K External Address Bus
PC68HC711E9	12K	512	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN 64–FU	EEPROM Block Protect, 64K External Address Bus
PC68HC711E20	20K	768	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	38	SPI, SCI	8 Ch, 8–Bit	–	52–FN 52–FS 64–FU	EEPROM Block Protect, 64K External Address Bus
PC68HC711G5	16K	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	66	SPI, SCI	8 Ch, 10–Bit	4 Ch, 8–Bit	84–FN 84–FS	
PC68HC711J6	16K	512	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	54	SPI, SCI	–	–	68–FN 68–FS	1 Chip Select
PC68HC711K4	24K	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 84–FS 80–FU	4 MHz Non–Mux Bus, EEPROM Block Protect, Chip Selects, Extended Memory Map
PC68HC711L6	16K	512	512	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	46	SPI, SCI	8 Ch, 8–Bit	–	68–FN 68–FS 64–FU	EEPROM Block Protect, 64K External Address Bus
PC68HC711M2	32K	1.25K	–	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	8 Ch, 8–Bit	–	84–FN 84–FS 80–FU	16–Bit Math Coprocessor, 4 MHz Non–Mux Bus, 4 Ch DMA Controller
PC68HC711N4	24K	768	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	12 Ch, 8–Bit	6 Ch, 8–Bit	84–FN 84–FS	16–Bit Math Coprocessor, 4 MHz Non–Mux Bus, 2 Ch 8–Bit D/A
XC68HC711P2	32K	1K	640	16–Bit – 3/4 IC, 4/5 OC, RTI, WDOG, Pulse Accumulator	62	SPI, SCI	8 Ch, 8–Bit	4 Ch, 8–Bit	84–FN 84–FS 88–FU	PLL Clock

Definitions for Tables 3 and 4

General Definitions		Package Definitions	
ADC	Analog to Digital Converter Module	FB	10x10 mm Quad Flat Pack (QFP)
A/D	Analog to Digital Converter	FC	Fine Pitch Plastic Quad Flat Pack (PQFP)
CPU16	16 bit Central Processing Unit	FD	Plastic Quad Flat Pack in Molded Carrier Ring
CPU32	32 bit Central Processing Unit	FE	Ceramic Quad Flat Pack (CQFP)
D/A	Digital to Analog Converter	FM	Molded Carrier Flat Pack (CQFP)
DMA	Direct Memory Access	FN	Plastic Leaded Chip Carrier (PLCC)
GPT	General–Purpose Timer	FS	Windowed Cerquad (Ceramic LCC)
IC	Input Capture	FT	28x28 mm Quad Flat Pack (QFP)
IIC	Inter–Integrated Circuit	FU	14x14 mm Quad Flat Pack (QFP)
MCCI	Multi–Channel Communication Interface	FV	20x20 mm Quad Flat Pack (QFP)
PLL	Phase Lock Loop	L	Ceramic
OC	Output Capture	P	Dual–in–Line Plastic
POQ	Preferred Order Quantity Multiple	PB	Thin Quad Flat Pack (TQFP) 10x10 mm
PWM	Pulse Width Modulation	PU	Thin Quad Flat Pack (TQFP) 14x14 mm
QSM	Queued Serial Module	PV	Thin Quad Flat Pack (TQFP) 20x20mm
RPSCIM	Reduced Pin Count SCIM	S	Cerdip (windowed or non–windowed)
RTC	Real–Time Clock	TH	16x16 mm Quad Flat Pack (QFP)
RTI	Real–Time Interrupt		
SCI	Serial Communication Interface		
SCIM	Single Chip Integration Module		
SIM	System Integration Module		
SPI	Serial Peripheral Interface		
TPU	Time Processing Unit		
UART	Universal Asynchronous Receiver/Transmitter		
WDOG	Watch Dog Timer		

M6800 Series Microprocessors and Peripherals

These devices are a testament to the staying power of Motorola microtechnology. The original MC6800 was Introduced in 1975, and is still in demand today. Quality M6801, M6804 and M6805 systems have been performing reliably in automotive, industrial, and office equipment applications for years. Each of these devices can be combined with various peripherals to meet the requirements of a microcontroller design.

Table 3. M6801 and M6803 (HMOS)

Part Number	ROM	RAM	EEPROM	Timer	Serial	A/D	I/O	Bus Speed, MHz	Package	Comments
MC6801	2048	192	0	16 bit: 1 IC, 1 OC	SCI	No	29	0.5–2.0	40 P	
MC68701	0	128	2048	16 bit: 1 IC, 1 OC	SCI	No	29	0.5–2.0	40 P	
MC6803	0	192	0	16 bit: 1 IC, 1 OC	SCI	No	13	0.5–2.0	40 P	
MC6801U4	4096	256	0	16 bit: 2 IC, 3 OC	SCI	No	29	0.5–1.25	40 P	
MC68701U4	0	128	4096	16 bit: 2 IC, 3 OC	SCI	No	29	0.5–1.25	40 P	
MC6803U4	0	256	0	16 bit: 2 IC, 3 OC	SCI	No	13	0.5–1.25	40 P	

Table 4. 8–Bit MPU/Peripherals

Device	Pins	Package	Part Description	Speed
MC68B00	40	P	8 Bit MPU, Addresses 64K Memory, 1 or 2 MHz Versions	2 MHz
MC6802	40	P	MC6800 + Int. Clock Oscillator; 128 Bytes RAM	1 MHz
MC68B09	40	P	High Performance MPU, 10 Powerful Addressing Modes	2 MHz
MC68B09E	40	P	MC6809 With External Clock Input for External Sync.	2 MHz
MC68B21	40	P	Peripheral Interface Adapter	2 MHz
MC68B40	40	P	Programmable Timer Module Contains 3 16–Bit Timers	2 MHz
MC6845	40	P	CRT Ctrl, Refresh Memory Addressing; 2nd Source HD6845R	1 MHz
MC68B50	40	P	Asynchronous Communication Interface Adaptor	2 MHz
MC68HC24	40, 44	P, FN	MC68HC11 Port Replacement (Expanded Mode) for A8, E9	2 MHz
MC68HC27	46, 68	FU, FN	Port Replacement for D3, K4, F1	2 MHz
MC68HCB34	40	P, FN	256 Byte Dual Port RAM, 6 Semaphore Registers	2 MHz
MC68B10	24	P	128 x 8 Random Access Memory	2 MHz
MC68B44	40	P	Direct Memory Access Controller	2 MHz
MC68B488	40	P	General Purpose Interface Adapter	2 MHz
MC68B52	24	P	Synchronous Serial Data Adapter	2 MHz
MC68B54	28	P	Advanced Data Link Controller	2 MHz

Table 5. M6805 (HMOS) Microprocessors

Part Number	ROM	RAM	EEPROM	Timer	Serial	A/D	I/O	Bus Speed, MHz	Package	EPROM or EEPROM Version	Comments
MC6805P2	1K	64	0	8–Bit	–	No	20	0.1–1.0	28–P 28–FN	705P3	LVI Option
MC6805P6	2K	64	0	8–Bit	–	No	20	0.1–1.0	28–P	705P3	LVI Option
MC6805R2	2K	64	0	8–Bit	–	Yes	32	0.1–1.0	40–P 44–FN	705R3	LVI Option, Prog. Prescaler Option
MC6805R3	4K	112	0	8–Bit	–	Yes	32	0.1–1.0	40–P 44–FN	705R3	7–Bit Prescaler, LVI Option
MC6805R6	4K	112	0	8–Bit, WDOG	–	Yes	32	0.1–1.0	40–P 44–FN	705R3	7–Bit Prescaler, LVI Option
MC6805S2	1K	64	0	16–Bit, 8–Bit	SPI	Yes	16	0.1–1.0	28–P	705S3	15–Bit Prescaler, LVI
MC6805S3	4K	104	0	2 8–Bit, 16–Bit	SPI	Yes	21	0.1–1.0	28–P	705S3	1 Extra 8–Bit Timer
MC6805U2	2K	64	0	8–Bit	–	No	32	0.1–1.0	40–P 44–FN	705U3	LVI Option
MC6805U3	4K	112	0	8–Bit	–	No	32	0.1–1.0	40–P 44–FN	705U3	7–Bit Prescaler, LVI Option

Table 6. 8–Bit MPU/Peripherals

Device	Pins	Package	Part Description
MC14618	24	P	Real Time Clock, 50 Bytes RAM, Programmable Square Wave
MC146818A	24, 28	P, FN	Enhanced Version of the MC146818
MC146823	40, 44	P, FN	Three 8–Bit Ports, Handshake Control Logic
MC146805E2	40, 44	P, FN	CMOS 8–Bit Microprocessor
MC68HC68L9	80	FU	LCD Expansion to the MC05L9

Modular Microcontrollers

Modular microcontrollers are another of the innovations that make Motorola a leader in single–chip control systems. Modular controllers are built up from standard modules that interface via a common intermodule bus (IMB). The modular concept allows rapid design and manufacture of controllers tailored for specific applications.

Intermodule Bus Peripherals

Each modular microcontroller incorporates a state–of–the art pipelined CPU module, a sophisticated integration module, and a number of special–purpose modules. The rapidly–growing library of special–purpose modules includes programmable timers, serial communication interfaces, analog–to–digital converters, and a variety of memory modules.

Central Processing Units

CPU16

- 16–Bit Architecture
- Full Set of 16–Bit Instructions
- Three 16–Bit Index Registers
- Two 16–Bit Accumulators
- One Megabyte of Program Memory and One Megabyte of Data Memory
- Source code compatible with the M68HC11 CPU
- Control–Oriented Digital Signal Processing Capability
- High–Level Language Support
- Fast Interrupt Response Time
- Fully Static Implementation
- Low Power Stop Operation
- Background Debugging Mode
- Hardware Breakpoint Signal

CPU32

- 32–Bit Internal Data Path and Arithmetic Hardware
- 32–Bit Internal Address Bus – 24–Bit External Address Bus
- Eight 32–Bit General–Purpose Data Registers
- Seven 32–Bit General–Purpose Address Registers
- Separate User and Supervisor Stack Pointers and Address Spaces
- Separate Program and Data Address Spaces
- Virtual Memory Implementation
- Enhanced Addressing Modes
- Object Code Compatible with M68000 Family
- Improved Exception Handling for Controller Applications
- Rich Instruction Set
- Fully Static Implementation
- Low Power Stop Operation
- Background Debugging Mode
- Hardware and Software Breakpoints
- Trace on Change of Flow

Integration Modules

System Integration Module (SIM)

- Manages controller internal and external bus interfaces
- Provides device interrupt arbitration
- Spurious interrupt monitor
- Twelve programmable chip–select outputs
- Watchdog timer, clock monitor, and bus monitor
- PLL clock synthesizer

Single–Chip Integration Module (SCIM)

- Manages controller internal and external bus interfaces
- Provides device interrupt arbitration
- Spurious interrupt monitor
- Single–chip operation with address and data bus pins configured as I/O ports
- Optional Fully or Partially–expanded bus operation
- Nine general–purpose chip select outputs
- Emulation mode chip–select outputs can be used to address a port replacement unit and external emulation RAM
- Watchdog timer, clock monitor, and bus monitor
- PLL clock synthesizer
- Interrupt request inputs can be configured for edge or level detection
- Reduced pin SCIM (RPSCIM) available with 5 chip selects

Timers

Time Processor Unit (TPU)

- On–chip microengine dedicated to high–speed timing tasks
- Two independent 16–bit counters used as basis for timing tasks
- Real–time task scheduler
- Executes a programmed series of functions to perform complex tasks
- Each of 16 orthogonal channels can perform available time functions
- Functions contained in dedicated control store or in MCU RAM
- TPU communicates to CPU via dual port RAM

General Purpose Timer (GPT)

- Two 16–bit free–running counters
- Three input capture channels
- Four output compare channels
- One input capture/output compare channel
- One pulse accumulator/event counter input
- Two pulse–width modulation outputs
- Pulse accumulator input

Configurable Timer Module (CTM)

- Modular timer system combining different configurations of timer submodules:
- CPSM–6 TAP counter prescaler
- FCSM–16–bit free running up counter
- MCSM–16–bit modulus up counter
- SASM–(Single Action) two I/O pins for 16–bit input capture or output compare functions
- DASM–(Dual Action) one I/O pin for 16–bit I/C, O/C, PWM, or output function

Timer Module (TM)

- 16–bit free–running counter with 8–bit prescaler
- Two TM can be externally cascaded to increase count width
- Software selected input capture, output compare, pulse accumulation, event counting, or pulse–width modulation functions

Communication Modules

Queued Serial Module (QSM)

- Queued full–duplex, synchronous three–line SPI with dedicated RAM
- Standard, asynchronous NRZ–format SCI
- Polled and interrupt–driven operation
- Pins can be configured as a parallel I/O port

Multi–Channel Communications Interface (MCCI)

- One full–duplex synchronous three–line SPI
- Two independent standard, asynchronous NRZ–format SCI
- Polled and interrupt–driven operation
- Pins can be configured as a parallel I/O port

Dual Universal Asynchronous/ Synchronous Receiver Transmitter (DUART)

- Dual NRZ Serial RS–232C channels
- Independently programmable TxD and Receiver Transmitter (DUART)
- RxD Baud rates for each channel up to 76.8K Baud
- Optional external input pins provide baud clock
- Transmit operations are double buffered, and receive operations are quadruple buffered
- RTS and CTS signals are directly supported

Analog–to–Digital Conversion Modules

Analog–to–Digital Converter (ADC)

- 8 or 10 bits of resolution
- Eight input channels
- Eight result registers
- Three result alignment formats
- Eight automated conversion modes
- Programmable sample and hold times are provided
- Three result alignment modes

Queued Analog–to–Digital Converter (QADC)

- 10 bits of resolution
- 16 analog input channels (up to 27 if multiplexed externally)
- Two independent conversion queues
- 32 result registers (16 per queue)
- Three result alignment formats
- Queued conversions can be performed continuously or can be retriggered by software or the QADC module periodic interval timer and external trigger
- Programmable sample and hold times
- Alternate voltage references

Specialized Control Modules

Direct Memory Access (DMA)

- Provides low–latency transfer to external peripheral or for memory–memory data transfer
- Two independent DMA channels with full programmability

Memory Modules

Standby RAM (SRAM)

- Fast Static RAM maintained by voltage from standby voltage pin
- Available in 1K, 1.5K, 2K, 3.5K, and 4K blocks
- Fast (2 clock) access speed
- Byte, word, and long–word operations supported

Standby RAM with TPU Emulation (TPURAM)

- Fast Static RAM maintained by voltage from standby voltage pin
- Available in 1K, 1.5K, 2K, 3.5K, and 4K blocks
- Fast termination (2 clock) access speed
- Supports TPU microcode ROM emulation
- Byte, word, and long–word operations supported

Masked ROM (MRM)

- Custom–masked non–volatile 16–bit wide memory
- Available in 4K increments from 8K to 48K bytes
- Fast (2 clock) access speed
- Byte, word, and long–word operations supported
- Boot ROM capability

Flash EEPROM (FLASH)

- Word programmable, bulk erasable non–volatile 16–bit wide memory
- Available in 8K increments from 8K to 64K bytes
- Fast (2 clock) access speed
- Byte, word, and long–word operations supported
- Boot ROM capability
- External 12 volt programming/erasure source required

Block Erasable Flash EEPROM (BEFLASH)

- Available in 8K increments from 8K to 64K bytes
- Eight independently–erasable blocks
- Fast termination (2 clock) access speed
- Byte, word, and long–word operations supported
- Byte/Word programming with 12 volt external input

The M68HC16 Family

The M68HC16 family is designed for embedded control applications. Each M68HC16 MCU incorporates a true 16–bit CPU module (CPU16) that is upwardly code–compatible with the M68HC11 CPU, a sophisticated integration module, and a number of special–purpose modules. M68HC16 devices can be placed in low–power stop mode to minimize power consumption during periods of inactivity. The M68HC16 family provides the flexibility and features of the M68300 family, and also provides a convenient way for users of M68HC11 devices to move up to 16–bit performance.

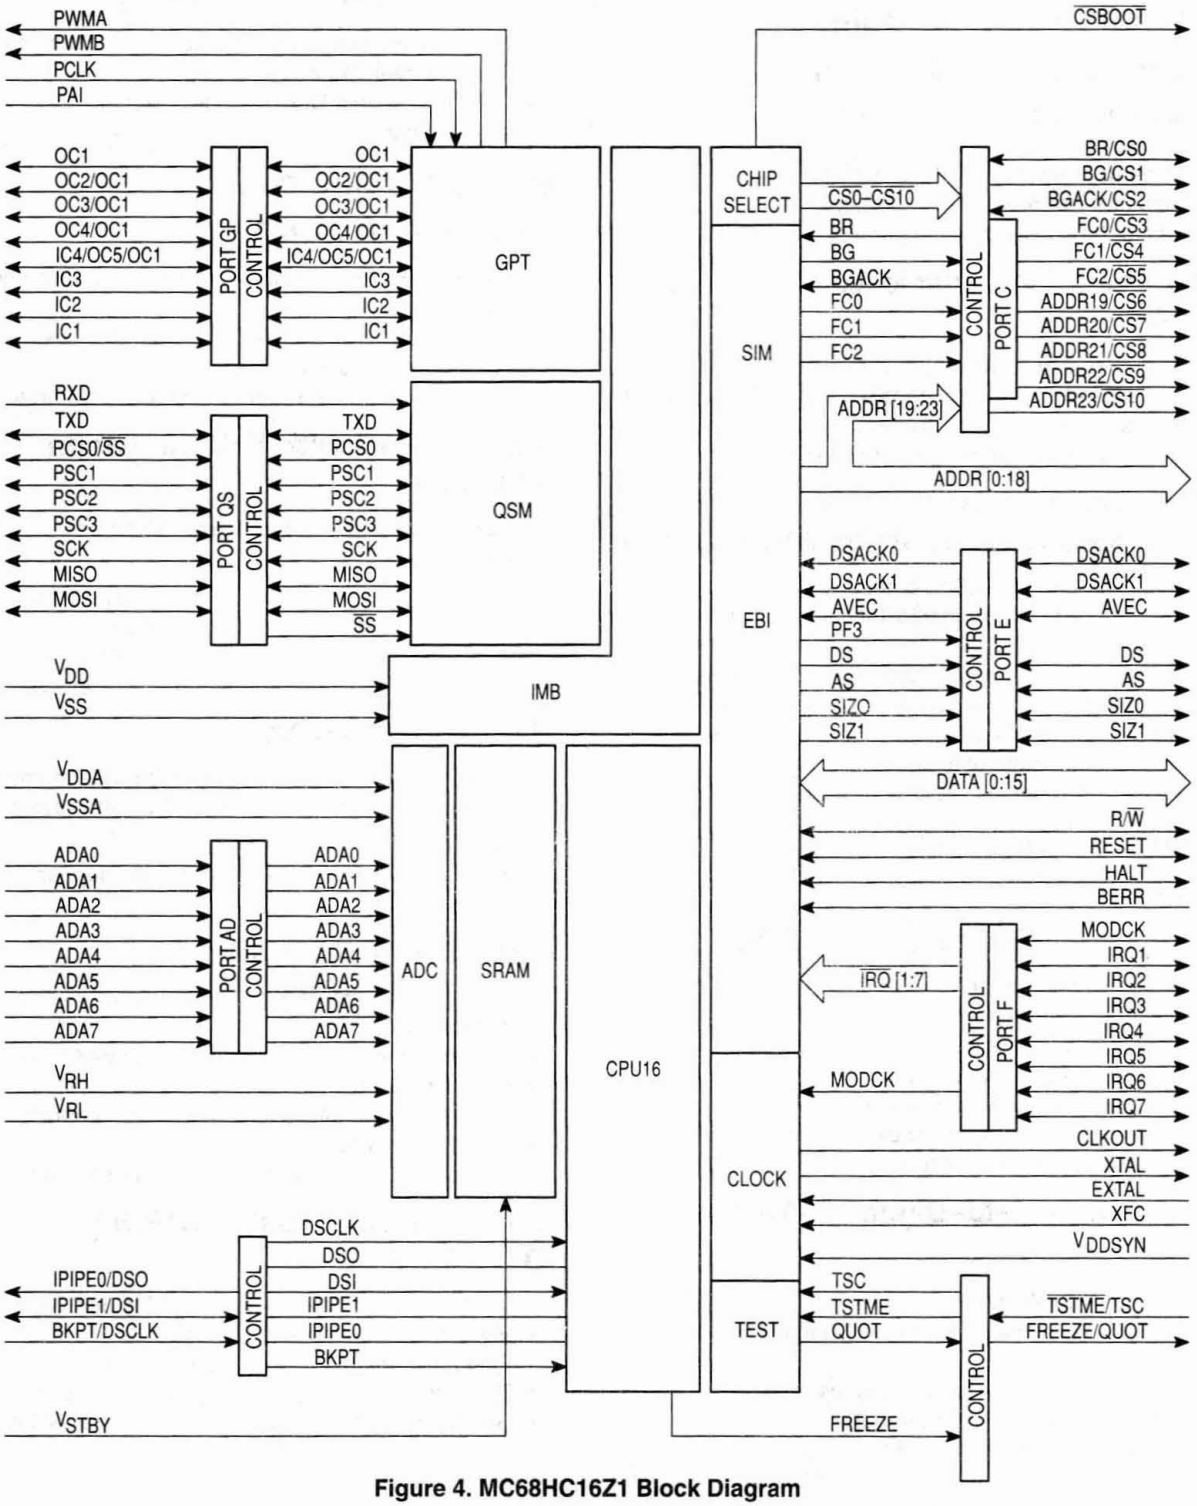

Figure 4. MC68HC16Z1 Block Diagram

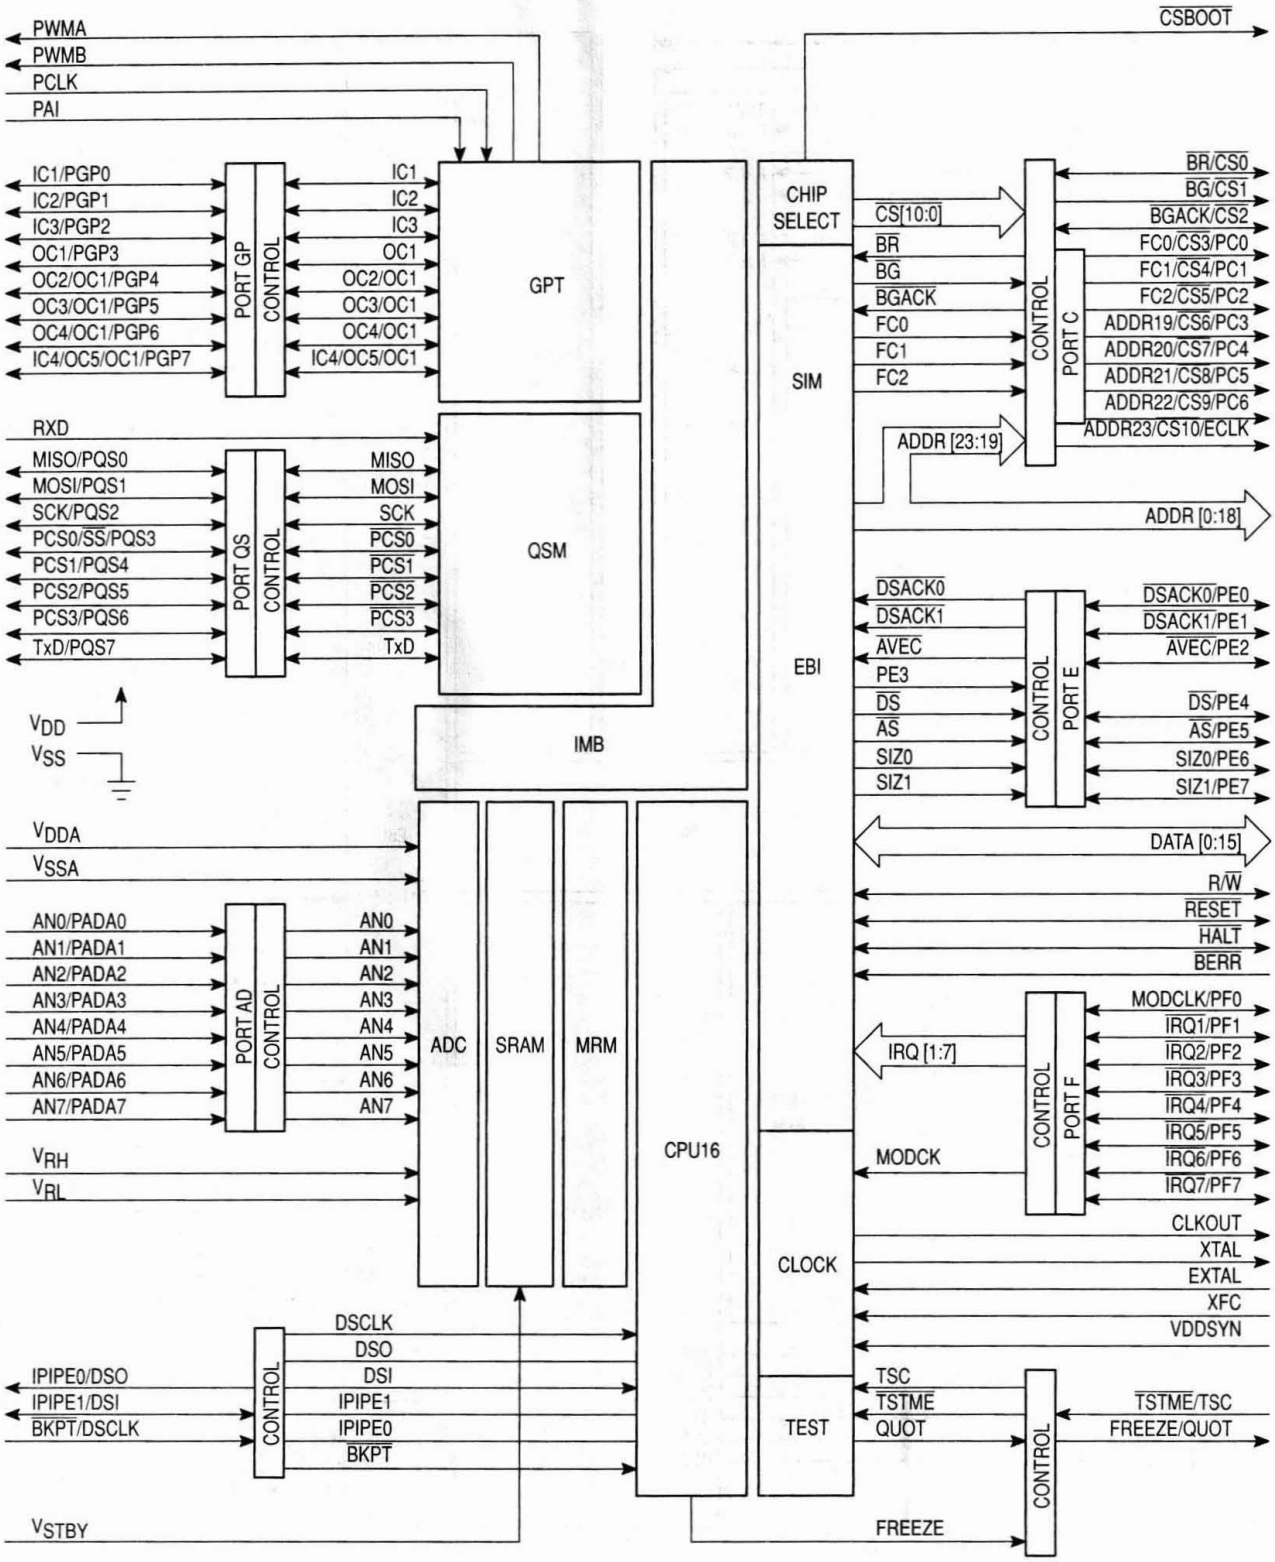

Figure 5. MC68HC16Z2 Block Diagram

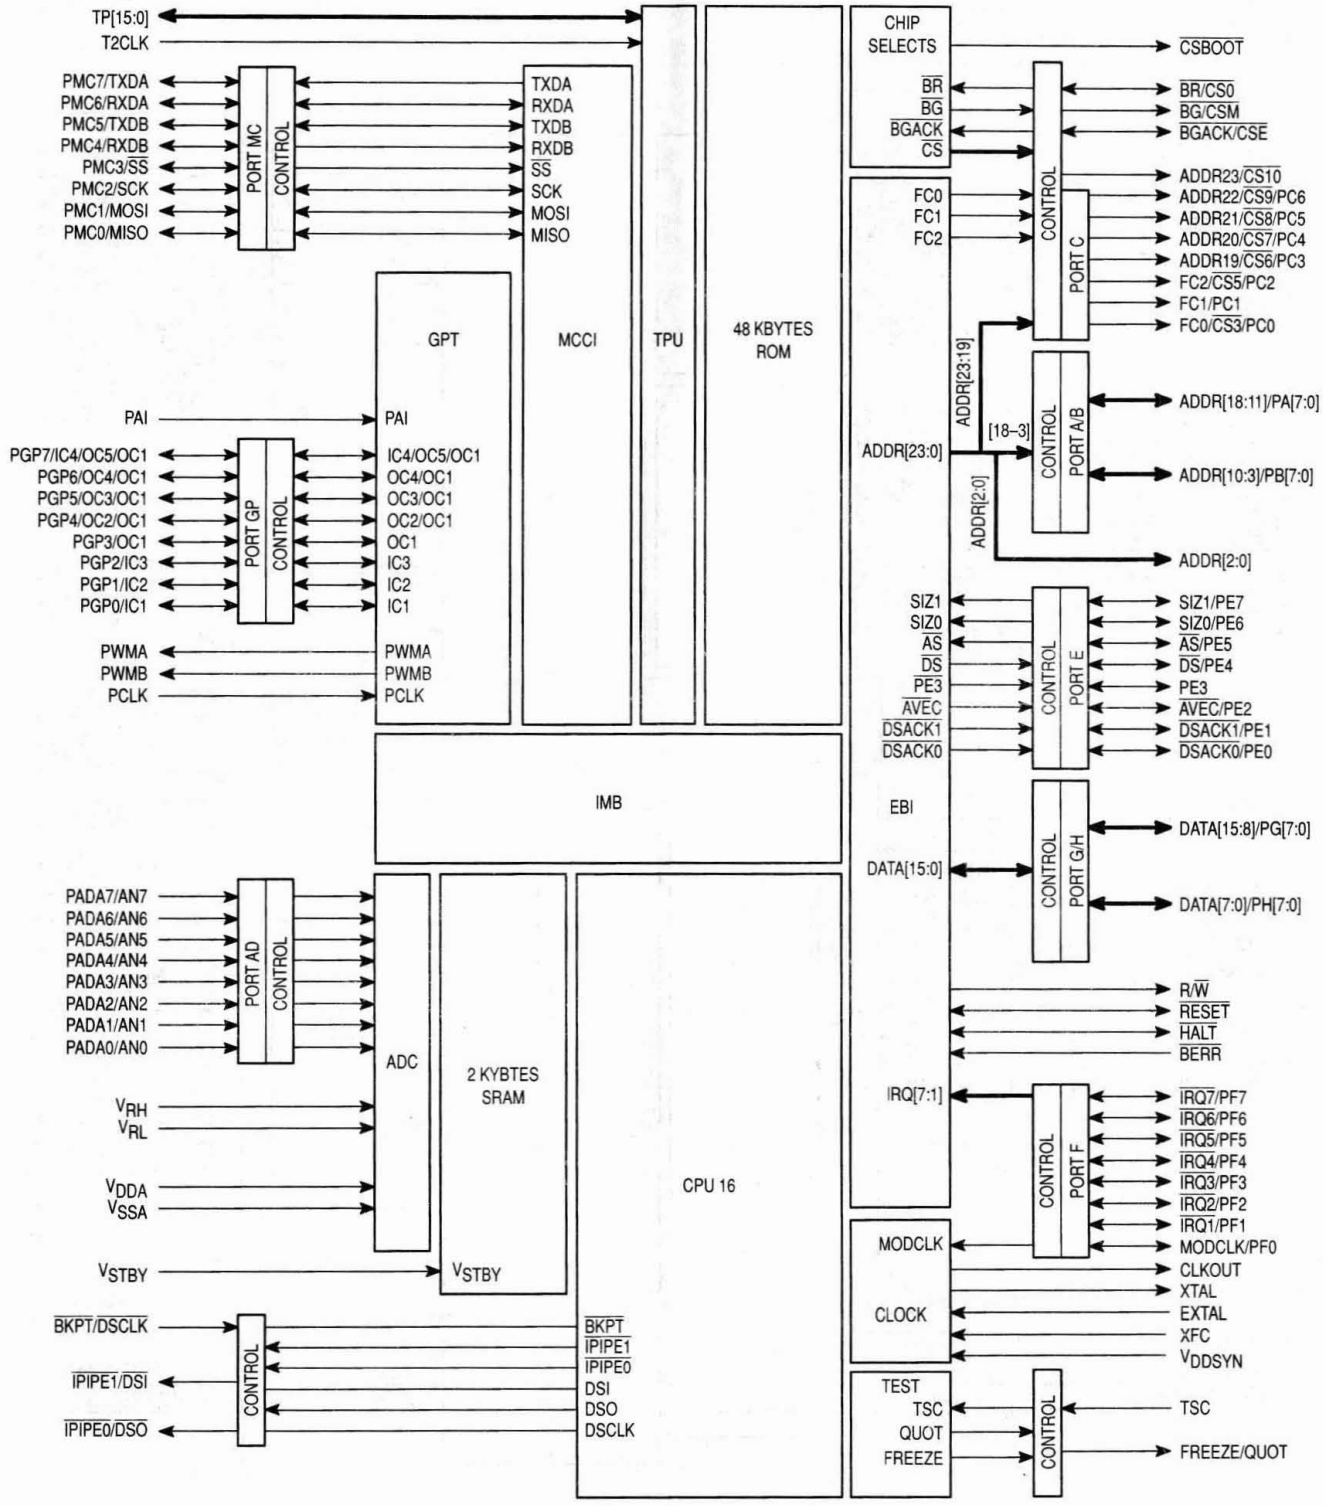

Figure 6. MC68HC16Y1 Block Diagram

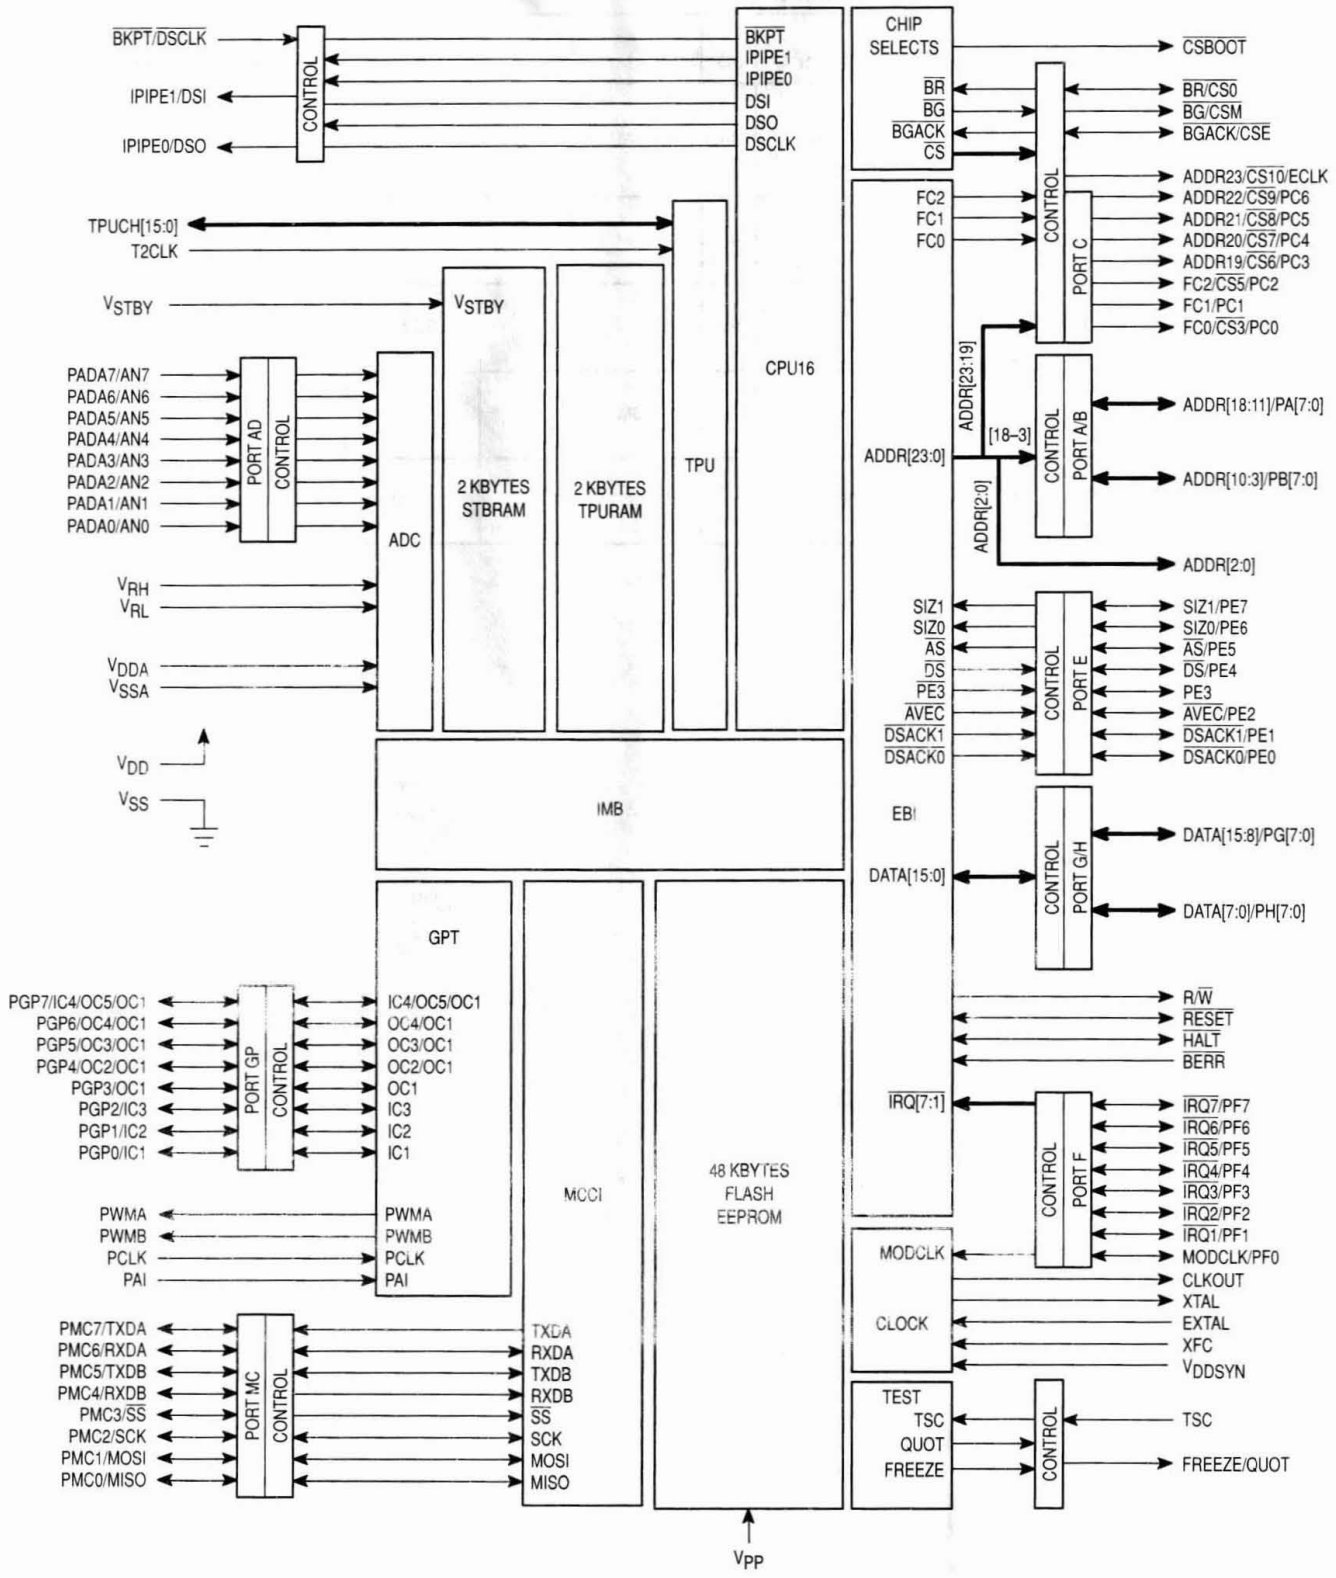

Figure 7. MC68HC916Y1 Block Diagram

Table 7. M68HC16 Family Modular Microcontrollers

Part Number	ROM	SRAM	EEPROM	Timer	I/O	Serial	ADC	Integration Module	Package	Comments
MC68HC16Z1	–	1K	–	GPT	46	QSM	8 Ch, 10–Bit	SIM	132–FC 132–FD 144–FM 144–FV	20 Address Lines, 12 Chip Selects, Synthesized Clock
MC68HC16Z2	8K	2K	–	GPT	46	QSM	8 Ch, 10–Bit	SIM	132–FC 132–FD	20 Address Lines, 12 Chip Selects, Synthesized Clock
MC68HC16Y1	48K	2K	–	TPU + GPT	95	MCCI	8 Ch, 10–Bit	SCIM	160–FT 160–FM	20 Address Lines, 9 Chip Selects, Single Chip or Expanded Mode
XC68HC916X1		1K	2K BEFlash 48K Flash	GPT	70	QSM	8 Ch, 10–Bit	RPSCIM	120–TH	20 Address Lines, 5 Chip Selects, Single Chip or Expanded Mode
XC68HC916Y1	–	4K	48K Flash	TPU + GPT	95	MCCI	8 Ch, 10–Bit	SCIM	160–FT 160–FM	20 Address Lines, 9 Chip Selects, Single Chip or Expanded Mode

The M68300 Family

The high–performance M68300 family is designed for embedded control applications. Each M68300 MCU incorporates a 32–bit M68000–based CPU module (CPU32), a sophisticated integration module, and a number of dedicated special–purpose modules. In addition to utilizing a bus protocol similar to that of the M68020, the system integration module generates external bus–control signals for M6800 devices, and provides a variety of programmable chip–select functions. M68300 devices can be placed in low–power stop mode to minimize power consumption during periods of inactivity. The M68300 family provides great design flexibility, performance, and compatibility with exiting hardware and software.

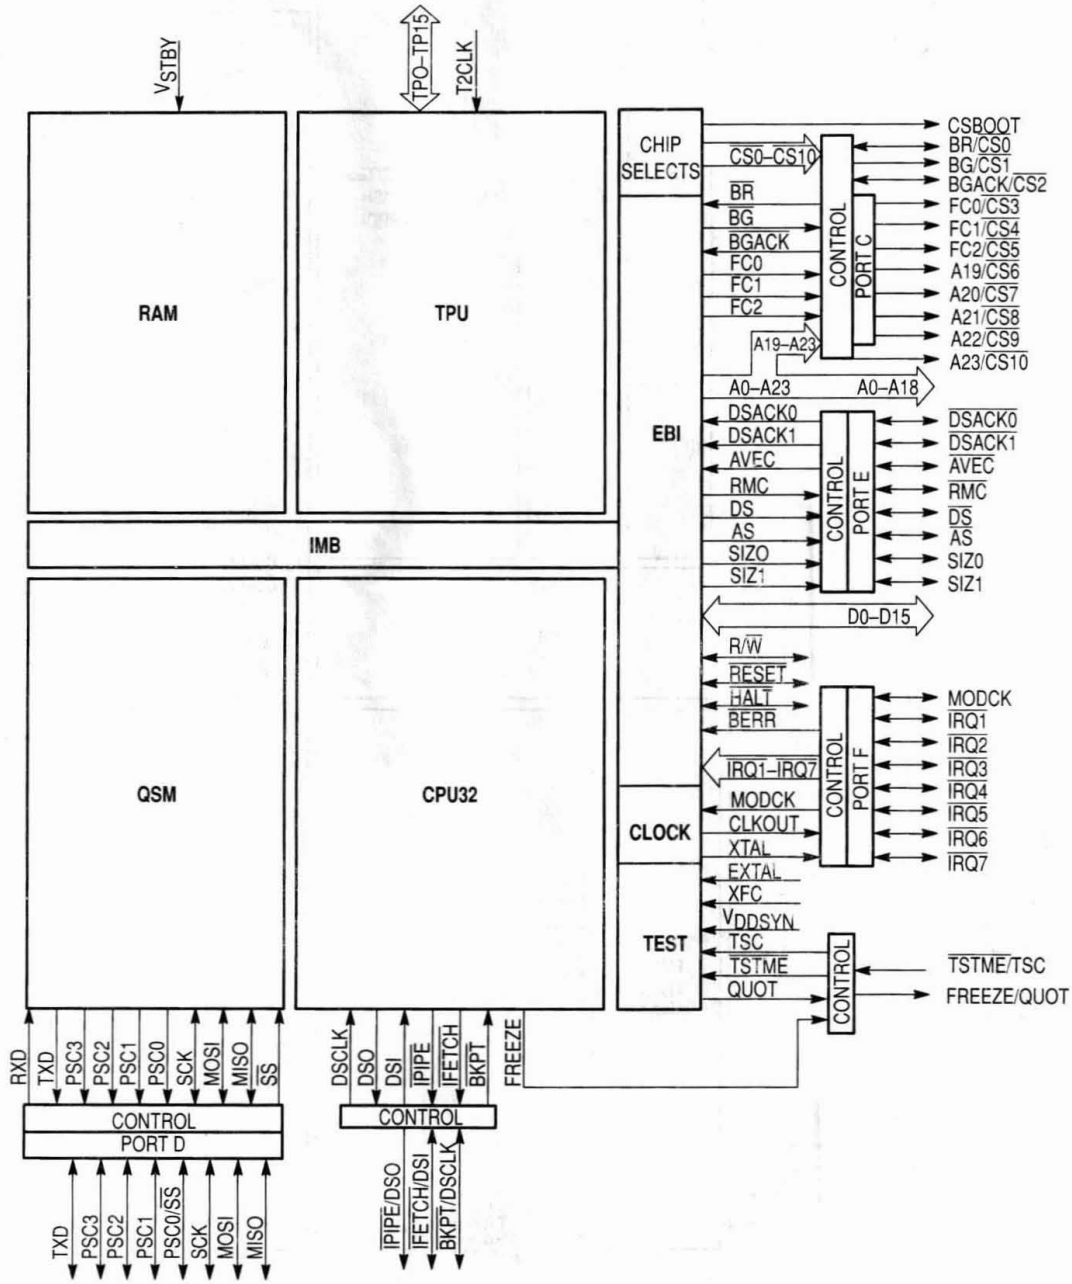

Figure 8. MC68332 Block Diagram

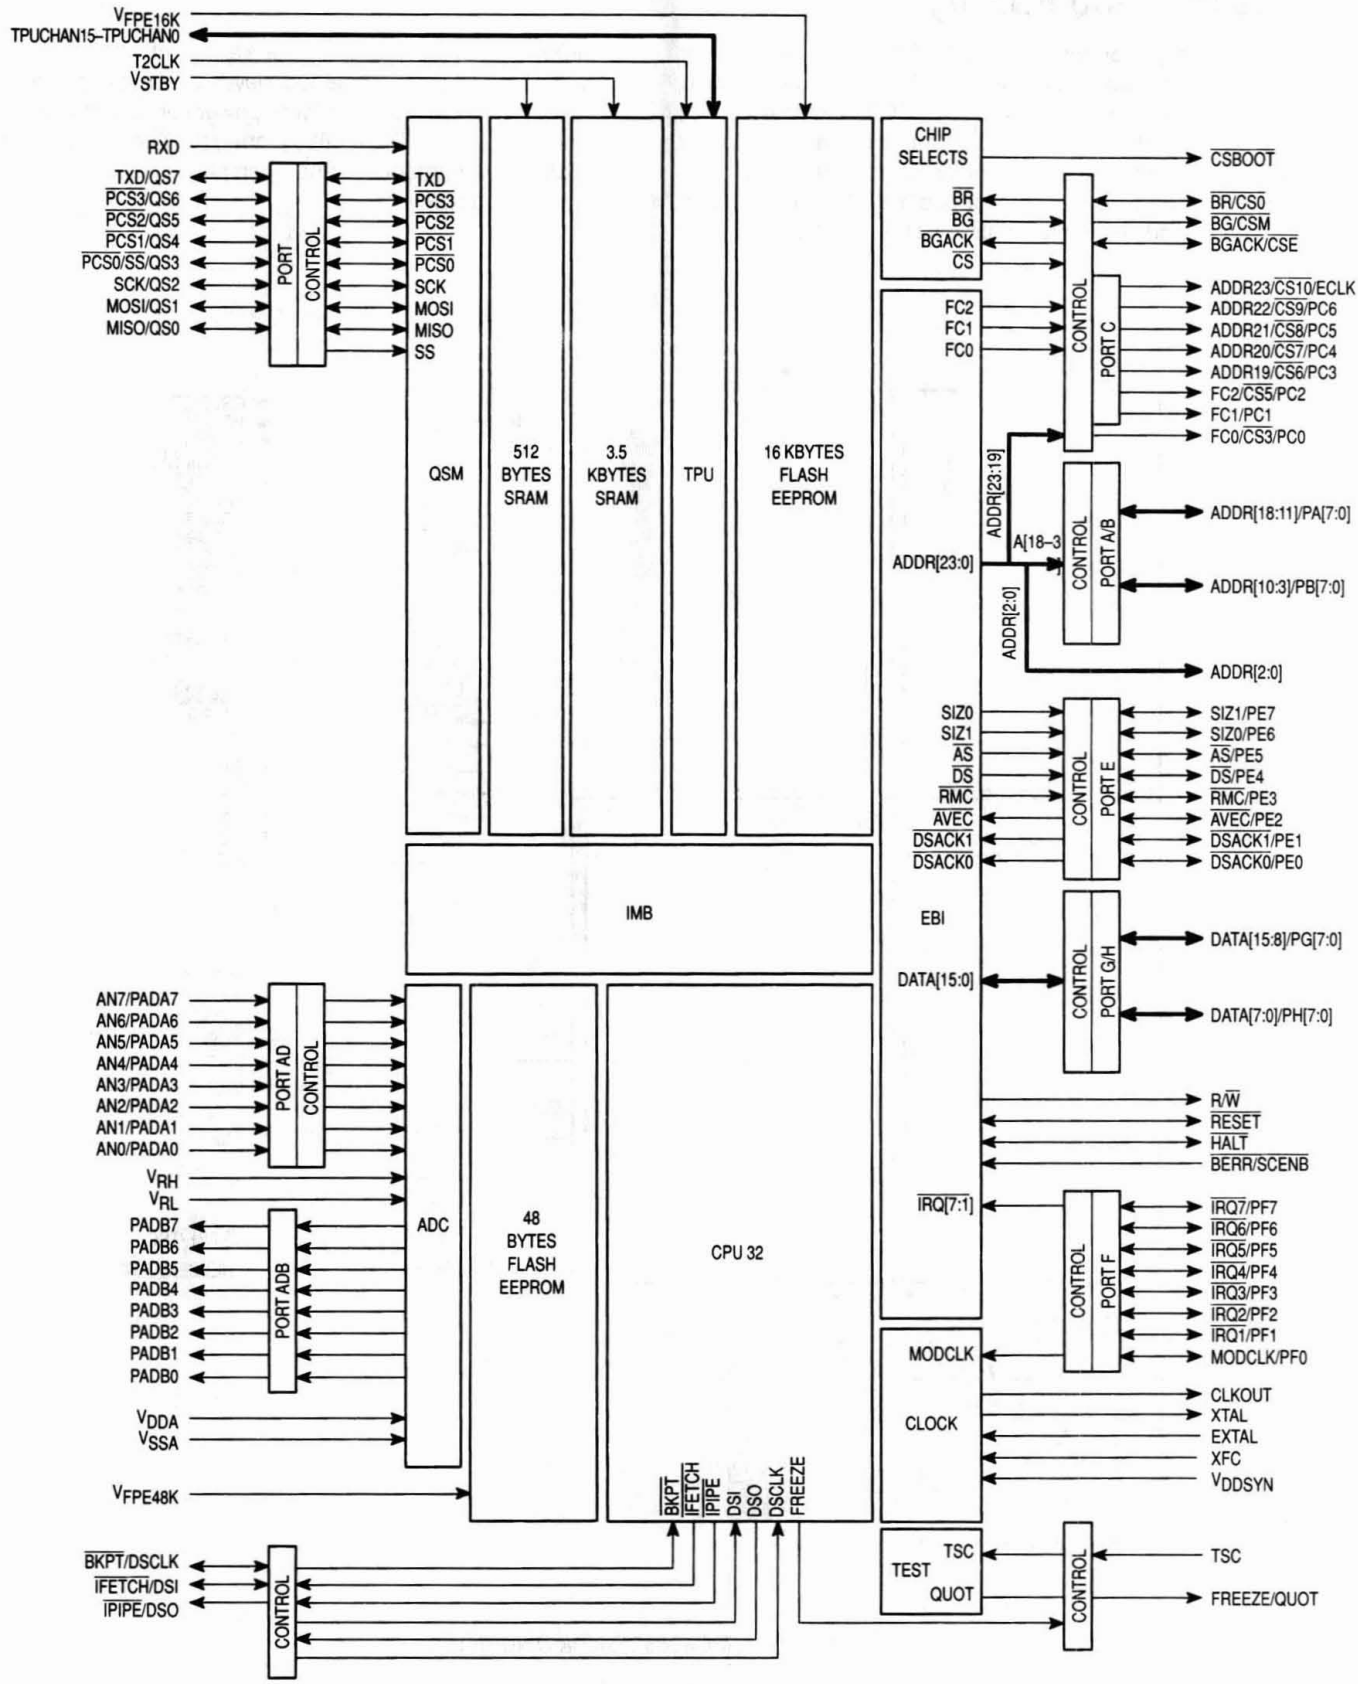

Figure 9. MC68F333 Block Diagram

Table 8. M68300 Family Modular Microcontrollers

Part Number	ROM	SRAM	EEPROM	Timer	I/O	Serial	ADC	Integration Module	Package	Comments
MC68331	–	–	–	GPT	43	QSM	–	SIM	132–FC, 132–FD 144–FM, 144–FV	12 Chip Selects, Synthesized Clock
MC68332	–	2K	–	TPU	47	QSM	–	SIM	132–FC, 132–FD 144–FM, 144–FV	12 Chip Selects, Synthesized Clock
PC68F333	–	4K	16K Flash, 48K Flash Emulator	TPU	96	QSM	8 Ch, 10–Bit	SCIM	160–FT, 160–FM	9 Chip Selects, Synthesized Clock
XC68334	–	1K	–	TPU	47	–	8 Ch, 10–Bit	SIM	132–FC, 132–FD	12 Chip Selects, Synthesized Clock, Single Chip or Expanded Mode

Definitions for Tables 9 and 10

General Definitions

ADC	Analog to Digital Converter Module
A/D	Analog to Digital Converter
CPU16	16 bit Central Processing Unit
CPU32	32 bit Central Processing Unit
D/A	Digital to Analog Converter
DMA	Direct Memory Access
GPT	General–Purpose Timer
IC	Input Capture
IIC	Inter–Integrated Circuit
MCCI	Multi–Channel Communication Interface
PLL	Phase Lock Loop
OC	Output Capture
POQ	Preferred Order Quantity Multiple
PWM	Pulse Width Modulation
QSM	Queued Serial Module
RPSCIM	Reduced Pin Count SCIM
RTC	Real–Time Clock
RTI	Real–Time Interrupt
SCI	Serial Communication Interface
SCIM	Single Chip Integration Module
SIM	System Integration Module
SPI	Serial Peripheral Interface
TPU	Time Processing Unit
UART	Universal Asynchronous Receiver/Transmitter
WDOG	Watch Dog Timer

Package Definitions

FB	10x10 mm Quad Flat Pack (QFP)
FC	Fine Pitch Plastic Quad Flat Pack (PQFP)
FD	Plastic Quad Flat Pack in Molded Carrier Ring
FE	Ceramic Quad Flat Pack (CQFP)
FM	Molded Carrier Flat Pack (CQFP)
FN	Plastic Leaded Chip Carrier (PLCC)
FS	Windowed Cerquad (Ceramic LCC)
FT	28x28 mm Quad Flat Pack (QFP)
FU	14x14 mm Quad Flat Pack (QFP)
FV	20x20 mm Quad Flat Pack (QFP)
L	Ceramic
P	Dual–in–Line Plastic
PB	Thin Quad Flat Pack (TQFP) 10x10 mm
PU	Thin Quad Flat Pack (TQFP) 14x14 mm
PV	Thin Quad Flat Pack (TQFP) 20x20mm
S	Cerdip (windowed or non–windowed)
TH	16x16 mm Quad Flat Pack (QFP)

Microcontroller Development Tools

M68HC05 Family

The M68HC05 Family is supported by a variety of development tools including Evaluation Modules (EVM) and Evaluation Systems (EVS). Both provide an economical means of designing, debugging, and evaluating M68HC05 microcontrollers in a target system environment.

Many new M68HC05 CSIC devices are supported by an MCU–specific EVS. The EVS is a two–board system consisting of a 68HC05 Platform Board (PFB) and an Emulator Module (EM) which contains the emulating microcontroller, and control circuits.

The M68HC05 Family is also supported by the Compact Development System (CDS) for 8–bit microcontrollers (M68CDS8HC05), a powerful, portable, full–featured emulator for debugging hardware and software operations. The CDS8HC05 features high–speed, non–invasive, in–circuit emulation with real–time trace, and a powerful bus state analyzer. Commands are entered from an MS–DOS® host computer.

The Motorola Modular Development System for the M68HC05 Family, MMDS05, allows the use of Emulation Modules (EM) that are compatible with the existing EVS product line. The MMDS05 provides an upgrade for CDS8HC05 customers. The MMDS05 has all of the features of the CDS8HC05, and includes a notable enhancement. A dual–port RAM "memory window" allows a user to to modify memory while a program is running at full speed. An internal power supply and totally shielded enclosure assure compliance with FCC and EC92 regulations. The development software provided with the MMDS05 is an enhancement of the EVM05/EVM11 front end — it provides an integrated development environment with true Source Level Debug (SLD).

M68HC11 Family

The M68HC11 Family is supported by a variety of economical development tools. These include Evaluation Boards (EVB), Evaluation Modules (EVM), and Evaluation Systems (EVS).

An EVB allows a user to debug code under the BUFFALO (Bit User Fast Friendly Aid to Logical Operations) monitor/debugging program contained in the microcontroller ROM. The EVB emulates only the single–chip mode of operation and has no EPROM programmer. The EVBU, a "universal" version of the EVB, includes a wire–wrap area for custom interfacing.

EVM are low–cost tools for designing, debugging, and evaluating M68HC11 devices in a target system. An EVM provides essential microcontroller signals and timing, and on–board monitor/debugging firmware contains extensive commands for controlling I/O and debug operations.

An EVS is a two–board system consisting of a 68HC11 Platform Board (PFB) and an Emulator Module (EM). The EM contains control circuits and a 68HC11 MCU for the part or series of parts being emulated. An EVS provides expanded, multiplexed, special test, and single–chip mode emulation, a dual 64 kbyte memory map with 64 kbytes of emulation RAM, and an RS–232 port.

In addition, the Intermetrics Whitesmiths 68HC11 C Compiler/Assembler (M68S11CCAB) and 68HC11 Simulator Debugger (M68S11SIMAB) are now available through Motorola.

Modular Microcontroller Families

In–circuit debuggers for modular microcontroller families (M68ICD32 and M68ICD16) are economical development and debugging environments. ICD make use of the non–intrusive Background Debug Mode (BDM) interface, and provide sophisticated software debugging functions. The ICD consist of debugger and assembler development software, a small interconnect board, and target system cable. The IASM32 and IASM16 assemblers provide a single development environment that includes an editor and cross–assembler programs. ICD source–level debugger software uses easy–to–read screen windows to display register information for the CPU, the instruction pointer, breakpoints, program memory, and data memory.

The MC68331 and MC68332 are supported by evaluation kits (EVK). These multi–board systems include a common platform board, a Business Card Computer (BCC) that contains the MCU being emulated, and the CPU32BUG debug monitor program. The EVK is a cost–effective system for designing, debugging, and evaluating target system software and hardware. The MC68340 is supported by an evaluation system (EVS) similar to the EVK with the addition of a development interface board for a comprehensive development environment.

The M68HC16Z1 Evaluation Board (EVB) is an inexpensive tool for designing, debugging, and evaluating the MC68HC16Z1. Features include background–mode operation, an integrated assembly/editing/emulation environment, and logic analyzer pod connectors.

Modular evaluation boards (MEVB) for each modular family member are under development. The MEVB system is a multi–board evaluation system that consists of a common platform board (PFB) and interchangeable MCU personality boards (MPB). The MEVB system provides an economical development environment for downloading and debugging software generated with IASM16 and IASM32.

Motorola also sells the Intermetrics Whitesmiths 68HC16 C Compiler/Assembler (M68S16CCAB) and 68HC16 Simulator Debugger (M68S16SIMAB) for the M68HC16 Family. In addition, the Intermetrics InterTools™ 683XX C Compiler/Assembler (M68S32CCAB) and 683XX ROM Monitor Debugger (M68S32ROMAB) for the M68300 Family are now available through Motorola.

Table 9. Development Tools

Devices	Evaluation Modules*	Programmer Boards	Evaluation Systems/Kits
M6800 Development Tools			
MC6801		M68701EVM	
MC6801U4		M68701EVM	
MC68701		M68701EVM	
MC68701U4		M68701EVM	
MC6803		M68701EVM	
MC6803U4		M68701EVM	
M68HC05 Development Tools			
MC68HC05B4/B6/B8/B16 MC68HC705B5 MC68HC705B16	M68HC05X16EVS M68HC05X16EVS M68HC05X16EVS	 M68HC05BPGMR M68HC05BPGMR	52PLCCU: 52 Pin PLCC Target Cable Use M68HC05X16PGMR for 64 QFP
MC68HC05C5 XC68HC705C5	M68HC05C5EVS M68HC05C5EVS		44 PLCC05M: 44 Pin PLCC Target Cable
MC68HC05C4/C4A/C8/C9/C12 XC68HC05C4 MC68HC705C8 XC68HC705C	M68HC05C9EVS M68HC05C9EVS	 M68HC05PGMR–2	44 PLCC05M: 44 Pin PLCC Target Cable
MC68HC05D9/D24 XC68HC05D32 MC68HC705D9	 M68HC05D32EVS M68HC05D32EVS	 M68HC05PGMR–2	44 PLCC05M: 44 Pin PLCC Target Cable
MC68HC05E1 MC68HC705E1	M68HC05E1EVS M68HC05E1EVS		
XC68HC05F2 XC68HC05F6	M68HC05F6EVM		42 SDIP Target Cable Included
XC68HC05F8 XC68HC705F8	M68HC05F8EVM M68HC05F8EVM	 M68HC705F8PGMR	
MC68HC05G1 MC68HC705G1	M68HC05G1EVM M68HC05G1EVM	 M68HC705G1PGMR	
XC68HC05G9 XC68HC705G9	M68HC05G9EVM M68HC05G9EVM	 M68HC705G9PGMR	
XC68HC05G10 XC68HC705G10	M68HC05G10EVM M68HC05G10EVM		
XC68HC05H2	M68HC05H2EVS		
XC68HC05I8 XC68HC705I8	M68HC05I8EVS M68HC05I8EVS	 M68HC705L4PGMR	
MC68HC05J1 MC68HC705J2	M68HC05P8EVS M68HC05P8EVS	 M68HC705J2PGMR	
XC68HC05J3 XC68HC705J3	M68HC05J3EVS M68HC05J3EVS	 M68HC705J2PGMR	
XC68HC05K0/K1 XC68HC705K1		M68HC705KIGANG** Use M68HC705KICS	M68HC705KICS In–Circuit Simulator M68HC705KICS In–Circuit Simulator

* EVSs and EVMs include an Integrated Development Environment (IDE) which contains an editor, assembler and hardware debugger.
* EVSs and EVMs do not include target cables or OTP/EPROM programming capability unless noted in comment section.
** Development tools that are scheduled for availability during 1Q94.

Table 9. Development Tools (continued)

Devices	Evaluation Modules*	Programmer Boards	Evaluation Systems/Kits
M68HC05 Development Tools (continued)			
XC68HC05L1 XC68HC705L1	M68HC05L1EVM M68HC05L1EVM		56 SDIP Target Cable Included
XC68HC05L2 XC68HC705L2	M68HC05L2EVS M68HC05L2EVS	 M68HC705L2PGMR	
XC68HC05L4 XC68HC705L4	M68HC05L4EVS M68HC05L4EVS	 M68HC705L4PGMR	M68SDIP64: 64 Pin SDIP Target Cable
MC68HC05L5 MC68HC705L5	M68HC05L5EVS M68HC05L5EVS	 M68HC705L5PGMR	80QFPUKIT: 80 Pin QFP Target Cable
MC68HC05L7/L9	M68HC05L9EVM2		
MC68HC05L10	M68HC05L10EVM		
XC68HC05L11	M68HC05L11EVM		
XC68HC05M4	M68HC05M4EVM		
XC68HC05P3	M68HC05P3EVS		
MC68HC05P1/P4/P6/P7/P9 XC68HC705P9	M68HC05P9EVS M68HC05P9EVS	 M68HC705P9PGMR	XMDS05 Hi–Performance In–Circuit Emulator 68HC705P6 is required for P6 EVS Capability
MC68HC05P8	M68HC05P8EVS		
XC68HC05SC11/SC21/SC24/SC27	M68HC05SCEVS		ISO Adaptor Included with M68HC05SCEVS
MC68HC05T1 XC68HC05T2/T3	M68HC05T2EVS		
XC68HC05T4	M68HC05T4EVM		
MC68HC05T7/T10 XC68HC705T10	M68HC05T7EVM M68HC05T7EVM	 M68HC705T10PGMR	
XC68HC05T12 XC68HC705T12	M68HC05T12EVM M68HC05T12EVM	 M68HC705T12PGMR	
XC68HC05X4 XC68HC705X4	M68HC05X4EVS M68HC05X4EVS	 M68HC705X4PGMR	
XC68HC05X16 MC68HC705X16	M68HC05X16EVS M68HC05X16EVS	 M68HC705X16PGMR	68 PLCCU: 68 Pin PLCC Target Cable
M68HC11 Development Tools			
MC68HC11A0/A1/A8	M68HC11EVB M68HC11EVB2 M68HC11EVBU	M68HC11EVM	
MC68HC11D0/D3		M68HC11EVM	M68HC11D3EVS
MC68HC711D3	M68HC711D3EVB	M68HC11EVM	M68HC11D3EVS
MC68HC11E0/E1/E2/E9	M68HC11EVB M68HC11EVBU	M68HC11EVM	
MC68HC711E9	M68HC11EVBU	M68HC11EVM	
MC68HC811A8/E2	M68HC11EVB M68HC11EVBU	M68HC11EVM	

* EVSs and EVMs include an Integrated Development Environment (IDE) which contains an editor, assembler and hardware debugger.
* EVSs and EVMs do not include target cables or OTP/EPROM programming capability unless noted in comment section.
** Development tools that are scheduled for availability during 1Q94.

Table 9. Development Tools (continued)

Devices	Evaluation Modules*	Programmer Boards	Evaluation Systems/Kits
M68HC11 Development Tools (continued)			
MC68HC11F1			M68HC11F1EVS
MC68HC11G5/G7 MC68HC711G5			M68HC11G7EVS
MC68HC11KA4			M68HC11KA4EVS
MC68HC11K0/K1/K4 MC68HC711K4			M68HC11K4EVS
MC68HC11L0/L1/L6 MC68HC711L6			M68HC11L6EVS
MC68HC11M2 MC68HC711M2			M68HC11KMNPEVS
MC68HC11N4 MC68HC711N4			M68HC11KMNPEVS
MC68HC11P2 MC68HC711P2			M68HC11KMNPEVS
M68HC16 Development Tools			
MC68HC16Y1	MG8MEVB16Y1		
MC68HC16Z1	M68MEVB16Z1		
MC68HC16Z2	M68MEVB16Z1		
M68300 Development Tools			
MC68331	M68MEVB333		M68331EVK
MC68332	M68MEVB16Z1		M68332EVS/M68332EVK
MC68F333 MC6805R2/R3	M68MEVB333		

* EVSs and EVMs include an Integrated Development Environment (IDE) which contains an editor, assembler and hardware debugger.
* EVSs and EVMs do not include target cables or OTP/EPROM programming capability unless noted in comment section.
** Development tools that are scheduled for availability during 1Q94.

Fuzzy Logic

Fuzzy logic replaces conventional programming techniques with a simpler approach to control algorithms. Fuzzy logic uses a series of case statements to create sophisticated features that do not require additional memory or excessive processing time.

Motorola's portfolio of fuzzy logic products is geared for every level of user. The fuzzy logic educational kit (part number FLEDKT00) includes everything needed to learn how to use fuzzy logic with M68HC05 and M68HC11 microcontrollers.

- An easy–to–follow PC–based tutorial
  - Explains fuzzy logic fundamentals, basic concepts and terminology
  - Methodology section teaches a five–step sequence or principles and procedures for designing a fuzzy logic system. These include defining the control system, writing rules and membership functions, tuning and debugging and optimizing the design.
  - Advanced topics section covers areas such as stability, adaptability, ambiguity, noise, alpha–cuts and contribution weights
- A Knowledge Base Generator (KBG)
  - Uses natural language inputs to generate a knowledge base (rules and membership functions)
  - Inference Engines for the M68HC11 and M68HC05 families implement the fuzzy logic in software ready to embed in your Motorola microcontroller application
  - Runs a software simulation of the inference engine and displays a two–dimensional plot of the control surface
  - Generates real–time code for the standard M68HC05 or M68HC11 microcontroller families which can be downloaded to an evaluation module (EVM) for in–circuit emulation
- Demonstration–version of Aptronix's Fuzzy Inference Development Environment (FIDE) software
  - Features powerful, time–saving debug functions to help determine the correct membership functions and rules for any application
  - Demonstrates easy–to–use graphical interface for designing and debugging integrated systems

Aptronix's Fuzzy Inference Development Environment (FIDE™) is a powerful software tool that allows users to easily edit, simulate, debug, and tune the membership functions and rules of a fuzzy logic application. FIDE offers graphical and natural language editing of source files. The user–friendly debug tools allow time domain simulations, three–dimensional surface displays of input–to–output relationships, and linkage of fuzzy and non–fuzzy modules. FIDE also generates assembler code that implements fuzzy logic on Motorola microcontrollers.

On–Line Help

Microcontroller Electronic Bulletin Board

Freeware Data Service provides a direct line to the latest information and software for Motorola microcontrollers. The Freeware bulletin board provides access to:

- Development Software for PC and Macintosh Computers
  - Cross Assemblers
  - Small C Compiler for 68HC11
  - EVM and EVB Monitor/Debugger Object Code
- Development software
  - Floating Point Routines
  - Fast Fourier Transform Routines
  - 16–Bit Math Packages
  - Utility Programs
  - User Group Library Routines and User–Donated Programs
  - Kermit File Transfer Program
  - Terminal Emulation Program
- Masked ROM information
- MCU literature listings
- Updates/Erratas to existing literature
- Press releases and updates concerning new and phase–out products
- Contests, promotions and seminars
- Electronic mail service

How to Access Freeware

You can access Freeware from anywhere in the world. To log on, you'll need the following equipment:

1. 2400/1200/300 baud modem
2. Terminal, MS–DOS personal computer or Macintosh computer
3. Telephone line

This equipment will allow the user to read files and post questions. However, with a file transfer program such as XMODEM, YMODEM or Kermit, all information can be downloaded to your terminal or PC.

To log on:

1. Dial (512) 891–FREE (891–3733). Be sure to set the character format to 8 data, no parity, 1 stop bit.
2. Follow directions from the system.
3. Read log–on messages, then follow the directions on the screen display. A log–on session is limited to 120 minutes.

Third–Party Support

Development support for Motorola microcontrollers is available from a variety of independent suppliers.

Third–Party Development Tools

Table 10. Software Products

M68HC05 Family	M68HC11 Family	M68HC16 Family	M68300 Family
Simulators			
Byte Craft Ltd.	Avocet Systems, Inc.	P&E Microcomputer Systems, Inc.	Software Environments Ltd.
P&E Microcomputer Systems, Inc.	Nohau Corp.		
PseudoCorp.	P&E Microcomputer Systems, Inc.		
TECi			
Assemblers			
2500AD Software, Inc.	2500AD Software, Inc.	2500AD Software, Inc.	Avocet Systems, Inc.
American Arium	Archimedes Software, Inc.	Byte Craft Ltd.	Eyring Systems Software Division
Byte Craft Ltd.	Avocet Systems, Inc.	Eris Systems, Inc.	Introl Corp.
Computer Systems Consultants, Inc.	Computer Systems Consultants, Inc	Introl Corp.	Micro Dialects, Inc.
Eris Systems, Inc.	Eris Systems, Inc.	Micro Dialects, Inc.	Microtec Research, Inc.
Introl Corp.	Introl Corp.	P&E Microcomputer Systems, Inc.	Oasys, Inc.
Lloyd I/O, Inc.	Lloyd I/O, Inc.		
LOGISOFT	LOGISOFT		
Micro Dialects, Inc.	Micro Dialects, Inc.		
Onset Computer Corp.			
P&E Microcomputer Systems, Inc.			
PseudoCorp.			
TECi			
Symbolic Debuggers			
2500AD Software, Inc.	2500AD Software, Inc.	Byte Craft Ltd.	Eyring Systems Software Division
Byte Craft Ltd.	Microtec Research, Inc.		Integrated Systems, Inc.
P&E Microcomputer Systems, Inc.	P&E Microcomputer Systems, Inc.		JMI Software Consultants, Inc.
TECi	TECi		
Wytec Company			
Compilers			
American Arium	2500AD Software, Inc.	Byte Craft Ltd.	Eyring Systems Software Division
Byte Craft Ltd.	Archimedes Software, Inc.	Intermetrics Microsystems Software, Inc.	Forth, Inc.
	Avocet Systems, Inc.	Introl Corp.	Integrated Systems, Inc.
	Forth, Inc.	Software Environments Ltd.	Intermetrics Microsystems Software, Inc.
	Intermetrics Microsystems Software, Inc.		Introl Corp.
	Introl Corp.		Laboratory Microsystems Inc.
	Laboratory Microsystems Inc.		Microtec Research, Inc.
	New Micros, Inc.		Microware Systems Corp.
	Software Environments Ltd.		RAVEN Computer Systems
	SYNGEN Industrial Control		Sierra Systems

Table 10. Software Products (continued)

M68HC05 Family	M68HC11 Family	M68HC16 Family	M68300 Family
Source Level Debuggers			
Byte Craft Ltd. Yokogawa Digital Computer Corp. Introl Corp.	Huntsville Microsystems, Inc. Intermetrics Microsystems Software, Inc. Introl Corp. Yokogawa Digital Computer Corp.	Huntsville Microsystems, Inc. Intermetrics Microsystems Software, Inc. Introl Corp. Yokogawa Digital Computer Corp.	Embedded Support Tools Corp. Eyring Systems Software Division GreenSpring Computers, Inc. Huntsville Microsystems, Inc. Integrated Systems, Inc. Intermetrics Microsystems Software, Inc. Microtec Research, Inc. Sierra Systems Yokogawa Digital Computer Corp.
Real–Time Executives			
	Accelerated Technology, Inc. A. T. Barrett & Associates U S Software Corporation	A. T. Barrett & Associates U S Software Corporation	Accelerated Technology, Inc. A. T. Barrett & Associates Eyring Systems Software Division GreenSpring Computers, Inc. Integrated Systems, Inc. JMI Software Consultants, Inc. Microware Systems Corp. Ready Systems U S Software Corporation
Other			
PsuedoCorp	Logic Automation Inc. LOGISOFT PsuedoCorp U S Software Corporation	Momentum Data Systems, Inc. U S Software Corporation	Avocet Systems, Inc. CARDtools Systems Corp. Eyring Systems Software Division GreenSpring Computers, Inc. Integrated Systems, Inc. JMI Software Consultants, Inc. Logic Automation Inc. Microware Systems Corp. U S Software Corporation

Table 11. Hardware Products

M68HC05 Family	M68HC11 Family	M68HC16 Family	M68300 Family
Logic Analyzers			
	American Arium Hewlett–Packard Step Engineering Tektronix, Inc.	Hewlett–Packard Tektronix, Inc.	Hewlett–Packard
Emulators			
American Arium Orion Instruments, Inc. Pentica Systems Inc. Sophia Systems & Technology TECi Thorson Engineering Co. Trace Technology Ltd. Yokogawa Digital Computer Corp.	Advance Electronic Diagnostics, Inc. American Arium Huntsville Microsystems, Inc. MetaLink Corp. Nohau Corp. Orion Instruments, Inc. Pentica Systems Inc. Sophia Systems & Technology TECi Thorson Engineering Co. Wytec Company Yokogawa Digital Computer Corp.	Embedded Support Tools Corp. Huntsville Microsystems, Inc. Nohau Corp. Pentica Systems, Inc. Yokogawa Digital Computer Corp.	Advance Electronic Diagnostics, Inc. Applied Microsystems Embedded Support Tools Corp. Hewlett–Packard Huntsville Microsystems, Inc. Microtek International Nohau Corp. Pentica Systems Inc. Yokogawa Digital Computer Corp.
Evaluation Boards			
Elan Digital Systems	Elan Digital Systems Mosaic Industries, Inc. New Micros, Inc.	New Micros, Inc.	GreenSpring Computers, Inc. New Micros, Inc.
Other			
3M Electronic Products Division AMP Inc. EE Tools Co. Elan Digital Systems Pentica Systems Inc. TECi	3M Electronic Products Division AMP Inc. Elan Digital Systems Emulation Technology, Inc. Pentica Systems Inc. SYNGEN Industrial Control	AMP Inc. P&E Microcomputer Systems, Inc.	Emulation Technology, Inc Pentica Systems Inc.

Table 12. Contact List

Company	Phone
3M Electronic Products Division	(512) 984–3441
2500AD Software, Inc.	(719) 395–8683
A. T. Barrett & Associates	(713) 728–9688
Accelerated Technology, Inc.	(205) 450–0707
Advance Electronic Diagnostics, Inc.	(602) 861–9359
American Arium	(714) 731–1661
AMP Inc.	(800) 52AMP52
Applied Microsystems	(800) 426–3925
Archimedes Software, Inc.	(415) 567–4010
Avocet Systems, Inc.	(800) 448–8500
Byte Craft Ltd.	(519) 888–6911
CARDtools Systems Corp.	(408) 559–4240
Computer Systems Consultants, Inc	(404) 483–4570
EE Tools Co.	(716) 346–6973
Elan Digital Systems	(4489) 579799
Embedded Support Tools Corp.	(617) 828–5588
Emulation Technology, Inc.	(408) 982–0660
Eris Systems, Inc.	(612) 374–2967
Eyring Systems Software Division	(801) 375–2434
Forth, Inc.	(213) 372–8493
GreenSpring Computers, Inc.	(415) 327–1200
Hewlett–Packard	(800) 447–3282
Huntsville Microsystems, Inc.	(205) 881–6005
Integrated Systems, Inc.	(408) 980–1500
Intermetrics Microsystems Software, Inc.	(617) 661–0072
Introl Corp.	(414) 327–7171
JMI Software Consultants, Inc.	(215) 628–0840
Laboratory Microsystems Inc.	(310) 306–7412
Lloyd I/O, Inc.	(503) 222–0702
Logic Automation Inc.	(503) 690–6900
LOGISOFT	(408) 773–8465
MetaLink Corp.	(602) 926–0797
Micro Dialects, Inc.	(513) 271–9100
Microtec Research, Inc.	(408) 980–1300
Microtek International	(503) 645–7333
Microware Systems Corp.	(515) 224–1929
Momentum Data Systems, Inc.	(714) 577–6894
Mosaic Industries, Inc.	(415) 790–1255
New Micros, Inc.	(214) 339–2204
Nohau Corp.	(408) 866–1820
Oasys, Inc.	(617) 862–2002

Table 12. Contact List (continued)

Company	Phone
Onset Computer Corp.	(508) 563–9000
Orion Instruments, Inc.	(800) 729–7700
P&E Microcomputer Systems, Inc.	(617) 944–7585
Pentica Systems Inc.	(617) 275–4419
PseudoCorp.	(804) 873–1947
RAVEN Computer Systems	(612) 636–0365
Ready Systems	(800) 228–1249
Sierra Systems	(510) 339–8200
Software Environments Ltd.	(714) 588–9685
Sophia Systems & Technology	(800) 824–9294
Step Engineering	(408) 733–7837
SYNGEN Industrial Control	(403) 986–1203
TECi	(802) 525–3458
Tektronix, Inc.	(503) 629–1773
Thorson Engineering Co.	(206) 334–4214
Trace Technology Ltd.	0234 266 455
U S Software Corporation	(503) 641–8446
Wytec Company	(708) 894–1440
Yokogawa Digital Computer Corp.	(415) 570–7050

LonWorks® Neuron® IC Products

In Brief . . .

Motorola's Neuron Chip processors are sophisticated VLSI devices that make it possible to implement low–cost Local Operating Network applications. The unique combination of hardware and firmware provides all the key functions necessary to process inputs from sensors and control devices intelligently, and propagate control information across a variety of network media.

Used in conjunction with the LonBuilder® Developer's Workbench or the NodeBuilder™ Development Tool, the Neuron Chips make available to a system designer an object–oriented, high–level environment providing for the easy implementation of distributed sense and control networks, flexible reconfiguration capability after network installation, and management of LonTalk® protocol messages on the network.

Applications include distributed sense and control systems, instrumentation, machine automation, processor control, diagnostic equipment, environmental monitoring and control, power distribution and control, production control, lighting control, building automation and control, security systems, data collection/acquisition, robotics, home automation, consumer electronics, and automotive electronics.

	Page
Neuron Chips	2.7–2
LonWorks Technology Overview and Architecture	2.7–7
LonWorks Support Tools	2.7–9
Echelon Support Tools	2.7–10

Neuron Chips

The Motorola MC143150 and MC143120 Neuron Chips are sophisticated VLSI devices that make it possible to implement low–cost local operating network applications. Through a unique combination of hardware and firmware, they provide all the key functions necessary to process inputs from sensors and control devices intelligently, and propagate control information across a variety of network media. The MC143150 and MC143120, with the LonBuilder Developer's Workbench or the NodeBuilder Development Tool, offer the system designer:

- Easy implementation of distributed sense and control networks
- Flexible reconfiguration capability after network installation
- Management of LonTalk protocol messages on the network
- An object–oriented high level environment for system development

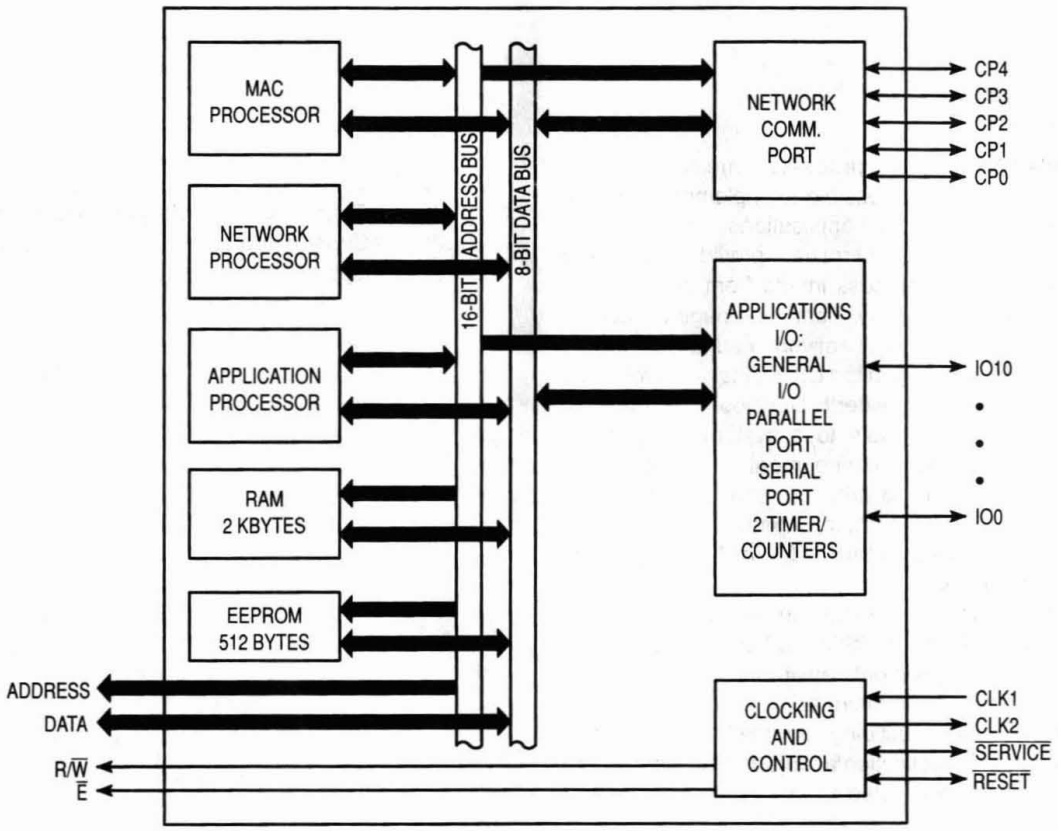

Figure 1. MC143150 Neuron Chip Simplified Block Diagram

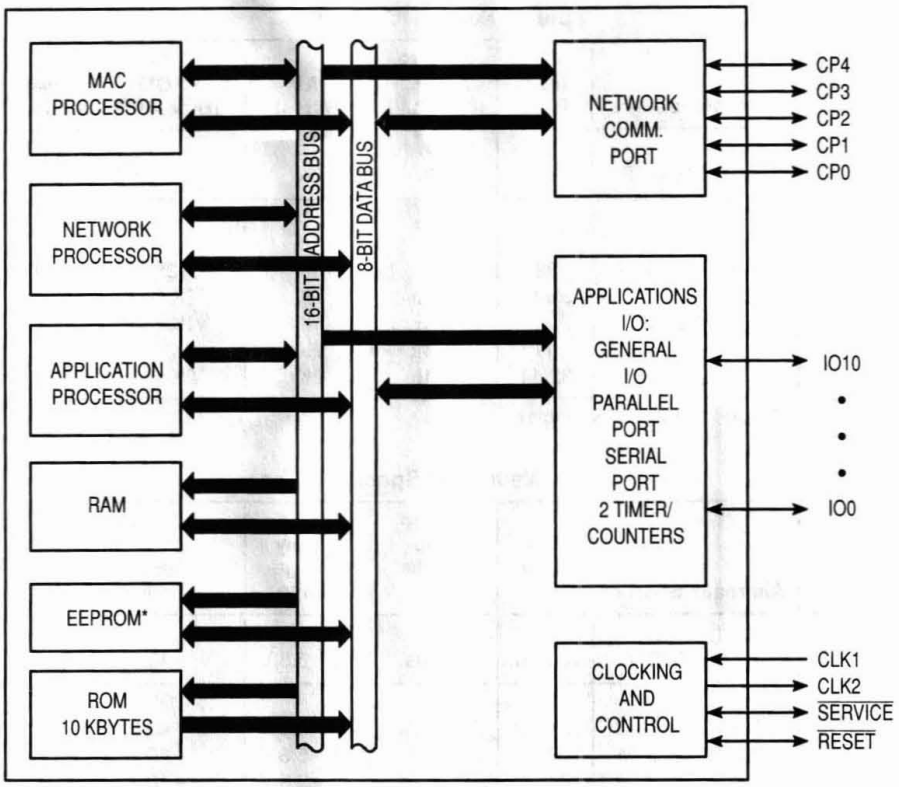

*512 bytes for MC143120B1
2 kbytes for MC143120E2, MC143120LE2, and MC143120FE2

Figure 2. MC143120 Neuron Chip Simplified Block Diagram

The MC143150 is designed for sense and control systems that require large application programs. An external memory interface allows the system designer to use 42K of the available 64K of address space for application program storage. The MC143150 has no ROM on the device. The communications protocol, developer's operating system, and I/O device driver object code are provided with Echelon's LonBuilder Developer's Workbench and NodeBuilder Development Tool. The protocol and application object code can be stored in external ROM, flash, or other non–volatile memory.

The Neuron Chip is available in multiple versions. See Table 1 for the 3150® and 3120® Neuron Chip family. See Appendix G.1 of *LonWorks Technology Device Data,* DL159/D, Rev. 4; if using MC143120B1 (version 4 firmware) with LonBuilder 2.2 or newer.

Throughout this section, the device numbers "MC143120" and "MC143150" refer to the Motorola 3120 and 3150 families of Neuron Chips. Only if Toshiba is being referenced will the data be applied to the particular Toshiba Neuron Chip.

The MC143120B1, MC143120E2, MC143120LE2, MC143120FE2, and MC143150B1FU1 versions will allow internal EEPROM writes over the full temperature range (– 40 to + 85°C).

Table 1. Neuron IC Family

Device	Alternate Source	No. of Pins	Feature Size (Nominal)	RAM (Bytes)	EEPROM (Bytes)	Firmware Version	Model No.*	Intro
3150 Neuron Chip								
MC143150B1FU1	TMPN3150B1F	64	0.8µ	2K	512	N/A	0	5/96
3120 Neuron Chip (Internal ROM = 10,240 bytes)								
MC143120B1DW	TMPN3120B1M	32	0.8µ	1K	512	4	8	10/94
MC143120E2DW/FB	None	32/44	0.71µ	2K	2K	6	A, 1	9/96
	TMPN3120E1M		0.8µ	1K	1K	6	9	
MC143120LE2FB		44	0.71µ	2K	2K	6	A, 3	12/97
MC143120FE2DW/FB		32/44	0.71µ	2K	2K	7	A, 2	12/97

* Major/Minor Model No. Location h'F006, h'F007 (MS Nibble)

Table 2. Neuron IC Specifications

Device	Alternate Source	Max Clock Rate	Neuron Chip Access Time	Supply Voltage Range	EEPROM Programming Temperature Range	Typical I_{DD}	Typical Sleep Mode I_{DD}
3150 Neuron Chip							
MC143150B1FU1	TMPN3150B1F	10 MHz	130 ns	4.5 – 5.5 V	– 40 to + 85°C	15 mA	15 mA
3120 Neuron Chip							
MC143120B1DW	TMPN3120B1M	10 MHz	—	4.5 – 5.5 V	– 40 to + 85°C	14 mA	9 µA
MC143120E2DW/FB	TMPN3120E1M	10 MHz	—	4.5 – 5.5 V	– 40 to + 85°C	14 mA	9 µA
MC143120LE2FB		10 MHz	—	2.8 – 5.5 V	– 40 to + 85°C	14 mA	9 µA
MC143120FE2DW/FB		20 MHz	—	4.5 – 5.5 V	– 40 to + 85°C	34 mA	9 µA

NOTE: Motorola parts that are marked with the prefix "XC" are pre–release ICs.

0.71µ/0.8µ 3120 devices may require re–linking before being reprogrammed with a network manager or device programmer. Refer to Tables 3 and 4 for details regarding which firmware versions are supported by the LonBuilder Developer's Workbench or NodeBuilder Development Tool.

Table 3. LonBuilder Firmware Supported

LonBuilder Software Version	3150 Firmware Supported	3120 Firmware Supported	3120 E1/E2/LE2 Firmware Supported	3120 FE2* Firmware Supported	Other Firmware Supported
3.01	3–7	3, 4	6	7	LTM–10
3.0	3–6	3, 4	6	7	
2.2	2–4	2, 3, (4**)	Not Supported	Not Supported	
2.1	2, 3	2, 3	Not Supported	Not Supported	

* The MC143120FE2 requires new LonBuilder firmware from Echelon's Website and recompiled application code.
** Version 4 support available through a patch on Echelon's Website.

Table 4. NodeBuilder Firmware Supported

Node Builder Software Version	3150 Firmware Supported	3120 Firmware Supported	3120 E1/E2/LE2 Firmware Supported	3120 FE2 Firmware Supported	Other Firmware Supported
1.0	3–6	3, 4	6	7	LTM–10
1.5	3–6	3, 4	6	7	LTM–10

Both parts have an 11–pin I/O interface with integrated hardware and firmware for connecting to motors, valves, display drivers, A/D converters, pressure sensors, thermistors, switches, relays, triacs, tachometers, other microprocessors, modems, etc. They each have three processors, of which two interact with a communication subsystem to make the transfer of information from node to node in a distributed control system an automatic process. These devices make it possible to rapidly implement many applications. These include distributed sense and control systems, instrumentation, machine automation, process control, diagnostic equipment, environmental monitoring and control, power distribution and control, production control, lighting control, building automation and control, security systems, data collection/acquisition, robotics, home automation, consumer electronics, and automotive electronics.

The Neuron Chips can send and receive information on either the 5–pin communications port or the 11–pin applications I/O port.

Features

- Three 8–Bit Pipelined Processors
  - Selectable Input Clock Rates: 625 kHz, 1.25 kHz, 2.5 MHz, 5 MHz, 10 MHz
- On–Chip Memory
  - 2 Kbytes Static RAM (MC143150, MC143120E2, MC143120LE2, and MC143120FE2)
  - 1 Kbytes Static RAM (MC143120B1)
  - 512 bytes EEPROM (MC143150 and MC143120B1)
  - 2 Kbytes EEPROM (MC143120E2, MC143120LE2, and MC143120FE2)
  - 1 Kbyte EEPROM (TMPN3120E1)
  - 10 Kbytes ROM (MC143120)
- 11 Programmable I/O Pins
  - 34 Selectable Modes of Operation
  - Programmable Pull–Ups (IO4 – IO7)
  - 20 mA Current Sink (IO0 – IO3)
- Two 16–Bit Timer/Counters for Frequency and Timer I/O
- Up to 15 Software Timers
- Sleep Mode for Reduced Current Consumption While Retaining Operating State
- Network Communications Port
  - Single–Ended Mode
  - Differential Mode
  - Selectable Transmission Rates: 0.6 kbps to 1.25 Mbps
  - 40 mA Current Output for Differentially Driving Twisted–Pair Networks
  - Optional Collision Detect Input
  - Relay No Longer Needed for Differential Communications
- Firmware
  - LonTalk Protocol Conforming to 7–Layer OSI Reference Model
  - I/O Drivers
  - Event–Driven Task Scheduler
- Service Pin for Remote Identification and Diagnostics
- Unique 48–Bit Internal Neuron ID Stored Redundantly in Every Device
- Channel Capacity: 560 Packets/s Throughput Sustained; 700 Packets/s Peak at 10 MHz
- Built–In Low–Voltage Detection for Added EEPROM Protection (B1, E2, LE2, and FE2 Parts Only)

Table 5. MC143150 Neuron IC Progressions/Alerts

Device	Description
MC143150FU1 **DISCONTINUED**	5 MHz EEPROM writes down to – 40°C Requires a power down relay for differential twisted pair communications Quadrature may have random missing of counts 1.2μ technology
MC143150FU **DISCONTINUED**	10 MHz EEPROM writes down to – 20°C 90 ns external memory Quadrature may have random missing of counts 1.2μ technology
MC143150B1FB **DISCONTINUED**	Sold as SC143150FU and equivalent to TMPN3150B1F
MC143150B1FU **sold as** **SC143150B1FU**	Consumes less current than MC143150FU EEPROM writes down to – 40°C 120 ns external memory 0.8μ technology Does not require a power down relay for differential communications Successor to MC143150FU External LVI required for reset **Not recommended for applications using SRAM, NVRAM, or memory map logic.** Relaxed address and read/write hold time specifications.
MC143150B1FU1	10 MHz operation 0.8μ technology Longer address hold time than MC143150B1FU (10 ns minimum) 120 ns external memory Successor to MC143150B1FU

Table 6. MC143120 Neuron IC Progressions/Alerts

Device	Description
MC143120DW **DISCONTINUED**	1.2μ technology 24 I/O models masked in internal ROM EEPROM writes from – 20 to + 85°C Requires a power down relay for differential communications Quadrature may have random missing of counts Requires LonBuilder release 2.0 and later
MC143120B1	Consumes less current than MC143120DW 24 I/O models masked in internal ROM 0.8μ technology EEPROM writes from – 20 to + 85°C Does not require a power down relay for differential communications Successor to MC143120DW Requires an external LVI for reset Requires LonBuilder release 3.0, or release 2.2 with patch
MC143120E2	2K RAM, 2K EEPROM 21 I/O models masked in internal ROM Does not require a power down relay for differential communications 0.71μ technology External LVI not needed Requires LonBuilder release 3.0 or greater
MC143120LE2	Same as the MC143120E2 with 2.8 to 5.5 V operation
MC143120FE2	Same as the MC143120E2 with 20 MHz clock operation Requires new LonBuilder firmware

Motorola LONWORKS Application Support: (512) 934–7610

LonWorks Technology Overview and Architecture

LonWorks technology is a complete platform for implementing control network systems. These networks consist of intelligent devices or *nodes* that interact with their environment, and communicate with one another over a variety of communications *media* using a common, message–based control *protocol.*

LonWorks technology includes all of the elements required to design, deploy, and support control networks, specifically the following components:

- MC143150 and MC143120 Neuron Chips
- LonTalk Protocol
- LonWorks Transceivers
- LonBuilder and NodeBuilder Development Tools

The Motorola Neuron Chip is a VLSI component that performs the network and application–specific processing within a node. A node typically consists of a Neuron Chip, a power source, a transceiver for communicating over the network medium, and circuitry for interfacing to the device being controlled or monitored. The specific circuitry will depend on the networking medium and application. See Figures 3 and 4.

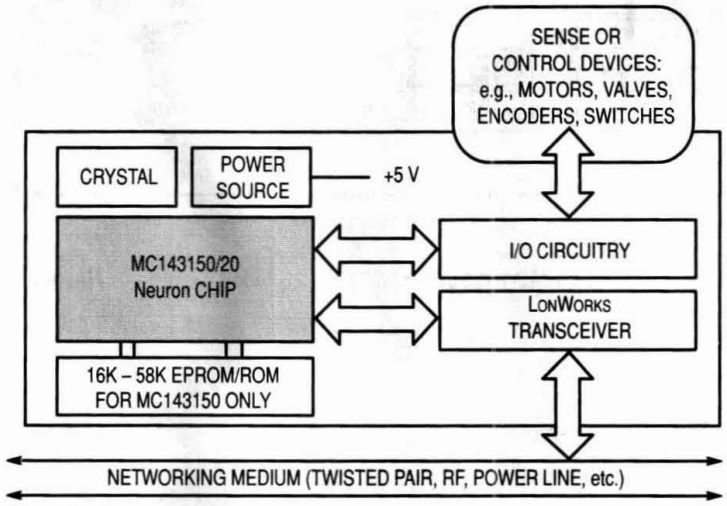

Figure 3. Typical Node Block Diagram

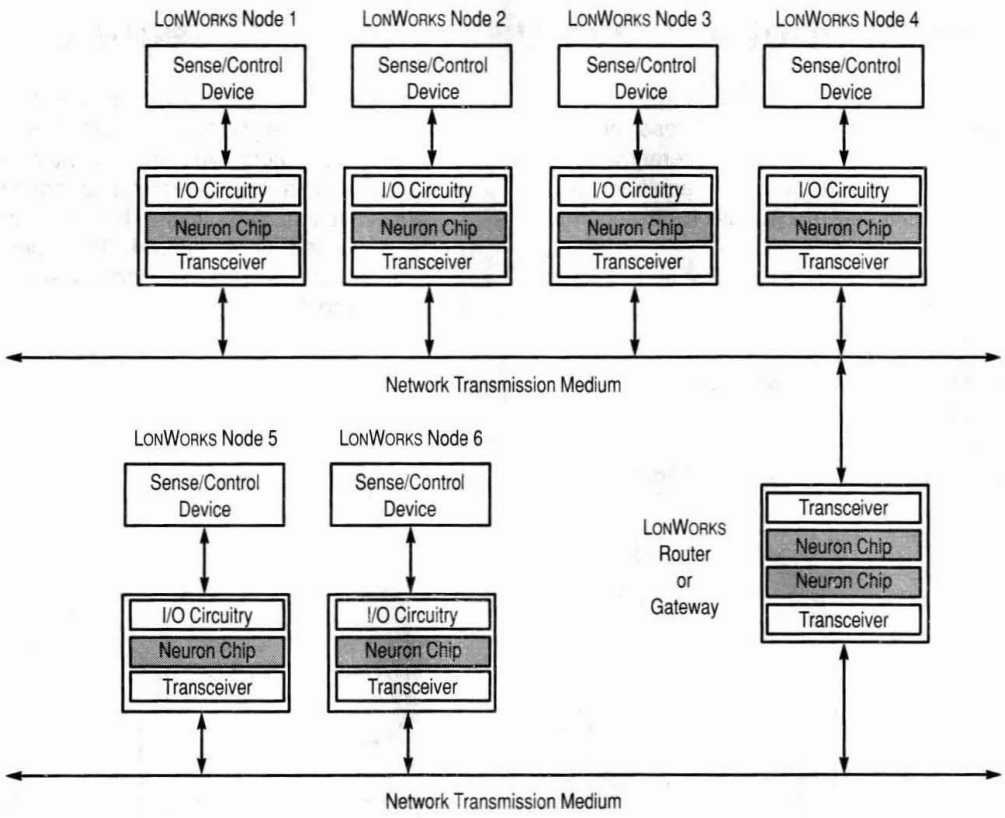

Figure 4. The MC143150 or MC143120 in a LonWorks Network

LonWorks Support Tools

Motorola's LonBuilder Support tools offer the user a quick and flexible means to demonstrate or test a LonWorks–based product which has been developed and debugged on the LonBuilder Developer's Workbench. The family of tools consists of Neuron Chip–based development boards, I/O application boards, a Differential Direct–Connect Transceiver board (for the LonBuilder Developer's Workbench), and a Neuron Chip Test/Programming board. These tools offer the unique advantages of:

- Capability to Test Products Over a Wide Range of Media and Data Rates
- Boards All Have RJ–45 Connectors Allowing Ease of Connectivity
- Neuron Chip Boards Contain a 5 V Regulator Allowing for a Wider Range of Power Supply Voltages
- Common 2 x 10 Connector for Interface to the Neuron Chip I/O Pins
- Library of Application Functions is Available from Motorola
- Inexpensive Means of Demonstrating LonWorks–Based Products

This document covers a brief detail on each of the boards. For further information, contact Motorola's LonWorks applications support team in Austin,TX.

Phone: 512–934–7610
FAX: 512–934–7991
http://motorola.com/lonworks

The family consists of the following:

- M143120EVK Neuron Evaluation/Programming Kit With 3120 Socket
- M143150EVK Neuron Evaluation/Programming Kit With 3150 Socket
- M143204EVK LonBuilder Emulator Boards Direct Drive Transceiver
- M143206EVK Neuron I/O Application Kit, 5 LEDs, A/D, D/A, Clock
- M143208EVK I/O Test Board, 11 LEDs and 11 Switches
- M143221EVK RS–232 EVK Interface Board for M143120EVK/M143150EVK
- M143222EVK Neuron Intelligent Card (Pack Five Cards)
- M143223EVK Neuron Intelligent Card Reader Board
- M143226EVK Gateway–TP78 to UART Interface with Neuron, 32K Flash, 32K SRAM
- M143232EVK Voice Development Kit, to Interface to LonBuilder or Neuron Board
- M143235EVK Neuron IC Evaluation Kit with MC143120E2, RS–485 Transceiver, Full 11 I/O Access, Two Isolated Input/Output Ports

All the boards are available from Motorola and our franchised distributors.

Echelon Support Tools

LonBuilder Developer's Workbench

Thanks to Echelon's LonBuilder and NodeBuilder tools, as well as Motorola's extensive technical support network, both system and device manufacturers can now develop control networks quickly and inexpensively. These tools provide developers with everything needed to begin building LonWorks nodes.

The LonBuilder Developer's Workbench combines three development tools — a multi–node development system, a network manager, and a protocol analyzer — into an integrated hardware and software development environment. This development system provides the tools to create software applications and prototype hardware on a network ranging from two to hundreds of nodes. The network manager installs and configures nodes during development, making them easy to connect, define, and build. The protocol analyzer monitors the network and interprets its activity.

The LonBuilder Developer's Workbench includes a PC interface card, two LonWorks transceivers, an expandable development station with two Neuron Chip emulator cards, DOS–based software for compiling, loading, integrating, and testing LonWorks applications, and software for monitoring and controlling a LonWorks application.

The LonWorks NodeBuilder Development Tool is used to design LonWorks nodes. The NodeBuilder tool does not include the system integration and test tools incorporated into the LonBuilder Developer's Workbench, but does include all the tools required to compile, load, and test code for a LonWorks node. NodeBuilder includes Windows®–based software, a PC interface card, a prototype LonWorks node, and two LonWorks transceivers that are used to develop and test LonWorks nodes.

For further information on the Echelon LonWorks Product Family, call Echelon at 1–800–258–4566.

Transceivers

FTT–10A Free Topology Twisted–Pair Transceiver Model 50051, 50051–1, 50050–01 (78 kbps)
LPT–10 Link Power Twisted–Pair Transceiver Model 50040 (78 kbps)
TPT/XF Twisted–Pair Transceiver Models 50010–10 (78 kbps) and 50020–10 (1.25 Mbps)
PLT–10A Power Line Transceiver Model 50080 (10 kbps)
PLT–21 Power Line Transceiver Model 50090–01 (5 kbps)
PLT–30 Power Line Transceiver Model 50100–01 (2 kbps)
PLA–21 Amplifier Model 53001–01

Control Modules

Twisted–Pair Control Modules Models Flash Control Modules
55010–00 (TP/XF–78), 55020–01 (TP/FT–10), and 55030–00 (TP/XF–1250)
PLC–10 Power Line Control Module Models 56010–00 and 56010–01
LPI–10 Link Power Interface Module and Developer's Kit Model 56210–01 and 58020–01
PLCA Power Line Communications Analyzers Models 57010, 57010–01, and 57010–03

Router Products

RTR–10 Router Core Module Model 61000–100
LonWorks Router Model 71000–11

Network Interface Products

LonBuilder MIP/P20 and MIP/P50 Developer's Kit Model 23201, 23205
LonBuilder MIP/DPS Developer's Kit Model 23211, 23215
LTS–10 SLTA Core Module Model 65200–100
PSG–10 Serial Gateway Core Module and Evaluation Kit Model 65200–200
SLTA/2 Serial LonTalk Adapter Model 73000–1
PSG/2 Programmable Serial Gateway Model 73000–3
PCLTA PC LonTalk Adapter Model 73100–1x, 73401
SLTA/2 and Router Accessories Model 73000–1
PCC–10 PCMCIA Card Model 73200, 7830x, 7840x
PCLTA–10 Network Interface

Network Services Products

LonManager LonMaker Starter Kit Model 32100–00, 32200–0x, 32205
LonManager LonMaker Installation Tool Model 32100–00, 32200–0x, 32205
LonManager DDE Server Model 33000, 33000–01, 33005
LonManager ISA–Bus and PCC Protocol Analyzer Model 33100–00, 33100–10
LonManager NSS–10 Module Model 35000–100

Network Services Products (Continued)

LonManager PCNSS Card Model 34100
LonManager PCNSI Card Model 35100
LonManager LNS for Microcontrollers and NSS–10 Upgrade Model 34001–00x, 34001–005
LonManager LNS for Windows Model 34303
LonManager LNS FASTART Package Model 34304–00x

Development Tools

LonBuilder Starter Kit Model 20311
LonBuilder Control Processor Model 21200
LonBuilder Development Station Enclosure Model 21400
LonBuilder Neuron 3120 Programmer Model 21700
LonBuilder 3120 and 3150 Application Interface Pods Models 21820 and 21850
LonBuilder Neuron Emulator Model 25000
LonBuilder Router Model 25400
LonBuilder SMX Adapter Model 27100
LonBuilder I/O Evaluation Board Model 27800
LonBuilder Application Interface Kit Model 27810
LonBuilder Gizmo 3 Kit Model 28001
NodeBuilder Development Tools Model 10010
LonBuilder Application Interface Cable Model 21800
LonBuilder Module Application Interface Model 21860

SMX Transceivers

LonWorks SMX Transceivers Models 77010, 77030, 77040, 77090, 77160, and 77180
Power Line Coupler Model 78200

Customer Support and Training Programs

LonWorks Technology Intelligent Distributed Control Training Course (4 days)
LonSupport Program for LonBuilder Kits and NodeBuilder Tools
LNS Network Tools Development Course
Host–Based Node Development Course

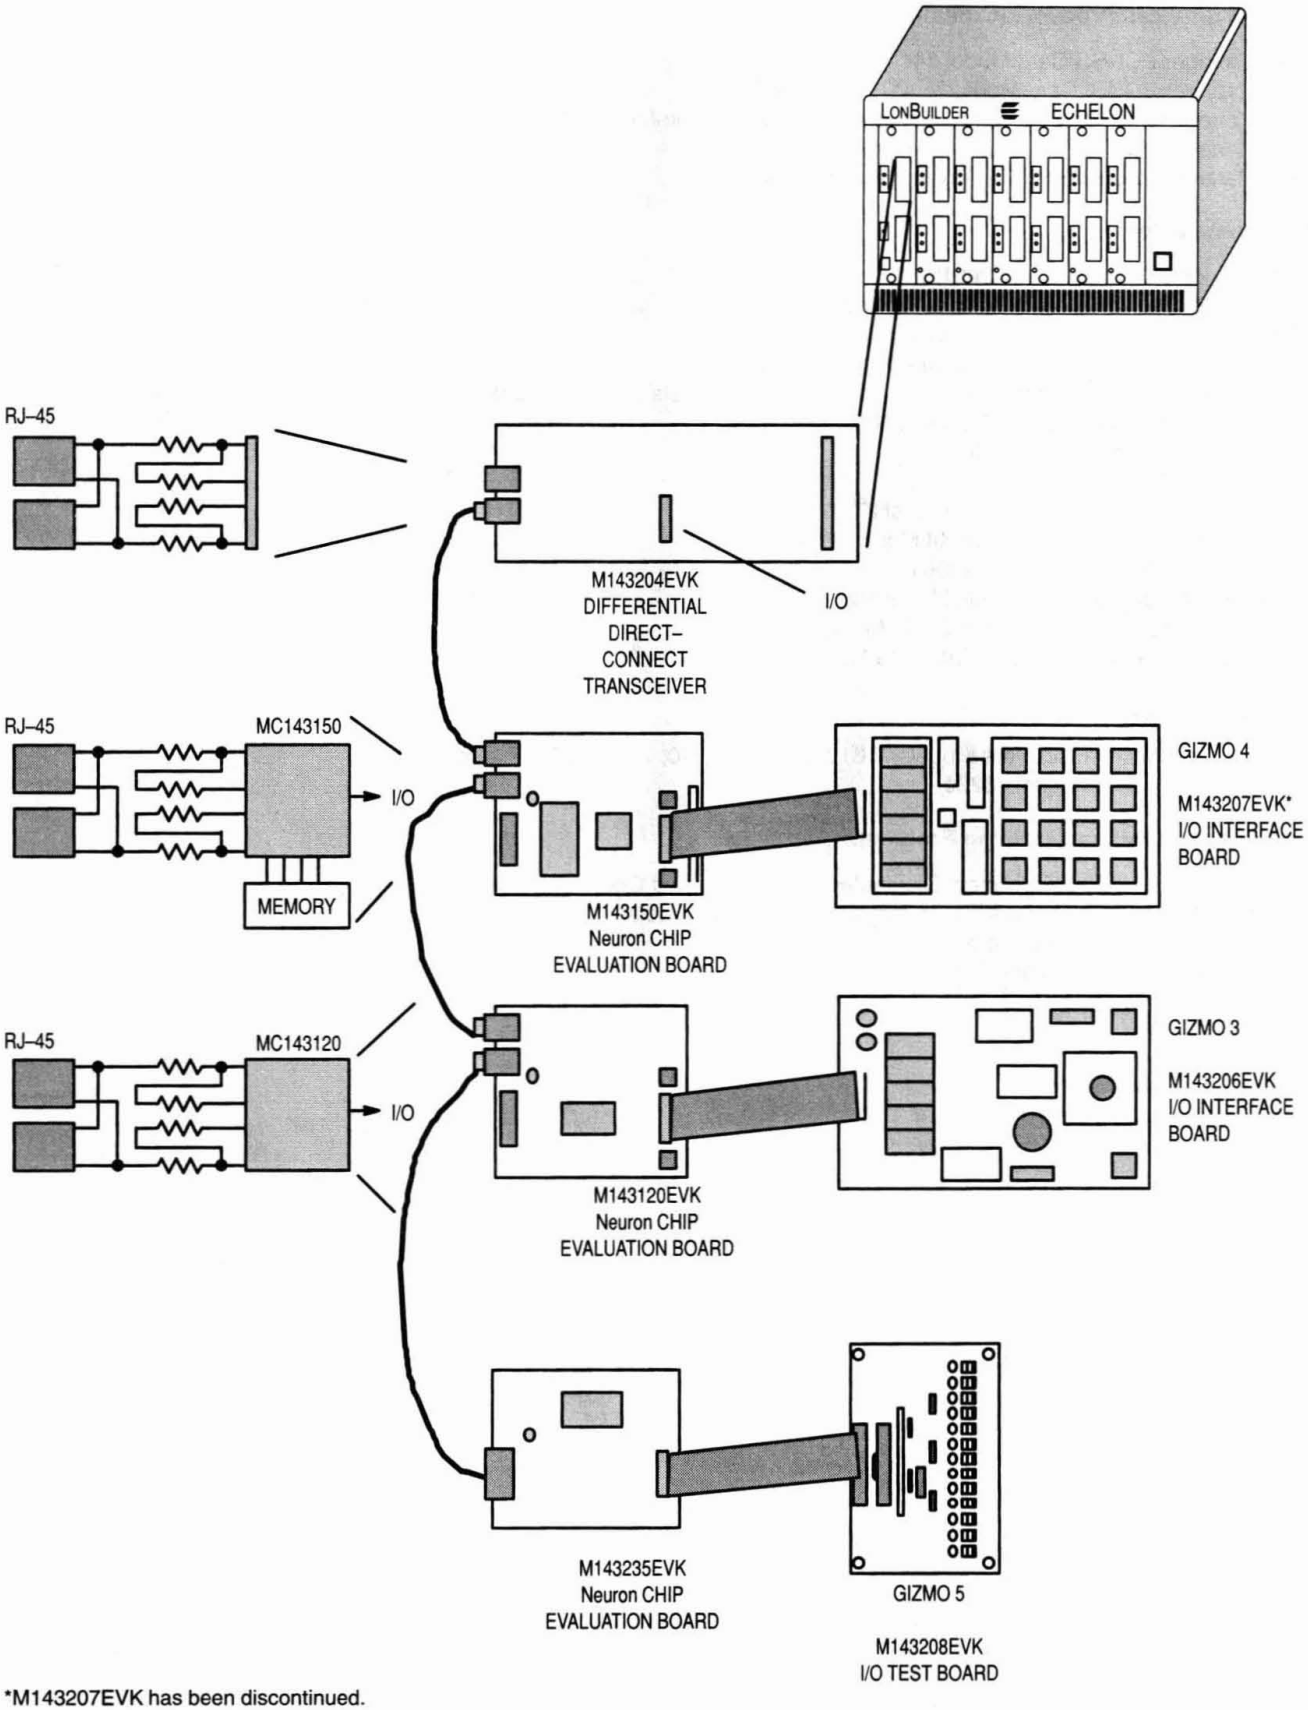

*M143207EVK has been discontinued.

Figure 5. Evaluation and I/O Interface Boards

Memory Products

In Brief . . .

Motorola's memory products include high-performance Fast Static RAMs and Flash memory. These products support a variety of computing and communication applications.

Flash memory is the most cost-effective non-volatile semiconductor memory and can be easily programmed while remaining in the system. Motorola's Flash memory is optimized for code or data storage in networking applications. These high-performance Flash devices will interface with Motorola's industry-leading network processors to maximize system performance.

	Page
Fast Static RAMs	2.8–2
Synchronous	2.8–2
Asynchronous	2.8–3
Fast Static RAM Modules	2.8–4
Flash Memory	2.8–5
Flash Memory Targets Network Silicon Solutions	2.8–5

Fast Static RAMs

SYNCHRONOUS

Late Write RAMs

Description	Organi–zation	V_{CC}	Part Number	Pin Count	Packaging	Cycle Time (ns Max)	Pro–duction	Comments
4M	256K x 18	3.3 V	MCM69R818A	119	(ZP) PBGA	5/6/7/8	Now	Late write interface. Register/Register. HSTL I/Os.
			MCM69R819A	119	(ZP) PBGA	5/6/7/8	Now	Late write interface. Register/Register. LVTTL I/Os.
			MCM69R820A	119	(ZP) PBGA	5/6/7/8	Now	Late write interface. Register/Register. 2.5 V I/Os.
			MCM69L819A	119	(ZP) PBGA	8.5/9/9.5 Latency	Now	Late write interface. Register/Latch LVTTL I/Os.
			MCM69L820A	119	(ZP) PBGA	8.5/9/9.5 Latency	Now	Late write interface. Register/Latch 2.5 V I/Os.
	128K x 36		MCM69R736A	119	(ZP) PBGA	5/6/7/8	Now	Late write interface. Register/Register. HSTL I/Os.
			MCM69R737A	119	(ZP) PBGA	5/6/7/8	Now	Late write interface. Register/Register. LVTTL I/Os.
			MCM69R738A	119	(ZP) PBGA	5/6/7/8	Now	Late write interface. Register/Register. 2.5 V I/Os.
			MCM69L737A	119	(ZP) PBGA	8.5/9/9.5 Latency	Now	Late write interface. Register/Latch. LVTTL I/Os.
			MCM69L738A	119	(ZP) PBGA	8.5/9/9.5 Latency	Now	Late write interface. Register/Latch. 2.5 V I/Os.

BurstRAMs

Description	Organi–zation	V_{CC}	Motorola Part Number	Pin Count	Packaging	AccessTime (ns Max)	Pro–duction	Comments
4M	256K x 18	3.3 V	MCM69P819	100 119	(TQ) TQFP (ZP) PBGA	3.5/3.8/4	Now	Pipelined BurstRAM for servers, switches, and workstations.
			MCM69F819	100 119	(TQ) TQFP (ZP) PBGA	7.5/8/8.5/11	Now	Flow–through BurstRAM for servers, switches, and workstations.
	128K x 36	3.3 V	MCM69P737	100 119	(TQ) TQFP (ZP) PBGA	3.5/3.8/4	Now	Pipelined BurstRAM for servers, switches, and workstations.
			MCM69F737	100 119	(TQ) TQFP (ZP) PBGA	7.5/8/8.5/11	Now	Flow–through BurstRAM for servers, switches, and workstations.
	128K x 32	3.3 V	MCM63P733	100	(TQ) TQFP	4/4.5/5	1Q98	133 MHz pipelined BurstRAM, for servers and notebooks.
			MCM63F733	100	(TQ) TQFP	10/11	1Q98	75 MHz flow–through BurstRAM, for servers and datacomm.
2M	64K x 32	3.3 V	MCM63P631	100	(TQ) TQFP	117 MHz 4.5/7/8 ns	Now	Not recommended for new designs. Suggest MCM63P733.
1M	64K x 18	3.3 V	MCM69F618C	100	(TQ) TQFP	8.5/9/10/12	Now	5 V tolerant on all pins.
			MCM69P618C	100	(TQ) TQFP	4/4.5/5/6/7	Now	5 V tolerant on all pins.
		5 V	MCM67B618A	52	(FN) PLCC	8.5/9/10/12	Now	Flow–through BurstRAM for Pentium™, MIPS. Not for new designs, suggest MCM67B618B.
			MCM67B618B	52	(FN) PLCC	8.5/9/10/12	Now	Flow–through BurstRAM for Pentium, MIPS.
			MCM67C618A	52	(FN) PLCC	5/7	Now	Pipelined BurstRAM for Pentium. Not for new designs, suggest MCM67C618B.
			MCM67C618B	52	(FN) PLCC	5/7	Now	Pipelined BurstRAM for Pentium and communication applications.
			MCM67M618A	52	(FN) PLCC	9/10/12	Now	Flow–through BurstRAM for PowerPC™. Not for new designs, suggest MCM67M618B.
			MCM67M618B	52	(FN) PLCC	9/10/12	Now	Flow–through BurstRAM for PowerPC.
	32K x 36	3.3 V	MCM69F536B	100	(TQ) TQFP	8.5/9/10/12	Now	Flow–through BurstRAM, 5 V tolerant I/Os. Not for new designs, suggest MCM69F536C.
			MCM69F536C	100	(TQ) TQFP	8.5/9/10/12	Now	5 V tolerant on all pins.
			MCM69P536B	100	(TQ) TQFP	4/4.5/5/6/7	Now	Pipelined BurstRAM, 5 V tolerant I/Os. Not for new designs, suggest MCM69P536C.
			MCM69P536C	100	(TQ) TQFP	4/4.5/5/6/7	Now	5 V tolerant on all pins.

SYNCHRONOUS

Tag RAMs

Description	Organi–zation	V_{CC}	Motorola Part Number	Pin Count	Packaging	Access Time (ns Max)	Pro–duction	Comments
Tag RAMs	64K x 18	3.3 V	MCM69T618	100	(TQ) TQFP	5	Now Now	100 MHz Data/Tag RAM. For MIPS R5000, Pentium Pro and graphics accelerators applications.
ZBT™	128K x 36	3.3 V	MCM63Z736	100	(TQ) TQFP	4.2/5	2Q98	Pipelined with back–to–back read/write write/read cycles.
		3.3 V	MCM63Z737	100	(TQ) TQFP	11/15	2Q98	Flow–Through with back–to–back read/write write/read cycles.
	256K x 18	3.3 V	MCM63Z818	100	(TQ) TQFP	4.2/5	2Q98	Pipelined with back–to–back read/write write/read cycles.
		3.3 V	MCM63Z819	100	(TQ) TQFP	11/15	2Q98	Flow–through with back–to–back read/write write/read cycles.

CAMs

Description	Organi–zation	V_{CC}	Motorola Part Number	Pin Count	Packaging	Access Time (ns Max)	Pro–duction	Comments
CAMs	16K x 64	3.3 V	MCM69C432	100	(TQ) TQFP	180 ns Match Time	1Q98	Content addressable memory for communication applications. 16K connections.
	4K x 64	3.3 V	MCM69C232	100	(TQ) TQFP	160 ns Match Time	Now	Content addressable memory for communication applications. 4K connections.

Integrated Cache Solutions

Integrated Cache Solutions	32K x 72	3.3 V	MPC2605	241	(ZP) PBGA	66 MHz	1Q98	Integrated L2 cache for PowerPC processors.One component for 256KB, two for 512KB, and four for 1MB L2 cache solution.

Separate and Dual I/O Devices

4M	512K x 9	5 V	MCM67Q909	86	(ZP) PBGA	5	Now	General synchronous separate I/O with write pass through. 3.3 V output levels.
1M	128K x 9	5 V	MCM67Q709A	86	(ZP) PBGA	5	Now	General synchronous separate I/O with write pass through. 3.3 V output levels. Replaces the MCM67Q709.
	32K x 36	3.3 V	MCM69D536	176	(TQ) TQFP	6/8	1Q98	Dual address, dual I/O. NetRAM. Sampling now.
	64K x 18	3.3 V	MCM69D618	100	(TQ) TQFP	6/8	1Q98	Dual address, dual I/O. NetRAM. Sampling now.

ASYNCHRONOUS

Description	Organi–zation	V_{CC}	Motorola Part Number	Pin Count	Packaging Package width in mils	AccessTime (ns Max)	Pro–duction	Comments
4M	512K x 8	5 V	MCM6246	36	400 (WJ) SOJ	17/20/25	Now	Output enable. Revolutionary pinout.
		3.3 V	MCM6946	36	400 (YJ) SOJ	10/12/15	1Q98	For telecom, storage and computing applications.
	256K x 16	3.3 V	MCM6343	44 44	400 (YJ) SOJ TSOP	10/12/15	2Q98	For telecom, modems, cellular, storage and computing applications.
	1M x 4	5 V	MCM6249	32	400 (WJ) SOJ	20/25/35	Now	Output enable. Revolutionary pinout.
		3.3 V	MCM6949	32	400 (YJ) SOJ	10/12/15	1Q98	For telecom, storage, and computing applications.
3M	128K x 24	3.3 V	MCM6341	119	(ZP) PBGA	10/12/15	1Q98	DSP applications for base stations, cost, and other communication applications.
1M	64K x 18	5 V	MCM67A618A	52	(FN) PLCC	10/12/15	Now	Not recommended for new designs. Suggest MCM67A618B.
		5 V	MCM67A618B	52	(FN) PLCC	10/12/15	Now	General asynchronous, latched address and data.
	64K x 16	3.3 V	MCM6323	44	400 (YJ) SOJ	12/15	Now	Not recommended for new designs. Suggest MCM6323A.
		3.3 V	MCM6323A	44	400 (YJ) SOJ (TS) TSOP	10/12/15	Now	Industrial temperature offered. Revolutionary pinout. DSP applications.
	128K x 8	5 V	MCM6226BB	32	300 (EJ), 400 (XJ) SOJ	15/17/20/25	Now	Evolutionary pinout. Not recommended for new designs. Suggest MCM6246.
		5 V	MCM6726C	32	400 (WJ) SOJ	6/7	Now	Revolutionary pinout.
		5 V	MCM6726D	32	400 (WJ) SOJ	7.5/8/10/12	Now	Revolutionary pinout.
		3.3 V	MCM6926A	32	400 (WJ) SOJ	8/10/12/15	Now	Revolutionary pinout.
	256K x 4	5 V	MCM6229BB	28	300 (EJ), 400 (XJ) SOJ	15/17/20/25	Now	Evolutionary pinout. Not recommended for new designs. Suggest MCM6249.
		5 V	MCM6729D	32	400 (WJ) SOJ	7.5/8/10/12	Now	Revolutionary pinout.
		3.3 V	MCM6929A	32	400 (WJ) SOJ	8/10/12/15	Now	Revolutionary pinout.
	1M x 1	5 V	MCM6227B	28	300 (J), 400 (WJ) SOJ	15/17/20/25	Now	Not recommended for new designs.
DSPRAM	8K x 24	5 V	MCM56824A	52	(FN) PLCC	20/25/35	Now	Designed for DSP56001 applications. Replaces 32K x 8s.
256K	32K x 8	5 V	MCM6206BB	28	300 (EJ) SOJ	12/15/20/25	Now	Not recommended for new designs. Suggest MCM6246.
		5 V	MCM6706B	28	300 (J) SOJ	8/10	Now	Evolutionary pinout.
		5 V	MCM6706BR	32	300 (J) SOJ	6/7/8	Now	Revolutionary pinout.
	64K x 4	5 V	MCM6709B	28	300 (J) SOJ	8/10	Now	Evolutionary pinout.
		5 V	MCM6709BR	28	300 (J) SOJ	6/7/8	Now	Revolutionary pinout.

FAST STATIC RAM MODULES
(Contact Fast Static RAM Marketing for Custom Fast SRAM Modules)

Desktop Computing Applications

Description	Organization and Function	Access Time	Packaging	Production	Motorola Part Number
PowerPC Cache Modules	64K x 72 Flow–Through Burst	9 ns	178 Pin Card Edge DIMM (DG)	Now	MPC2105C
	128K x 72 Flow–Through Burst	9 ns		Now	MPC2106C

Data Communications Applications

Standard BurstRAM Modules	64K x 72 Flow–Through Burst	9/12 ns	168 Pin DIMM (DG)	3Q97	MCM72F6DG
	128K x 72 Flow–Through Burst	9/12 ns	168 Pin DIMM (DG)	3Q97	MCM72F7DG
	256K x 72 Flow–Through Burst	8/12 ns	168 Pin DIMM (DG)	4Q97	MCM72F8DG
	512K x 72 Flow–Through Burst	8/12 ns	168 Pin DIMM (DG)	4Q97	MCM72F9DG

Flash Memory

Flash Memory Targets Network Silicon Solutions

Motorola will focus its new flash products towards networking applications. Both standard and custom flash devices will be designed to interface with Motorola's industry–leading network processors to maximize system performance. The first products scheduled to sample in 4Q98 will be a line of fast Flash delivering extremely high performance. In addition, the Flash technology will be embeddable on Motorola's leading–edge technology platform, allowing customers to integrate and create cost–effective custom *smart memory* solutions. Motorola plans to offer this integration capability in 1999.

In the area of low–voltage standalone flash, Motorola developed working silicon on a single supply 1.5 – 2.0 volt flash using an internally developed technology. Motorola has revised its roadmap and does not plan to introduce a standalone 1.8 V device in 1998. The main factor behind this decision is due to the delay in demand for the 1.8 V technology in the cellular market. Besides the low voltage attribute, Motorola's technology has significant advantages for high performance required in leading–edge networking applications. Motorola will use this technology to deliver the high performance Flash products discussed above.

Please stayed tuned as our product roadmap and portfolio develops.

ATM

In Brief . . .

Asynchronous Transfer Mode (ATM) is the communications protocol for the new broadband, full–service network. It can transmit voice, video, and data simultaneously to enable the deployment of broadband services such as high–speed Internet access, LAN interconnect for telecommuters, and video–on–demand.

Today's end–users, information technology, and telecommunication managers are searching for ways to save on network deployment and usage costs while meeting efficiency and quality requirements. In addition, they want to have cost–effective access to broadband resources when they need them, regardless of traffic type.

Operators, who are being asked to maximize their usage of resources, want to avoid congestion while sharing network resources. Further, they need a way to fulfill differing customer needs with cost–effective, selectable cost/performance levels. Motorola's 92500 Family of ATM cell processors was designed with the needs of these groups in mind.

The 92500 ATMC Family offers advanced ATM functionality for a variety of applications such as DSLAMS (Digital Subscriber Line Access Multiplexes), WAN and Enterprise Switches, and Multi–Service Platforms.

	Page
ATM Network	2.9–2
ATM Cell Processor	2.9–3

ATM Network

ATM Network Description

A typical ATM network consists of user end stations that transmit and receive 53–byte data cells on virtual connections (see figure below). Physical links and switching systems interconnect the virtual connections. A virtual connection's path is established at the beginning of the data transfer, maintained while the end–stations are communicating, and torn down after the transfer is complete. This transmission method increases the transfer speed because the determination of the path the data will take is done only at the beginning of the data transfer instead of when each data sub–block or packet is transferred.

On a given physical link, each connection is assigned a unique connection identifier. The connection identifier is placed in the header of each cell by the transmitting equipment and is used by the receiving equipment to route the cell to the next physical link on the connection path. All cells belonging to a specific virtual connection follow the identical path from the transmitting end station through the switching systems to the receiving end station.

An ATM switch contains a high–speed switching fabric that connects multiple line cards. The switching fabric connects the input port to the output port based on the switch's routing table. The line card interfaces between the physical medium and the switching fabric by recovering incoming cells from the arriving bit stream or converting outgoing cells into a bit stream for transmission. An ATM swtich partitioned in this fashion can efficiently handle multiple physical links by independently transferring each incoming ATM cell from its source port to its destination port, based on the switch's routing table.

ATM standards divide the tasks to be performed on each side of the switch fabric into PHY layer and ATM layer tasks. The PHY layer tasks are dependent on the physical medium that connects ATM switches. The ATM layer tasks operate at the cell level and are independent of the physical medium.

MC92501 IN AN ATM NETWORK APPLICATION

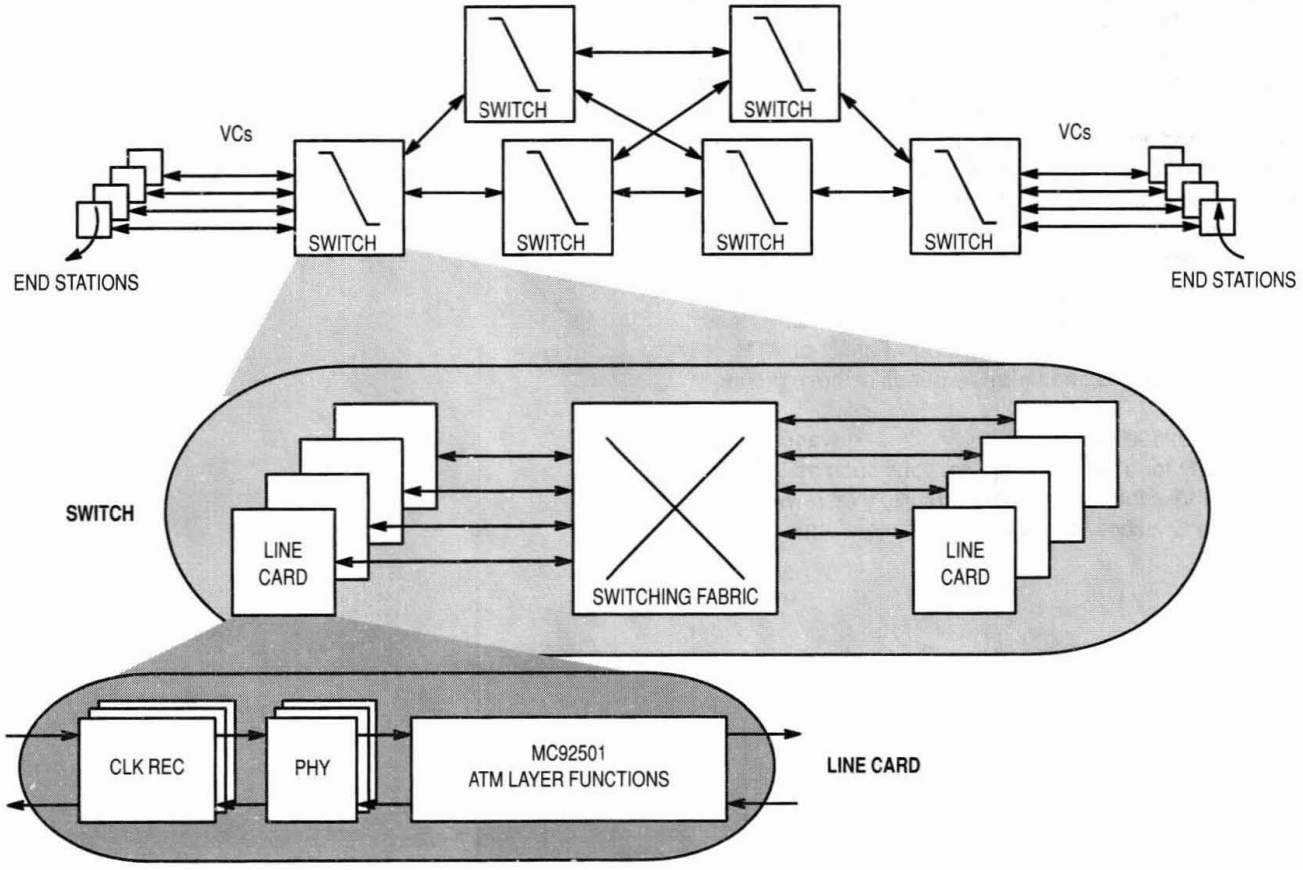

ATM Cell Processor

MC92501
Case 1208

The MC92501 is an ATM layer device composed of dedicated high–performance ingress and egress cell processors combined with UTOPIA Level 2–compliant physical (PHY) and switch interface ports (see Block Diagram). The MC92501 is a second generation ATM cell processor in Motorola's 92500 series.

Features of the MC92501

The MC92501 integrates address translation, UPC/NPC, OAM, and statistical functions into a single semiconductor device. By incorporating the standardized functions of the switch, the ATMC can reduce the switch's design cycle time, while allowing the customer to differentiate the product.

General Features

- Full–Duplex Operation at Data Rates up to 155 Mbit/sec
- Implements ATM Layer Functions for Broadband ISDN According to ATM Forum UNI 4.0 and TM 4.0 Specifications, ITU Recommendations, and Bellcore Recommendations

OAM (Operations, Administration, and Management)

- Performance Monitoring Block Test on All 64K Connections
- Fault Management Functions (AIS, RDI, CC, and Loopback)
- OAM Functionality Operates in Both the Ingress and Egress Directions

UPC/NPC (Usage/Network Parameter Control)

- Supports Partial Packet Discard (PPD), Early Packet Discard (EPD), and Limited EPD
- Change ABR RM Cell Priority
- Bidirectional UPC or NPC Design with up to Four Leaky Buckets Per Connection
- Selective Discard CLP = 1 (or CLP = 0 + 1) Flow on Selected Connections
- Support for CLP Transparency

ATM Interfaces

- UTOPIA Level 2 PHY Interface and UTOPIA ATM Layer Interface
- Supports a Programmable Number (up to 11 bytes) of Additional Switch Overhead Routing Header
- Each Physical Link Can Be Configured as Either a UNI or NNI Port
- Programmable 32–Bit Microprocessor Interface Supporting Big–Endian or Little–Endian Bus Formats

Statistics

- Per VC Counters
- Per PHY Counters

Address Translation

- Performs Internal VPI and VCI Address Compression for up to 64K VCs
- Supports Multicast, Multiport Address Translation

REPRESENTATIVE BLOCK DIAGRAM

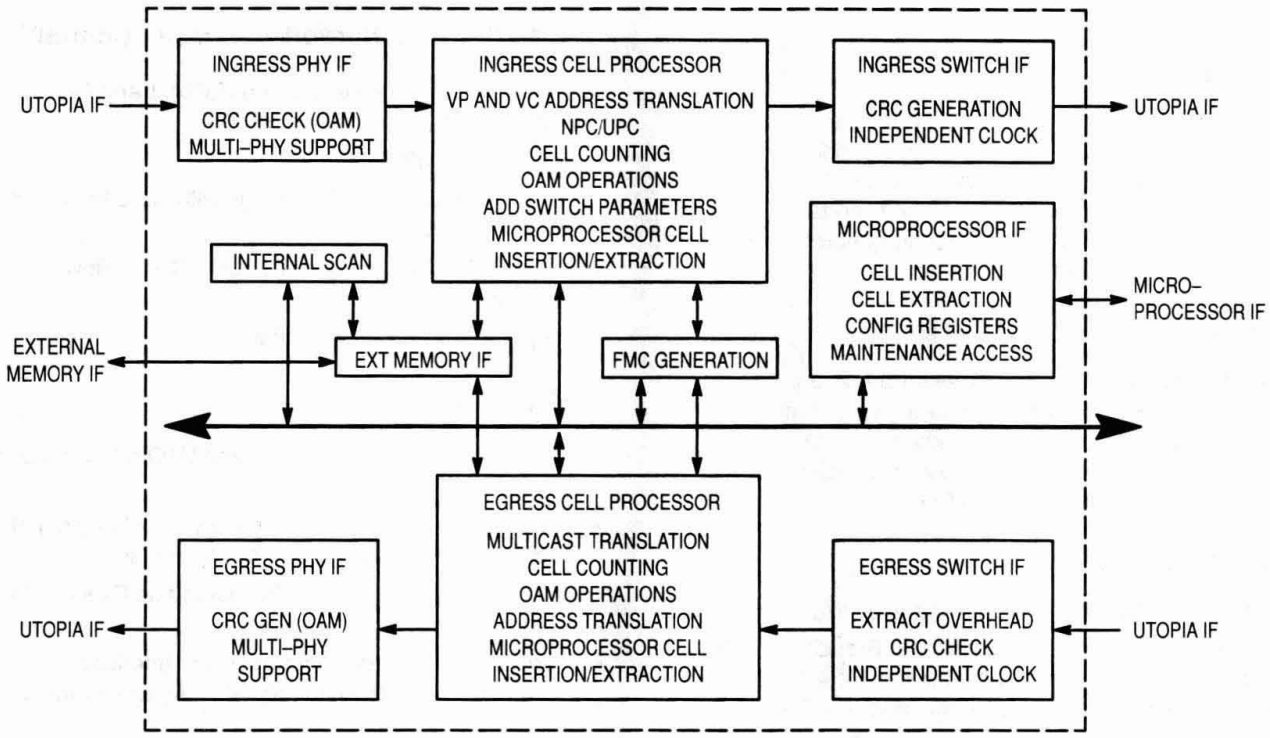

Logic: Standard, Special and Programmable

In Brief . . .

This selector guide is a quick reference to Motorola's vast offering of standard logic integrated circuits. In TTL, popular due to its ease of use, low cost, medium–to–high speed operation and good output drive capability, Motorola offers both LS and FAST. Motorola's CMOS portfolio includes MC14000B standard CMOS series devices, High–Speed CMOS consisting of a full line of products that are pinout–compatible with many LSTTL and MC14000B standard CMOS logic devices which offers designers a solution to the long–standing combined barrier — high speed and low power. Motorola's Emitter Coupled Logic (MECL) is a non–saturated form of digital logic which eliminates transistor storage time permitting very high speed operation. Motorola offers five versions of MECL: MECL 10K, MECL 10H, MECL III, and the recently introduced families ECLinPS (ECL in picoseconds) and ECLinPS Lite. Also included are timing solution products such as clock drivers, clock generators and programmable delay chips, high performance and communications products such as VCO's, prescalers, and synthesizers, and a wide variety of translators, low–voltage bus interface and serial data transmission devices. Field programmable logic and in particular, field programmable arrays, have become the solution of choice for logic design implementation in applications where time to market is a critical product development factor. In addition, reconfigurable arrays have been used to enhance Customer product flexibility in ways that no other technology can match.

	Page
Motorola Programmable Arrays (MPA)	3.1–1
Selection by Function	
Logic Functions	3.1–8
Device Index	3.1–36
Ordering Information	3.1–46
Case Outlines	3.1–50
Packaging Information	3.1–83
Surface Mount	3.1–83
Pin Conversion Tables	3.1–83
Tape and Reel	3.1–84

INTRODUCTION TO MOTOROLA PROGRAMMABLE ARRAYS AND THE MPA DESIGN SYSTEM

Field programmable logic and in particular, field programmable arrays, have become the solution of choice for logic design implementation in applications where time to market is a critical product development factor. In addition, reconfigurable arrays have been used to enhance Customer product flexibility in ways that no other technology can match.

Programmable logic not only vastly reduces the time necessary to implement a static design, but significant product feature benefits can be realized when hardware can be dynamically altered as easily as software.

The reconfigurable Motorola Programmable Array (MPA) and MPA design system maximize application flexibility and minimize time to market by delivering a gate level, push button, programmable logic solution.

Design Capture

Logic system designers have two basic options when selecting a method for capturing their designs. For smaller or very regular designs, schematic capture continues to be a popular design entry vehicle. With the increasing size and complexity of today's designs coupled with decreasing design cycle time requirements, many designers are turning to Hardware Description Languages (HDLs).

The MPA family was designed from the outset to be well suited to both methodologies. The output of logic synthesis compilers maps effortlessly and efficiently onto the MPA architecture. Unlike other FPGA offerings, the MPA poses no significant architectural limitations for which the designer might otherwise have to adjust his schematic design techniques for.

Push Button Design Implementation

The MPA design system minimizes training investment and automatically generates design implementations which meet timing constraints.

The gate level logic and abundant hierarchical routing resources of the MPA device present a rich implementation media for design implementation. MPA design tools understand and optimally utilize the MPA device resources so there are no elaborate rules to learn or design modifications required to begin design capture. Staying focused on end product design rather than implementation tools or device architecture gets the design done faster and, unlike other programmable solutions, without programmable logic device specificity to impede future design migration efforts. The combination of automatic tools and gate level architecture is ideal for traditional schematic driven or high level language based design capture methods. In fact, logic synthesis tools were originally designed for and produce the most efficient results for targeting gate level devices.

A design is analyzed, optimized, transformed into MPA cells, partitioned, placed and routed based on timing constraints for all paths in the design – automatically. A netlist from one of the popular design capture systems or an existing XNF or LPM netlist is imported into the MPA design system. The logic is mapped to a series of MPA cells and the entire resulting netlist is optimized and checked. Based on a simple clock specification, the MPA design system generates timing constraints for all paths in the design. During automatic partitioning, placement and routing path slack time is constantly redistributed insuring only the resources required to meet timing requirements are consumed. Because MPA tools implement the design according to constraints, tool induced design iterations are virtually eliminated. Completed layouts can be transformed into device configurations, as well as annotated simulation netlists. A layout browser is also available.

The MPA design system also includes complete on–line, hypermedia, help covers the device, the design system and the integration kits. Integration kits for Viewlogic, Exemplar, VHDL (1076 and SDF), Verilog (OVI and SDF) and OrCAD are included (contact your vendor for additional kits).All these features add up to a powerful yet extremely easy to use design implementation engine for the MPA product family.

Design Importation

Designs can be captured using schematics, a high level language, or a combination of these entry methods using commercially available design capture and logic synthesis software and the appropriate interface kit. Alternatively, existing designs can be retargeted from other programmable logic devices to the MPA device using commercial logic synthesis tools or the powerful retargetting capabilities provided with MPA design system.

Design importation begins with a netlist and an optional clock specification file. The clock specification file provides a mechanism for the user or design capture tools to document system level timing requirements. In addition, a rich set of attributes can be attached to specific components or nets within the design to specify timing and design pinout constraints.

A retargetting rules file is read and the input netlist is transformed into a series of MPA cells and associated interconnections. Rules files provide a mechanism to perform attribute mapping, cell mapping and macro expansion. By creating custom rule files, the user can extend the importation process from arbitrary sources. The MPA design system comes with rules for it's native library/EDIF. The resulting netlist is optimized to clip unused logic and remove redundant logic. For example: each MPA cell has programmable input inversion capability. All Inverters or non–inverting buffers can be removed from the netlist and replaced with signal sense information attached to each input.

A series of design rule checks are performed to insure design integrity before the layout process begins.

Constraint Generation

Timing constraints, the optimized MPA netlist and static timing analysis is used to generate path slack constraints for all paths in the design. Each unique signal pathway between a register output and a register input throughout the design are enumerated. The total logic and estimated or real wire delays along the path are summed. The time between the active upstream register clock edge and the next active downstream clock edge minus the downstream register setup time is subtracted from the total path delay. This difference is called path slack. If any path in the design has a negative slack value, the implementation will not function at the required clock rate(s).

Path constraints are utilized throughout the layout process to insure that a design implementation which meets timing constraints is automatically generated. If no clock or timing specifications are provided, the MPA design system uses the fastest possible clock based on very small net delay estimates to generate the path constraints. This usually results in the best possible implementation, but may take longer than the time required to generate a satisfactory rather than best possible result.

Contrast this to other programmable logic design tools which only provide manual net constraint annotation or net criticality assignment. In these cases significant effort is necessary to generate constraints and many costly iterations are required to tune these constraints for a given design. If any changes are made to the design, another costly round of iterations is required.

Autolayout

The autolayout process makes use of the hierarchical organization of the MPA device to minimize run time and deliver implementations that meet timing requirements. Designs which have diverse timing requirements are ideally implemented because path slack estimates are refined throughout the autolayout process insuring only the resources required to meet timing requirements are consumed.

The process begins by flattening the design and partitioning it into small component groups of approximately the same size called clusters. A cluster boundary delay estimation is applied to pull the most tightly constrained paths into a minimum number of clusters. The clusters are then assigned to zones talking into account zonal boundary delay cost and relative zone placement delay costs. Other costs like total number of port connections per zone and are also considered. As assignment proceeds, cluster and zone boundary delay costs are added to each path and slack is recomputed.

Next global placement and routing is done. Global routes begin and end on either I/O cells or port cells. Intrazone placement and routing is deferred to a later phase. During global routing all the port cell and I/O cell locations are fixed and the connections between them established. High fanout nets are constructed in a highly regular manner to insure efficient resource utilization. As in partitioning, slack estimates are refined throughout global routing.

Finally the intrazonal placement and routing is done. Cells assigned to a particular zone are placed and routed to other zone cells or zone port cells. Port cells and core cells are constructed to allow port swapping. Core cells can be routed through if necessary. Allowing core cells to act as routing cells allows dynamic adjustment of routing resources within the zone. Dynamic resource adjustment is a powerful design specific adaptation mechanism.

This process produces a layout from which device configurations, delay back annotations, and chipviews can be generated.

Incremental Design Support

When specification changes necessitate design iterations, simply push the button again. Constraints are automatically recalculated and autolayout only reworks those portions of the design which have changed. Full incremental design support means simple design changes to facilitate design verification can be made quickly and easily.

Delay Back Annotation

Designs can be verified through numerous methods. One particularly useful method is the annotation of device and implementation specific delays back into the original simulation environment to improve system or device level simulation accuracy. A MPA device layout can be transformed into an appropriately formatted delay annotation file or annotated netlist quickly and easily. The annotated delay information represents the worst case delays for a given device speed grade.

Chipview

While the MPA design system provides a rich set of reports describing the implementation of a design, a graphical view of the implementation can be indispensable for reviewing overall layout quality. Chipview provides a graphical view of a completed layout. Chipview can be useful during initial design iterations to visually verify I/O pin placements before commencing PCB layout, for example.

Configuration

A layout can be transformed into a device configuration which, when loaded into the appropriate MPA device, produces a physical design realization. Many formatting options are available. The MPA download pod can be used to emulate a serial PROM. Using the pod, device configuration files can be downloaded to a device directly from the PC or workstation development environment.

Integration Kits

The MPA design system can be used with a large number of commercial electronic design automation software. For each supported vendor, an integration kit is provided which facilitates MPA design within that vendors' environment. Many of these kits are available from Motorola and included at no charge on the MPA design system CDROM. Other kits can be acquired directly from the vendor. Refer to the MPA Design System Product List for more information.

Low Cost, Easy Access

MPA Design systems are easy to use, competitively priced and widely available. Copies of MPA design system software supporting up to 8000 gates can be downloaded from the World Wide Web (WWW) at URL:

http://sps.motorola.com/fpga

Complete kits including download pod, evaluation board, MPA device, CDROM and documentation can be ordered from your local authorized Motorola distributor or Motorola sales representative.

Fast, Efficient Design Implentation With Minimal Investment.

That's MPA!

Motorola Programmable Array Design System

DESIGN SYSTEM

The Motorola Programmable Array (MPA) design system is a bridge between a design capture environment and Motorola field programmable arrays. The MPA design system automatically transforms designs into device configurations to realize a design, when loaded into an MPA device. A design is automatically analyzed, optimized, transformed into MPA cells, partitioned, placed and routed based on timing constraints for every path in the design. MPA design tools understand and optimally utilize the MPA device architecture; this eliminates the need to learn a new set of rules and makes these tools ideally suited for use with logic synthesis. Full incremental design support reduces design implementation time and powerful library retargeting capabilities allow you to reuse designs which may have been implemented on less capable devices. The MPA design system operates on existing hardware platforms and supports design capture and simulation tools from more than 10 vendors. All these features plus on–line, hypermedia, help make the MPA design system a powerful, yet extremely easy to use, design implementation engine.

Features

- Push Button Implementation
- Optimal Use of MPA Device Resources
- Optimal Results with Gate Level Design Input
- Library of Common MSI Functions
- Design Flow Manager
- Design Retargeter
- Timing Driven with Integrated Static Timing Analysis
- Layout Delay extraction for post layout simulation
- Layout viewer
- Incremental design support
- On–line, hypermedia, documentation
- Supports all popular design capture and simulation tools
- Lowest cost FPGA development systems.
- Instant access; Downloading via the internet (WWW, ftp).
- Supports multiple speed grades

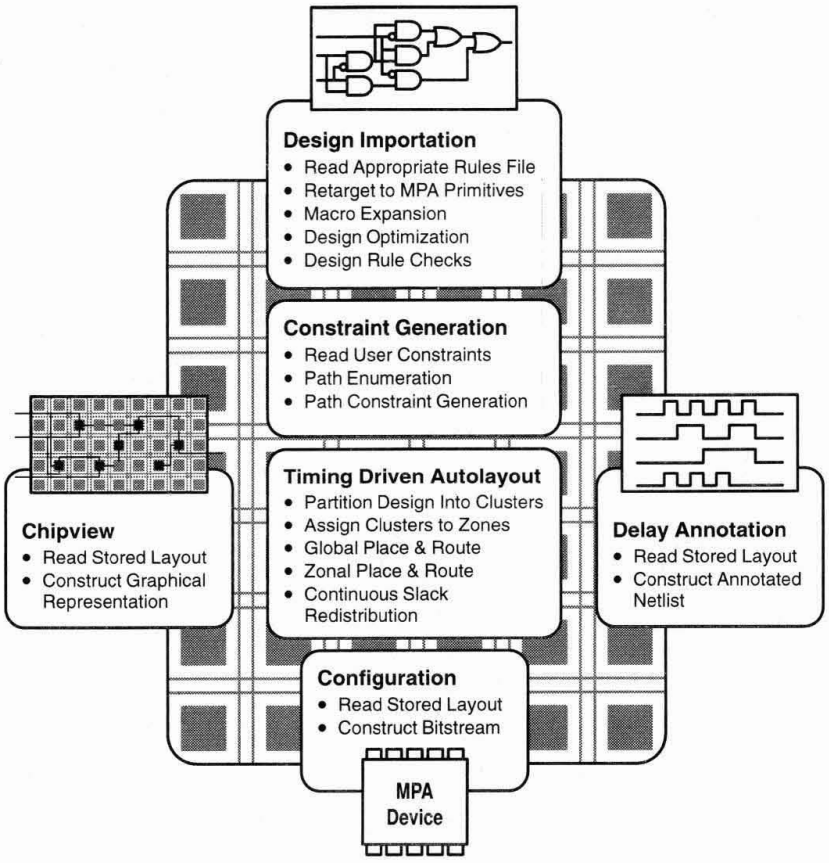

MPA1000 Programmable Arrays

Motorola Programmable Array (MPA) products are a high density, high performance, low cost, solution for your reconfigurable logic needs. When used with our automatic high performance design tools, MPA delivers custom logic solutions in minutes rather than weeks. And the low cost keeps those solutions competitive throughout the product lifecycle.

The MPA architecture has solved the historical problems associated with fine grain devices without sacrificing re–programmability, reliability, or cost. MPA1000 devices are reprogrammable SRAM based products manufactured on a standard 0.43µ Leff CMOS process with logic capacities from 3,500 to more than 22,000 equivalent FPGA gates. MPA Logic resources hold a single gate or storage element providing a highly efficient, adaptable, design implementation medium. Gate level logic resources, abundant hierarchical interconnection resources and automatic, timing driven, tools work together to quickly provide design implementations that meet timing constraints without sacrificing device utilization.

Staying focused on end product design rather than implementation tools or device architecture gets the design done faster and, unlike other programmable solutions, without programmable logic device specificity to impede future design migration efforts. The combination of automatic tools and gate level architecture is ideal for traditional schematic driven or high level language based design methodologies. In fact, logic synthesis tools were originally designed for and produce the most efficient results when targeting gate level devices.

High MPA1000 register count and controlled clock skew is ideal for designs employing pipelining techniques such as communications. The unique set of MPA1000 I/O programming options make these devices suitable for industrial and computer interfacing circuits.

MPA1016
MPA1036
MPA1064
MPA1100

PROGRAMMABLE ARRAY
3,500 to 22,000 GATES

- Multiple I/O from 80–200 I/O Pins
- Programmable 3V/5V I/O at Any Site
- Multiple Packaging Options
- Fine Grain Structure Is Optimized for Logic Synthesis
- Programmable Output Drive, 4/6mA @ 5.0V and 3.3V
- High Register Count, with 560–2,900 Flip–Flops
- IEEE 1149.1 JTAG Boundary Scan
- Eight Low–Skew (<1ns) Clocks

MPA1000 Family Members

FPGA Gates*	Part No.	Logic Cells	Internal Flip–Flops	I/O Cell Flip–Flops	Avail I/O Pins	Packages	Availability
3500	MPA1016FN	1600	400	122	61	84 PLCC	NOW
	MPA1016DD			160	80	128 PQFP	NOW
8000	MPA1036FN	3600	900	122	61	84 PLCC	NOW
	MPA1036DD			160	80	128 PQFP	NOW
	MPA1036DH			240	120	160 PQFP	NOW
	MPA1036HI			240	120	181 PGA	NOW
14200	MPA1064DH	6400	1600	240	120	160 PQFP	NOW
	MPA1064DK			320	160	208 PQFP	NOW
	MPA1064KE			320	160	224 PGA	NOW
	MPA1064BG			320	160	256 PBGA	3Q97
22000	MPA1100DK	10000	2500	320	160	208 PQFP	NOW
	MPA1100HV			400	200	299 PGA	NOW
	MPA1100BG			400	200	256 PBGA	3Q97

* Equivalent to Industry Standards, as supplied by most manufacturers.

MPA17000 Serial EPROMs

The MPA17128, MPA1765 serial OTP EPROMs provide a compact, low pin count, non–volatile configuration store for MPA1000 devices.

MPA17000 devices can be cascaded for increased memory capacity when needed. They are available in the standard 8–pin plastic DIP (N suffix), 8–pin SOIC (D suffix) and 20–pin PLCC (FN suffix) packages.

- Configuration EPROM for MPA1000 Devices
- Voltage Range — 4.5 to 6.0V
- Maximum Read Current of 10mA
- Standby Current of 10μA, Typical
- Industry Standard Synchronous Serial Interface
- Full Static Operation
- 10MHz Maximum Clock Rate at 5.0V
- Programmable Polarity on Hardware Reset
- Programs With Industry Standard Programmers
- Electrostatic Discharge Protection > 2000 Volts
- 8–Pin PDIP and SOIC; 20–Pin PLCC Packages
- Commercial (0 to +70°C) and Industrial (–40 to +85°C)

8–Lead Pinouts
(Top View)



20–Lead Pinout
(Top View)

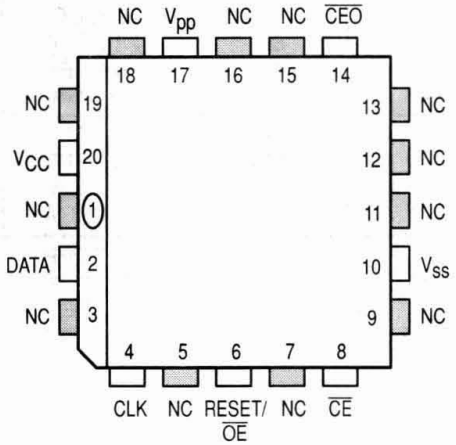

MPA17128
MPA1765

128K, 64K SERIAL EPROM

P SUFFIX
PLASTIC PACKAGE
CASE 626–05

D SUFFIX
PLASTIC SOIC PACKAGE
CASE 751–05



FN SUFFIX
PLCC PACKAGE
CASE 775–02

PIN NAMES

Pins	Function
DATA	Data I/O
CLK	Clock
RESET/$\overline{OE}$	Reset Input and Output Enable
$\overline{CE}$	Chip Enable Input
V_{SS}	Ground
$\overline{CEO}$	Chip Enable Output
V_{PP}	Programming Voltage Supply
V_{CC}	+4.5 to 6.0V Power Supply
NC	Not Connected

Advance Information

MPA17000 Serial EEPROM

MPA17C256

The MPA17C256 is an easy to use and cost effective serial configuration memory ideally suited for use with today's popular SRAM based FPGAs. The MPA17C256 is available in 8–pin PDIP and 20–pin SOIC and PLCC packages, adhering to industry standard pinouts. The device interfaces downstream FPGA(s) with a very simple enable, clock and data interface. The MPA17C256 is reprogrammable with no need for a higher programming "super voltage"; it may even be reprogrammed on board. The MPA17C256 also has user programmable RESET/$\overline{OE}$ polarity.

- EE Programmable 262,144 x 1 bit Serial Memories Designed to Store Configuration Programs for FPGAs
- Simple Interface to SRAM FPGAs
- Cascadable to Support Additional Configurations or Future Higher Density FPGAs
- Low Power CMOS EEPROM Process
- Programmable Reset Polarity
- Available in Space Efficient 8–Pin PDIP, 20–Pin SOIC and 20–Pin PLCC Packages
- In–System Programmable via 2–Wire Bus

P SUFFIX
8–LEAD PLASTIC PACKAGE
CASE 626–05

DW SUFFIX
20–LEAD PLASTIC SOIC WIDE PACKAGE
CASE 751D–04



FN SUFFIX
20–LEAD PLCC PACKAGE
CASE 775–02

Controlling the MPA17C256 Serial EEPROM

Most connections between the FPGA device and the Serial EEPROM are simple and self–explanatory:

- The DATA output of the MPA17C256 drives DIN of the FPGA devices
- The master FPGA DCLK output drives the CLK input of the MPA17C256
- The $\overline{CEO}$ output of the first MPA17C256 drives the $\overline{CE}$ input of the next MPA17C256 in a cascade chain of EEPROMs.
- $\overline{SER_EN}$ must be connected to V_{CC}
- $\overline{CE}$ enables the chip and is required to enable the DATA output pin
- RESET/$\overline{OE}$ is chip reset and is part of the DATA output enable structure

PIN NAMES

Pins	Function
DATA	Data I/O
CLK	Clock
RESET/$\overline{OE}$	Reset Input and Output Enable
$\overline{CE}$	Chip Enable Input
V_{SS}	Ground
$\overline{CEO}$	Chip Enable Output
$\overline{SER_EN}$	Programming Enable
V_{CC}	+4.5 to 6.0V Power Supply
NC	Not Connected

This document contains information on a new product. Specifications and information herein are subject to change without notice.

Selection by Function

In order to better serve our customers, we have made some modifications to the Selection by Function portion of the Logic Selector Guide. For easy selection of Logic's newer, more complex functions, as well as standard family functions, refer to the subject index below. Within the Selection by Function tables on the next 27 pages, you will find functions sorted by these broad subjects, and then broken down alphabetically into more precise functions.

Logic Functions

AMPLIFIER 3.1–9
ARITHMETIC OPERATORS 3.1–9
BOUNCE ELIMINATOR 3.1–9
BUFFERS 3.1–9
BUFFERS, 3–STATE 3.1–9
BUS INTERFACE 3.1–10
CBM 3.1–12
CLOCK DISTRIBUTION CHIPS 3.1–12
CLOCK DRIVERS 3.1–12
COAX CABLE DRIVERS 3.1–13
COMPARATORS 3.1–14
CONVERTERS 3.1–14
COUNTERS 3.1–14
DECODER/DEMULTIPLEXERS 3.1–16
DETECTORS 3.1–17
DISPLAY DECODE DRIVERS 3.1–17
DIVIDERS 3.1–17
DRIVER 3.1–17
EDACs 3.1–17
ENCODERS 3.1–17
ENCODER/DECODERS 3.1–18
EXPANDERS 3.1–18
FIELD PROGRAMMABLE GATE ARRAYS 3.1–18
FLIP–FLOPS 3.1–18
GATES, AND/NAND 3.1–21
GATES, COMPLEX 3.1–22
GATES, EXCLUSIVE OR/EXCLUSIVE NOR ... 3.1–23
GATES, NOR 3.1–24
GATES, OR 3.1–24
INDUSTRIAL CONTROL UNIT 3.1–25
INVERTERS 3.1–25
INVERTER/BUFFERS, 2–STATE 3.1–25
LATCHES 3.1–26
MEMORY SUPPORT 3.1–27
MISCELLANEOUS 3.1–27
MULTIPLEXER/DATA SELECTORS 3.1–27
MULTIVIBRATORS 3.1–29
OSCILLATORS 3.1–29
OSCILLATOR/TIMERS 3.1–30
PARITY CHECKERS 3.1–30
PHASE–LOCKED LOOP 3.1–30
PRESCALERS 3.1–30
PROGRAMMABLE DELAY CHIPS 3.1–31
RAMs 3.1–31
RECEIVERS 3.1–31
REGISTERS 3.1–32
REGISTER FILES 3.1–32
SCHMITT TRIGGERS 3.1–32
SCSI BUS TERMINATORS 3.1–32
SERIAL EPROMs 3.1–32
SHIFT REGISTERS 3.1–32
SYNTHESIZERS 3.1–34
TRANSCEIVERS 3.1–34
TRANSLATORS 3.1–34
VCO 3.1–35

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
AMPLIFIER						
Fiber Optic Post Amplifier	ECL	MC10SX1125	–	16		D
ARITHMETIC OPERATORS						
4–Bit Arithmetic Logic Unit	TTL	MC74F181	–	24	N	DW
	TTL	MC74F381	–	20	N	DW
	TTL	MC74F382	–	20	N	DW
4–Bit Arithmetic Logic Unit/Function Generator	ECL	MC10H181	–	24	P,L, PW, LW	FN
	ECL	MC10181	–	24	P,L	
4–Bit Binary Full Adder With Fast Carry	TTL	MC74F283	–	16	N	D
	TTL	SN54LS83A	SN74LS83A	14	N,J	D
	TTL	SN54LS283	SN74LS283	16	N,J	D
4–Bit Full Adder	CMOS	MC14008B	–	16	P,L	D
9's Complementer	CMOS	MC14561B	–	14	P	D
BCD Rate Multiplier	CMOS	MC14527B	–	16	P	DW
Carry Lookahead Generator	TTL	MC74F182	–	16	N	D
Dual 2–Bit Adder/Subtractor	ECL	MC10H180	–	16	P,L	FN
	ECL	MC10180	–	16	P,L	
Look Ahead Carry Block	ECL	MC10H179	–	16	P,L	FN
NBCD Adder	CMOS	MC14560B	–	16	P,L	D
Triple Serial Adder (Negative Logic)	CMOS	MC14038B	–	16	L	
BOUNCE ELIMINATOR						
Hex Contact Bounce Eliminator	CMOS	MC14490	–	16	P,L	DW
BUFFERS						
1:2 Differential Fanout Buffer	ECL	MC100LVEL11	–	8		D
2:8 Differential Fanout Buffer	ECL	MC100LVE310	MC100E310	28		FN
Dual 1:3 Fanout Buffer	ECL	MC100LVEL13	MC100EL13	20		DW
Expandable Buffer	DTL	MC832	–	14	P,L	
Low Voltage Dual 1:4, 1:5 Differential Fanout Buffer, ECL/PECL Compatible	ECL	MC100LVE210	MC100E210	28		FN
BUFFERS, 3–STATE						
Low–Voltage CMOS 16–Bit Buffer, 3–State, Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16240A	–	20		DW,M, DT
Low–Voltage CMOS 16–Bit Buffer, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16244	–	20		DW,M, DT
Low–Voltage CMOS Octal Buffer, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX244	–	20		DW,M, DT
Low–Voltage CMOS Octal Buffer, 3–State, Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX240	–	20		DW,M, DT
Low–Voltage CMOS Octal Buffer Flow Through Pinout, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX541	–	20		DW,M, DT
Low–Voltage CMOS Octal Buffer Flow Through Pinout, 3–State, Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX540	–	20		DW,M, DT
Low–Voltage CMOS Quad Buffer, 3–State, Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX125	–	20		DW,M, DT
Low–Voltage Quiet CMOS Octal Buffer	CMOS	MC74LVQ541	–	20		D,M, SD,DT
Low–Voltage Quiet CMOS Octal Buffer, 3–State, Non–Inverting	CMOS	MC74LVQ244	–	20		DW,M, SD,DT

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
BUFFERS, 3–STATE						
Low–Voltage Quiet CMOS Octal Buffer, 3–State, Inverting	CMOS	MC74LVQ240	–	20		DW,M, SD,DT
Low–Voltage Quiet CMOS Quad Buffer, 3–State, Non–Inverting	CMOS	MC74LVQ125	–	14		D,M, SD,DT
BUS INTERFACE						
10–Bit Buffer/Line Driver (Inverting), With 3–State Outputs	TTL	MC74F828	–	24	N	DW
10–Bit Buffer/Line Driver (Non–Inverting), With 3–State Outputs	TTL	MC74F827	–	24	N	DW
3–Bit Registered Bus Transceiver, 25Ω Cutoff Outputs	ECL	MC10E336	MC100E336	28		FN
3–Bit Scannable Registered Bus Transceiver	ECL	MC10E337	MC100E337	28		FN
32–Bit to 32/16/8–Bit Dynamic READ/WRITE Bus Sizer	CMOS	MC68150*33	–	68		FN
	CMOS	MC68150*40	–	68		FN
9–Bit Bus Interface, NINV, 3 State Outputs	TTL	MC74F823	–	24	N	DW
Dual Bus Driver/Receiver With 4–to–1 Output Multiplexer (25Ω)	ECL	MC10H332	–	20	P,L	FN
Hex 3–State Inverting Buffer With Common Enables	CMOS	MC54HC366	MC74HC366	16	N,J	
Hex 3–State Inverting Buffer With Separate 2–Bit and 4–Bit Sections	CMOS	MC74HC368	–	16	N	
Hex 3–State Non–Inverting Buffer With Common Enables	CMOS	MC54HC365	MC74HC365	16	N,J	DT
Hex 3–State Non–Inverting Buffer With Separate 2–Bit and 4–Bit Sections	CMOS	MC54HC367	MC74HC367	16	N,J	
Hex Buffer 4/2–Bit/Inverting With 3–State Outputs	TTL	SN54LS368A	SN74LS368A	16	N,J	D
Hex Buffer 4/2–Bit/Non–Inverting With 3–State Outputs	TTL	SN54LS367A	SN74LS367A	16	N,J	D
Hex Buffer Driver, 4+2–Bit, Inverting, With 3–State Outputs	TTL	MC74F368	–	16	N	D
Hex Buffer Gated Enable Inverting With 3–State Outputs	TTL	SN54LS366A	SN74LS366A	16	N,J	D
Hex Buffer Gated Enable Non–Inverting With 3–State Outputs	TTL	SN54LS365A	SN74LS365A	16	N,J	D
Hex Buffer/Driver Gated Enable Inverting, With 3–State Outputs	TTL	MC74F366	–	16	N	D
Hex Buffer/Driver Gated Enable Non–Inverting, With 3–State Outputs	TTL	MC74F365	–	16	N	D
Hex Buffer/Driver, 4+2–Bit, Non–Inverting, With 3–State Outputs	TTL	MC74F367	–	16	N	D
Hex With 3–State Outputs Buffer (Non–Inverting)	CMOS	MC14503B	–	16	P,L	D
Octal 3–State Non–Inverting Bus Transceiver With LSTTL Compatible Inputs	CMOS	MC54HCT245A	MC74HCT245A	20	N,J	DW, SD,DT
Octal Bidirectional Transceiver With 3–State Inputs/Outputs	CMOS	MC74AC245	–	20	N	DW
	CMOS	MC74ACT245	–	20	N	DW
Octal Bidirectional Transceiver With 3–State Outputs	CMOS	MC74AC620	–	20	N	DW
	CMOS	MC74ACT620	–	20	N	DW
	CMOS	MC74AC623	–	20	N	DW
	CMOS	MC74ACT623	–	20	N	DW
	CMOS	MC74AC640	–	20	N	DW
	CMOS	MC74ACT640	–	20	N	DW
	CMOS	MC74AC643	–	20	N	DW
	CMOS	MC74ACT643	–	20	N	DW
	TTL	MC74F245	–	20	N	DW
Octal Bidirectional Transceiver With 8–Bit Parity Generator Checker, With 3–State Outputs	TTL	MC74F657A	–	24	N	DW
	TTL	MC74F657B	–	24	N	DW
Octal Bidirectional Transceiver, With 3–State Inputs/Outputs	TTL	MC74F1245	–	20	N	DW
Octal Buffer With 3–State Outputs (81LS95)	TTL	SN54LS795	SN74LS795	20	N,J	DW
(81LS96)	TTL	SN54LS796	SN74LS796	20	N,J	DW
(81LS97)	TTL	SN54LS797	SN74LS797	20	N,J	DW
(81LS98)	TTL	SN54LS798	SN74LS798	20	N,J	DW

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
BUS INTERFACE						
Octal Buffer/Line Driver With 3–State Outputs	TTL	SN54LS244	SN74LS244	20	N,J	DW
	TTL	MC74F240	–	20	N	DW
	TTL	MC74F241	–	20	N	DW
	TTL	MC74F244	–	20	N	DW
	TTL	SN54LS240	SN74LS240	20	N,J	DW
	TTL	SN54LS241	SN74LS241	20	N,J	DW
	TTL	SN54LS540	SN74LS540	20	N,J	DW
	TTL	SN54LS541	SN74LS541	20	N,J	DW
	CMOS	MC74AC241	–	20	N	DW
	CMOS	MC74AC244	–	20	N	DW
	CMOS	MC74ACT244	–	20	N	DW
	CMOS	MC74AC540	–	20	N	DW
	CMOS	MC74ACT540	–	20	N	DW
	CMOS	MC74AC541	–	20	N	DW
	CMOS	MC74ACT541	–	20	N	DW
	CMOS	MC74AC240	–	20	N	DW
	CMOS	MC74ACT240	–	20	N	DW
	CMOS	MC74ACT241	–	20	N	DW
Octal Bus Transceiver	TTL	SN54LS245	SN74LS245	20	N,J	DW
	TTL	SN54LS623	SN74LS623	20	N,J	DW
Octal Bus Transceiver, With 3–State Outputs	TTL	MC74F623	–	20	N	DW
Octal Bus Transceiver/Inverting With 3–State Outputs	TTL	SN54LS640	SN74LS640	20	N,J	DW
	TTL	MC74F620	–	20	N	DW
	TTL	MC74F640	–	20	N	DW
Octal Bus Transceiver/Non–Inverting With 3–State Outputs	TTL	SN54LS645	SN74LS645	20	N,J	DW
Octal Bus Transceiver/Register With 3–State Outputs Non–Inverting	CMOS	MC74AC652	–	24	N	DW
	CMOS	MC74ACT652	–	24	N	DW
Octal Registered Transceiver Inverting, With 3–State Outputs	TTL	MC74F544	–	24	N	DW
Octal Transceiver/Register With 3–State Outputs Non–Inverting	CMOS	MC74AC646	–	24	N	DW
	CMOS	MC74ACT646	–	24	N	DW
Octal Transceiver/Register With 3–State Outputs Inverting	CMOS	MC74AC648	–	24	N	DW
	CMOS	MC74ACT648	–	24	N	DW
Octal Transceiver/Register, With 3–State Outputs	TTL	MC74F646	–	24	N	DW
Octal With 3–State Non–Inverting Buffer/Line Driver/Line Receiver	CMOS	MC54HC241A	MC74HC241A	20	N,J	DW
Octal With 3–State Non–Inverting Buffer/Line Driver/Line Receiver With LSTTL Compatible Inputs	CMOS	MC54HCT241A	MC74HCT241A	20	N,J	DW
	CMOS	MC54HCT244A	MC74HCT244A	20	N,J	DW, SD,DT
Octal With 3–State Outputs Inverting Buffer/Line Driver/Line Receiver	CMOS	MC54HC240A	MC74HC240A	20	N,J	DW, DT
	CMOS	MC54HC540A	MC74HC540A	20	N,J	DW
Octal With 3–State Outputs Inverting Buffer/Line Driver/Line Receiver With LSTTL Compatible Inputs	CMOS	MC74HCT240A	–	20	N	DW, SD,DT
Octal With 3–State Outputs Inverting Bus Transceiver	CMOS	MC54HC640A	MC74HC640A	20	N,J	DW
Octal With 3–State Outputs Non–Inverting Buffer/Line Driver/Line Receiver	CMOS	MC54HC541A	MC74HC541A	20	N,J	DW
	CMOS	MC74VHC541	–	20		DW, DT,M
Octal With 3–State Outputs Non–Inverting Buffer/Line Driver/Line Receiver With LSTTL Compatible Inputs	CMOS	MC74HCT541A	–	20	N	DW

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
BUS INTERFACE						
Octal With 3–State Outputs Non–Inverting Buffer/Line Driver/Line Receiver	CMOS	MC54HC244A	MC74HC244A	20	N,J	DW, SD,DT
	CMOS	MC74VHC244	–	20		DW, DT,M
Octal With 3–State Outputs Non–Inverting Bus Transceiver	CMOS	MC54HC245A	MC74HC245A	20	N,J	DW
	CMOS	MC74VHC245	–	20		DW DT,M
Octal With 3–State Outputs Non–Inverting Bus Transceiver & D Flip–Flop	CMOS	MC54HC646	MC74HC646	24	N,J	DW
Quad Buffers With 3–State Outputs	TTL	SN54LS125A	SN74LS125A	14	N,J	D
Quad 3–State Non–Inverting Buffers	CMOS	MC74HC125A	–	14	N	D,DT
	CMOS	MC74VHC125	–	14		D, DT,M
	CMOS	MC74HC126A	–	14	N	D,DT
Quad Buffer With 3–State Outputs	CMOS	MC74AC125	–	14	N	D
	CMOS	MC74ACT125	–	14	N	D
	CMOS	MC74AC126	–	14	N	D
	CMOS	MC74ACT126	–	14	N	D
	TTL	MC74F125	–	14	N	D
	TTL	MC74F126	–	14	N	D
	TTL	SN54LS126A	SN74LS126A	14	N,J	D
Quad Bus Driver	ECL	MC10192	–	16	P,L	FN
Quad Bus Driver/Receiver With 2–to–1 Output Multiplexer (25Ω)	ECL	MC10H330	–	24	P,L	FN
Quad Bus Driver/Receiver With Transmit & Receiver Latches (25Ω)	ECL	MC10H334	–	20	P,L	FN
Quad Bus Transceiver/Inverting With 3–State Outputs	TTL	SN54LS242	SN74LS242	14	N,J	D
Quad Bus Transceiver/Non–Inverting With 3–State Outputs	TTL	SN54LS243	SN74LS243	14	N,J	D
Quad Bus Transceivers With 3–State Outputs	TTL	MC74F242	–	14	N	D
	TTL	MC74F243	–	14	N	D
Quad With 3–State Outputs Inverting Bus Transceiver	CMOS	MC74HC242	–	14	N	
Triple 3–Input Bus Driver With Enable (25Ω)	ECL	MC10H423	–	16	P,L	FN
Triple 4–3–3 Input Bus Driver (25Ω)	ECL	MC10H123	–	16	P,L	FN
	ECL	MC10123	–	16	P,L	FN
CBM						
CBM – Carrier Band Modem	SXLG	MC68194	–	52		*FJ
CLOCK DISTRIBUTION CHIPS						
1:4 Clock Distribution Chip	ECL	MC10EL15	MC100EL15	16		D
1:5 Clock Distribution Chip	ECL	MC100LVEL14	MC100EL14	20		DW
1:6 Differential Clock Distribution Chip	ECL	MC10E211	MC100E211	28		FN
Low Voltage 1:12 Clock Distribution Chip	SXLG	MPC948	–	32		FA
	SXLG	MPC948L	–	32		FA
Low Voltage 1:9 Clock Distribution Chip	SXLG	MPC947	–	32		FA
Low Voltage 1:9 ECL/PECL Clock Distribution Chip	ECL	MC100LVE111	–	28		FN
CLOCK DRIVERS						
1:2 Differential Clock Driver	ECL	MC10EL11	MC100EL11	8		D
1:6 PCI Clock Generator/Fanout Buffer	CMOS	MPC903	–	16		D
	CMOS	MPC904	–	16		D
	CMOS	MPC905	–	16		D
1:9 Differential Clock Driver With Low Skew, Enable, Vbb	ECL	MC10E111	MC100E111	28		FN

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
CLOCK DRIVERS						
1:9 Differential ECL/PECL RAMBus Clock Buffer	ECL	MC10E411	–	28		FN
1:9 TTL/TTL Clock Distribution Chip	ECL	MC10H645	–	28		FN
3.3/5.0V Fully Integrated PLL Clock Driver	CMOS	MPC974	–	52		FA
50 MHz Low Skew CMOS PLL Clock Driver With µP Power Down	CMOS	MC88920	–	20		DW
66 MHz Low Skew CMOS PLL Clock Driver With µP Power–Down/Power–Up Feature	CMOS	MC88921	–	20		DW
68030/040 PECL/TTL Clock Driver	ECL	MC10H640	MC100H640	28		FN
	ECL	MC10H642	MC100H642	28		FN
	ECL	MC10H644	MC100H644	20		FN
Clock Driver Quad D–Type Flip–Flop w/ Matched Propagation Delays	TTL	MC74F1803	–	14	N	D
	TTL	MC74F803	–	14	N	D
CMOS PLL Clock Driver Programmable Frequency, Low Skew, High Fan–Out	CMOS	MC88PL117	–	52		FN
Dual 3.3V PLL Clock Generator	CMOS	MPC980	–	52		FA
Dual Supply ECL/TTL 1:8 Clock Driver	ECL	MC10H643	MC100H643	28		FN
High Frequency PLL Clock Generator	ECL	MC12429	–	28		FN
	ECL	MC12430	–	28		FN
	ECL	MC12439	–	28		FN
Low Skew CMOS Clock Driver	CMOS	MC88913	–	14	N	D
Low Skew CMOS Clock Driver With Reset	CMOS	MC88914	–	14	N	D
Low Skew CMOS PLL 68060 Clock Driver	CMOS	MC88LV926	–	20		DW
Low Skew CMOS PLL Clock Driver	CMOS	MC88915*55	–	28		FN
	CMOS	MC88915*70	–	28		FN
Low Skew CMOS PLL Clock Driver With Processor Reset	CMOS	MC88916*70	–	20		DW
	CMOS	MC88916*80	–	20		DW
Low Skew CMOS PLL Clock Driver 160 MHz Version	CMOS	MC88915T*160	–	28		FN
133 MHz Version	CMOS	MC88915T*133	–	28		FN
100 MHz Version	CMOS	MC88915T*100	–	28		FN
70 MHz Version	CMOS	MC88915T*70	–	28		FN
55 MHz Version	CMOS	MC88915T*55	–	28		FN
Low Voltage 1:10 CMOS Clock Driver	CMOS	MPC946	–	32		FA
Low Voltage 1:15 Differential ÷1/2 ECL/PECL Clock Driver	ECL	MC100LVE222	–	52		FA
Low Voltage 1:15 PECL to CMOS Clock Driver	CMOS	MPC949	–	52		FA
Low Voltage 1:9 Differential ECL/HSTL to HSTL Clock Driver	CMOS	MPC911	–	28		FN
Low Voltage PECL PLL Clock Driver	CMOS	MPC992	–	32		FA
Low Voltage PLL Clock Driver	CMOS	MPC930	MPC931	32		FA
	CMOS	MPC950	MPC951	32		FA
	CMOS	MPC956	–	32		FA
	CMOS	MPC970	–	52		FA
	CMOS	MPC972	MPC973	52		FA
	CMOS	MPC990	MPC991	52		FA
Low Voltage Wide Fanout PLL Clock Driver	CMOS	MPC952	–	32		FA
PECL/TTL to TTL 1: 8 Clock Distribution Chip	ECL	MC10H646	MC100H646	28		FN
Single Supply PECL/TTL 1:9 Clock Distribution Chip	ECL	MC10H641	MC100H641	28		FN
÷2, ÷4/6 Clock Generation Chip (3.3V)	ECL	MC100LVEL38	MC100EL38	20		DW
÷2/4, ÷4/6 Clock Generation Chip	ECL	MC100LVEL39	MC100EL39	20		DW
÷2,4,8 Differential Clock Driver	ECL	MC10EL34	MC100EL34	16		D
COAX CABLE DRIVERS						
Fibre Channel Coaxial Cable Driver and Loop Resiliency Circuit	SDX	MC10SX1189	–	16		D
300 MBit/s LED Driver for FDDI and Fibre Channel	SDX	MC10SX1130	–	16		D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
COMPARATORS						
4–Bit Magnitude Comparator	TTL	MC74F85	–	16	N	D
	CMOS	MC74HC85	–	16	N	DT
	TTL	SN54LS85	SN74LS85	16	N,J	D
	CMOS	MC14585B	–	16	P,L	D
5–Bit Magnitude Comparator	ECL	MC10H166	–	16	P,L	FN
	ECL	MC10166	–	16	P,L	FN
8–Bit Equality Comparator	CMOS	MC54HC688	MC74HC688	20	N,J	DW
8–Bit Identity Comparator	CMOS	MC74ACT521	–	20	N	
	TTL	MC74F521	–	20	N	DW
8–Bit Magnitude Comparator	TTL	SN54LS682	SN74LS682	20	N,J	DW
	TTL	SN54LS684	SN74LS684	20	N,J	DW
	TTL	SN54LS688	SN74LS688	20	N,J	DW
9–Bit Magnitude Comparator	ECL	MC10E166	MC100E166	28		FN
Dual Analog Comparator With Latch	ECL	MC10E1651	–	16,20	L	FN
Dual Analog Comparator With Latch (Hi–Perf MC1651)	ECL	MC10E1652	–	16,20	L	FN
CONVERTERS						
4–Bit Parallel to Serial Converter	ECL	MC10E446	MC100E446	28		FN
4–Bit Serial to Parallel Converter	ECL	MC10E445	MC100E445	28		FN
Dual A/D Converter	ECL	MC1650	–	16	L	
	ECL	MC1651	–	16	L	
COUNTERS						
12–Bit Binary Counter	CMOS	MC14040B	–	16	P,L	D
12–Stage Binary Ripple Counter	CMOS	MC54HC4040A	MC74HC4040A	16	N,J	D,DT
	CMOS	MC74AC4040	–	16	N	D
14–Bit Binary Counter	CMOS	MC14020B	–	16	P,L	D
14–Bit Binary Counter and Oscillator	CMOS	MC14060B	–	16	P,L	D
14–Stage Binary Ripple Counter	CMOS	MC74HC4020A	–	16	N	D,DT
	CMOS	MC74AC4020	–	16	N	D
14–Stage Binary Ripple Counter With Oscillator	CMOS	MC54HC4060	MC74HC4060	16	N,J	DT
	CMOS	MC54HC4060A	MC74HC4060A	16	N,J	D,DT
3–Digit BCD Counter	CMOS	MC14553B	–	16	P	DW
4–Bit BCD Decade Counter, Asynchronous Reset	TTL	SN54LS160A	SN74LS160A	16	N,J	D
	TTL	SN54LS162A	SN74LS162A	16	N,J	D
4–Bit Bidirectional Binary Counter, With 3–State Outputs	TTL	MC74F569	–	20	N	DW
4–Bit Bidirectional Decade Counter, With 3–State Outputs	TTL	MC74F568	–	20	N	DW
4–Bit Binary Counter	TTL	SN54LS93	SN74LS93	14	N,J	D
	TTL	SN54LS293	SN74LS293	14	N,J	D
	ECL	MC10H16	–	16	P,L	FN
4–Bit Binary Counter, Synchronous Presettable	CMOS	MC14161B	–	16	P	D
	CMOS	MC14163B	–	16	P	D
4–Bit Binary Counter, Synchronous Reset	TTL	SN54LS161A	SN74LS161A	16	N,J	D
	TTL	SN54LS163A	SN74LS163A	16	N,J	D
4–Bit Up/Down Counter With 3–State Outputs	TTL	SN54LS569A	SN74LS569A	20	N,J	DW
4–Stage Presettable Ripple Counters	TTL	SN54LS196	SN74LS196	14	N,J	D
	TTL	SN54LS197	SN74LS197	14	N,J	D
4–Stage Synchronous Bidirectional Counter	TTL	MC74F168	–	16	N	D
	TTL	MC74F169	–	16	N	D
5 Cascaded BCD Counters	CMOS	MC14534B	–	24	P,L	DW
6–Bit Universal Counter, (Lookahead Carry)	ECL	MC10E136	MC100E136	28		FN
7–Stage Ripple Counter	CMOS	MC14024B	–	14	P,L	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
COUNTERS						
8–Bit Bidirectional Binary Counter	TTL	MC74F269	–	24	N	DW
8–Bit Bidirectional Binary Counter, With 3–State Outputs	TTL	MC74F579	–	20	N	DW
	TTL	MC74F779	–	16	N	D
8–Bit Ripple Counter	ECL	MC10E137	MC100E137	28		FN
8–Bit Synchronous Binary Up Counter	ECL	MC10E016	MC100E016	28		FN
BCD Decade Counter, Synchronous Presettable	TTL	MC74F160A	–	16	N	D
	TTL	MC74F162A	–	16	N	D
BCD Decade Synchronous Bidirectional Counter	TTL	SN54LS168	SN74LS168	16	N,J	D
Bi–Quinary Counter	ECL	MC10138	–	16	P,L	FN
Binary Counter	ECL	MC10154	–	16	P,L	
	ECL	MC10178	–	16	P,L	FN
Binary Counter, Synchronous Presettable, 4–Bit	TTL	MC74F161A	–	16	N	D
	TTL	MC74F163A	–	16	N	D
Counter Control Logic	ECL	MC12014	–	16	P,L	
Decade Counter	TTL	SN54LS90	SN74LS90	14	N,J	D
	TTL	SN54LS290	SN74LS290	14	N,J	D
	CMOS	MC14017B	–	16	P,L	D
	CMOS	MC74HC4017	–	16	N	D
Divide By 12 Counter	TTL	SN54LS92	SN74LS92	14	N,J	D
Dual 4–Stage Binary Counter	TTL	SN54LS393	SN74LS393	16	N,J	D
Dual 4–Stage Binary Ripple Counter	CMOS	MC54HC393	MC74HC393	14	N,J	D
Dual 4–Stage Binary Ripple Counter W ÷2, ÷5 Sections	CMOS	MC54HC390	MC74HC390	16	N,J	D
Dual BCD Up Counter	CMOS	MC14518B	–	16	P,L	DW
Dual Binary Up Counter	CMOS	MC14520B	–	16	P,L	DW
Dual Decade Counter	TTL	SN54LS390	SN74LS390	16	N,J	D
	TTL	SN54LS490	SN74LS490	16	N,J	D
Industrial Time Base Generator	CMOS	MC14566B	–	16	P	D
Modulo 16 Binary Synchronous Bidirectional Counter	TTL	SN54LS169	SN74LS169	16	N,J	D
Octal Counter	CMOS	MC14022B	–	16	P,L	D
Phase Comparator and Programmable Counter	CMOS	MC14568B	–	16	P,L	D
Presettable 4–Bit BCD Down Counter	CMOS	MC14522B	–	16	P	DW
Presettable 4–Bit Binary Down Counter	CMOS	MC14526B	–	16	P,L	DW
Presettable 4–Bit Binary Up/Down Counter	TTL	SN54LS191	SN74LS191	16	N,J	D
	TTL	SN54LS193	SN74LS193	16	N,J	D
Presettable BCD Up/Down Counter	CMOS	MC14510B	–	16	P	D
Presettable BCD/Decade Up/Down Counter	TTL	SN54LS190	SN74LS190	16	N,J	D
	TTL	SN54LS192	SN74LS192	16	N,J	D
Presettable Binary Up/Down Counter	CMOS	MC14516B	–	16	P,L	D
Presettable Binary/BCD Up/Down Counter	CMOS	MC14029B	–	16	P,L	D
Presettable Counter	CMOS	MC54HC160	MC74HC160	16	N,J	D
	CMOS	MC54HC161A	MC74HC161A	16	N,J	D
	CMOS	MC54HCT161A	MC74HCT161A	16	N,J	D
	CMOS	MC54HC162	MC74HC162	16	N,J	D
	CMOS	MC54HC163A	MC74HC163	16	N,J	D
	CMOS	MC54HCT163A	MC74HCT163A	16	N,J	D
Presettable Divide–by–N Counter	CMOS	MC14018B	–	16	P	D
Programmable Dual Binary/BCD Counter	CMOS	MC14569B	–	16	P,L	DW

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
COUNTERS						
Programmable Modulo–N Counters (N=0–9)	ECL	MC4016	–	16	P,L	
	ECL	MC4018	–	16	P,L	
	ECL	MC4316	–	16	P,L	
Synchronous 4–Bit Up/Down Counter	TTL	SN54LS669	SN74LS669	16	N,J	D
Synchronous Presettable Binary Counter	CMOS	MC74AC161	–	16	N	D
	CMOS	MC74ACT161	–	16	N	D
Synchronous Presettable Binary Counter	CMOS	MC74AC163	–	16	N	D
	CMOS	MC74ACT163	–	16	N	D
Synchronous Presettable Binary–Coded–Decimal Decade Counter	CMOS	MC74AC160	–	16	N	D
	CMOS	MC74ACT160	–	16	N	D
	CMOS	MC74AC162	–	16	N	D
	CMOS	MC74ACT162	–	16	N	D
Universal Decade Counter	ECL	MC10137	–	16	P,L	
Universal Hexadecimal Counter	ECL	MC10H136	–	16	P,L	FN
	ECL	MC10136	–	16	P,L	FN
Up/Down Counter With Preset and Ripple Clock	CMOS	MC74AC190	–	16	N	D
DECODER/DEMULTIPLEXERS						
1–of–10 Decoder	CMOS	MC74HC42	–	16	N	D
	TTL	SN54LS42	SN74LS42	16	N,J	D
1–of–10 Decoder/Driver Open–Collector	TTL	SN54LS145	SN74LS145	16	N,J	D
1–of–10 Decoder, With 3–State Outputs	TTL	MC74F537	–	20	N	DW
1–of–16 Decoder/Demultiplexer	CMOS	MC54HC154	MC74HC154	24	N,J	DW
1–of–16 Decoder/Demultiplexer With Address Latch	CMOS	MC74HC4514	–	24	N	DW
1–of–4 Decoder, With 3–State Outputs	TTL	MC74F539	–	20	N	DW
1–of–8 Decoder, With 3–State Outputs	TTL	MC74F538	–	20	N	DW
1–of–8 Decoder/Demultiplexer	CMOS	MC74AC138	–	16	N	D
	CMOS	MC74ACT138	–	16	N	D
	TTL	MC74F138	–	16	N	D
	CMOS	MC54HC138A	MC74HC138A	16	N,J	D
	CMOS	MC74VHC138	–	16		D,DT, M
	CMOS	MC74HCT138A	–	16	N	D,DT
	TTL	SN54LS138	SN74LS138	16	N,J	D
1–of–8 Decoder/Demultiplexer With Address Latch	CMOS	MC74HC137	–	16	N	D
	CMOS	MC74HC237	–	16	N	D
3–Line to 8–Line Decoders/Demultiplexers With Address Latches	TTL	SN54LS137	SN74LS137	16	N,J	D
4–Bit Transparent Latch/4–to–16 Line Decoder (High)	CMOS	MC14514B	–	24	P,L	DW
4–Bit Transparent Latch/4–to–16 Line Decoder (Low)	CMOS	MC14515B	–	24	P,L	DW
8–Bit Addressable Latch/1–of–8 Decoder	CMOS	MC54HC259	MC74HC259	16	N,J	D
BCD–to–Decimal Decoder/Binary–to–Octal Decoder	CMOS	MC14028B	–	16	P,L	D
Binary to 1–4 Decoder (Low)	ECL	MC10171	–	16	P,L	FN
Binary to 1–8 Decoder, (High)	ECL	MC10H162	–	16	P,L	FN
	ECL	MC10162	–	16	P,L	FN
Binary to 1–8 Decoder, (Low)	ECL	MC10H161	–	16	P,L	FN
	ECL	MC10161	–	16	P,L	FN
Dual 1–of–4 Decoder	TTL	SN54LS155	SN74LS155	16	N,J	D
Dual 1–of–4 Decoder Open–Collector	TTL	SN54LS156	SN74LS156	16	N,J	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
DECODER/DEMULTIPLEXERS						
Dual 1–of–4 Decoder/Demultiplexer	CMOS	MC74AC139	–	16	N	D
	CMOS	MC74ACT139	–	16	N	D
	TTL	MC74F139	–	16	N	D
Dual 1–of–4 Decoder/Demultiplexer	CMOS	MC54HC139A	MC74HC139A	16	N,J	D
	TTL	SN54LS139	SN74LS139	16	N,J	D
Dual Binary to 1–4 Decoder (High)	ECL	MC10H172	–	16	P,L	FN
	ECL	MC10172	–	16	P,L	FN
Dual Binary to 1–4 Decoder (Low)	ECL	MC10H171	–	16	P,L	FN
Dual Binary to 1–of–4 Decoder (Active High Outputs)	CMOS	MC14555B	–	16	P	D
Dual Binary to 1–of–4 Decoder (Active Low Outputs)	CMOS	MC14556B	–	16	P	D
Low–Voltage CMOS 1–of–8 Decoder/Demultiplexer With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX138	–	16		D,DT
Low–Voltage Quiet CMOS 1–of–8 Decoder/Demultiplexer	CMOS	MC74LVQ138	–	16		D,M, SD,DT
DETECTORS						
Analog Mixer	ECL	MC12002	–	14	P,L	
Phase–Frequency Detector	ECL	MC4044	–	14	P,L	D
	ECL	MC4344	–	14	P,L	
	ECL	MC12040	–	14	P,L	FN
	ECL	MCH12140	MCK12140	8		D
DISPLAY DECODE DRIVERS						
BCD–to–Seven Segment Decoder	TTL	SN54LS48	SN74LS48	16	N,J	D
	CMOS	MC14558B	–	16	P,L	D
BCD–to–Seven Segment Decoder/Driver	TTL	SN54LS47	SN74LS47	16	N,J	D
	TTL	SN54LS247	SN74LS247	16	N,J	D
	TTL	SN54LS248	SN74LS248	16	N,J	D
	TTL	SN54LS249	SN74LS249	16	N,J	D
BCD–to–Seven Segment Latch/Decoder/Display Driver	CMOS	MC74HC4511	–	16	N	D
BCD–to–Seven Segment Latch/Decoder/Driver	CMOS	MC14511B	–	16	P,L	D,DW
BCD–to–Seven Segment Latch/Decoder/Driver for Liquid Crystals	CMOS	MC14543B	–	16	P,L	D
BCD–to–Seven Segment Latch/Decoder/Driver With Ripple Blanking	CMOS	MC14544B	–	18	P,L	
	CMOS	MC14513B	–	18	P	
High Current BCD–to–Seven Segment Decoder/Driver	CMOS	MC14547B	–	16	P,L	DW
DIVIDERS						
÷ 2 Divider	ECL	MC10EL32	MC100EL32	8		D
	ECL	MC100LVEL32	–	8		D
÷ 4 Divider	ECL	MC10EL33	MC100EL33	8		D
	ECL	MC100LVEL33	–	8		D
DRIVER						
Coaxial Cable Driver	ECL	MC10EL89	–	8		D
300MBit/s LED Driver for FDDI and Fibre Channel	ECL	MC10SX1130	–	16		D
EDACs						
Error Detection–Correction Circuit (IBM Code)	ECL	MC10163	–	16	P,L	
Error Detection–Correction Circuit (Motorola Code)	ECL	MC10193	–	16	P,L	
ENCODERS						
10–Line to 4–Line Priority Encoder	TTL	SN54LS147	SN74LS147	16	N,J	D
8–Bit Priority Encoder	CMOS	MC14532B	–	16	P,L	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
ENCODERS						
8–Input Priority Encoder	TTL	SN54LS348	SN74LS348	16	N,J	D
	ECL	MC10H165	–	16	P,L	FN
	ECL	MC10165	–	16	P,L	FN
8–Input Priority Encoder (Glitchless)	TTL	SN54LS848	SN74LS848	16	N,J	D
8–Line to 3–Line Priority Encoder	TTL	MC74F148	–	16	N	D
	TTL	SN54LS148	SN74LS148	16	N,J	D
	TTL	SN54LS748	SN74LS748	16	N,J	D
Decimal–to–BCD Encoder	CMOS	MC74HC147	–	16	N	D
ENCODER/DECODERS						
CMI Encoder/Decoder	ECL	MC100SX1230	–	28		FN
EXPANDERS						
Dual 4–Iput Expander	HTL	MC669	–	14	P,L	
Expandable Dual 4–Input Gate (Active Pullup)	HTL	MC660	–	14	P,L	
Expandable Dual 4–Input Gate (Passive Pullup)	HTL	MC661	–	14	P,L	
Expandable Dual 4–Input Line Driver	HTL	MC662	–	14	P,L	
Expandable Dual Power Gate	DTL	MC844	–	14	P,L	
	DTL	MC944	–	14	P,L	
FIELD PROGRAMMABLE GATE ARRAY						
14,200–Gate Programmable Array With Up to 160 User I/Os	CMOS	MPA1064	–	160, 224		DH, KE
22,000–Gate Programmable Array With Up to 200 User I/Os	CMOS	MPA1100	–	229		HV
3,500–Gate Programmable Array With Up to 80 User I/Os	CMOS	MPA1016	–	84, 128		FN, DD
8,000–Gate Programmable Array With Up to 120 User I/Os	CMOS	MPA1036	–	84, 128, 160, 181		FN, DD, DH, HI
FLIP–FLOPS						
3–Bit Differential Flip–Flop	ECL	MC10E431	MC100E431	28		FN
4–Bit D Flip–Flop Individual Clock, Reset Differential Output	ECL	MC10E131	MC100E131	28		FN
4–Bit D Flip–Flop With Enable	TTL	SN54LS379	SN74LS379	16	N,J	D
4–Bit D–Type Register With With 3–State Outputs	TTL	SN54LS173A	SN74LS173A	16	N,J	D
5–Bit Differential Register	ECL	MC10E452	MC100E452	28		FN
6–Bit 2:1 Mux–Register With Common Clock, Asynchronous Master Reset Single Ended	ECL	MC10E167	MC100E167	28		FN
6–Bit D Register With Common Clock, Asynchronous Master Reset, Differential Outputs	ECL	MC10E151	MC100E151	28		FN
6–Bit D Register, With Differential Inputs, (Data & Clock) , VBB, Common Reset	ECL	MC10E451	MC100E451	28		FN
6–Bit Parallel D Register With Enable	CMOS	MC74AC378	–	16	N	D
	CMOS	MC74ACT378	–	16	N	D
9–Bit Hold Register, 700MHz, With Asynchronous Master Reset	ECL	MC10E143	MC100E143	28		FN
Clocked Flip–Flop	DTL	MC845	–	14	P,L	
Clocked Flip–Flop	DTL	MC945	–	14	P,L	
D Flip–Flop With Set & Reset	ECL	MC10EL31	MC100EL31	8		D
Differential Clock D Flip–Flop	ECL	MC10EL51	MC100EL51	8		D
	ECL	MC100LVEL51	–	8		D
Differential Data & Clock D Flip–Flop	ECL	MC10EL52	MC100EL52	8		D
Dual D Flip–Flop	CMOS	MC74AC74	–	14	N	D
	CMOS	MC74ACT74	–	14	N	D
	CMOS	MC14013B	–	14	P,L	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
FLIP–FLOPS						
Dual D Flip–Flop With Set and Reset	CMOS	MC54HC74A	MC74HC74A	14	N,J	D,DT
	CMOS	MC74VHC74	–	14		D, DT,M
Dual D Flip–Flop With Set and Reset With LSTTL Compatible Inputs	CMOS	MC74HCT74A	–	14	N	D
Dual D–Type Positive Edge–Triggered Flip–Flop	TTL	MC74F74	–	14	N	D
	TTL	SN54LS74A	SN74LS74A	16	N,J	D
Dual Differential Data and Clock D Flip–Flop With Set and Reset	ECL	MC100LVEL29	MC100EL29	20		DW
Dual J–K Negative Edge–Triggered Flip–Flop	TTL	SN54LS112A	SN74LS112A	16	N,J	D
	TTL	SN54LS113A	SN74LS113A	14	N,J	D
	TTL	SN54LS114A	SN74LS114A	14	N,J	D
Dual J–K Positive Edge–Triggered Flip–Flop	TTL	SN54LS109A	SN74LS109A	16	N,J	D
Dual J–K Flip–Flop	HTL	MC663	–	14	P,L	
	TTL	SN54LS107A	SN74LS107A	14	N,J	D
Dual J–K Flip–Flop (Common Clock and CD Separate SD)	DTL	MC952	–	14	P,L	
Dual J–K Flip–Flop (Separate Clock and SD, No CD)	DTL	MC953	–	14	P,L	
Dual J–K Flip–Flop Negative Edge Trigger	CMOS	MC74AC112	–	16	N	D
	CMOS	MC74ACT112	–	16	N	D
Dual J–K Flip–Flop Negative Edge Trigger	CMOS	MC74AC113	–	14	N	D
	CMOS	MC74ACT113	–	14	N	D
Dual J–K Flip–Flop With Set and Clear	TTL	SN54LS76A	SN74LS76A	16	N,J	D
Dual J–K Flip–Flop With Set and Reset	CMOS	MC74HC112	–	16	N	D,DT
Dual J–K Flip–Flop	CMOS	MC14027B	–	16	P,L	D
Dual J–K Flip–Flop With Reset	CMOS	MC74HC73	–	14	N	D
	CMOS	MC74HC107	–	14	N	D
Dual J–K Flip–Flop With Set and Reset	CMOS	MC74HC76	–	16	N	D
Dual J–K Master–Slave Flip–Flop	ECL	MC10135	–	16	P,L	FN
	ECL	MC10H135	–	16	P,L	FN
Dual J–K Negative Edge–Triggered Flip–Flop	TTL	MC74F112	–	16	N	D
	TTL	SN54LS73A	SN74LS73A	14	N,J	D
Dual J–K Positive Edge–Triggered Flip–Flop With Set & Clear	CMOS	MC74AC109	–	16	N	D
	CMOS	MC74ACT109	–	16	N	D
Dual $\overline{J}$–$\overline{K}$ Flip–Flop With Set and Reset	CMOS	MC74HC109	–	16	N	D
Dual $\overline{J}$–$\overline{K}$ Positive Edge–Triggered Flip–Flop	TTL	MC74F109	–	16	N	D
Dual Type–D Master–Slave Flip–Flop	ECL	MC10131	–	16	P,L	FN
	ECL	MC10H131	–	16	P,L	FN
Hex D Flip–Flop	TTL	SN54LS174	SN74LS174	16	N,J	D
	CMOS	MC14174B	–	16	P,L	D
Hex D Flip–Flop With Enable	TTL	SN54LS378	SN74LS378	16	N,J	D
Hex D Flip–Flop With Master Reset	CMOS	MC74AC174	–	16	N	D
	TTL	MC74F174	–	16	N	D
	CMOS	MC74ACT174	–	16	N	D
Hex D Flip–Flop With Common Clock & Reset	CMOS	MC54HC174A	MC74HC174A	16	N,J	D
	CMOS	MC74HCT174A	–	16	N	D
Hex D Master–Slave Flip–Flop	ECL	MC10H176	–	16	P,L	FN
	ECL	MC10176	–	16	P,L	FN
Hex D Master–Slave Flip–Flop With Reset	ECL	MC10H186	–	16	P,L	FN
	ECL	MC10186	–	16	P,L	FN
High Speed Dual D Master–Slave Flip–Flop	ECL	MC10231	–	16	P,L	FN
J–K Flip–Flop	ECL	MC10EL35	MC100EL35	8		D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
FLIP–FLOPS						
Low–Voltage CMOS Octal D–Type Flip–Flop With Set and Reset, 3–State, Non–Inverting With 5V Tolerant Inputs	CMOS	MC74LCX74	–	14		D,DT
Low–Voltage CMOS 16–Bit D–Type Flip–Flop, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16374	–	20		DW,M, DT
Low–Voltage CMOS Octal D–Type Flip–Flop, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX374	–	20		DW,M, DT
Low–Voltage CMOS Octal D–Type Flip–Flop Flow Through Pinout, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX574	–	20		DW,M, DT
Low Voltage D Flip–Flop With Set & Reset	ECL	MC100LVEL31	–	8		D
Low–Voltage Quiet CMOS Octal D–Type Flip–Flop	CMOS	MC74LVQ374	–	20		DW,M, SD,DT
Low–Voltage Quiet CMOS Octal D–Type Flip–Flop Flow Through Pinout	CMOS	MC74LVQ574	–	20		DW,M, SD,DT
Master–Slave Flip–Flop	ECL	MC1670	–	16	L	
Master–Slave R–S Flip–Flop	HTL	MC664	–	14	P,L	
Octal 3–State Inverting D Flip–Flop	CMOS	MC54HC534A	MC74HC534A	20	N,J	DW
Octal 3–State Non–Inverting D Flip–Flop With LSTTL Compatible Inputs	CMOS	MC54HCT374A	MC74HCT374A	20	N,J	DW, SD,DT
Octal D Flip Flop, With 3–State Outputs	TTL	MC74F374	–	20	N	DW
Octal D Flip–Flop	CMOS	MC74AC273	–	20	N	DW
	CMOS	MC74ACT273	–	20	N	DW
Octal D Flip–Flop With 3–State Outputs/Broadside Pinout, F374	TTL	MC74F574	–	20	N	DW
Octal D Flip–Flop With Clear	TTL	SN54LS273	SN74LS273	20	N,J	DW
Octal D Flip–Flop With Clock Enable	CMOS	MC74AC377	–	20	N	DW
	CMOS	MC74ACT377	–	20	N	DW
Octal D Flip–Flop With Common Clock & Reset	CMOS	MC54HC273A	MC74HC273A	20	N,J	DW, DT
Octal D Flip–Flop With Common Clock and Reset With LSTTL Compatible Inputs	CMOS	MC74HCT273A	–	20	N	DW
Octal D Flip–Flop With Enable	TTL	MC74F377	–	20	N	DW
Octal D Flip–Flop With Enable/ Non–Inverting	TTL	SN54LS377	SN74LS377	20	N,J	DW
Octal D Type Flip–Flop With 3–State Outputs	CMOS	MC74AC374	–	20	N	DW
	CMOS	MC74ACT374	–	20	N	DW
	TTL	MC74F534	–	20	N	DW
	TTL	SN54LS374	SN74LS374	20	N,J	DW
	CMOS	MC74AC534	–	20	N	DW
	CMOS	MC74ACT534	–	20	N	DW
Octal D–Type Latch With 3–State Outputs	CMOS	MC74AC564	–	20	N	DW
	CMOS	MC74ACT564	–	20	N	DW
	CMOS	MC74AC574	–	20	N	DW
	CMOS	MC74ACT574	–	20	N	DW
Octal With 3–State Outputs Inverting D Flip–Flop	CMOS	MC74HC564A	–	20	N	DW
Octal With 3–State Outputs Non–Inverting D Flip–Flop	CMOS	MC54HC374A	MC74HC374A	20	N,J	DW, SD,DT
	CMOS	MC74VHC374	–	20		DW, DT,M
	CMOS	MC54HC574A	MC74HC574A	20	N,J	DW
	CMOS	MC74VHC574	–	20		DW, DT,M
Octal With 3–State Outputs Non–Inverting D Flip–Flop With LSTTL Compatible Inputs	CMOS	MC54HCT574A	MC74HCT574A	20	N,J	DW
Quad D Flip–Flop	CMOS	MC74AC175	–	16	N	D
	CMOS	MC74ACT175	–	16	N	D
	TTL	MC74F175	–	16	N	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
FLIP–FLOPS						
Quad D Flip–Flop	TTL	SN54LS175	SN74LS175	16	N,J	D
	CMOS	MC14175B	–	16	P,L	D
Quad D Flip–Flop With Common Clock & Reset	CMOS	MC54HC175	MC74HC175	16	N,J	D
	CMOS	MC54HC175A	MC74HC175A	16	N,J	D,SD
Quad D–Type Register With 3–State Outputs	CMOS	MC14076B	–	16	P,L	D
Quad Parallel Register With Enable	TTL	MC74F379	–	16	N	D
Quad With 3–State Outputs D Flip–Flop With Common Clock & Reset	CMOS	MC74HC173	–	16	N	D
Triple D Flip–Flop With Set and Reset	ECL	MC100LVEL30	MC100EL30	20		DW
GATES, AND/NAND						
13–Input NAND Gate	CMOS	MC74HC133	–	16	N	D
	TTL	SN54LS133	SN74LS133	16	N,J	D
8–Input NAND Gate	CMOS	MC74HC30	–	14	N	D
	TTL	SN54LS30	SN74LS30	14	N,J	D
	CMOS	MC14068B	–	14	P	D
Dual 4–Input AND Gate	TTL	MC74F21	–	14	N	D
	TTL	SN54LS21	SN74LS21	14	N,J	D
	CMOS	MC14082B	–	14	P,L	D
Dual 4–Input NAND Buffer	TTL	MC74F40	–	14	N	D
	TTL	SN54LS40	SN74LS40	14	N,J	D
Dual 4–Input NAND Gate	CMOS	MC74AC20	–	14	N	D
	CMOS	MC74ACT20	–	14	N	D
	TTL	MC74F20	–	14	N	D
	CMOS	MC74HC20	–	14	N	D
	TTL	SN54LS20	SN74LS20	14	N,J	D
	TTL	SN54LS22	SN74LS22	14	N,J	D
	CMOS	MC14012B	–	14	P,L	D
Dual 4–Input NAND Gate (Unbuffered)	CMOS	MC14012UB	–	14	P,L	D
Expandable NAND Gate	DTL	MC830	–	14	P,L	
Hex AND Gate	ECL	MC10197	–	16	P,L	FN
Low–Voltage CMOS Quad 2–Input AND Gate, 5V–Tolerant Inputs	CMOS	MC74LCX08	–	14		D,DT
Low–Voltage CMOS Quad 2–Input NAND Gate, 5V–Tolerant Inputs	CMOS	MC74LCX00	–	14		D,DT
Low–Voltage Quiet CMOS Quad 2–Input NAND Gate	CMOS	MC74LVQ00	–	14		D,M, DT,SD
Quad 2–Input AND Gate	CMOS	MC74AC08	–	14	N	D
	CMOS	MC74ACT08	–	14	N	D
	TTL	MC74F08	–	14	N	D
	CMOS	MC54HC08A	MC74HC08A	14	N,J	D,DT
	CMOS	MC74VHC08	–	14		D, DT,M
	TTL	SN54LS08	SN74LS08	14	N,J	D
	TTL	SN54LS09	SN74LS09	14	N,J	D
	ECL	MC10H104	–	16	P,L	FN
	ECL	MC10104	–	16	P,L	FN
	CMOS	MC14081B	–	14	P,L	D
Quad 2–Input AND Gate With LSTTL–Compatible Inputs	CMOS	MC54HCT08A	MC74HCT08A	14	N,J	D
Quad 2–Input NAND Buffer	TTL	MC74F37	–	14	N	D
	TTL	SN54LS26	SN74LS26	14	N,J	D
	TTL	SN54LS37	SN74LS37	14	N,J	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
GATES, AND/NAND						
Quad 2–Input NAND Buffer Open–Collector	TTL	MC74F38	–	14	N	D
Quad 2–Input NAND Buffer Open–Collector	TTL	SN54LS38	SN74LS38	14	N,J	D
Quad 2–Input NAND Gate	DTL	MC846	–	14	P,L	
	DTL	MC946	–	14	P,L	
	CMOS	MC74AC00	–	14	N	D
	CMOS	MC74ACT00	–	14	N	D
	TTL	MC74F00	–	14	N	D
	CMOS	MC54HC00A	MC74HC00A	14	N,J	D,DT
	CMOS	MC74VHC00	–	14		D, DT,M
	TTL	SN54LS00	SN74LS00	14	N,J	D
	TTL	SN54LS01	SN74LS01	14	N,J	D
	TTL	SN54LS03	SN74LS03	14	N,J	D
	CMOS	MC14011B	–	14	P,L	D
Quad 2–Input NAND Gate (Unbuffered)	CMOS	MC14011UB	–	14	P,L	D
Quad 2–Input NAND Gate With LSTTL–Compatible Inputs	CMOS	MC54HCT00A	MC74HCT00A	14	N,J	D
Quad 2–Input NAND Gate With Open–Drain Outputs	CMOS	MC74HC03A	–	14	N	D,DT
Triple 3–Input AND Gate	CMOS	MC74AC11	–	14	N	D
	CMOS	MC74ACT11	–	14	N	D
	TTL	MC74F11	–	14	N	D
	CMOS	MC74HC11	–	14	N	D
	TTL	SN54LS11	SN74LS11	14	N,J	D
	TTL	SN54LS15	SN74LS15	14	N,J	D
	CMOS	MC14073B	–	14	P,L	D
Triple 3–Input NAND Gate	CMOS	MC74AC10	–	14	N	D
	CMOS	MC74ACT10	–	14	N	D
	TTL	MC74F10	–	14	N	D
	CMOS	MC74HC10	–	14	N	D
	TTL	SN54LS10	SN74LS10	14	N,J	D
	TTL	SN54LS12	SN74LS12	14	N,J	D
	CMOS	MC14023B	–	14	P,L	D
Triple 3–Input NAND Gate (Unbuffered)	CMOS	MC14023UB	–	14	P,L	D
GATES, COMPLEX						
2–Input AND/NAND Gate	ECL	MC10EL04	MC100EL04	8		D
2–Input Differential AND/NAND Gate	ECL	MC10EL05	MC100EL05	8		D
	ECL	MC100LVEL05	–	8		D
2–Input XOR/NOR Gate	ECL	MC10EL07	MC100EL07	8		D
2–Wide, 2–Input/2–Wide, 3–Input AND–NOR Gate	CMOS	MC74HC51	–	14	N	D
2–Wide, 2–Input/2–Wide, 3–Input AND–OR Gate	CMOS	MC74HC58	–	14	N	D
2–Wide, 4–Input AND/OR Invert Gate	TTL	SN54LS55	SN74LS55	14	N,J	D
3–2–2–3–Input AND/OR Invert Gate	TTL	SN54LS54	SN74LS54	14	N,J	D
4–2–3–2 Input AND–OR–Invert Gate	TTL	MC74F64	–	14	N	D
4–Bit AND/OR Selector	CMOS	MC14519B	–	16	P	D
4–Input OR/NOR Gate	ECL	MC10EL01	MC100EL01	8		D
	ECL	MC100LVEL01	–	8		D
4–Wide 4–3–3–3 Input OR–AND Gate	ECL	MC10H119	–	16	P,L	FN
4–Wide OR–AND/OR–AND–Invert Gate	ECL	MC10H121	–	16	P,L	FN
4–Wide OR–AND/OR–AND–Invert Gate	ECL	MC10121	–	16	P,L	FN

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
GATES, COMPLEX						
8–Input NOR/OR Gate	CMOS	MC74HC4078	–	14	N	D
Dual 2 Wide 2–Input/3–Input AND/OR Invert Gate	TTL	SN54LS51	SN74LS51	14	N,J	D
Dual 2–Wide 2–3–Input OR–AND/OR–AND–Invert Gate	ECL	MC10117	–	16	P,L	FN
	ECL	MC10H117	–	16	P,L	FN
Dual 2–Wide 2–Input, 2–Wide 3–Input AND–OR–Invert Gate	TTL	MC74F51	–	14	N	D
Dual 2–Wide 3–Input OR–AND Gate	ECL	MC10H118	–	16	P,L	FN
Dual 4–5 Input OR/NOR Gate	ECL	MC10H109	–	16	P,L	FN
	ECL	MC10109	–	16	P,L	FN
	ECL	MC10H209	–	16	P,L	FN
Dual 4–Input NAND, 2–Input NOR/OR, 8–Input AND/NAND Gate (Unbuffered)	CMOS	MC14501UB	–	16	P	D
Dual 4–Input OR/NOR Gate	ECL	MC1660	–	16	L	
Dual 5–Input Majority Logic Gate	CMOS	MC14530B	–	16	P	D
Dual Expandable AND OR Invert Gate (Unbuffered)	CMOS	MC14506UB	–	16	L	
Hex NAND/NOR/Invert Gate (Unbuffered)	CMOS	MC14572UB	–	16	P	D
High Speed Dual 3–Input 3–Output OR/NOR Gate	ECL	MC10212	–	16	P	
Quad 4–Input OR/NOR Gate	ECL	MC10E101	MC100E101	28		FN
Quad Differential AND/NAND Gate	ECL	MC10E404	MC100E404	28		FN
Quad OR/NOR Gate	ECL	MC10H101	–	16	P,L	FN
	ECL	MC10101	–	16	P,L	FN
Quint 2–Input AND/NAND Gate	ECL	MC10E104	MC100E104	28		FN
Quint 2–Input XOR/XNOR Gate	ECL	MC10E107	MC100E107	28		FN
Triple 2–3–2 Input OR/NOR Gate	ECL	MC10H105	–	16	P,L	FN
	ECL	MC10105	–	16	P,L	FN
Triple 2–Input Exclusive OR/Exclusive NOR Gate	ECL	MC10H107	–	16	P,L	FN
	ECL	MC10107	–	16	P,L	FN
GATES, EXCLUSIVE OR/EXCLUSIVE NOR						
Low–Voltage CMOS Quad 2–Input Exclusive OR Gate With 5V Tolerant Inputs	CMOS	MC74LCX86	–	14		D,M SD,DT
Quad 2–Input Exclusive NOR Gate	CMOS	MC74AC810	–	14	N	DW
	CMOS	MC74ACT810	–	14	N	DW
	CMOS	MC74HC7266	–	14	N	D
	CMOS	MC74HC7266A	–	14	N	D,DT
	TTL	SN54LS266	SN74LS266	14	N,J	D
Quad Exclusive NOR Gate	CMOS	MC14077B	–	14	P,L	D
Quad 2–Input Exclusive OR Gate	CMOS	MC74AC86	–	14	N	D
	CMOS	MC74ACT86	–	14	N	D
	TTL	MC74F86	–	14	N	D
	CMOS	MC54HC86	MC74HC86	14	N,J	D
	CMOS	MC54HC86A	MC74HC86A	14	N,J	D,DT
	TTL	SN74LS136	–	14	N,J	D
	TTL	SN54LS386	SN74LS386	14	N,J	D
Quad Exclusive OR Gate	TTL	SN54LS86	SN74LS86	14	N,J	D
	ECL	MC10H113	–	16	P,L	FN
	ECL	MC10113	–	16	P,L	FN
	CMOS	MC14070B	–	14	P,L	D
Triple 2–Input Exclusive–OR Gate	ECL	MC1672	–	16	L	

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
GATES, NOR						
8–Input NOR Gate	CMOS	MC14078B	–	14	P	D
Dual 3–Input 3–Output NOR Gate	ECL	MC10111	–	16	P,L	FN
	ECL	MC10H211	–	16	P,L	FN
	ECL	MC10211	–	16	P,L	FN
Dual 4–Input NOR Gate	CMOS	MC74HC4002	–	14	N	D
	CMOS	MC14002B	–	14	P,L	D
Dual 4–Input NOR Gate (Unbuffered)	CMOS	MC14002UB	–	14	P,L	D
Dual 5–Input NOR Gate	TTL	SN54LS260	SN74LS260	14	N,J	D
Low–Voltage CMOS Quad 2–Input NOR Gate, 5V–Tolerant Inputs	CMOS	MC74LCX02	–	14		D,DT
Quad 2–Input NOR Buffer	TTL	SN54LS28	SN74LS28	14	N,J	D
	TTL	SN54LS33	SN74LS33	14	N,J	D
Quad 2–Input NOR Gate	CMOS	MC74AC02	–	14	N	D
	CMOS	MC74ACT02	–	14	N	D
	TTL	MC74F02	–	14	N	D
	CMOS	MC54HC02A	MC74HC02A	14	N,J	D,DT
	CMOS	MC74VHC02	–	14		D, DT,M
	TTL	SN54LS02	SN74LS02	14	N,J	D
	ECL	MC10H102	–	16	P,L	FN
	ECL	MC10102	–	16	P,L	FN
	ECL	MC1662	–	16	L	
	CMOS	MC14001B	–	14	P,L	D
Quad 2–Input NOR Gate (Unbuffered)	CMOS	MC14001UB	–	14	P,L	D
Quad 2–Input NOR Gate With strobe	ECL	MC10H100	–	16	P,L	FN
Triple 3–Input NOR Gate	CMOS	MC54HC27	MC74HC27	14	N,J	D
	TTL	SN54LS27	SN74LS27	14	N,J	D
	CMOS	MC14025B	–	14	P,L	D
Triple 3–Input NOR Gate (Unbuffered)	CMOS	MC14025UB	–	14	P,L	D
Triple 4–3–3 Input NOR Gate	ECL	MC10H106	–	16	P,L	FN
	ECL	MC10106	–	16	P,L	FN
GATES, OR						
Dual 3–Input 3–Output OR Gate	ECL	MC10110	–	16	P,L	FN
	ECL	MC10H210	–	16	P,L	FN
	ECL	MC10210	–	16	P,L	FN
Dual 4–Input OR Gate	CMOS	MC14072B	–	14	P	D
Low–Voltage CMOS Quad 2–Input OR Gate, 5V–Tolerant Inputs	CMOS	MC74LCX32	–	14		D,DT
Low–Voltage Quiet CMOS Quad 2–Input OR Gate, 5V–Tolerant Inputs	CMOS	MC74LVQ32	–	14		D,M SD,DT
Quad 2–Input OR Gate	CMOS	MC74AC32	–	14	N	D
	CMOS	MC74ACT32	–	14	N	D
	TTL	MC74F32	–	14	N	D
	CMOS	MC54HC32A	MC74HC32A	14	N,J	D,DT
	CMOS	MC74VHC32	–	14		D, DT,M
	CMOS	MC54HCT32A	MC74HCT32A	14	N,J	D
	TTL	SN54LS32	SN74LS32	14	N,J	D
	ECL	MC10H103	–	16	P,L	FN
	ECL	MC10103	–	16	P,L	FN
	CMOS	MC14071B	–	14	P,L	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
GATES, OR						
Triple 3–Input OR Gate	CMOS	MC74HC4075	–	14	N	D
	CMOS	MC14075B	–	14	P,L	D
INDUSTRIAL CONTROL UNIT						
Industrial Control Unit	CMOS	MC14500B	–	16	P	DW
INVERTERS						
Hex Inverter	DTL	MC836	–	14	P	
	DTL	MC837	–	14	P	
	DTL	MC936	–	14	P,L	
	DTL	MC937	–	14	P,L	
Hex Inverter (Without Input Diodes)	DTL	MC840	–	14	P	
INVERTER/BUFFERS, 2–STATE						
9–Bit Buffer	ECL	MC10E122	MC100E122	28		FN
Driver	ECL	MC10EL12	MC100EL12	8		D
	ECL	MC100LVEL12	–	8		D
Dual Complementary Pair Plus Inverter (Unbuffered)	CMOS	MC14007UB	–	14	P	D
Hex Buffer With Enable	ECL	MC10H188	–	16	P,L	FN
	ECL	MC10188	–	16	P,L	FN
Hex Buffer/Non–Inverting	CMOS	MC14050B	–	16	P,L	D
Hex Inverter	CMOS	MC74AC04	–	14	N	D
	CMOS	MC74ACT04	–	14	N	D
	TTL	MC74F04	–	14	N	D
	CMOS	MC54HC04A	MC74HC04A	14	N,J	D,SD, DT
	CMOS	MC74VHC04	–	14		D, DT,M
	TTL	SN54LS04	SN74LS04	14	N,J	D
	TTL	SN54LS05	SN74LS05	14	N,J	D
Hex Inverter Gate (Unbuffered)	CMOS	MC14069UB	–	14	P,L	D
Hex Inverter With Enable	ECL	MC10H189	–	16	P,L	FN
	ECL	MC10189	–	16	P,L	FN
Hex Inverter With LSTTL Compatible Inputs	CMOS	MC74HCT04A	–	14	N	D,DT
Hex Inverter With open Drain Outputs	CMOS	MC74AC05	–	14	N	D
	CMOS	MC74ACT05	–	14	N	D
Hex Inverter With Strobe (Active Pullup)	HTL	MC677	–	14	P,L	
Hex Inverter With Strobe (Without Output Resistors)	HTL	MC678	–	14	P,L	
Hex Inverter/Buffer	ECL	MC10195	–	16	P,L	FN
	CMOS	MC14049B	–	16	P	D
Hex Inverter/Buffer (Unbuffered)	CMOS	MC14049UB	–	16	P,L	D
Hex Inverting Buffer/Logic–Level Down Converter	CMOS	MC54HC4049	MC74HC4049	16	N,J	D
Hex Non–Inverting Buffer/Logic–Level Down Converter	CMOS	MC54HC4050	MC74HC4050	16	N,J	D
Hex Unbuffered Inverter	CMOS	MC74HCU04	–	14	N	D
	CMOS	MC74HCU04A	–	14	N	D,DT
Low–Voltage CMOS Hex Inverter, With 5V–Tolerant Inputs	CMOS	MC74LCX04	–	14		D,DT
Low–Voltage Quiet CMOS Hex Inverter	CMOS	MC74LVQ04	–	14		D,M, SD,DT
Quad 2–Input Gate (Active Pullup)	HTL	MC672	–	14	P,L	
Quad 2–Input Gate (Passive Pullup)	HTL	MC668	–	14	P,L	
Quad Driver	ECL	MC10E112	MC100E112	28		FN
Strobed Hex Inverter/Buffer	CMOS	MC14502B	–	16	P,L	DW
Triple 3–Input Gate (Active Pullup)	HTL	MC671	–	14	P,L	
Triple 3–Input Gate (Passive Pullup)	HTL	MC670	–	14	P,L	

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
LATCHES						
3–Bit 4:1 Mux–Latch (Integrated E156 & E171)	ECL	MC10E256	MC100E256	28		FN
3–Bit 4:1 Mux–Latch, With Common Enable, Asynchronous Master Reset, Differential Output	ECL	MC10E156	MC100E156	28		FN
4–Bit D Latch	TTL	SN54LS75	SN74LS75	16	N,J	D
	TTL	SN54LS77	SN74LS77	14	N,J	D
	TTL	SN54LS375	SN74LS375	16	N,J	D
5–Bit 2:1 Mux–Latch, With Common Enable, Asynchronous Master Reset Differential Output	ECL	MC10E154	MC100E154	28		FN
6–Bit 2:1 Mux–Latch, With Common Enable, Asynchronous Master Reset Single Ended	ECL	MC10E155	MC100E155	28		FN
6–Bit D Latch	ECL	MC10E150	MC100E150	28		FN
8–Bit Addressable Latch	CMOS	MC74AC259	–	16	N	D
	CMOS	MC74ACT259	–	16	N	D
	TTL	MC74F259	–	16	N	D
	TTL	SN54LS259	SN74LS259	16	N,J	D
	CMOS	MC14099B	–	16	P	DW
	CMOS	MC14599B	–	18	P	
8–Bit Bus Compatible Addressable Latch	CMOS	MC14598B	–	18	P,L	
9–Bit Latch, With Parity	ECL	MC10E175	MC100E175	28		FN
Dual Latch	ECL	MC10H130	–	16	P,L	FN
Dual 2–Bit Transparent Latch	CMOS	MC74HC75	–	16	N	D
Dual 4–Bit Addressable Latch	CMOS	MC74AC256	–	16	N	DW
	CMOS	MC74ACT256	–	16	N	DW
	TTL	MC74F256	–	16	N	D
	TTL	SN54LS256	–	16	N,J	D
Dual 4–Bit Latch	CMOS	MC14508B	–	24	P,L	DW
Dual Latch	ECL	MC10130	–	16	P,L	FN
Low–Voltage CMOS Octal Transparent Latch, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX373	–	20		DW,M, DT
Low–Voltage CMOS 16–Bit Transparent Latch, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16373	–	48		DT
Low–Voltage CMOS Octal Transparent Latch Flow Through Pinout, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX573	–	20		DW,M, SD,DT
Low–Voltage Quiet CMOS Octal Transparent Latch	CMOS	MC74LVQ373	–	20		DW,M, SD,DT
Low–Voltage Quiet CMOS Octal Transparent Latch Flow Through Pinout	CMOS	MC74LVQ573	–	20		DW,M, SD,DT
Octal 3–State Non–Inverting Transparent Latch With LSTTL Compatible Inputs	CMOS	MC54HCT373A	MC74HCT373A	20	N,J	DW, SD,DT
Octal D Latch With 3–State Outputs	CMOS	MC74AC563	–	20	N	DW
	CMOS	MC74ACT563	–	20	N	DW
	CMOS	MC74AC573	–	20	N	DW
	CMOS	MC74ACT573	–	20	N	DW
Octal Transparent Latch With 3–State Outputs	CMOS	MC74AC373	–	20	N	DW
	CMOS	MC74ACT373	–	20	N	DW
	TTL	SN54LS373	SN74LS373	20	N,J	DW
	TTL	MC74F373	–	20	N	DW
	TTL	MC74F533	–	20	N	DW
	CMOS	MC74AC533	–	20	N	DW
	CMOS	MC74ACT533	–	20	N	DW

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
LATCHES						
Octal With 3–State Outputs Inverting Transparent Latch	CMOS	MC54HC533A	MC74HC533A	20	N,J	DW
	CMOS	MC54HC563A	MC74HC563A	20	N,J	DW,DT
Octal With 3–State Outputs Non–Inverting Transparent Latch	CMOS	MC54HC373A	MC74HC373A	20	N,J	DW, DT,SD
	CMOS	MC74VHC373	–	20		DW, DT,M
	CMOS	MC54HC573A	MC74HC573A	20	N,J	DW
	CMOS	MC74VHC573	–	20		DW, DT,M
Octal With 3–State Outputs Non–Inverting Transparent Latch With LSTTL Compatible Inputs	CMOS	MC74HCT573A	–	20	N	DW
Quad Latch	ECL	MC10133	–	16	P,L	FN
	ECL	MC10153	–	16	P,L	FN
Quad NAND R–S Latch	CMOS	MC14044B	–	16	P	D
Quad NOR R–S Latch	CMOS	MC14043B	–	16	P,L	D
Quad Set/Reset Latch	TTL	SN54LS279	SN74LS279	16	N,J	D
Quad Transparent Latch	CMOS	MC14042B	–	16	P,L	D
Quint Latch	ECL	MC10H175	–	16	P,L	FN
	ECL	MC10175	–	16	P,L	FN
MEMORY SUPPORT						
4–Bit ECL–TTL Load Reducing DRAM Driver	ECL	MC10H660	MC100H660	28		FN
MISCELLANEOUS						
Data Separator	ECL	MC10E197	–	28		FN
MULTIPLEXER/DATA SELECTORS						
1–of–8 Decoder/Demultiplexer	CMOS	MC74AC151	–	16	N	D
	CMOS	MC74ACT151	–	16	N	D
16–Channel Analog Multiplexer/Demultiplexer	CMOS	MC14067B	–	24	P	DW
16:1 Multiplexer	ECL	MC10E164	MC100E164	28		FN
2–Bit 8:1 Multiplexer	ECL	MC10E163	MC100E163	28		FN
2:1 Multiplexer	ECL	MC10EL58	MC100EL58	8		D
3–Bit 4:1 Multiplexer, With Split Select Differential Output	ECL	MC10E171	MC100E171	28		FN
4:1 Differential Multiplexer	ECL	MC10EL57	MC100EL57	16		D
5–Bit 2:1 Multiplexer, With Differential Output	ECL	MC10E158	MC100E158	28		FN
8–Channel Analog Multiplexer/Demultiplexer With Address Latch	CMOS	MC54HC4351	MC74HC4351	20	N,J	DW
8–Channel Analog Multiplexer/Demultiplexer	CMOS	MC54HC4051	MC74HC4051	16	N,J	D, DW ,DT
	CMOS	MC14051B	–	16	P,L	D
8–Channel Data Selector	CMOS	MC14512B	–	16	P,L	D
8–Input Data Selector/Multiplexer	CMOS	MC74HC151	–	16	N	D
8–Input Data Selector/Multiplexer With 3–State Outputs	CMOS	MC54HC251	MC74HC251	16	N,J	D
8–Input Multiplexer	TTL	MC74F151	–	16	N	D
	TTL	SN54LS151	SN74LS151	16	N,J	D
8–Input Multiplexer With 3–State Outputs	TTL	SN54LS251	SN74LS251	16	N,J	D
	TTL	MC74F251	–	16	N	D
	CMOS	MC74AC251	–	16	N	D
	CMOS	MC74ACT251	–	16	N	D
8–Input Data Selector/Multiplexer With Data and Address Latchs and With 3–State Outputs	CMOS	MC54HC354	MC74HC354	20	N,J	DW
8–Line Multiplexer	ECL	MC10H164	–	16	P,L	FN
	ECL	MC10164	–	16	P,L	FN
Analog Multiplexer/Demultiplexer With Injection Current Effect Control, Automotive Customized	CMOS	MC74HC4851A	MC74HC4852A	16	N	D,DW, DT
		MC74HC4853A	–			

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
MULTIPLEXER/DATA SELECTORS						
Dual 4–Channel Analog Data Selector	CMOS	MC14529B	–	16	P	D
Dual 4–Channel Analog Multiplexer/Demultiplexer	CMOS	MC74HC4052	–	16	N	D, DW
	CMOS	MC14052B	–	16	P,L	D
Dual 4–Channel Data Selector/Multiplexer	CMOS	MC14539B	–	16	P	D
Dual 4–Input Data Selector/Multiplexer	CMOS	MC74HC153	–	16	N	D
Dual 4–Input Data Selector/Multiplexer With 3–State Outputs	CMOS	MC74HC253	–	16	N	D
Dual 4–Input Multiplexer	CMOS	MC74AC153	–	16	N	D
	CMOS	MC74ACT153	–	16	N	D
	CMOS	MC74AC352	–	16	N	DW
	CMOS	MC74ACT352	–	16	N	DW
	TTL	MC74F153	–	16	N	D
	TTL	MC74F352	–	16	N	D
	TTL	SN54LS153	SN74LS153	16	N,J	D
	TTL	SN54LS352	SN74LS352	16	N,J	D
Dual 4–Input Multiplexer With 3–State Outputs	CMOS	MC74AC253	–	16	N	DW
	CMOS	MC74ACT253	–	16	N	DW
	CMOS	MC74AC353	–	16	N	D
	CMOS	MC74ACT353	–	16	N	D
	TTL	SN54LS253	SN74LS253	16	N,J	D
	TTL	SN54LS353	SN74LS353	16	N,J	D
	TTL	MC74F253	–	16	N	D
	TTL	MC74F353	–	16	N	D
Dual 4–to–1 Multiplexer	ECL	MC10H174	–	16	P,L	FN
	ECL	MC10174	–	16	P,L	FN
Dual Differential 2:1 Multiplexer (3.3V)	ECL	MC100LVEL56	MC100EL56	20		DW
Dual Multiplexer With Latch	ECL	MC10134	–	16	P,L	FN
Low Voltage 16:1 Multiplexer	ECL	MC100LVE164	–	32		FA
Low–Voltage CMOS Quad 2–Input, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX157	–	16		M,D, SD,DT
Quad 2–Input Multiplexer With Latch	ECL	MC10H173	–	16	P,L	FN
Quad 2–Channel Analog Multiplexer/Demultiplexer	CMOS	MC14551B	–	16	P	D
Quad 2–Input Data Selector/Multiplexer	CMOS	MC54HC158	MC74HC158	16	N,J	D
	CMOS	MC74HC158A	–	16	N,J	D,DT
Quad 2–Input Data Selector/Multiplexer With 3–State Outputs	CMOS	MC74HC257	–	16	N	D
Quad 2–Input Data Selectors/Multiplexers	CMOS	MC54HC157A	MC74HC157A	16	N,J	D,DT
	CMOS	MC74VHC157	–	16		D, DT,M
Quad 2–Input Data Selector/Multiplexer With LSTTL Compatible Inputs	CMOS	MC74HCT157A	–	16	N	D
Quad 2–Input Multiplexer	TTL	MC74F157A	–	16	N	D
	TTL	MC74F158A	–	16	N	D
	TTL	SN54LS157	SN74LS157	16	N,J	D
	TTL	SN54LS158	SN74LS158	16	N,J	D
Quad 2–Input Multiplexer (Inverting)	ECL	MC10159	–	16	P,L	FN
Quad 2–Input Multiplexer (Non–Inverting)	ECL	MC10158	–	16	P,L	FN
Quad 2–Input Multiplexer Inverting With 3–State Outputs	CMOS	MC74AC258	–	16	N	DW
	CMOS	MC74ACT258	–	16	N	DW
Quad 2–Input Multiplexer Non–Inverting With 3–State Outputs	CMOS	MC74ACT257	–	16	N	D
	CMOS	MC74AC257	–	16	N	D
Quad 2–Input Multiplexer With 3–State Outputs	TTL	SN54LS257B	SN74LS257B	16	N,J	D
Quad 2–Input Multiplexer With Storage	TTL	SN54LS298	SN74LS298	16	N,J	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
MULTIPLEXER/DATA SELECTORS						
Quad 2–Input Multiplexer, Inverting	CMOS	MC74AC158	–	16	N	D
	CMOS	MC74ACT158	–	16	N	D
Quad 2–Input Multiplexer, Inverting Output	ECL	MC10H159	–	16	P,L	FN
Quad 2–Input Multiplexer, Inverting, With 3–State Outputs	TTL	SN54LS258B	SN74LS258B	16	N,J	D
Quad 2–Input Multiplexer, Non–Inverting	CMOS	MC74AC157	–	16	N	D
	CMOS	MC74ACT157	–	16	N	D
Quad 2–Input Multiplexer, Non–Inverting Output	ECL	MC10H158	–	16	P,L	FN
Quad 2–Input Multiplexer, With 3–State Outputs	TTL	MC74F257A	–	16	N	D
	TTL	MC74F258A	–	16	N	D
Quad 2–Input Multiplexer/Latch	ECL	MC10173	–	16	P,L	FN
Quad 2–Port Register	TTL	MC74F398	–	20	N	DW
	TTL	MC74F399	–	16	N	D
	TTL	SN54LS398	SN74LS398	20	N,J	DW
	TTL	SN54LS399	SN74LS399	16	N,J	D
Quad 2:1 Mux, Individual–Select	ECL	MC10E157	MC100E157	28		FN
Quad Analog Switch/Multiplexer	CMOS	MC14016B	–	14	P,L	D
	CMOS	MC14066B	–	14	P,L	D
Quad Analog Switch/Multiplexer/Demultiplexer	CMOS	MC54HC4016	MC74HC4016	14	N,J	D
	CMOS	MC54HC4066	MC74HC4066	14	N,J	D,DT
Quad Analog Switch/Multiplexer/Demultiplexer With Separate Analog/Digital Power Supplies	CMOS	MC74HC4316	–	16	N	D
Triple 2–Channel Analog Multiplexer/Demultiplexer	CMOS	MC54HC4053	MC74HC4053	16	N,J	D, DW
	CMOS	MC14053B	–	16	P,L	D
Triple 2–Channel Analog Multiplexer/Demultiplexer With Address Latch	CMOS	MC54HC4353	MC74HC4353	20	N,J	DW
Triple 2:1 Multiplexer	ECL	MC100EL59	–	20		DW
Triple 2:1 Multiplexer (3.3V)	ECL	MC100LVEL59	–	20		DW
Triple Differential 2:1 Multiplexer	ECL	MC100E457	–	28		FN
	ECL	MC10E457	–	28		FN
MULTIVIBRATORS						
130MHz Voltage Controlled Multivibrator	ECL	MC12101	–	20	P	FN
200 MHz Voltage Controlled Multivibrator	ECL	MC12100	–	20	P	FN
Dual Monostable Multivibrator	HTL	MC667	–	14	P,L	
	CMOS	MC14528B	–	16	P,L	D
Dual Monstable Multivibrators With Schmitt Trigger Inputs	TTL	SN54LS221	SN74LS221	16	N,J	D
Dual Precision Monostable Multivibrator Retriggerable, Resettable)	CMOS	MC54HC4538A	MC74HC4538A	16	N,J	D
Dual Precision Monostable Multivibrator	CMOS	MC14538B	–	16	P,L	D, DW
Dual Voltage–Controlled Multivibrator	ECL	MC4024	–	14	P,L	
Monostable Multivibrator	DTL	MC951	–	14	P,L	
	ECL	MC10198	–	16	P,L	FN
Retriggerable Monostable Multivibrators	TTL	SN54LS122	SN74LS122	14	N,J	D
	TTL	SN54LS123	SN74LS123	14	N,J	D
Voltage Controlled Multivibrator	ECL	MC1658	–	16	P,L	D,FN
OSCILLATORS						
7–Stage Binary Ripple Counter	CMOS	MC74HC4024	–	14	N	D
Crystal Oscillator	ECL	MC12061	–	16	P,L	
Dual Voltage–Controlled Multivibrator	ECL	MC4324	–	14	P,L	
Low Power Voltage Controlled Oscillator	ECL	MC12148	–	8		D,SD

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
OSCILLATORS						
Voltage Controlled Oscillator	ECL	MC1648	–	14	P,L	D,FN
OSCILLATOR/TIMERS						
24–Stage Frequency Divider	CMOS	MC14521B	–	16	P,L	D
Programmable Oscillator Timer	CMOS	MC14541B	–	14	P,L	D
Programmable Timer	CMOS	MC14536B	–	16	P,L	DW
Quad Precision Timer/Driver	CMOS	MC14415	–	16	P,L	DW
PARITY CHECKERS						
12–Bit Parity Generator/Checker	ECL	MC10H160	–	16	P,L	FN
	ECL	MC10160	–	16	P,L	FN
12–Bit Parity Generator/Checker, Register–Shiftable, Diff Output	ECL	MC10E160	MC100E160	28		FN
12–Bit Parity Tree	CMOS	MC14531B	–	16	P	D
9 + 2–Bit Parity Generator–Checker	ECL	MC10170	–	16	P,L	FN
9–Bit Odd/Even Parity Generator/Checker	CMOS	MC74HC280	–	14	N	D
	TTL	SN54LS280	SN74LS280	14	N,J	D
9–Bit Parity Generator/Checker	TTL	MC74F280	–	14	N	D
Error Detection and Correction Circuit	ECL	MC10E193	MC100E193	28		FN
PHASE–LOCKED LOOP						
Phase–Locked Loop	CMOS	MC14046B	–	16	P,L	DW
PRESCALERS						
1.1GHz ÷10/20/40/80 Prescaler	ECL	MC12080	–	8	P	D
1.1GHz ÷126/128, ÷254/256 Low Power Dual Modulus Prescaler	ECL	MC12058	–	8		D,SD
1.1GHz ÷127/128, ÷255/256 Low Power Dual Modulus Prescaler	ECL	MC12038A	–	8	P	D
1.1GHz ÷8/9, ÷16/17 Dual Modulus Prescaler	ECL	MC12026A	–	8	P	D
	ECL	MC12026B	–	8	P	D
1.1GHz ÷2 Low Power Prescaler With Stand–By Mode	ECL	MC12083	–	8	P	D
1.1GHz ÷2/4/8 Low Power Prescaler With Stand–By Mode	ECL	MC12093	–	8	P	D,SD
1.1GHz ÷256 Prescaler	ECL	MC12074	–	8	P	D
1.1GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	ECL	MC12028A	–	8	P	D
1.1GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	ECL	MC12028B	–	8	P	D
1.1GHz ÷64 Prescaler	ECL	MC12073	–	8	P	D
1.1GHz ÷64/65, ÷128/129 Dual Modulus Prescaler	ECL	MC12022A	–	8	P	D
	ECL	MC12022B	–	8	P	D
	ECL	MC12022SLA	–	8	P	D
	ECL	MC12022SLB	–	8	P	D
	ECL	MC12022TSA	–	8	P	D
	ECL	MC12022TSB	–	8	P	D
1.1GHz ÷64/65, ÷128/129 Dual Modulus Prescaler With Stand–By Mode	ECL	MC12036A	–	8	P	D
	ECL	MC12036B	–	8	P	D
1.1GHz ÷64/65, ÷128/129 Low Voltage Dual Modulus Prescaler	ECL	MC12022LVA	–	8	P	D
	ECL	MC12022LVB	–	8	P	D
	ECL	MC12022TVA	–	8	P	D
	ECL	MC12022TVB	–	8	P	D
1.1GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler	ECL	MC12052A	–	8		D,SD
1.1GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler With Stand–By Mode	ECL	MC12053A	–	8		D,SD
1.3GHz ÷64 Prescaler	ECL	MC12075	–	8	P	D
1.3GHz ÷64/256 Prescaler	ECL	MC12066	–	8		D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
PRESCALERS						
1.3GHz ÷256 Prescaler	ECL	MC12076	–	8	P	D
	ECL	MC12078	–	8	P	D
2.0GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	ECL	MC12034A	–	8	P	D
	ECL	MC12034B	–	8	P	D
2.0GHz ÷32/33, ÷64/65 Low Voltage Dual Modulus Prescaler	ECL	MC12033A	–	8	P	D
	ECL	MC12033B	–	8	P	D
2.0GHz ÷64/65, ÷128/129 Dual Modulus Prescaler	ECL	MC12032A	–	8	P	D
	ECL	MC12032B	–	8	P	D
2.0GHz ÷64/65, ÷128/129 Low Voltage Dual Modulus Prescaler	ECL	MC12031A	–	8	P	D
	ECL	MC12031B	–	8	P	D
2.0GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler	ECL	MC12054A	–	8		D,SD
2.5GHz ÷2, ÷4 Low Power Prescaler With Satnd–By Mode	ECL	MC12095	–	8		D,SD
2.5GHz ÷8192 Prescaler	ECL	MC12098	–	8		D
2.8GHz ÷64/128/256 Prescaler	ECL	MC12079	–	8	P	D
	ECL	MC12089	–	8	P	D
225MHz ÷20/21 Dual Modulus Prescaler	ECL	MC12019	–	8	P,L	D
225MHz ÷32/33 Dual Modulus Prescaler	ECL	MC12015	–	8	P,L	D
225MHz ÷40/41 Dual Modulus Prescaler	ECL	MC12016	–	8	P,L	D
225MHz ÷64 Prescaler	ECL	MC12023	–	8	P	D
225MHz ÷64/65 Dual Modulus Prescaler	ECL	MC12017	–	8	P,L	D
480MHz ÷5/6 Dual Modulus Prescaler	ECL	MC12009	–	16	P,L	
520MHz ÷128/129 Dual Modulus Prescaler	ECL	MC12018	–	8	P,L	D
520MHz ÷64/65 Dual Modulus Prescaler	ECL	MC12025	–	8	P	D
550MHz ÷10/11 Dual Modulus Prescaler	ECL	MC12013	–	16	P,L	
550MHz ÷8/9 Dual Modulus Prescaler	ECL	MC12011	–	16	P,L	
750MHz ÷2 UHF Prescaler	ECL	MC12090	–	16	P,L	
PROGRAMMABLE DELAY CHIPS						
Programmable Delay Chip (Dig 80ps Anal. 1.6 Ps/mv)	ECL	MC10E196	MC100E196	28		FN
Programmable Delay Chip (Digitally Selectable 20ps Res)	ECL	MC10E195	MC100E195	28		FN
RAMs						
1024 X 1–Bit Random Access Memory	ECL	MCM10146	–	16	L	
256 X 1–Bit Random Access Memory	ECL	MCM10152	–	16	L	
RECEIVERS						
Differential Receiver	ECL	MC10EL16	MC100EL16	8		D
	ECL	MC100LVEL16	–	8		D
High Speed Triple Line Receiver	ECL	MC10216	–	16	P,L	FN
Low–Voltage Quad Differential Line Receiver	ECL	MC100LVEL17	MC100EL17	20		DW
Quad Bus Receiver	ECL	MC10129	–	16	L	
Quad Line Receiver	ECL	MC10H115	–	16	P,L	FN
	ECL	MC10115	–	16	P,L	FN
	ECL	MC1692	–	16	L	
Quint Differential Line Receiver	ECL	MC10E116	MC100E116	28		FN
	ECL	MC10E416	MC100E416	28		FN

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
RECEIVERS						
Triple Line Receiver	ECL	MC10H116	–	16	P,L	D,FN
	ECL	MC10114	–	16	P,L	FN
	ECL	MC10116	–	16	P,L	FN
REGISTERS						
4 X 4 Multiport Register	CMOS	MC14580B	–	24	P,L	D
Hex Parallel D Register With Enable	TTL	MC74F378	–	16	N	D
REGISTER FILES						
16 X 4–Bit Register File (RAM)	ECL	MC10H145	–	16	P,L	FN
4 X 4 Register File Open Collector	TTL	SN54LS170	SN74LS170	16	N,J	D
4 X 4 Register File With 3–State Outputs	TTL	SN54LS670	SN74LS670	16	N,J	D
64–Bit Register File (RAM)	ECL	MCM10145	–	16	L	
8 X 2 Multiport Register File (RAM)	ECL	MCM10143	–	24	L	
SCHMITT TRIGGERS						
Dual 4–Input NAND Schmitt Trigger	TTL	MC74F13	–	14	N	D
	TTL	SN54LS13	SN74LS13	14	N,J	D
Dual Schmitt Trigger	CMOS	MC14583B	–	16	P	D
Hex Inverter Schmitt Trigger	CMOS	MC74AC14	–	14	N	D
	CMOS	MC74ACT14	–	14	N	D
	TTL	MC74F14	–	14	N	D
	TTL	SN54LS14	SN74LS14	14	N,J	D
Hex Schmitt Trigger	CMOS	MC14106B	–	14	P,L	D
	CMOS	MC14584B	–	14	P,L	D
Hex Schmitt Trigger Inverter	CMOS	MC54HC14A	MC74HC14A	14	N,J	D,DT
	CMOS	MC74VHC14	–	14		D, DT,M
	CMOS	MC54HCT14A	MC74HCT14A	14	N,J	D
Quad 2–Input NAND Gate With Schmitt Trigger Inputs	CMOS	MC54HC132A	MC74HC132A	14	N,J	D
Quad 2–Input NAND Schmitt Trigger	CMOS	MC74AC132	–	14	N	D
	CMOS	MC74ACT132	–	14	N	D
	TTL	MC74F132	–	14	N	D
	CMOS	MC14093B	–	14	P,L	D
Quad 2–Input Schmitt Trigger NAND Gate	TTL	SN54LS132	SN74LS132	14	N,J	D
SCSI BUS TERMINATORS						
9–Bit Switchable Active SCSI–2 Bus Term (110Ω) with Volt Reg	CMOS	MCCS142237	–	16,20		DW, DT
9–Bit Switchable SCSI Bus Term (220Ω & 330Ω: Passive)	CMOS	MCCS142233	–	20		FN
18–Bit Active SCSI Bus Terminator (*Also Available in 32–Pin QFP Package)	CMOS	MCCS142235	–	24,32		DW, *FA
18–Bit Switchable Active SCSI–2 Bus Term (110Ω) with Volt Reg	CMOS	MCCS142236	–	28		DW
18–Bit Switchable Active SCSI–2 Bus Term (110Ω) with Volt Reg Plus Inverted Disconnect	CMOS	MCCS142238	–	28		DW
9–Bit Switchable Active SCSI Bus Terminator (110Ω) with Volt Reg	CMOS	MCCS142239	–	16		D,DW
SERIAL EPROMs						
Serial EPROM for MPA1016: 8–Pin DIP and SOIC; 20–Pin PLCC	CMOS	MPA1765	–	8,20	N	D,FN
Serial EPROM for MPA1036: 8–Pin DIP and SOIC; 20–Pin PLCC	CMOS	MPA17128	–	8,20	P	D,FN
SHIFT REGISTERS						
1–to–64–Bit Variable Length Shift Register	CMOS	MC14557B	–	16	P,L	DW
128–Bit Static Shift Register	CMOS	MC14562B	–	14	P,L	
18–Bit Static Shift Register	CMOS	MC14006B	–	14	P,L	D
3–Bit Scannable Registered Address Driver, ECL	ECL	MC10E212	MC100E212	28		FN

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
SHIFT REGISTERS						
4–Bit Bidirectional Universal Shift Register	CMOS	MC74AC194	–	16	N	D
	CMOS	MC74ACT194	–	16	N	D
	TTL	MC74F194	–	16	N	D
	CMOS	MC74HC194	–	16	N	
	TTL	SN54LS194A	SN74LS194A	16	N,J	D
4–Bit Shift Register	TTL	MC74F195	–	16	N	D
	TTL	SN54LS95B	SN74LS95B	14	N,J	D
	CMOS	MC14035B	–	16	P,L	D
4–Bit Shift Register With 3–State Outputs	TTL	SN74LS395	–	16	N,J	D
4–Bit Shifter With 3–State	CMOS	MC74AC350	–	16	N	D
	CMOS	MC74ACT350	–	16	N	D
4–Bit Shifter, With 3–State Outputs	TTL	MC74F350	–	16	N	D
4–Bit Universal Shift Register	CMOS	MC74HC195	–	16	N	
	ECL	MC10H141	–	16	P,L	FN
	ECL	MC10141	–	16	P,L	FN
	CMOS	MC14194B	–	16	P,L	D
8–Bit Bidirectional Universal Shift Register With parallel I/O	CMOS	MC74HC299	–	20	N	DW
8–Bit Parallel–to–Serial Shift Register	TTL	SN54LS165	SN74LS165	16	N,J	D
8–Bit Scannable Register	ECL	MC10E241	MC100E241	28		FN
8–Bit Serial In–Serial Out Shift Register	TTL	MC74F164	–	14	N	D
8–Bit Serial or Parallel–Input/Serial–Output Shift Register	CMOS	MC54HC165	MC74HC165	16	N,J	D
8–Bit Serial or Parallel–Input/Serial–Output Shift Register With 3–State Outputs	CMOS	MC54HC589	MC74HC589	16	N,J	D
	CMOS	MC54HC589A	MC74HC589A	16	N,J	D,SD DT
8–Bit Serial or Parallel–Input/Serial–Output Shift Register With Input Latch	CMOS	MC54HC597	MC74HC597	16	N,J	D
	CMOS	MC54HC597A	MC74HC597A	16	N,J	D,DT
8–Bit Serial–In/Parallel–Out Shift Register	TTL	SN54LS164	SN74LS164	14	N,J	D
8–Bit Serial–Input/Parallel–Output Shift Register	CMOS	MC54HC164	MC74HC164	14	N,J	D
	CMOS	MC54HC164A	MC74HC164A	14	N,J	D,DT
8–Bit Serial–Input/Serial or Parallel–Output Shift Register With Latched 3–State Outputs	CMOS	MC54HC595A	MC74HC595A	16	N,J	D,DT
	CMOS	MC74VHC595	–	16		D, DT,M
8–Bit Shift Register	ECL	MC10E141	MC100E141	28		FN
	TTL	SN54LS166	SN74LS166	16	N,J	D
8–Bit Shift Registers With Sign Extend	TTL	SN54LS322A	SN74LS322A	20	N,J	DW
8–Bit Shift/Storage Register With 3–State Outputs	TTL	SN54LS299	SN74LS299	20	N,J	DW
	TTL	SN54LS323	SN74LS323	20	N,J	DW
8–Bit Static Shift Register	CMOS	MC14014B	–	16	P,L	D
	CMOS	MC14021B	–	16	P,L	D
8–Input Shift/Storage Register W/Synchronous Reset and Common I/O Pins	TTL	MC74F323	–	20	N	DW
8–Input Universal Shift/Storage Register With Common Parallel I/O Pins: With 3–State Outputs	CMOS	MC74AC299	–	20	N	DW
	CMOS	MC74ACT299	–	20	N	DW
8–Input Universal Shift/Storage Register With Syn Reset/Common Parallel I/O Pins: With 3–State Outputs	CMOS	MC74AC323	–	20	N	DW
	CMOS	MC74ACT323	–	20	N	DW
8–Input Universal Shift/Storage Register, W/Common Parallel I/O Pins	TTL	MC74F299	–	20	N	DW
8–Stage Shift/Store Register With 3–State Outputs	CMOS	MC14094B	–	16	P,L	D
9–Bit Shift Register, 700MHz, With Asynchronous Master Reset	ECL	MC10E142	MC100E142	28		FN
Dual 5–Bit Shift Register	CMOS	MC14015B	–	16	P,L	D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
SHIFT REGISTERS						
Dual 64–Bit Static Shift Register	CMOS	MC14517B	–	16	P	DW
Successive Approximation Register	CMOS	MC14549B	–	16	P,L	DW
	CMOS	MC14559B	–	16	P,L	DW
Universal 4–Bit Shift Register	TTL	SN54LS195A	SN74LS195A	16	N,J	D
SYNTHESIZERS						
1.1GHz Serial Input Synthesizer With ÷64/65, ÷128/129 Prescaler	ECL	MC12202	–	16,20		D,M, DT
125–1000MHz Frequency Synthesizer With Parallel Programming Interface	ECL	MC12181	–	16		DT
2.0GHz Serial Input Synthesizer With ÷64/65, ÷128/129 Prescaler	ECL	MC12206	–	16,20		D,DT
2.5GHz Serial Input Synthesizer With ÷32/33, ÷64/65 Prescaler	ECL	MC12210	–	16,20		D,DT
2.7GHz Frequency Synthesizer	ECL	MC12179	–	8		D
TRANSCEIVERS						
25Ω Octal Bidirectional Transceiver w/ 3–State Inputs and Outputs	ECL	MC74F2245	–	20		DW,SD
4–Bit Differential ECL Bus/TTL Bus Transceiver	ECL	MC10H680	MC100H680	28		FN
Dual Supply Octal Translating Transceiver	CMOS	MC74LVX4245	–	24		DW,DT
ECL/TTL Inverting Bidirectional Transceivers With Latch (4–Bit)	ECL	MC10804	–	16	L	
ECL/TTL Inverting Bidirectional Transceivers With Latch (5–Bit)	ECL	MC10805	–	20	L	
Hex ECL/TTL Transceiver With Latches	ECL	MC10H681	MC100H681	28		FN
Low–Voltage CMOS 16–Bit Latching Transceiver, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16543A	–	56		DT
Low–Voltage CMOS 16–Bit Transceiver, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16245	–	48		DT
Low–Voltage CMOS 18–Bit Universal Bus Transceiver, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX16500	–	56		DT
	CMOS	MC74LCX16501	–	56		DT
Low–Voltage CMOS Octal Registered Transceiver With Dual Output and Clock Enables, With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX2952	–	24		DW, SD,DT
Low–Voltage CMOS Octal Transceiver, 3–State, Non–Inverting With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX245	–	20		M,DW, DT
Low–Voltage Quiet CMOS Octal Transceiver, 3–State, Non–Inverting	CMOS	MC74LVQ245	–	20		M,DW, SD,DT
Low–Voltage CMOS Octal Transceiver/Registered Transceiver With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX646	–	24		DW, SD,DT
Low–Voltage CMOS Octal Transceiver/Registered Transceiver With Dual Enable, With 5V Tolerant Inputs and Outputs	CMOS	MC74LCX652	–	24		DW, DT
Low–Voltage Quiet CMOS Octal Transceiver/Registered Transceiver	CMOS	MC74LVQ646	–	24		DW, SD,DT
Low–Voltage Quiet CMOS Octal Transceiver/Registered Transceiver	CMOS	MC74LVQ652	–	24		DW, SD,DT
Octal Bus Transceiver/Inverting With Open Collector	TTL	SN54LS642	SN74LS642	20	N,J	DW
Octal Bus Transceiver/Non–Inverting With Open Collector	TTL	SN54LS641	SN74LS641	20	N,J	DW
Quad Futurebus Backplane Transceiver, With 3–State Outputs and Open Collector	TTL	MC74F3893A	–	20		FN
TRANSLATORS						
9–Bit ECL/TTL Translator	ECL	MC10H601	MC100H601	28		FN
9–Bit Latch ECL/TTL Translator	ECL	MC10H603	MC100H603	28		FN
9–Bit Latch TTL/ECL Translator	ECL	MC10H602	MC100H602	28		FN
9–Bit TTL/ECL Translator	ECL	MC10H600	MC100H600	28		FN
Differential ECL/TTL Translator	ECL	MC10ELT25	MC100ELT25	8		D
Differential PECL/TTL Translator	ECL	MC10ELT21	MC100ELT21	8		D
Dual Differential PECL/TTL Translator	ECL	MC100ELT23	–	8		D
Dual LVTTL/LVCMOS to Differential PECL Translator	ECL	MC100LVELT22	–	8		D
Dual TTL/Differential PECL Translator	ECL	MC10ELT22	MC100ELT22	8		D

Selection by Function

Description	Tech.	Device(s)		Pins	DIP	SM
TRANSLATORS						
ECL/TTL Translator (Single P.S. @+ 5.0V)	ECL	MC10H350	–	16	P,L	FN
Hex ECL/MST Translator	ECL	MC10191	–	16	P,L	
Hex TTL OR CMOS/CMOS Hex Level Shifter	CMOS	MC14504B	–	16	P,L	D
Quad CMOS/ECL Translator (Single P.S. @+ 5.0V)	ECL	MC10H352	–	20	P,L	FN
Quad MECL/TTL Translator	ECL	MC10H125	–	16	P,L	FN
	ECL	MC10125	–	16	P,L	FN
Quad MST/ECL Translator	ECL	MC10190	–	16	P	
Quad TTL/ECL Translator (ECL Strobe)	ECL	MC10H424	–	16	P,L	FN
Quad TTL/MECL Translator	ECL	MC10124	–	16	P,L	FN
Quad TTL/MECL Translator, With TTL Strobe Input	ECL	MC10H124	–	16	P,L	FN
Quad TTL/NMOS–to–PECL Translator (Single P.S. @+ 5.0V)	ECL	MC10H351	–	20	P,L	FN
Registered Hex ECL/TTL Translator	ECL	MC10H605	MC100H605	28		FN
Registered Hex PECL/TTL Translator	ECL	MC10H607	MC100H607	28		FN
Registered Hex TTL/ECL Translator	ECL	MC10H604	MC100H604	28		FN
Registered Hex TTL/PECL Translator	ECL	MC10H606	MC100H606	28		FN
Triple MECL/NMOS Translator	ECL	MC10177	–	16	L	
Triple ECL to PECL Translator	ECL	MC100LVEL90	MC100EL90	20		DW
Triple PECL to LVPECL Translator	ECL	MC100LVEL92	–	20		DW
Triple PECL to ECL Translator	ECL	MC100LVEL91	–	20		DW
TTL/Differential ECL Translator	ECL	MC10ELT24	MC100ELT24	8		D
TTL/Differential PECL Translator	ECL	MC10ELT20	MC100ELT20	8		D
TTL to Differential PECL/Differential PECL to TTL Translator	ECL	MC10ELT28	MC100ELT28	8		D
VCO						
Phase–Locked–Loop With VCO	CMOS	MC74HC4046A	–	16	N	D
Low Power Voltage Controlled Oscillator Buffer	CMOS	MC12147	–	8		D,SD
Low Power Voltage Controlled Oscillator Buffer	CMOS	MC12149	–	8		D,SD

Device Index

MC100E016	3.1–15
MC100E101	3.1–23
MC100E104	3.1–23
MC100E107	3.1–23
MC100E111	3.1–12
MC100E112	3.1–25
MC100E116	3.1–31
MC100E122	3.1–25
MC100E131	3.1–18
MC100E136	3.1–14
MC100E137	3.1–15
MC100E141	3.1–33
MC100E142	3.1–33
MC100E143	3.1–18
MC100E150	3.1–26
MC100E151	3.1–18
MC100E154	3.1–26
MC100E155	3.1–26
MC100E156	3.1–26
MC100E157	3.1–29
MC100E158	3.1–27
MC100E160	3.1–30
MC100E163	3.1–27
MC100E164	3.1–27
MC100E166	3.1–14
MC100E167	3.1–18
MC100E171	3.1–27
MC100E175	3.1–26
MC100E193	3.1–30
MC100E195	3.1–31
MC100E196	3.1–31
MC100E210	3.1–9
MC100E211	3.1–12
MC100E212	3.1–32
MC100E241	3.1–33
MC100E256	3.1–26
MC100E310	3.1–9
MC100E336	3.1–10
MC100E337	3.1–10
MC100E404	3.1–23
MC100E416	3.1–31
MC100E431	3.1–18
MC100E445	3.1–14
MC100E446	3.1–14
MC100E451	3.1–18
MC100E452	3.1–18
MC100E457	3.1–29
MC100EL01	3.1–22
MC100EL04	3.1–22
MC100EL05	3.1–22
MC100EL07	3.1–22
MC100EL11	3.1–12
MC100EL12	3.1–25
MC100EL13	3.1–9
MC100EL14	3.1–12
MC100EL15	3.1–12
MC100EL16	3.1–31
MC100EL17	3.1–31
MC100EL29	3.1–19
MC100EL30	3.1–21
MC100EL31	3.1–18
MC100EL32	3.1–17
MC100EL33	3.1–17
MC100EL34	3.1–13
MC100EL35	3.1–19
MC100EL38	3.1–13
MC100EL39	3.1–13
MC100EL51	3.1–18
MC100EL52	3.1–18
MC100EL56	3.1–28
MC100EL57	3.1–27
MC100EL58	3.1–27
MC100EL59	3.1–29
MC100EL90	3.1–35
MC100ELT20	3.1–35
MC100ELT21	3.1–34
MC100ELT22	3.1–34
MC100ELT23	3.1–34
MC100ELT24	3.1–35
MC100ELT25	3.1–34
MC100ELT28	3.1–35
MC100H600	3.1–34
MC100H601	3.1–34
MC100H602	3.1–34
MC100H603	3.1–34
MC100H604	3.1–35
MC100H605	3.1–35
MC100H606	3.1–35
MC100H607	3.1–35
MC100H640	3.1–13
MC100H641	3.1–13
MC100H642	3.1–13
MC100H643	3.1–13
MC100H644	3.1–13
MC100H646	3.1–13
MC100H660	3.1–27
MC100H680	3.1–34
MC100H681	3.1–34
MC100LVE111	3.1–12
MC100LVE164	3.1–28
MC100LVE210	3.1–9
MC100LVE222	3.1–13
MC100LVE310	3.1–9
MC100LVEL01	3.1–22
MC100LVEL05	3.1–22
MC100LVEL11	3.1–9
MC100LVEL12	3.1–25
MC100LVEL13	3.1–9
MC100LVEL14	3.1–12
MC100LVEL16	3.1–31
MC100LVEL17	3.1–31
MC100LVEL29	3.1–19
MC100LVEL30	3.1–21
MC100LVEL31	3.1–20
MC100LVEL32	3.1–17
MC100LVEL33	3.1–17
MC100LVEL38	3.1–13
MC100LVEL39	3.1–13
MC100LVEL51	3.1–18
MC100LVEL56	3.1–28
MC100LVEL59	3.1–29
MC100LVEL90	3.1–35
MC100LVEL91	3.1–35
MC100LVEL92	3.1–35
MC100LVELT22	3.1–34
MC100SX1230	3.1–18
MC10101	3.1–23
MC10102	3.1–24
MC10103	3.1–24
MC10104	3.1–21
MC10105	3.1–23
MC10106	3.1–24
MC10107	3.1–23
MC10109	3.1–23
MC10110	3.1–24
MC10111	3.1–24
MC10113	3.1–23
MC10114	3.1–32
MC10115	3.1–31
MC10116	3.1–32
MC10117	3.1–23
MC10121	3.1–22
MC10123	3.1–12
MC10124	3.1–35
MC10125	3.1–35
MC10129	3.1–31
MC10130	3.1–26
MC10131	3.1–19
MC10133	3.1–27
MC10134	3.1–28
MC10135	3.1–19
MC10136	3.1–16
MC10137	3.1–16

Device Index

MC10138	3.1–15
MC10141	3.1–33
MC10153	3.1–27
MC10154	3.1–15
MC10158	3.1–28
MC10159	3.1–28
MC10160	3.1–30
MC10161	3.1–16
MC10162	3.1–16
MC10163	3.1–17
MC10164	3.1–27
MC10165	3.1–18
MC10166	3.1–14
MC10170	3.1–30
MC10171	3.1–16
MC10172	3.1–17
MC10173	3.1–29
MC10174	3.1–28
MC10175	3.1–27
MC10176	3.1–19
MC10177	3.1–35
MC10178	3.1–15
MC10180	3.1–9
MC10181	3.1–9
MC10186	3.1–19
MC10188	3.1–25
MC10189	3.1–25
MC10190	3.1–35
MC10191	3.1–35
MC10192	3.1–12
MC10193	3.1–17
MC10195	3.1–25
MC10197	3.1–21
MC10198	3.1–29
MC10210	3.1–24
MC10211	3.1–24
MC10212	3.1–23
MC10216	3.1–31
MC10231	3.1–19
MC10804	3.1–34
MC10805	3.1–34
MC10E016	3.1–15
MC10E101	3.1–23
MC10E104	3.1–23
MC10E107	3.1–23
MC10E111	3.1–12
MC10E112	3.1–25
MC10E116	3.1–31
MC10E122	3.1–25
MC10E131	3.1–18
MC10E136	3.1–14
MC10E137	3.1–15
MC10E141	3.1–33
MC10E142	3.1–33
MC10E143	3.1–18
MC10E150	3.1–26
MC10E151	3.1–18
MC10E154	3.1–26
MC10E155	3.1–26
MC10E156	3.1–26
MC10E157	3.1–29
MC10E158	3.1–27
MC10E160	3.1–30
MC10E163	3.1–27
MC10E164	3.1–27
MC10E1651	3.1–14
MC10E1652	3.1–14
MC10E166	3.1–14
MC10E167	3.1–18
MC10E171	3.1–27
MC10E175	3.1–26
MC10E193	3.1–30
MC10E195	3.1–31
MC10E196	3.1–31
MC10E197	3.1–27
MC10E211	3.1–12
MC10E212	3.1–32
MC10E241	3.1–33
MC10E256	3.1–26
MC10E336	3.1–10
MC10E337	3.1–10
MC10E404	3.1–23
MC10E411	3.1–13
MC10E416	3.1–31
MC10E431	3.1–18
MC10E445	3.1–14
MC10E446	3.1–14
MC10E451	3.1–18
MC10E452	3.1–18
MC10E457	3.1–29
MC10EL01	3.1–22
MC10EL04	3.1–22
MC10EL05	3.1–22
MC10EL07	3.1–22
MC10EL11	3.1–12
MC10EL12	3.1–25
MC10EL15	3.1–12
MC10EL16	3.1–31
MC10EL31	3.1–18
MC10EL32	3.1–17
MC10EL33	3.1–17
MC10EL34	3.1–13
MC10EL35	3.1–19
MC10EL51	3.1–18
MC10EL52	3.1–18
MC10EL57	3.1–27
MC10EL58	3.1–27
MC10EL89	3.1–17
MC10ELT20	3.1–35
MC10ELT21	3.1–34
MC10ELT22	3.1–34
MC10ELT24	3.1–35
MC10ELT25	3.1–34
MC10ELT28	3.1–35
MC10H100	3.1–24
MC10H101	3.1–23
MC10H102	3.1–24
MC10H103	3.1–24
MC10H104	3.1–21
MC10H105	3.1–23
MC10H106	3.1–24
MC10H107	3.1–23
MC10H109	3.1–23
MC10H113	3.1–23
MC10H115	3.1–31
MC10H116	3.1–32
MC10H117	3.1–23
MC10H118	3.1–23
MC10H119	3.1–22
MC10H121	3.1–22
MC10H123	3.1–12
MC10H124	3.1–35
MC10H125	3.1–35
MC10H130	3.1–26
MC10H131	3.1–19
MC10H135	3.1–19
MC10H136	3.1–16
MC10H141	3.1–33
MC10H145	3.1–32
MC10H158	3.1–29
MC10H159	3.1–29
MC10H16	3.1–14
MC10H160	3.1–30
MC10H161	3.1–16
MC10H162	3.1–16
MC10H164	3.1–27
MC10H165	3.1–18
MC10H166	3.1–14
MC10H171	3.1–17
MC10H172	3.1–17
MC10H173	3.1–28
MC10H174	3.1–28
MC10H175	3.1–27
MC10H176	3.1–19
MC10H179	3.1–9
MC10H180	3.1–9

Device Index

MC10H181	3.1–9
MC10H186	3.1–19
MC10H188	3.1–25
MC10H189	3.1–25
MC10H209	3.1–23
MC10H210	3.1–24
MC10H211	3.1–24
MC10H330	3.1–12
MC10H332	3.1–10
MC10H334	3.1–12
MC10H350	3.1–35
MC10H351	3.1–35
MC10H352	3.1–35
MC10H423	3.1–12
MC10H424	3.1–35
MC10H600	3.1–34
MC10H601	3.1–34
MC10H602	3.1–34
MC10H603	3.1–34
MC10H604	3.1–35
MC10H605	3.1–35
MC10H606	3.1–35
MC10H607	3.1–35
MC10H640	3.1–13
MC10H641	3.1–13
MC10H642	3.1–13
MC10H643	3.1–13
MC10H644	3.1–13
MC10H645	3.1–13
MC10H646	3.1–13
MC10H660	3.1–27
MC10H680	3.1–34
MC10H681	3.1–34
MC10SX1125	3.1–9
MC10SX1130	3.1–13, 3.1–17
MC10SX1189	3.1–13
MC12002	3.1–17
MC12009	3.1–31
MC12011	3.1–31
MC12013	3.1–31
MC12014	3.1–15
MC12015	3.1–31
MC12016	3.1–31
MC12017	3.1–31
MC12018	3.1–31
MC12019	3.1–31
MC12022A	3.1–30
MC12022B	3.1–30
MC12022LVA	3.1–30
MC12022LVB	3.1–30
MC12022SLA	3.1–30
MC12022SLB	3.1–30
MC12022TSA	3.1–30
MC12022TSB	3.1–30
MC12022TVA	3.1–30
MC12022TVB	3.1–30
MC12023	3.1–31
MC12025	3.1–31
MC12026A	3.1–30
MC12026B	3.1–30
MC12028A	3.1–30
MC12028B	3.1–30
MC12031A	3.1–31
MC12031B	3.1–31
MC12032A	3.1–31
MC12032B	3.1–31
MC12033A	3.1–31
MC12033B	3.1–31
MC12034A	3.1–31
MC12034B	3.1–31
MC12036A	3.1–30
MC12036B	3.1–30
MC12038A	3.1–30
MC12040	3.1–17
MC12052A	3.1–30
MC12053A	3.1–30
MC12054A	3.1–31
MC12058	3.1–30
MC12061	3.1–29
MC12066	3.1–30
MC12073	3.1–30
MC12074	3.1–30
MC12075	3.1–30
MC12076	3.1–31
MC12078	3.1–31
MC12079	3.1–31
MC12080	3.1–30
MC12083	3.1–30
MC12089	3.1–31
MC12090	3.1–31
MC12093	3.1–30
MC12095	3.1–31
MC12098	3.1–31
MC12100	3.1–29
MC12101	3.1–29
MC12147	3.1–35
MC12148	3.1–29
MC12149	3.1–35
MC12179	3.1–34
MC12181	3.1–34
MC12202	3.1–34
MC12206	3.1–34
MC12210	3.1–34
MC12429	3.1–13
MC12430	3.1–13
MC12439	3.1–13
MC14001B	3.1–24
MC14001UB	3.1–24
MC14002B	3.1–24
MC14002UB	3.1–24
MC14006B	3.1–32
MC14007UB	3.1–25
MC14008B	3.1–9
MC14011B	3.1–22
MC14011UB	3.1–22
MC14012B	3.1–21
MC14012UB	3.1–21
MC14013B	3.1–18
MC14014B	3.1–33
MC14015B	3.1–33
MC14016B	3.1–29
MC14017B	3.1–15
MC14018B	3.1–15
MC14020B	3.1–14
MC14021B	3.1–33
MC14022B	3.1–15
MC14023B	3.1–22
MC14023UB	3.1–22
MC14024B	3.1–14
MC14025B	3.1–24
MC14025UB	3.1–24
MC14027B	3.1–19
MC14028B	3.1–16
MC14029B	3.1–15
MC14035B	3.1–33
MC14038B	3.1–9
MC14040B	3.1–14
MC14042B	3.1–27
MC14043B	3.1–27
MC14044B	3.1–27
MC14046B	3.1–30
MC14049B	3.1–25
MC14049UB	3.1–25
MC14050B	3.1–25
MC14051B	3.1–27
MC14052B	3.1–28
MC14053B	3.1–29
MC14060B	3.1–14
MC14066B	3.1–29
MC14067B	3.1–27
MC14068B	3.1–21
MC14069UB	3.1–25
MC14070B	3.1–23
MC14071B	3.1–24
MC14072B	3.1–24
MC14073B	3.1–22

Device Index

MC14075B	3.1–25
MC14076B	3.1–21
MC14077B	3.1–23
MC14078B	3.1–24
MC14081B	3.1–21
MC14082B	3.1–21
MC14093B	3.1–32
MC14094B	3.1–33
MC14099B	3.1–26
MC14106B	3.1–32
MC14161B	3.1–14
MC14163B	3.1–14
MC14174B	3.1–19
MC14175B	3.1–21
MC14194B	3.1–33
MC14415	3.1–30
MC14490	3.1–9
MC14500B	3.1–25
MC14501UB	3.1–23
MC14502B	3.1–25
MC14503B	3.1–10
MC14504B	3.1–35
MC14506UB	3.1–23
MC14508B	3.1–26
MC14510B	3.1–15
MC14511B	3.1–17
MC14512B	3.1–27
MC14513B	3.1–17
MC14514B	3.1–16
MC14515B	3.1–16
MC14516B	3.1–15
MC14517B	3.1–34
MC14518B	3.1–15
MC14519B	3.1–22
MC14520B	3.1–15
MC14521B	3.1–30
MC14522B	3.1–15
MC14526B	3.1–15
MC14527B	3.1–9
MC14528B	3.1–29
MC14529B	3.1–28
MC14530B	3.1–23
MC14531B	3.1–30
MC14532B	3.1–17
MC14534B	3.1–14
MC14536B	3.1–30
MC14538B	3.1–29
MC14539B	3.1–28
MC14541B	3.1–30
MC14543B	3.1–17
MC14544B	3.1–17
MC14547B	3.1–17
MC14549B	3.1–34
MC14551B	3.1–28
MC14553B	3.1–14
MC14555B	3.1–17
MC14556B	3.1–17
MC14557B	3.1–32
MC14558B	3.1–17
MC14559B	3.1–34
MC14560B	3.1–9
MC14561B	3.1–9
MC14562B	3.1–32
MC14566B	3.1–15
MC14568B	3.1–15
MC14569B	3.1–15
MC14572UB	3.1–23
MC14580B	3.1–32
MC14583B	3.1–32
MC14584B	3.1–32
MC14585B	3.1–14
MC14598B	3.1–26
MC14599B	3.1–26
MC1648	3.1–30
MC1650	3.1–14
MC1651	3.1–14
MC1658	3.1–29
MC1660	3.1–23
MC1662	3.1–24
MC1670	3.1–20
MC1672	3.1–23
MC1692	3.1–31
MC4016	3.1–16
MC4018	3.1–16
MC4024	3.1–29
MC4044	3.1–17
MC4316	3.1–16
MC4324	3.1–29
MC4344	3.1–17
MC54HC00A	3.1–22
MC54HC02A	3.1–24
MC54HC04A	3.1–25
MC54HC08A	3.1–21
MC54HC132A	3.1–32
MC54HC138A	3.1–16
MC54HC139A	3.1–17
MC54HC14A	3.1–32
MC54HC154	3.1–16
MC54HC157A	3.1–28
MC54HC158	3.1–28
MC54HC160	3.1–15
MC54HC161A	3.1–15
MC54HC162	3.1–15
MC54HC163A	3.1–15
MC54HC164	3.1–33
MC54HC164A	3.1–33
MC54HC165	3.1–33
MC54HC174A	3.1–19
MC54HC175	3.1–21
MC54HC175A	3.1–21
MC54HC240A	3.1–11
MC54HC241A	3.1–11
MC54HC244A	3.1–12
MC54HC245A	3.1–12
MC54HC251	3.1–27
MC54HC259	3.1–16
MC54HC27	3.1–24
MC54HC273A	3.1–20
MC54HC32A	3.1–24
MC54HC354	3.1–27
MC54HC365	3.1–10
MC54HC366	3.1–10
MC54HC367	3.1–10
MC54HC373A	3.1–27
MC54HC374A	3.1–20
MC54HC390	3.1–15
MC54HC393	3.1–15
MC54HC4016	3.1–29
MC54HC4040A	3.1–14
MC54HC4049	3.1–25
MC54HC4050	3.1–25
MC54HC4051	3.1–27
MC54HC4053	3.1–29
MC54HC4060	3.1–14
MC54HC4060A	3.1–14
MC54HC4066	3.1–29
MC54HC4351	3.1–27
MC54HC4353	3.1–29
MC54HC4538A	3.1–29
MC54HC533A	3.1–27
MC54HC534A	3.1–20
MC54HC540A	3.1–11
MC54HC541A	3.1–11
MC54HC563A	3.1–27
MC54HC573A	3.1–27
MC54HC574A	3.1–20
MC54HC589	3.1–33
MC54HC589A	3.1–33
MC54HC595A	3.1–33
MC54HC597	3.1–33
MC54HC597A	3.1–33
MC54HC640A	3.1–11
MC54HC646	3.1–12
MC54HC688	3.1–14
MC54HC74A	3.1–19
MC54HC86	3.1–23

Device Index

MC54HC86A	3.1–23
MC54HCT00A	3.1–22
MC54HCT08A	3.1–21
MC54HCT14A	3.1–32
MC54HCT161A	3.1–15
MC54HCT163A	3.1–15
MC54HCT241A	3.1–11
MC54HCT244A	3.1–11
MC54HCT245A	3.1–10
MC54HCT32A	3.1–24
MC54HCT373A	3.1–26
MC54HCT374A	3.1–20
MC54HCT574A	3.1–20
MC660	3.1–18
MC661	3.1–18
MC662	3.1–18
MC663	3.1–19
MC664	3.1–20
MC667	3.1–29
MC668	3.1–25
MC669	3.1–18
MC670	3.1–25
MC671	3.1–25
MC672	3.1–25
MC677	3.1–25
MC678	3.1–25
MC68150*33	3.1–10
MC68150*40	3.1–10
MC68194	3.1–12
MC74AC00	3.1–22
MC74AC02	3.1–24
MC74AC04	3.1–25
MC74AC05	3.1–25
MC74AC08	3.1–21
MC74AC10	3.1–22
MC74AC109	3.1–19
MC74AC11	3.1–22
MC74AC112	3.1–19
MC74AC113	3.1–19
MC74AC125	3.1–12
MC74AC126	3.1–12
MC74AC132	3.1–32
MC74AC138	3.1–16
MC74AC139	3.1–17
MC74AC14	3.1–32
MC74AC151	3.1–27
MC74AC153	3.1–28
MC74AC157	3.1–29
MC74AC158	3.1–29
MC74AC160	3.1–16
MC74AC161	3.1–16
MC74AC162	3.1–16
MC74AC163	3.1–16
MC74AC174	3.1–19
MC74AC175	3.1–20
MC74AC190	3.1–16
MC74AC194	3.1–33
MC74AC20	3.1–21
MC74AC240	3.1–11
MC74AC241	3.1–11
MC74AC244	3.1–11
MC74AC245	3.1–10
MC74AC251	3.1–27
MC74AC253	3.1–28
MC74AC256	3.1–26
MC74AC257	3.1–28
MC74AC258	3.1–28
MC74AC259	3.1–26
MC74AC273	3.1–20
MC74AC299	3.1–33
MC74AC32	3.1–24
MC74AC323	3.1–33
MC74AC350	3.1–33
MC74AC352	3.1–28
MC74AC353	3.1–28
MC74AC373	3.1–26
MC74AC374	3.1–20
MC74AC377	3.1–20
MC74AC378	3.1–18
MC74AC4020	3.1–14
MC74AC4040	3.1–14
MC74AC533	3.1–26
MC74AC534	3.1–20
MC74AC540	3.1–11
MC74AC541	3.1–11
MC74AC563	3.1–26
MC74AC564	3.1–20
MC74AC573	3.1–26
MC74AC574	3.1–20
MC74AC620	3.1–10
MC74AC623	3.1–10
MC74AC640	3.1–10
MC74AC643	3.1–10
MC74AC646	3.1–11
MC74AC648	3.1–11
MC74AC652	3.1–11
MC74AC74	3.1–18
MC74AC810	3.1–23
MC74AC86	3.1–23
MC74ACT00	3.1–22
MC74ACT02	3.1–24
MC74ACT04	3.1–25
MC74ACT05	3.1–25
MC74ACT08	3.1–21
MC74ACT10	3.1–22
MC74ACT109	3.1–19
MC74ACT11	3.1–22
MC74ACT112	3.1–19
MC74ACT113	3.1–19
MC74ACT125	3.1–12
MC74ACT126	3.1–12
MC74ACT132	3.1–32
MC74ACT138	3.1–16
MC74ACT139	3.1–17
MC74ACT14	3.1–32
MC74ACT151	3.1–27
MC74ACT153	3.1–28
MC74ACT157	3.1–29
MC74ACT158	3.1–29
MC74ACT160	3.1–16
MC74ACT161	3.1–16
MC74ACT162	3.1–16
MC74ACT163	3.1–16
MC74ACT174	3.1–19
MC74ACT175	3.1–20
MC74ACT194	3.1–33
MC74ACT20	3.1–21
MC74ACT240	3.1–11
MC74ACT241	3.1–11
MC74ACT244	3.1–11
MC74ACT245	3.1–10
MC74ACT251	3.1–27
MC74ACT253	3.1–28
MC74ACT256	3.1–26
MC74ACT257	3.1–28
MC74ACT258	3.1–28
MC74ACT259	3.1–26
MC74ACT273	3.1–20
MC74ACT299	3.1–33
MC74ACT32	3.1–24
MC74ACT323	3.1–33
MC74ACT350	3.1–33
MC74ACT352	3.1–28
MC74ACT353	3.1–28
MC74ACT373	3.1–26
MC74ACT374	3.1–20
MC74ACT377	3.1–20
MC74ACT378	3.1–18
MC74ACT521	3.1–14
MC74ACT533	3.1–26
MC74ACT534	3.1–20
MC74ACT540	3.1–11
MC74ACT541	3.1–11
MC74ACT563	3.1–26
MC74ACT564	3.1–20
MC74ACT573	3.1–26

Device Index

MC74ACT574	3.1–20
MC74ACT620	3.1–10
MC74ACT623	3.1–10
MC74ACT640	3.1–10
MC74ACT643	3.1–10
MC74ACT646	3.1–11
MC74ACT648	3.1–11
MC74ACT652	3.1–11
MC74ACT74	3.1–18
MC74ACT810	3.1–23
MC74ACT86	3.1–23
MC74F00	3.1–22
MC74F02	3.1–24
MC74F04	3.1–25
MC74F08	3.1–21
MC74F10	3.1–22
MC74F109	3.1–19
MC74F11	3.1–22
MC74F112	3.1–19
MC74F1245	3.1–10
MC74F125	3.1–12
MC74F126	3.1–12
MC74F13	3.1–32
MC74F132	3.1–32
MC74F138	3.1–16
MC74F139	3.1–17
MC74F14	3.1–32
MC74F148	3.1–18
MC74F151	3.1–27
MC74F153	3.1–28
MC74F157A	3.1–28
MC74F158A	3.1–28
MC74F160A	3.1–15
MC74F161A	3.1–15
MC74F162A	3.1–15
MC74F163A	3.1–15
MC74F164	3.1–33
MC74F168	3.1–14
MC74F169	3.1–14
MC74F174	3.1–19
MC74F175	3.1–20
MC74F1803	3.1–13
MC74F181	3.1–9
MC74F182	3.1–9
MC74F194	3.1–33
MC74F195	3.1–33
MC74F20	3.1–21
MC74F21	3.1–21
MC74F2245	3.1–34
MC74F240	3.1–11
MC74F241	3.1–11
MC74F242	3.1–12
MC74F243	3.1–12
MC74F244	3.1–11
MC74F245	3.1–10
MC74F251	3.1–27
MC74F253	3.1–28
MC74F256	3.1–26
MC74F257A	3.1–29
MC74F258A	3.1–29
MC74F259	3.1–26
MC74F269	3.1–15
MC74F280	3.1–30
MC74F283	3.1–9
MC74F299	3.1–33
MC74F32	3.1–24
MC74F323	3.1–33
MC74F350	3.1–33
MC74F352	3.1–28
MC74F353	3.1–28
MC74F365	3.1–10
MC74F366	3.1–10
MC74F367	3.1–10
MC74F368	3.1–10
MC74F37	3.1–21
MC74F373	3.1–26
MC74F374	3.1–20
MC74F377	3.1–20
MC74F378	3.1–32
MC74F379	3.1–21
MC74F38	3.1–22
MC74F381	3.1–9
MC74F382	3.1–9
MC74F3893A	3.1–34
MC74F398	3.1–29
MC74F399	3.1–29
MC74F40	3.1–21
MC74F51	3.1–23
MC74F521	3.1–14
MC74F533	3.1–26
MC74F534	3.1–20
MC74F537	3.1–16
MC74F538	3.1–16
MC74F539	3.1–16
MC74F544	3.1–11
MC74F568	3.1–14
MC74F569	3.1–14
MC74F574	3.1–20
MC74F579	3.1–15
MC74F620	3.1–11
MC74F623	3.1–11
MC74F64	3.1–22
MC74F640	3.1–11
MC74F646	3.1–11
MC74F657A	3.1–10
MC74F657B	3.1–10
MC74F74	3.1–19
MC74F779	3.1–15
MC74F803	3.1–13
MC74F823	3.1–10
MC74F827	3.1–10
MC74F828	3.1–10
MC74F85	3.1–14
MC74F86	3.1–23
MC74HC00A	3.1–22
MC74HC02A	3.1–24
MC74HC03A	3.1–22
MC74HC04A	3.1–25
MC74HC08A	3.1–21
MC74HC10	3.1–22
MC74HC107	3.1–19
MC74HC109	3.1–19
MC74HC11	3.1–22
MC74HC112	3.1–19
MC74HC125A	3.1–12
MC74HC132A	3.1–32
MC74HC133	3.1–21
MC74HC137	3.1–16
MC74HC138A	3.1–16
MC74HC139A	3.1–17
MC74HC147	3.1–18
MC74HC14A	3.1–32
MC74HC151	3.1–27
MC74HC153	3.1–28
MC74HC154	3.1–16
MC74HC157A	3.1–28
MC74HC158	3.1–28
MC74HC158A	3.1–28
MC74HC160	3.1–15
MC74HC161A	3.1–15
MC74HC162	3.1–15
MC74HC163	3.1–15
MC74HC164	3.1–33
MC74HC164A	3.1–33
MC74HC165	3.1–33
MC74HC173	3.1–21
MC74HC174A	3.1–19
MC74HC175	3.1–21
MC74HC175A	3.1–21
MC74HC194	3.1–33
MC74HC195	3.1–33
MC74HC20	3.1–21
MC74HC237	3.1–16
MC74HC240A	3.1–11
MC74HC241A	3.1–11
MC74HC242	3.1–12

Device Index

MC74HC244A	3.1–12
MC74HC245A	3.1–12
MC74HC251	3.1–27
MC74HC253	3.1–28
MC74HC257	3.1–28
MC74HC259	3.1–16
MC74HC27	3.1–24
MC74HC273A	3.1–20
MC74HC280	3.1–30
MC74HC299	3.1–33
MC74HC30	3.1–21
MC74HC32A	3.1–24
MC74HC354	3.1–27
MC74HC365	3.1–10
MC74HC366	3.1–10
MC74HC367	3.1–10
MC74HC368	3.1–10
MC74HC373A	3.1–27
MC74HC374A	3.1–20
MC74HC390	3.1–15
MC74HC393	3.1–15
MC74HC4002	3.1–24
MC74HC4016	3.1–29
MC74HC4017	3.1–15
MC74HC4020A	3.1–14
MC74HC4024	3.1–29
MC74HC4040A	3.1–14
MC74HC4046A	3.1–35
MC74HC4049	3.1–25
MC74HC4050	3.1–25
MC74HC4051	3.1–27
MC74HC4052	3.1–28
MC74HC4053	3.1–29
MC74HC4060	3.1–14
MC74HC4060A	3.1–14
MC74HC4066	3.1–29
MC74HC4075	3.1–25
MC74HC4078	3.1–23
MC74HC42	3.1–16
MC74HC4316	3.1–29
MC74HC4351	3.1–27
MC74HC4353	3.1–29
MC74HC4511	3.1–17
MC74HC4514	3.1–16
MC74HC4538A	3.1–29
MC74HC4851A	3.1–27
MC74HC4852A	3.1–27
MC74HC4853A	3.1–27
MC74HC51	3.1–22
MC74HC533A	3.1–27
MC74HC534A	3.1–20
MC74HC540A	3.1–11
MC74HC541A	3.1–11
MC74HC563A	3.1–27
MC74HC564A	3.1–20
MC74HC573A	3.1–27
MC74HC574A	3.1–20
MC74HC58	3.1–22
MC74HC589	3.1–33
MC74HC589A	3.1–33
MC74HC595A	3.1–33
MC74HC597	3.1–33
MC74HC597A	3.1–33
MC74HC640A	3.1–11
MC74HC646	3.1–12
MC74HC688	3.1–14
MC74HC7266	3.1–23
MC74HC7266A	3.1–23
MC74HC73	3.1–19
MC74HC74A	3.1–19
MC74HC75	3.1–26
MC74HC76	3.1–19
MC74HC85	3.1–14
MC74HC86	3.1–23
MC74HC86A	3.1–23
MC74HCT00A	3.1–22
MC74HCT04A	3.1–25
MC74HCT08A	3.1–21
MC74HCT138A	3.1–16
MC74HCT14A	3.1–32
MC74HCT157A	3.1–28
MC74HCT161A	3.1–15
MC74HCT163A	3.1–15
MC74HCT174A	3.1–19
MC74HCT240A	3.1–11
MC74HCT241A	3.1–11
MC74HCT244A	3.1–11
MC74HCT245A	3.1–10
MC74HCT273A	3.1–20
MC74HCT32A	3.1–24
MC74HCT373A	3.1–26
MC74HCT374A	3.1–20
MC74HCT541A	3.1–11
MC74HCT573A	3.1–27
MC74HCT574A	3.1–20
MC74HCT74A	3.1–19
MC74HCU04	3.1–25
MC74HCU04A	3.1–25
MC74LCX00	3.1–21
MC74LCX02	3.1–24
MC74LCX04	3.1–25
MC74LCX08	3.1–21
MC74LCX125	3.1–9
MC74LCX138	3.1–17
MC74LCX157	3.1–28
MC74LCX16240A	3.1–9
MC74LCX16244	3.1–9
MC74LCX16245	3.1–34
MC74LCX16373	3.1–26
MC74LCX373	3.1–26
MC74LCX16374	3.1–20
MC74LCX16500	3.1–34
MC74LCX16501	3.1–34
MC74LCX16543A	3.1–34
MC74LCX240	3.1–9
MC74LCX244	3.1–9
MC74LCX245	3.1–34
MC74LCX2952	3.1–34
MC74LCX32	3.1–24
MC74LCX374	3.1–20
MC74LCX540	3.1–9
MC74LCX541	3.1–9
MC74LCX573	3.1–26
MC74LCX574	3.1–20
MC74LCX652	3.1–34
MC74LCX86	3.1–23
MC74LVQ00	3.1–21
MC74LVQ04	3.1–25
MC74LVQ125	3.1–10
MC74LVQ138	3.1–17
MC74LVQ240	3.1–10
MC74LVQ244	3.1–9
MC74LVQ245	3.1–34
MC74LVQ32	3.1–24
MC74LVQ373	3.1–26
MC74LVQ374	3.1–20
MC74LVQ541	3.1–9
MC74LVQ573	3.1–26
MC74LVQ574	3.1–20
MC74LVQ646	3.1–34
MC74LVQ652	3.1–34
MC74LVX4245	3.1–34
MC74VHC02	3.1–24
MC74VHC04	3.1–25
MC74VHC08	3.1–21
MC74HC126A	3.1–12
MC74VHC125	3.1–12
MC74VHC138	3.1–16
MC74VHC14	3.1–32
MC74VHC157	3.1–28
MC74VHC244	3.1–12
MC74VHC245	3.1–12
MC74VHC32	3.1–24
MC74VHC373	3.1–27
MC74VHC374	3.1–20
MC74VHC541	3.1–11

Device Index

MC74VHC573	3.1–27
MC74VHC574	3.1–20
MC74VHC595	3.1–33
MC74VHC74	3.1–19
MC830	3.1–21
MC832	3.1–9
MC836	3.1–25
MC837	3.1–25
MC840	3.1–25
MC844	3.1–18
MC845	3.1–18
MC846	3.1–22
MC88913	3.1–13
MC88914	3.1–13
MC88915*55	3.1–13
MC88915*70	3.1–13
MC88915T*100	3.1–13
MC88915T*133	3.1–13
MC88915T*160	3.1–13
MC88915T*55	3.1–13
MC88915T*70	3.1–13
MC88916*70	3.1–13
MC88916*80	3.1–13
MC88920	3.1–13
MC88921	3.1–13
MC88LV926	3.1–13
MC88PL117	3.1–13
MC936	3.1–25
MC937	3.1–25
MC944	3.1–18
MC945	3.1–18
MC946	3.1–22
MC951	3.1–29
MC952	3.1–19
MC953	3.1–19
MCCS142233	3.1–32
MCCS142235	3.1–32
MCCS142236	3.1–32
MCCS142237	3.1–32
MCCS142238	3.1–32
MCCS142239	3.1–32
MCH12140	3.1–17
MCK12140	3.1–17
MCM10143	3.1–32
MCM10145	3.1–32
MCM10146	3.1–31
MCM10152	3.1–31
MPA1016	3.1–18
MPA1036	3.1–18
MPA1064	3.1–18
MPA1100	3.1–18
MPA17128	3.1–32
MPA1765	3.1–32
MPC903	3.1–12
MPC904	3.1–12
MPC905	3.1–12
MPC911	3.1–13
MPC930	3.1–13
MPC931	3.1–13
MPC946	3.1–13
MPC947	3.1–12
MPC948	3.1–12
MPC948L	3.1–12
MPC949	3.1–13
MPC950	3.1–13
MPC951	3.1–13
MPC952	3.1–13
MPC956	3.1–13
MPC970	3.1–13
MPC972	3.1–13
MPC973	3.1–13
MPC974	3.1–13
MPC980	3.1–13
MPC990	3.1–13
MPC991	3.1–13
MPC992	3.1–13
SN54LS00	3.1–22
SN54LS01	3.1–22
SN54LS02	3.1–24
SN54LS03	3.1–22
SN54LS04	3.1–25
SN54LS05	3.1–25
SN54LS08	3.1–21
SN54LS09	3.1–21
SN54LS10	3.1–22
SN54LS107A	3.1–19
SN54LS109A	3.1–19
SN54LS11	3.1–22
SN54LS112A	3.1–19
SN54LS113A	3.1–19
SN54LS114A	3.1–19
SN54LS12	3.1–22
SN54LS122	3.1–29
SN54LS123	3.1–29
SN54LS125A	3.1–12
SN54LS126A	3.1–12
SN54LS13	3.1–32
SN54LS132	3.1–32
SN54LS133	3.1–21
SN54LS137	3.1–16
SN54LS138	3.1–16
SN54LS139	3.1–17
SN54LS14	3.1–32
SN54LS145	3.1–16
SN54LS147	3.1–17
SN54LS148	3.1–18
SN54LS15	3.1–22
SN54LS151	3.1–27
SN54LS153	3.1–28
SN54LS155	3.1–16
SN54LS156	3.1–16
SN54LS157	3.1–28
SN54LS158	3.1–28
SN54LS160A	3.1–14
SN54LS161A	3.1–14
SN54LS162A	3.1–14
SN54LS163A	3.1–14
SN54LS164	3.1–33
SN54LS165	3.1–33
SN54LS166	3.1–33
SN54LS168	3.1–15
SN54LS169	3.1–15
SN54LS170	3.1–32
SN54LS173A	3.1–18
SN54LS174	3.1–19
SN54LS175	3.1–21
SN54LS190	3.1–15
SN54LS191	3.1–15
SN54LS192	3.1–15
SN54LS193	3.1–15
SN54LS194A	3.1–33
SN54LS195A	3.1–34
SN54LS196	3.1–14
SN54LS197	3.1–14
SN54LS20	3.1–21
SN54LS21	3.1–21
SN54LS22	3.1–21
SN54LS221	3.1–29
SN54LS240	3.1–11
SN54LS241	3.1–11
SN54LS242	3.1–12
SN54LS243	3.1–12
SN54LS244	3.1–11
SN54LS245	3.1–11
SN54LS247	3.1–17
SN54LS248	3.1–17
SN54LS249	3.1–17
SN54LS251	3.1–27
SN54LS253	3.1–28
SN54LS256	3.1–26
SN54LS257B	3.1–28
SN54LS258B	3.1–29
SN54LS259	3.1–26
SN54LS26	3.1–21
SN54LS260	3.1–24
SN54LS266	3.1–23

Device Index

SN54LS27	3.1–24
SN54LS273	3.1–20
SN54LS279	3.1–27
SN54LS28	3.1–24
SN54LS280	3.1–30
SN54LS283	3.1–9
SN54LS290	3.1–15
SN54LS293	3.1–14
SN54LS298	3.1–28
SN54LS299	3.1–33
SN54LS30	3.1–21
SN54LS32	3.1–24
SN54LS322A	3.1–33
SN54LS323	3.1–33
SN54LS33	3.1–24
SN54LS348	3.1–18
SN54LS352	3.1–28
SN54LS353	3.1–28
SN54LS365A	3.1–10
SN54LS366A	3.1–10
SN54LS367A	3.1–10
SN54LS368A	3.1–10
SN54LS37	3.1–21
SN54LS373	3.1–26
SN54LS374	3.1–20
SN54LS375	3.1–26
SN54LS377	3.1–20
SN54LS378	3.1–19
SN54LS379	3.1–18
SN54LS38	3.1–22
SN54LS386	3.1–23
SN54LS390	3.1–15
SN54LS393	3.1–15
SN54LS398	3.1–29
SN54LS399	3.1–29
SN54LS40	3.1–21
SN54LS42	3.1–16
SN54LS47	3.1–17
SN54LS48	3.1–17
SN54LS490	3.1–15
SN54LS51	3.1–23
SN54LS54	3.1–22
SN54LS540	3.1–11
SN54LS541	3.1–11
SN54LS55	3.1–22
SN54LS569A	3.1–14
SN54LS623	3.1–11
SN54LS640	3.1–11
SN54LS641	3.1–34
SN54LS642	3.1–34
SN54LS645	3.1–11
SN54LS669	3.1–16
SN54LS670	3.1–32
SN54LS682	3.1–14
SN54LS684	3.1–14
SN54LS688	3.1–14
SN54LS73A	3.1–19
SN54LS748	3.1–18
SN54LS74A	3.1–19
SN54LS75	3.1–26
SN54LS76A	3.1–19
SN54LS77	3.1–26
SN54LS795	3.1–10
SN54LS796	3.1–10
SN54LS797	3.1–10
SN54LS798	3.1–10
SN54LS83A	3.1–9
SN54LS848	3.1–18
SN54LS85	3.1–14
SN54LS86	3.1–23
SN54LS90	3.1–15
SN54LS92	3.1–15
SN54LS93	3.1–14
SN54LS95B	3.1–33
SN74LS00	3.1–22
SN74LS01	3.1–22
SN74LS02	3.1–24
SN74LS03	3.1–22
SN74LS04	3.1–25
SN74LS05	3.1–25
SN74LS08	3.1–21
SN74LS09	3.1–21
SN74LS10	3.1–22
SN74LS107A	3.1–19
SN74LS109A	3.1–19
SN74LS11	3.1–22
SN74LS112A	3.1–19
SN74LS113A	3.1–19
SN74LS114A	3.1–19
SN74LS12	3.1–22
SN74LS122	3.1–29
SN74LS123	3.1–29
SN74LS125A	3.1–12
SN74LS126A	3.1–12
SN74LS13	3.1–32
SN74LS132	3.1–32
SN74LS133	3.1–21
SN74LS136	3.1–23
SN74LS137	3.1–16
SN74LS138	3.1–16
SN74LS139	3.1–17
SN74LS14	3.1–32
SN74LS145	3.1–16
SN74LS147	3.1–17
SN74LS148	3.1–18
SN74LS15	3.1–22
SN74LS151	3.1–27
SN74LS153	3.1–28
SN74LS155	3.1–16
SN74LS156	3.1–16
SN74LS157	3.1–28
SN74LS158	3.1–28
SN74LS160A	3.1–14
SN74LS161A	3.1–14
SN74LS162A	3.1–14
SN74LS163A	3.1–14
SN74LS164	3.1–33
SN74LS165	3.1–33
SN74LS166	3.1–33
SN74LS168	3.1–15
SN74LS169	3.1–15
SN74LS170	3.1–32
SN74LS173A	3.1–18
SN74LS174	3.1–19
SN74LS175	3.1–21
SN74LS190	3.1–15
SN74LS191	3.1–15
SN74LS192	3.1–15
SN74LS193	3.1–15
SN74LS194A	3.1–33
SN74LS195A	3.1–34
SN74LS196	3.1–14
SN74LS197	3.1–14
SN74LS20	3.1–21
SN74LS21	3.1–21
SN74LS22	3.1–21
SN74LS221	3.1–29
SN74LS240	3.1–11
SN74LS241	3.1–11
SN74LS242	3.1–12
SN74LS243	3.1–12
SN74LS244	3.1–11
SN74LS245	3.1–11
SN74LS247	3.1–17
SN74LS248	3.1–17
SN74LS249	3.1–17
SN74LS251	3.1–27
SN74LS253	3.1–28
SN74LS257B	3.1–28
SN74LS258B	3.1–29
SN74LS259	3.1–26
SN74LS26	3.1–21
SN74LS260	3.1–24
SN74LS266	3.1–23
SN74LS27	3.1–24
SN74LS273	3.1–20

Device Index

SN74LS279	3.1–27
SN74LS28	3.1–24
SN74LS280	3.1–30
SN74LS283	3.1–9
SN74LS290	3.1–15
SN74LS293	3.1–14
SN74LS298	3.1–28
SN74LS299	3.1–33
SN74LS30	3.1–21
SN74LS32	3.1–24
SN74LS322A	3.1–33
SN74LS323	3.1–33
SN74LS33	3.1–24
SN74LS348	3.1–18
SN74LS352	3.1–28
SN74LS353	3.1–28
SN74LS365A	3.1–10
SN74LS366A	3.1–10
SN74LS367A	3.1–10
SN74LS368A	3.1–10
SN74LS37	3.1–21
SN74LS373	3.1–26
SN74LS374	3.1–20
SN74LS375	3.1–26
SN74LS377	3.1–20
SN74LS378	3.1–19
SN74LS379	3.1–18
SN74LS38	3.1–22
SN74LS386	3.1–23
SN74LS390	3.1–15
SN74LS393	3.1–15
SN74LS395	3.1–33
SN74LS398	3.1–29
SN74LS399	3.1–29
SN74LS40	3.1–21
SN74LS42	3.1–16
SN74LS47	3.1–17
SN74LS48	3.1–17
SN74LS490	3.1–15
SN74LS51	3.1–23
SN74LS54	3.1–22
SN74LS540	3.1–11
SN74LS541	3.1–11
SN74LS55	3.1–22
SN74LS569A	3.1–14
SN74LS623	3.1–11
SN74LS640	3.1–11
SN74LS641	3.1–34
SN74LS642	3.1–34
SN74LS645	3.1–11
SN74LS669	3.1–16
SN74LS670	3.1–32
SN74LS682	3.1–14
SN74LS684	3.1–14
SN74LS688	3.1–14
SN74LS73A	3.1–19
SN74LS748	3.1–18
SN74LS74A	3.1–19
SN74LS75	3.1–26
SN74LS76A	3.1–19
SN74LS77	3.1–26
SN74LS795	3.1–10
SN74LS796	3.1–10
SN74LS797	3.1–10
SN74LS798	3.1–10
SN74LS83A	3.1–9
SN74LS848	3.1–18
SN74LS85	3.1–14
SN74LS86	3.1–23
SN74LS90	3.1–15
SN74LS92	3.1–15
SN74LS93	3.1–14
SN74LS95B	3.1–33

Ordering Information
Device Nomenclatures

LS – Low Power Schottky

SN VV WW XXXX Y

Standard Prefix

Temperature Range
- 74 Series (0 to +70°C)
- 54 Series (–55 to +125°C)

Family
- LS = Low Power Schottky

Function Type

Package Type
- N for Plastic (74 Series Only)
- J for Ceramic
- D for 150 mil Plastic SOIC (74 Series Only)
- DW for 300 mil Plastic SOIC (74 Series Only)

FAST

MC VV W XXXX Y

Motorola Circuit Identifier

Temperature Range
- 74 Series (0 to +70°C)

Family
- F = FAST

Function Type

Package Type
- N for Plastic (74 Series Only)
- D for 150 mil Plastic SOIC (74 Series Only)
- DW for 300 mil Plastic SOIC (74 Series Only)
- SD for Plastic SSOP

MECL 10K, MECL 10H/100H

MC WWW XXX YY

Motorola Circuit Identifier

Temperature Range
- 10 = 10K (–30 to +85°C)
- 10H = 10H (0 to +75°C)
- 100H = 100K Compatible (0 to +85°C)

Function Type

Package Type
- P for Plastic
- L for Ceramic
- FN for PLCC

ECLinPS, ECLinPS Lite

MC WWW XXX YYY ZZ

Motorola Circuit Identifier
- MC = Fully Qualified Circuit
- XC = Non Reliability Qualified

Compatibility Identifier
- 10 = 10H Compatible (0 to +85°C)
- 100 = 100K Compatible (0 to +85°C)

ECLinPS Family Identifier
- E = ECLinPS
- EL = ECLinPS Lite
- ELT = ECLinPS Lite Translator
- LVE = Low Voltage ECLinPS
- LVEL = Low Voltage ECLinPS Lite

Function Type
- YYY = 3–Digits for ECLinPS
- YY= 2–Digits for ECLinPS Lite

Package Type
- FN = PLCC
- D = Plastic SOIC
- L = Ceramic DIP
- P = Plastic DIP

Metal Gate 14000 Series CMOS

MC 14XXX YY ZZ

Motorola Circuit Identifier

Function Type

Identifier (per JEDEC Standard)
- B (or Blank)= Buffered Outputs
- UB = Unbuffered Outputs

Package and Temperature Range
- CL for Ceramic –55 to +125°C
- CP for Plastic –55 to +125°C
- D/DW for Small Outline Package (Plastic) –55 to +125°C
- DT for Plastic TSSOP

High–Speed CMOS

MC VV WWW XXXX Y

Motorola Circuit Identifier

Temperature Range
- 74 Series (–55 to +125°C)
- 54 Series (–55 to +125°C)

High–Speed CMOS Specification Identifier
- HC = Buffered High–Speed CMOS
- HCU = Unbuffered High–Speed CMOS*
- HCT = High–Speed CMOS TTL Compatible

*Not Available On All Devices

Function Type
- XX(X) Same Function and Pin Configuration as LSTTL
- 4XXX Same Function and Pin Configuration as CMOS 14000
- 7XX(X) Variation of LSTTL or CMOS 14000 Device

Package Type
- N for Plastic (74 Series Only)
- J for Ceramic (54 Series Only)
- D for 150 mil Plastic SOIC (74 Series Only)
- DW for 300 mil Plastic SOIC (74 Series Only)
- SD for Plastic SSOP
- DT for Plastic TSSOP

FACT

MC WWWWW XXX YY

Motorola Circuit Identifier

Temperature Range Family
- 74AC = FACT (–40 to +85°C)
- 74ACT = TTL Compatible (–40 to +85°C)

Function Type

Package Type
- N for Plastic
- D for Narrow SOIC
- DW for Wide SOIC
- SD for Plastic SSOP
- DT for Plastic TSSOP

Other Logic Circuits

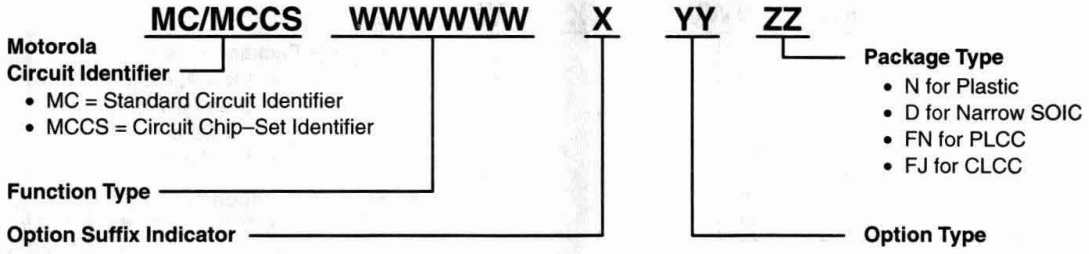

MECL III/HTL/DTL

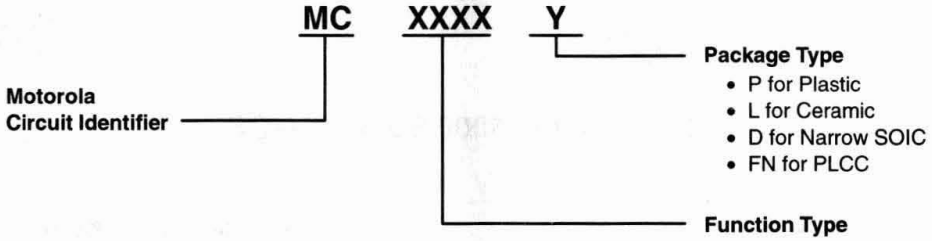

LCX Products

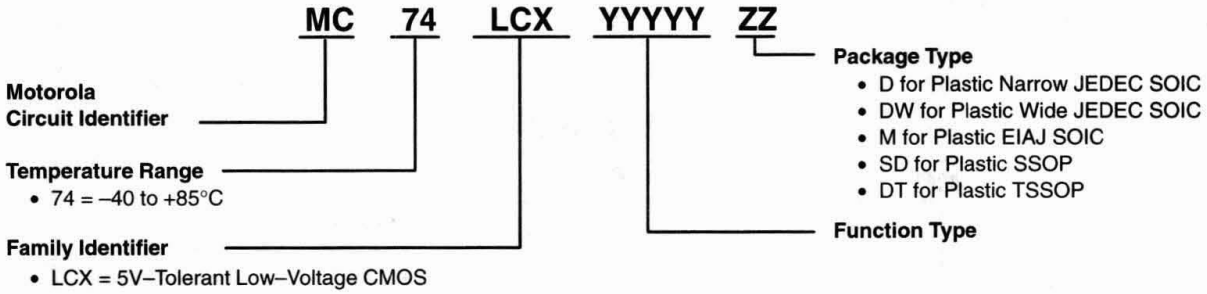

LVQ Products

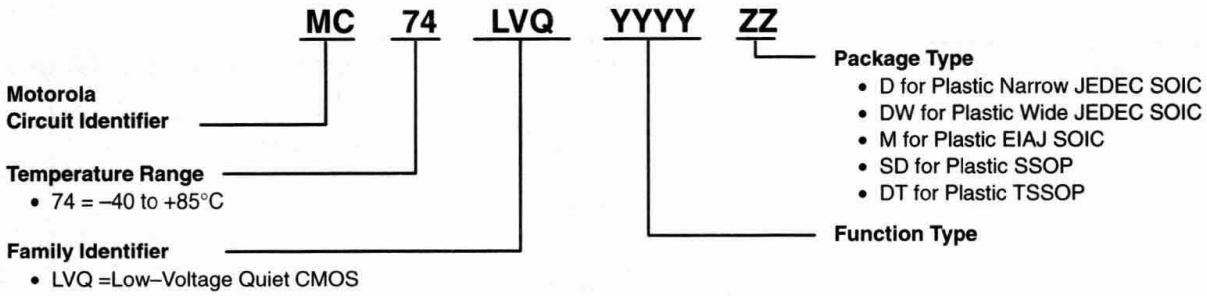

FPGA Nomenclature

MPA1 XXX YY Z I

Motorola Programmable Array (First Series) **Circuit Identifier**

Number of Core Cells
Physical Number of Cells in 100's
- 016 = 1,600 Cells
- 036 = 3,600 Cells
- 064 = 6,400 Cells
- 100 = 10,000 Cells

Package Type
- FN = 84 PLCC
- DD = 128 PQFP
- DH = 160 PQFP
- DK = 208 PQFP
- HI = 181 CPGA
- KE = 224 CPGA
- HV = 299 CPGA
- BG = 256 PBGA

Speed Grade

Temperature Grade
- Blank = Commercial
- I = Industrial

EPROM/EEPROM Nomenclature

MPA17 C XXX YY I

Motorola EPROM/EEPROM Circuit Identifier

PROM Type
- Blank = EPROM
- C = EEPROM

Number of Memory Bits (in K)

Package Type
- D = SOIC
- P = PDIP
- FN = PLCC

Temperature Grade
- Blank = Commercial
- I = Industrial

Case Outlines

8–Pin Packages

P SUFFIX
PLASTIC DIP PACKAGE
CASE 626–05
ISSUE K

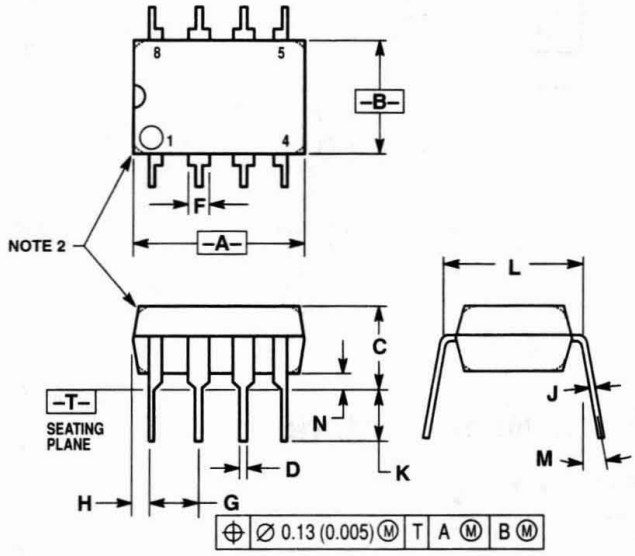

NOTES:
1. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
2. PACKAGE CONTOUR OPTIONAL (ROUND OR SQUARE CORNERS).
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.40	10.16	0.370	0.400
B	6.10	6.60	0.240	0.260
C	3.94	4.45	0.155	0.175
D	0.38	0.51	0.015	0.020
F	1.02	1.78	0.040	0.070
G	2.54 BSC		0.100 BSC	
H	0.76	1.27	0.030	0.050
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	—	10°	—	10°
N	0.76	1.01	0.030	0.040

D SUFFIX
PLASTIC SOIC PACKAGE
CASE 751–05
ISSUE S

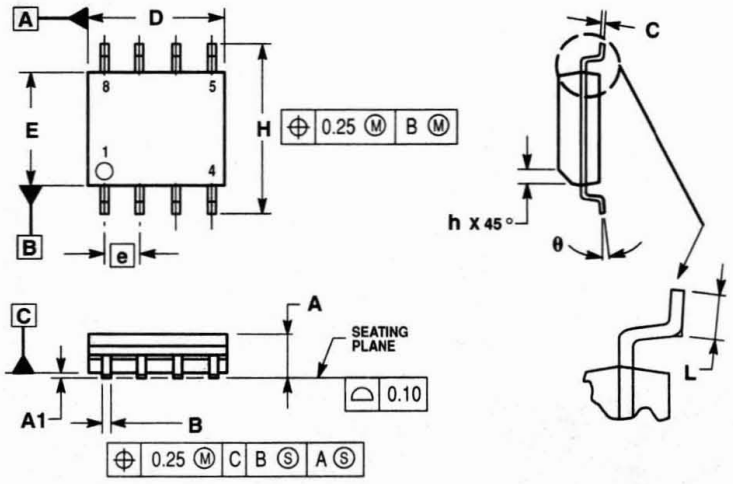

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. DIMENSIONS ARE IN MILLIMETERS.
3. DIMENSION D AND E DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.
5. DIMENSION B DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 TOTAL IN EXCESS OF THE B DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS	
DIM	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.35	0.49
C	0.18	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27 BSC	
H	5.80	6.20
h	0.25	0.50
L	0.40	1.25
θ	0°	7°

8–Pin Packages

SD SUFFIX
PLASTIC SSOP PACKAGE
CASE 940–03
ISSUE B

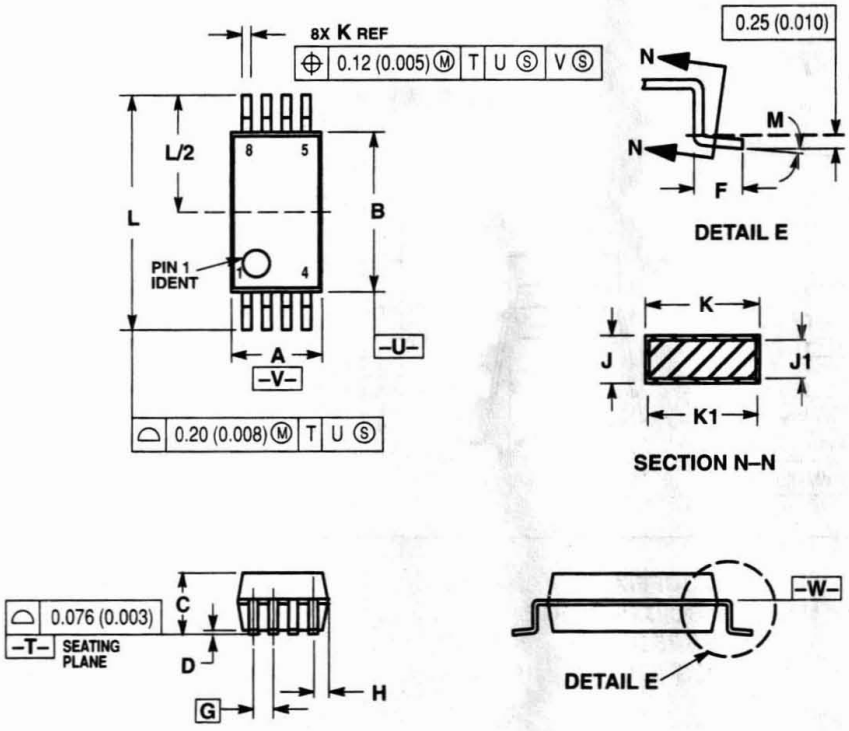

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF K DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR INTRUSION SHALL NOT REDUCE DIMENSION K BY MORE THAN 0.07 (0.002) AT LEAST MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	2.87	3.13	0.113	0.123
B	5.20	5.38	0.205	0.212
C	1.73	1.99	0.068	0.078
D	0.05	0.21	0.002	0.008
F	0.63	0.95	0.024	0.037
G	0.65 BSC		0.026 BSC	
H	0.44	0.60	0.017	0.023
J	0.09	0.20	0.003	0.008
J1	0.09	0.16	0.003	0.006
K	0.25	0.38	0.010	0.015
K1	0.25	0.33	0.010	0.013
L	7.65	7.90	0.301	0.311
M	0°	8°	0°	8°

14–Pin Packages

L,J SUFFIX
CERAMIC DIP PACKAGE
CASE 632–08
ISSUE Y

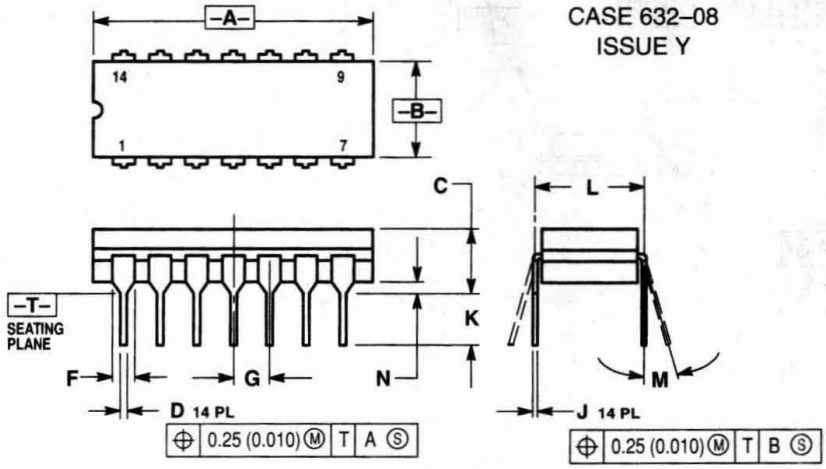

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.750	0.785	19.05	19.94
B	0.245	0.280	6.23	7.11
C	0.155	0.200	3.94	5.08
D	0.015	0.020	0.39	0.50
F	0.055	0.065	1.40	1.65
G	0.100 BSC		2.54 BSC	
J	0.008	0.015	0.21	0.38
K	0.125	0.170	3.18	4.31
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

14–Pin Packages

P,N SUFFIX
PLASTIC DIP PACKAGE
CASE 646–06
ISSUE M

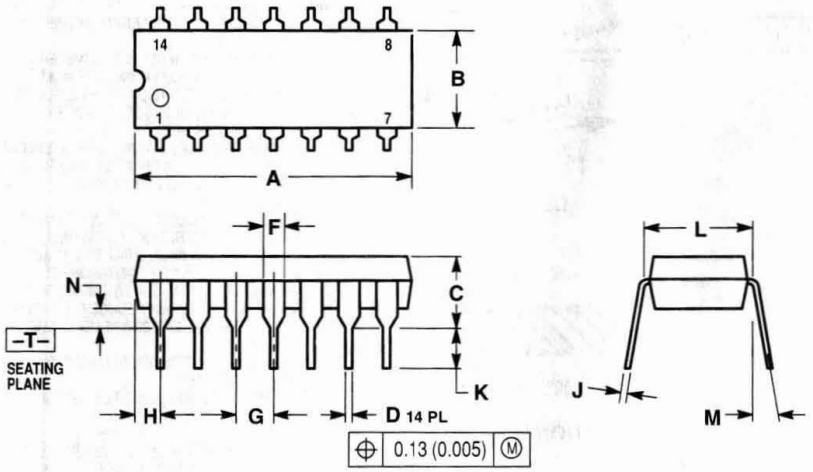

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.715	0.770	18.16	18.80
B	0.240	0.260	6.10	6.60
C	0.145	0.185	3.69	4.69
D	0.015	0.021	0.38	0.53
F	0.040	0.070	1.02	1.78
G	0.100 BSC		2.54 BSC	
H	0.052	0.095	1.32	2.41
J	0.008	0.015	0.20	0.38
K	0.115	0.135	2.92	3.43
L	0.290	0.310	7.37	7.87
M	—	10°	—	10°
N	0.015	0.039	0.38	1.01

D SUFFIX
PLASTIC SOIC PACKAGE
CASE 751A–03
ISSUE F

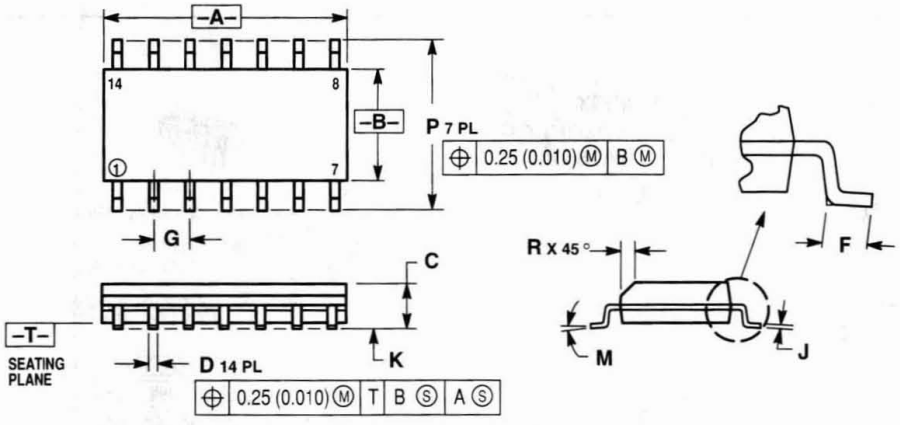

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	8.55	8.75	0.337	0.344
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.228	0.244
R	0.25	0.50	0.010	0.019

14–Pin Packages

M SUFFIX
PLASTIC SOIC EIAJ PACKAGE
CASE 965–01
ISSUE O

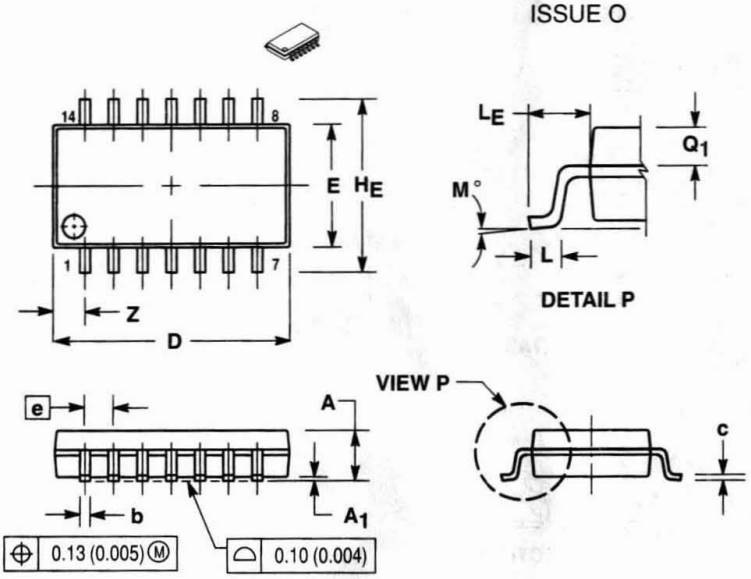

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	—	2.05	—	0.081
A_1	0.05	0.20	0.002	0.008
b	0.35	0.50	0.014	0.020
c	0.18	0.27	0.007	0.011
D	9.90	10.50	0.390	0.413
E	5.10	5.45	0.201	0.215
e	1.27 BSC		0.050 BSC	
H_E	7.40	8.20	0.291	0.323
0.50	0.50	0.85	0.020	0.033
L_E	1.10	1.50	0.043	0.059
M	0 °	10 °	0 °	10 °
Q_1	0.70	0.90	0.028	0.035
Z	—	1.42	—	0.056

SD SUFFIX
PLASTIC SSOP PACKAGE
CASE 940A–03
ISSUE B

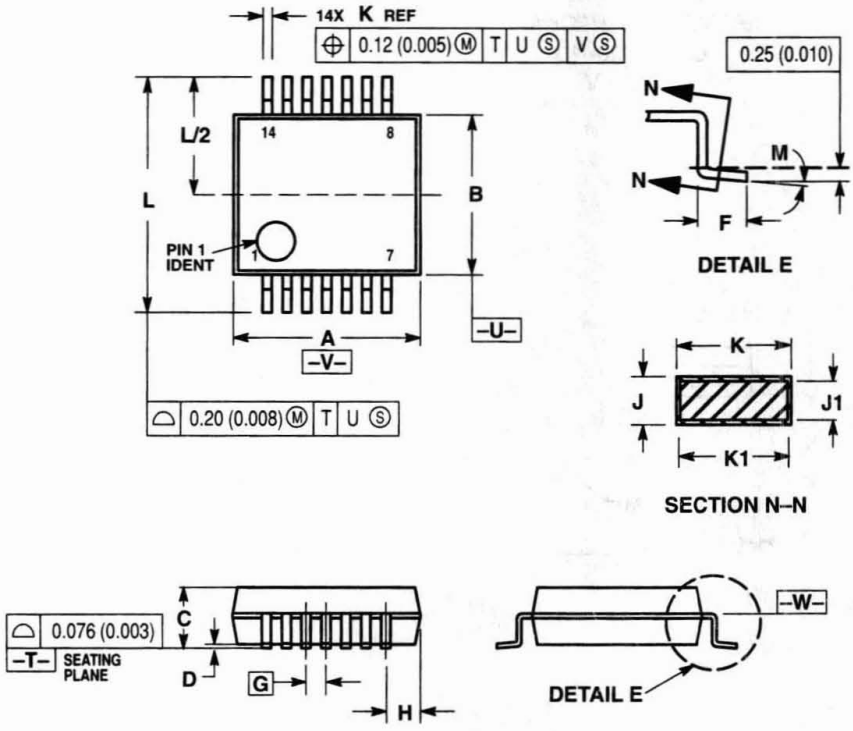

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF K DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR INTRUSION SHALL NOT REDUCE DIMENSION K BY MORE THAN 0.07 (0.002) AT LEAST MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	6.07	6.33	0.238	0.249
B	5.20	5.38	0.205	0.212
C	1.73	1.99	0.068	0.078
D	0.05	0.21	0.002	0.008
F	0.63	0.95	0.024	0.037
G	0.65 BSC		0.026 BSC	
H	1.08	1.22	0.042	0.048
J	0.09	0.20	0.003	0.008
J1	0.09	0.16	0.003	0.006
K	0.25	0.38	0.010	0.015
K1	0.25	0.33	0.010	0.013
L	7.65	7.90	0.301	0.311
M	0 °	8 °	0 °	8 °

14–Pin Packages

DT SUFFIX
PLASTIC TSSOP PACKAGE
CASE 948G–01
ISSUE O

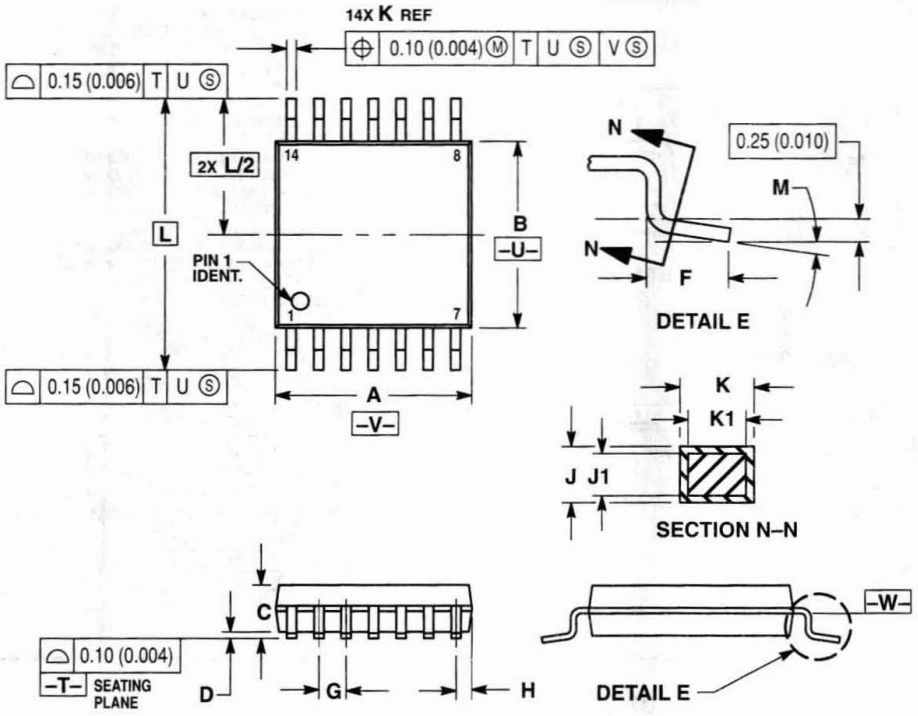

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	—	1.20	—	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.50	0.60	0.020	0.024
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0°	8°	0°	8°

16–Pin Packages

L,J SUFFIX
CERAMIC DIP PACKAGE
CASE 620–10
ISSUE V

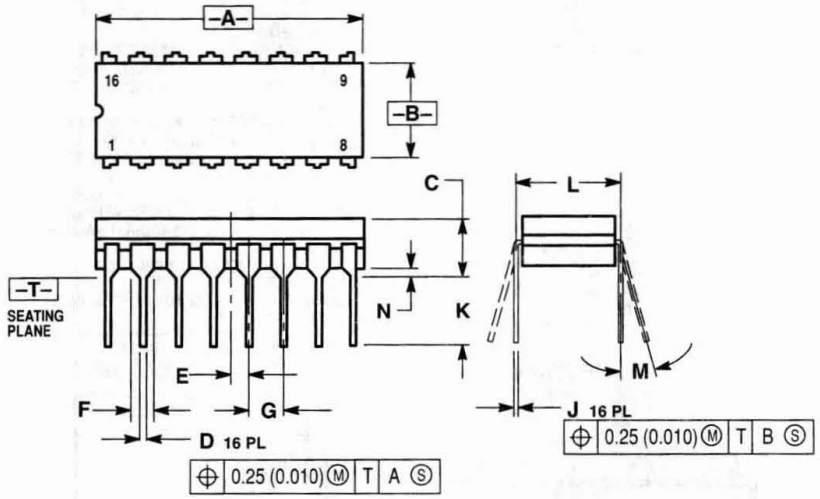

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.750	0.785	19.05	19.93
B	0.240	0.295	6.10	7.49
C	—	0.200	—	5.08
D	0.015	0.020	0.39	0.50
E	0.050 BSC		1.27 BSC	
F	0.055	0.065	1.40	1.65
G	0.100 BSC		2.54 BSC	
H	0.008	0.015	0.21	0.38
K	0.125	0.170	3.18	4.31
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

16–Pin Packages

P,N SUFFIX
PLASTIC DIP PACKAGE
CASE 648–08
ISSUE R

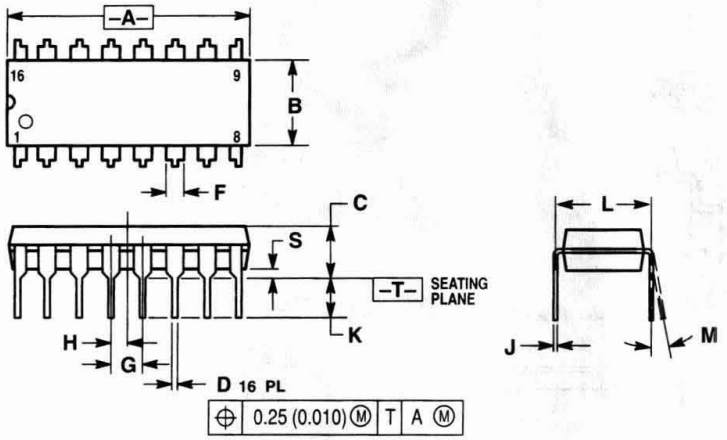

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.740	0.770	18.80	19.55
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.021	0.39	0.53
F	0.040	0.70	1.02	1.77
G	0.100 BSC		2.54 BSC	
H	0.050 BSC		1.27 BSC	
J	0.008	0.015	0.21	0.38
K	0.110	0.130	2.80	3.30
L	0.295	0.305	7.50	7.74
M	0°	10°	0°	10°
S	0.020	0.040	0.51	1.01

D SUFFIX
PLASTIC SOIC PACKAGE
CASE 751B–05
ISSUE J

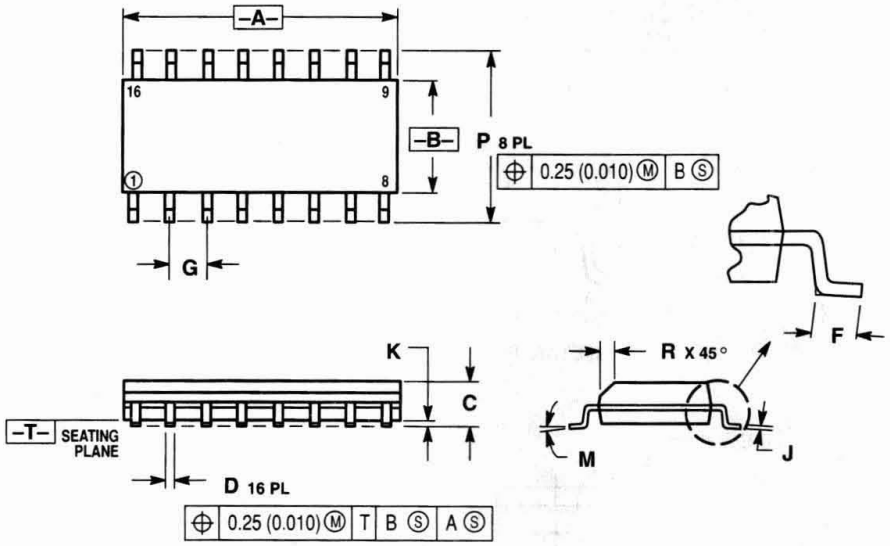

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	9.80	10.00	0.386	0.393
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.054	0.068
D	0.35	0.49	0.014	0.019
F	0.40	1.25	0.016	0.049
G	1.27 BSC		0.050 BSC	
J	0.19	0.25	0.008	0.009
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	5.80	6.20	0.229	0.244
R	0.25	0.50	0.010	0.019

16–Pin Packages

DW SUFFIX
PLASTIC WIDE SOIC PACKAGE
CASE 751G–02
ISSUE A

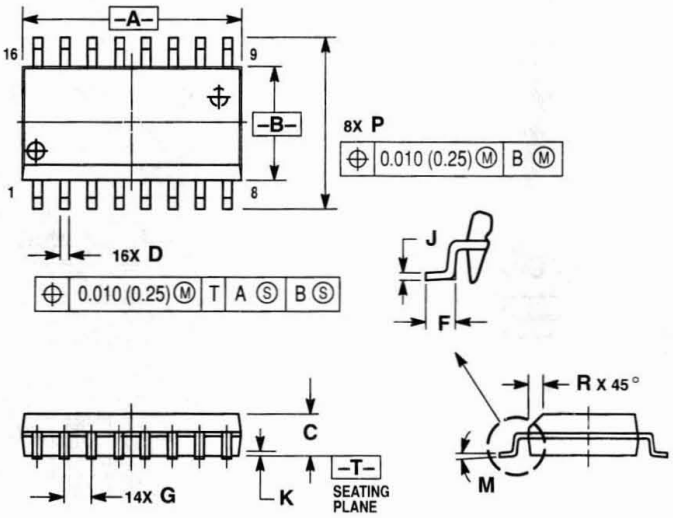

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSIOM D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	10.15	10.45	0.400	0.411
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

M SUFFIX
PLASTIC SOIC EIAJ PACKAGE
CASE 966–01
ISSUE O

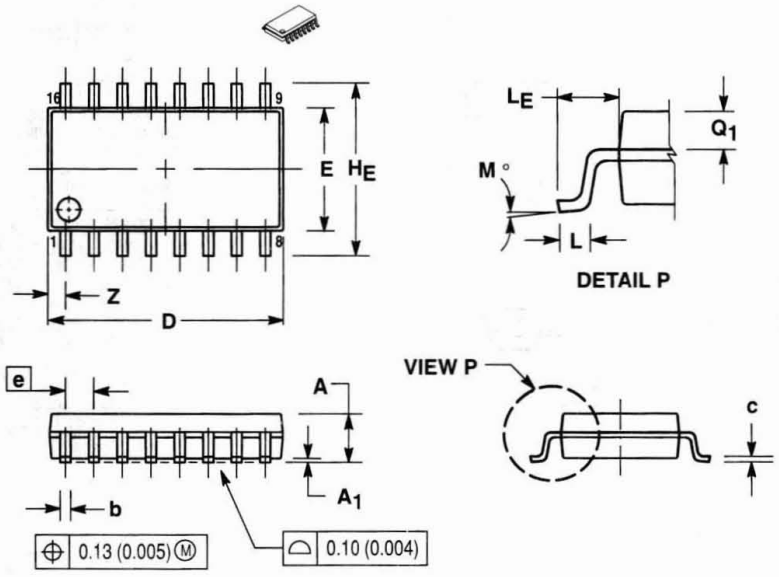

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	—	2.05	—	0.081
A_1	0.05	0.20	0.002	0.008
b	0.35	0.50	0.014	0.020
c	0.18	0.27	0.007	0.011
D	9.90	10.50	0.390	0.413
E	5.10	5.45	0.201	0.215
e	1.27 BSC		0.050 BSC	
H_E	7.40	8.20	0.291	0.323
L	0.50	0.85	0.020	0.033
L_E	1.10	1.50	0.043	0.059
M	0°	10°	0°	10°
Q_1	0.70	0.90	0.028	0.035
Z	—	0.78	—	0.031

16–Pin Packages

SD SUFFIX
PLASTIC SSOP PACKAGE
CASE 940B–03
ISSUE B

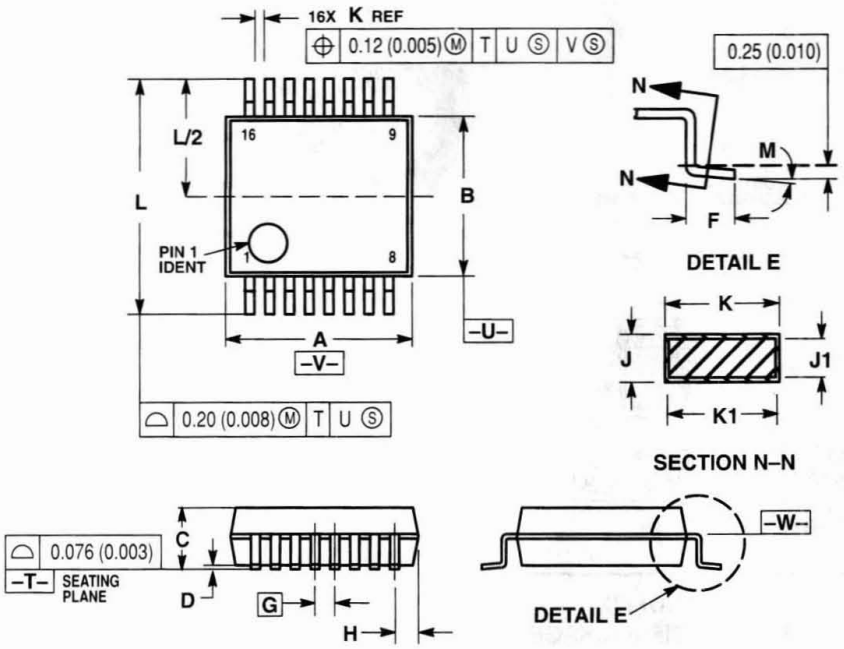

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF K DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR INTRUSION SHALL NOT REDUCE DIMENSION K BY MORE THAN 0.07 (0.002) AT LEAST MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	6.07	6.33	0.238	0.249
B	5.20	5.38	0.205	0.212
C	1.73	1.99	0.068	0.078
D	0.05	0.21	0.002	0.008
F	0.63	0.95	0.024	0.037
G	0.65 BSC		0.026 BSC	
H	0.73	0.90	0.028	0.035
J	0.09	0.20	0.003	0.008
J1	0.09	0.16	0.003	0.006
K	0.25	0.38	0.010	0.015
K1	0.25	0.33	0.010	0.013
L	7.65	7.90	0.301	0.311
M	0°	8°	0°	8°

DT SUFFIX
PLASTIC TSSOP PACKAGE
CASE 948F–01
ISSUE O

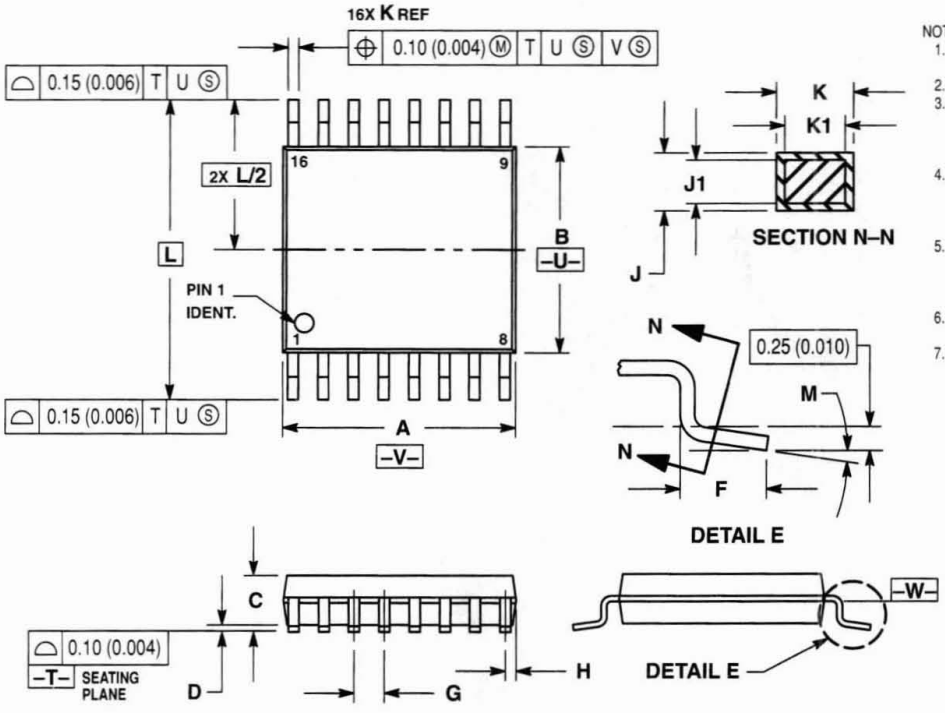

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH. PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.90	5.10	0.193	0.200
B	4.30	4.50	0.169	0.177
C	—	1.20	—	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.18	0.28	0.007	0.011
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0°	8°	0°	8°

18–Pin Packages

L,J SUFFIX
CERAMIC DIP PACKAGE
CASE 726–04
ISSUE G

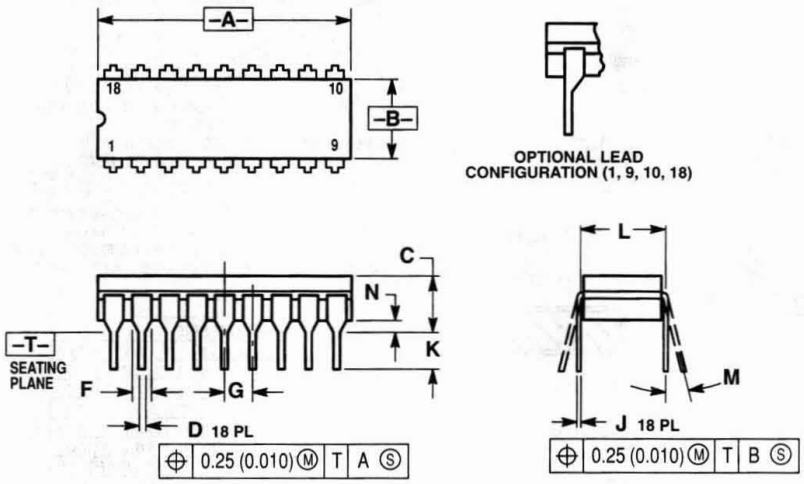

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION F FOR FULL LEADS. HALF LEADS OPTIONAL AT LEAD POSITIONS 1, 9, 10, AND 18.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.880	0.910	22.35	23.11
B	0.240	0.295	6.10	7.49
C	—	0.200	—	5.08
D	0.015	0.021	0.38	0.53
F	0.055	0.070	1.40	1.78
G	0.100 BSC		2.54 BSC	
J	0.008	0.012	0.20	0.30
K	0.125	0.170	3.18	4.32
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.02

P,N SUFFIX
PLASTIC DIP PACKAGE
CASE 707–02
ISSUE C

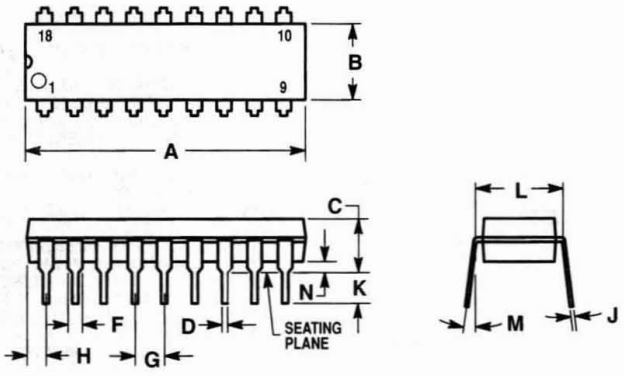

NOTES:
1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	22.22	23.24	0.875	0.915
B	6.10	6.60	0.240	0.260
C	3.56	4.57	0.140	0.180
D	0.36	0.56	0.014	0.022
F	1.27	1.78	0.050	0.070
G	2.54 BSC		0.100 BSC	
H	1.02	1.52	0.040	0.060
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	7.62 BSC		0.300 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

20–Pin Packages

L,J SUFFIX
CERAMIC DIP PACKAGE
CASE 732–03
ISSUE E

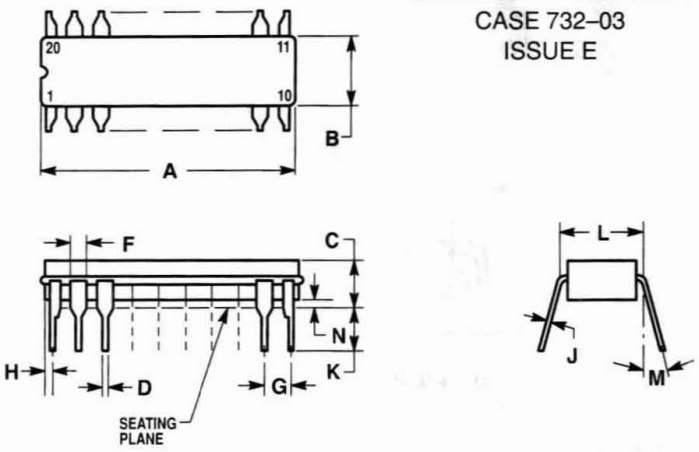

NOTES:
1. LEADS WITHIN 0.25 (0.010) DIAMETER, TRUE POSITION AT SEATING PLANE, AT MAXIMUM MATERIAL CONDITION.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSIONS A AND B INCLUDE MENISCUS.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	23.88	25.15	0.940	0.990
B	6.60	7.49	0.260	0.295
C	3.81	5.08	0.150	0.200
D	0.38	0.56	0.015	0.022
F	1.40	1.65	0.055	0.065
G	2.54 BSC		0.100 BSC	
H	0.51	1.27	0.020	0.050
J	0.20	0.30	0.008	0.012
K	3.18	4.06	0.125	0.160
L	7.62 BSC		0.300 BSC	
M	0°	15°	0°	15°
N	0.25	1.02	0.010	0.040

P,N SUFFIX
PLASTICC DIP PACKAGE
CASE 738–03
ISSUE E

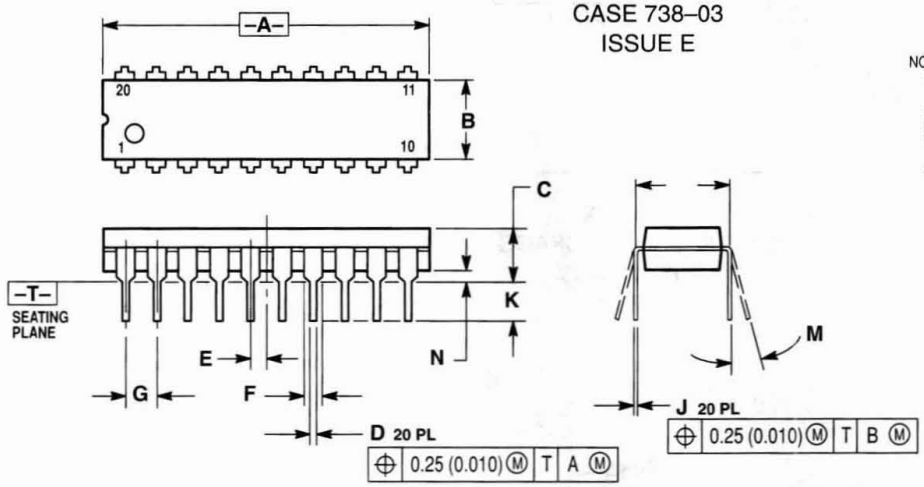

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.010	1.070	25.66	27.17
B	0.240	0.260	6.10	6.60
C	0.150	0.180	3.81	4.57
D	0.015	0.022	0.39	0.55
E	0.050 BSC		1.27 BSC	
F	0.050	0.070	1.27	1.77
G	0.100 BSC		2.54 BSC	
J	0.008	0.015	0.21	0.38
K	0.110	0.140	2.80	3.55
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

DW SUFFIX
PLASTIC WIDE SOIC PACKAGE
CASE 751D–04
ISSUE E

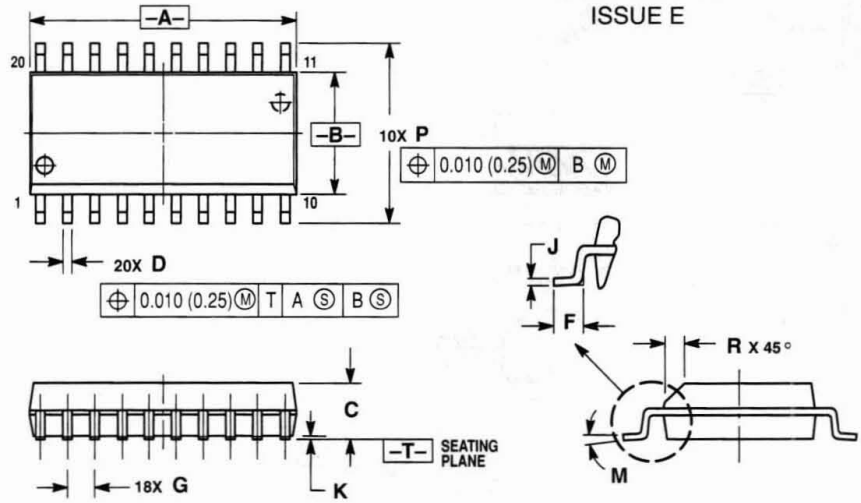

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.150 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	12.65	12.95	0.499	0.510
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.50	0.90	0.020	0.035
G	1.27 BSC		0.050 BSC	
J	0.25	0.32	0.010	0.012
K	0.10	0.25	0.004	0.009
M	0°	7°	0°	7°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

20–Pin Packages

M SUFFIX
PLASTIC SOIC EIAJ PACKAGE
CASE 967–01
ISSUE O

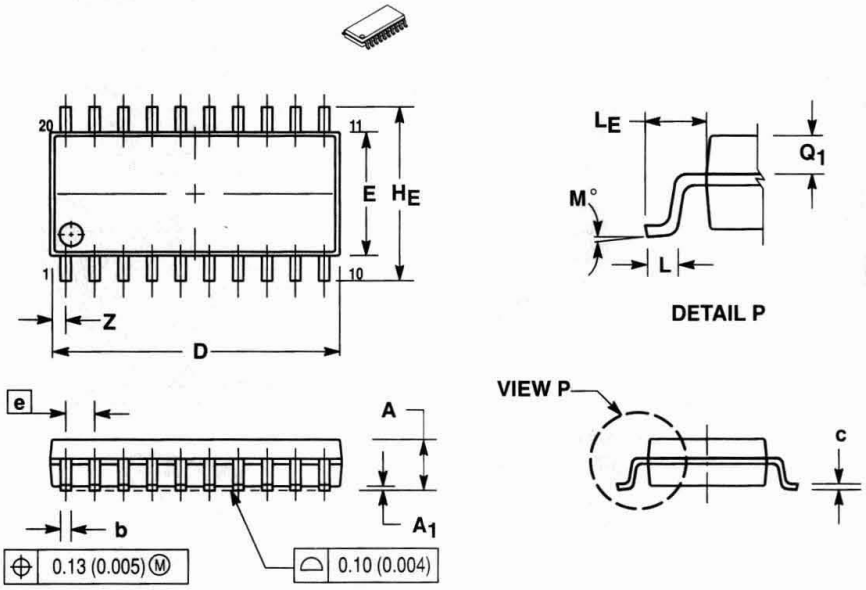

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	—	2.05	—	0.081
A_1	0.05	0.20	0.002	0.008
b	0.35	0.50	0.014	0.020
c	0.18	0.27	0.007	0.011
D	12.35	12.80	0.486	0.504
E	5.10	5.45	0.201	0.215
e	1.27 BSC		0.050 BSC	
H_E	7.40	8.20	0.291	0.323
L	0.50	0.85	0.020	0.033
L_E	1.10	1.50	0.043	0.059
M	0 °	10 °	0 °	10 °
Q_1	0.70	0.90	0.028	0.035
Z	—	0.81	—	0.032

SD SUFFIX
PLASTIC SSOP PACKAGE
CASE 940C–03
ISSUE B

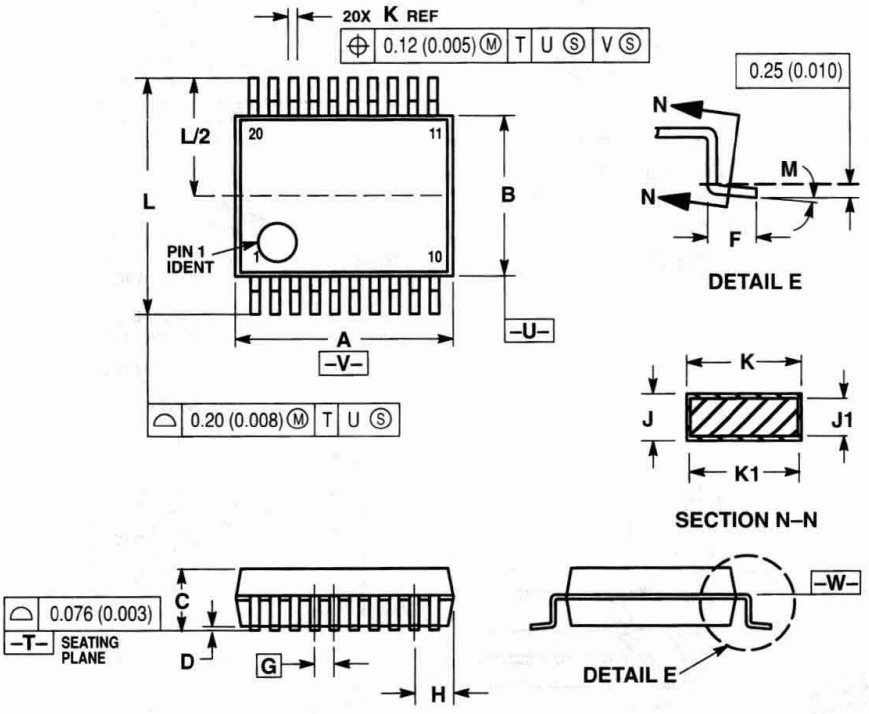

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF K DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR INTRUSION SHALL NOT REDUCE DIMENSION K BY MORE THAN 0.07 (0.002) AT LEAST MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	7.07	7.33	0.278	0.288
B	5.20	5.38	0.205	0.212
C	1.73	1.99	0.068	0.078
D	0.05	0.21	0.002	0.008
F	0.63	0.95	0.024	0.037
G	0.65 BSC		0.026 BSC	
H	0.59	0.75	0.023	0.030
J	0.09	0.20	0.003	0.008
J1	0.09	0.16	0.003	0.006
K	0.25	0.38	0.010	0.015
K1	0.25	0.33	0.010	0.013
L	7.65	7.90	0.301	0.311
M	0 °	8 °	0 °	8 °

DT SUFFIX
PLASTIC TSSOP PACKAGE
CASE 948E–02
ISSUE A

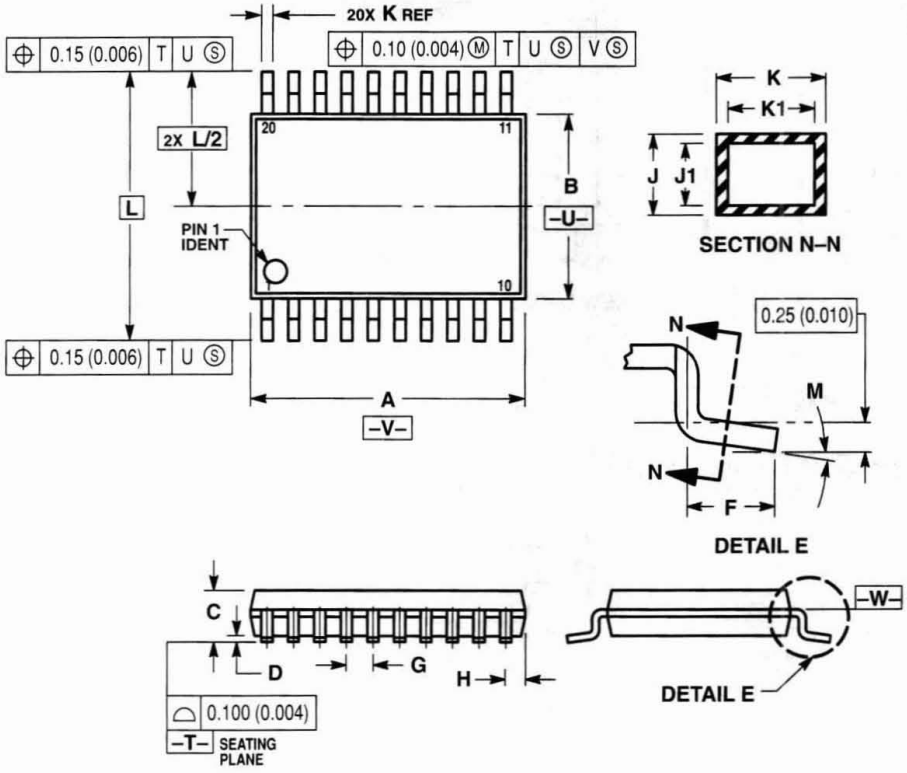

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	6.40	6.60	0.252	0.260
B	4.30	4.50	0.169	0.177
C	—	1.20	—	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.27	0.37	0.011	0.015
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0°	8°	0°	8°

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 775–02
ISSUE C

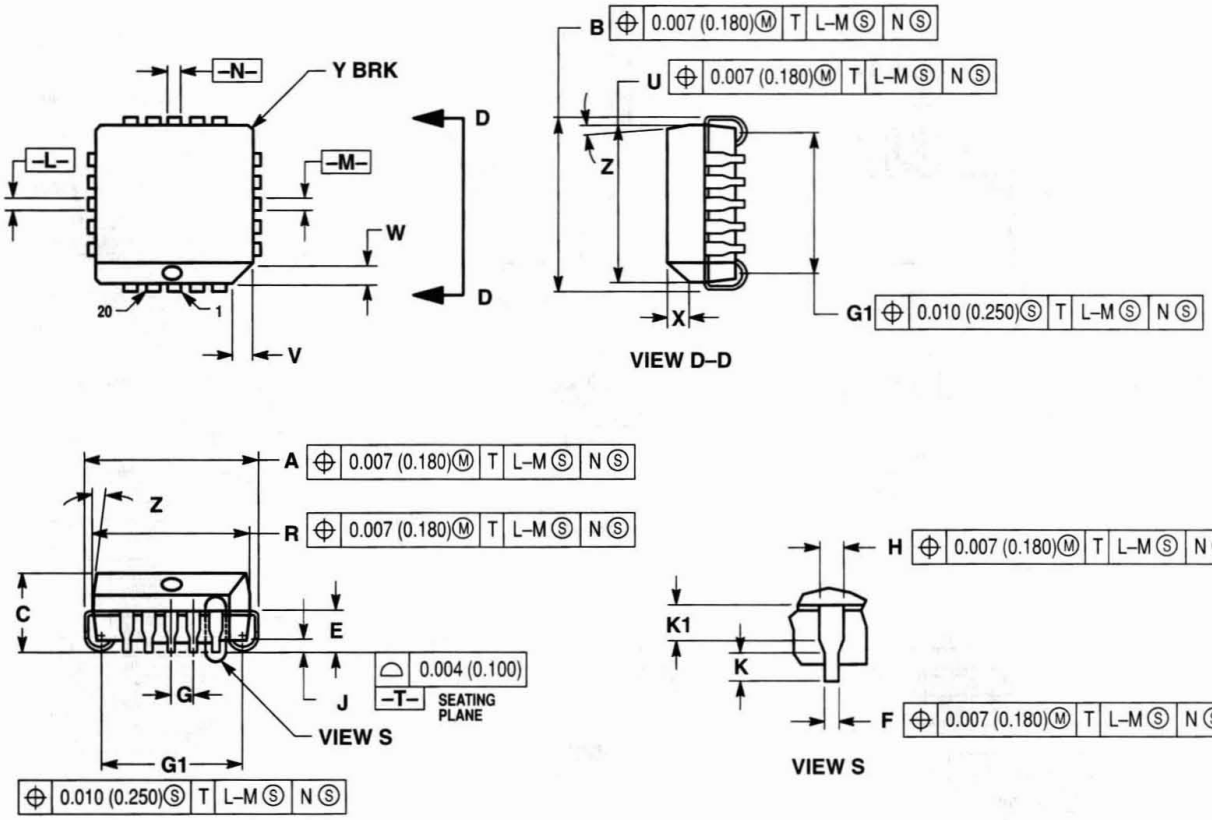



NOTES:
1. DATUMS –L–, –M–, AND –N– DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM –T–, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. CONTROLLING DIMENSION: INCH.
6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.385	0.395	9.78	10.03
B	0.385	0.395	9.78	10.03
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.310	0.330	7.88	8.38
K1	0.040	—	1.02	—

24–Pin Packages

J SUFFIX
CERAMIC DIP PACKAGE
CASE 758–02
ISSUE A

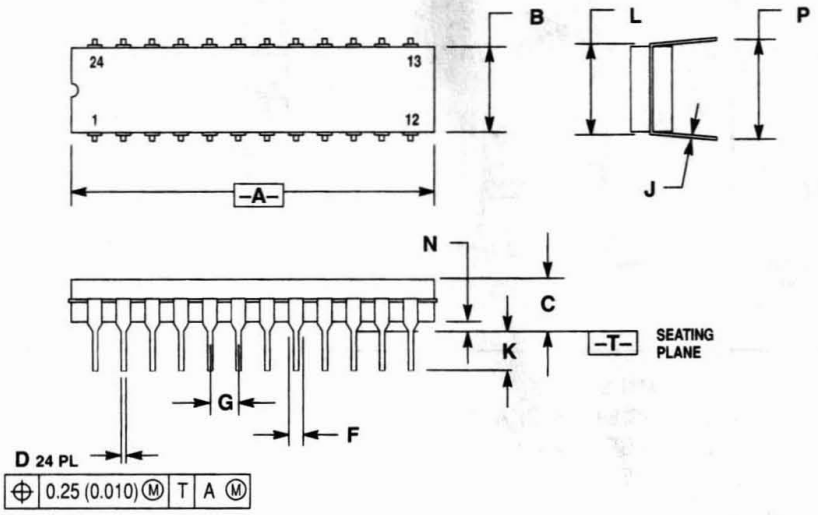

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.240	1.285	31.50	32.64
B	0.285	0.305	7.24	7.75
C	0.160	0.200	4.07	5.08
D	0.015	0.021	0.38	0.53
F	0.045	0.062	1.14	1.57
G	0.100 BSC		2.54 BSC	
J	0.008	0.013	0.20	0.33
K	0.100	0.165	2.54	4.19
L	0.300	0.310	7.62	7.87
N	0.020	0.050	0.51	1.27
P	0.360	0.400	9.14	10.16

L,J,JW SUFFIX
CERAMIC DIP PACKAGE
CASE 623–05
ISSUE M

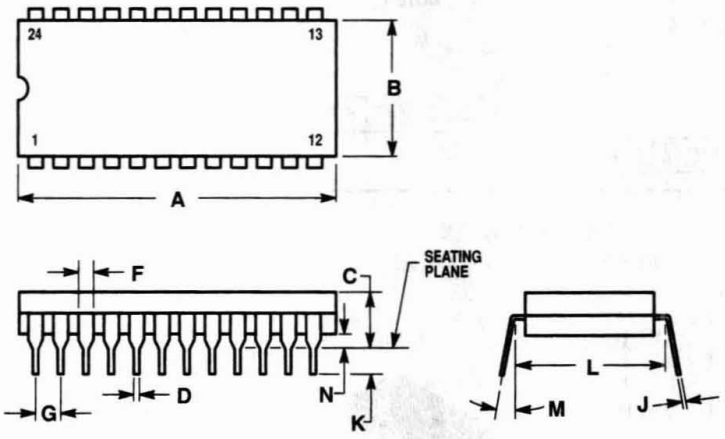

NOTES:
1. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
2. LEADS WITHIN 0.13 (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION (WHEN FORMED PARALLEL).

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	31.24	32.77	1.230	1.290
B	12.70	15.49	0.500	0.610
C	4.06	5.59	0.160	0.220
D	0.41	0.51	0.016	0.020
F	1.27	1.52	0.050	0.060
G	2.54 BSC		0.100 BSC	
J	0.20	0.30	0.008	0.012
K	3.18	4.06	0.125	0.160
L	15.24 BSC		0.600 BSC	
M	0°	15°	0°	15°
N	0.51	1.27	0.020	0.050

24–Pin Packages

N SUFFIX
PLASTIC DIP PACKAGE
CASE 709–02
ISSUE C

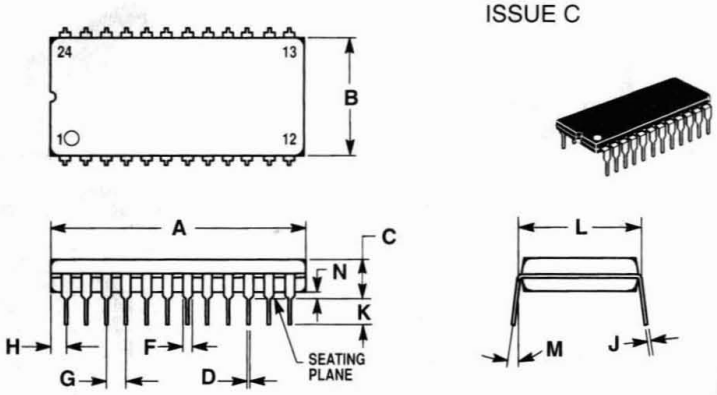

NOTES:
1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	31.37	32.13	1.235	1.265
B	13.72	14.22	0.540	0.560
C	3.94	5.08	0.155	0.200
D	0.36	0.56	0.014	0.022
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.03	0.065	0.080
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	15.24 BSC		0.600 BSC	
M	0°	15°	0°	15°
N	0.51	1.02	0.020	0.040

P,N SUFFIX
PLASTIC DIP PACKAGE
CASE 724–03
ISSUE D

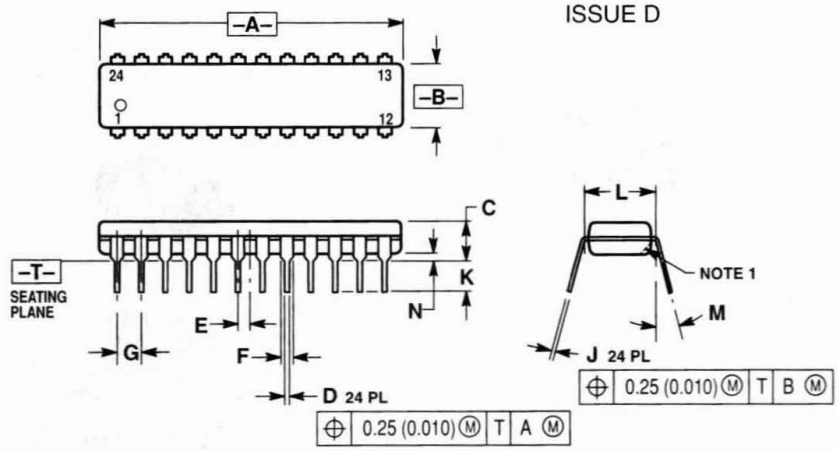

NOTES:
1. CHAMFERED CONTOUR OPTIONAL.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
4. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.230	1.265	31.25	32.13
B	0.250	0.270	6.35	6.85
C	0.145	0.175	3.69	4.44
D	0.015	0.020	0.38	0.51
E	0.050 BSC		1.27 BSC	
F	0.040	0.060	1.02	1.52
G	0.100 BSC		2.54 BSC	
J	0.007	0.012	0.18	0.30
K	0.110	0.140	2.80	3.55
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

P,N,PW SUFFIX
PLASTIC DIP PACKAGE
CASE 649–03
ISSUE D

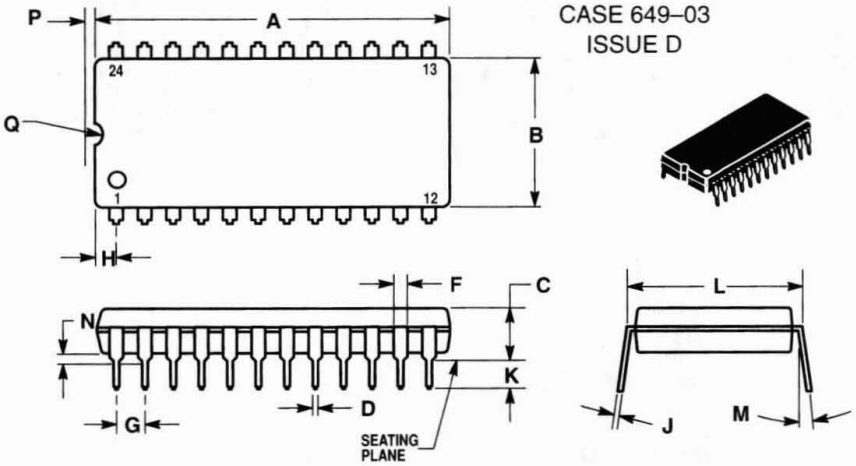

NOTES:
1. LEADS WITHIN 0.13 (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	31.50	32.13	1.240	1.265
B	13.21	13.72	0.520	0.540
C	4.70	5.21	0.185	0.205
D	0.38	0.51	0.015	0.020
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.16	0.065	0.085
J	0.20	0.30	0.008	0.012
K	2.92	3.43	0.115	0.135
L	14.99	15.49	0.590	0.610
M	—	10	—	10°
N	0.51	1.02	0.020	0.040
P	0.13	0.38	0.005	0.015
Q	0.51	0.76	0.020	0.030

24–Pin Packages

DW SUFFIX
PLASTIC WIDE SOIC PACKAGE
CASE 751E–04
ISSUE E

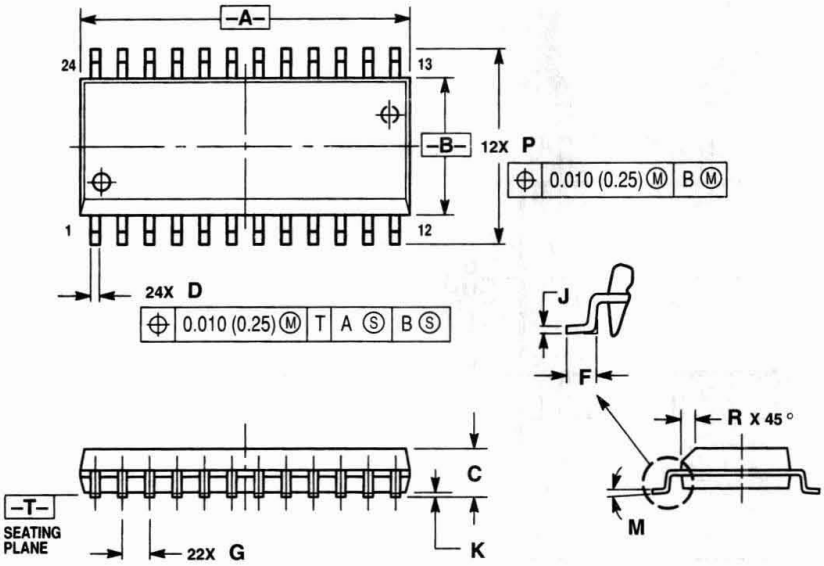

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	15.25	15.54	0.601	0.612
B	7.40	7.60	0.292	0.299
C	2.35	2.65	0.093	0.104
D	0.35	0.49	0.014	0.019
F	0.41	0.90	0.016	0.035
G	1.27 BSC		0.050 BSC	
J	0.23	0.32	0.009	0.013
K	0.13	0.29	0.005	0.011
M	0°	8°	0°	8°
P	10.05	10.55	0.395	0.415
R	0.25	0.75	0.010	0.029

SD SUFFIX
PLASTIC SSOP PACKAGE
CASE 940D–03
ISSUE B

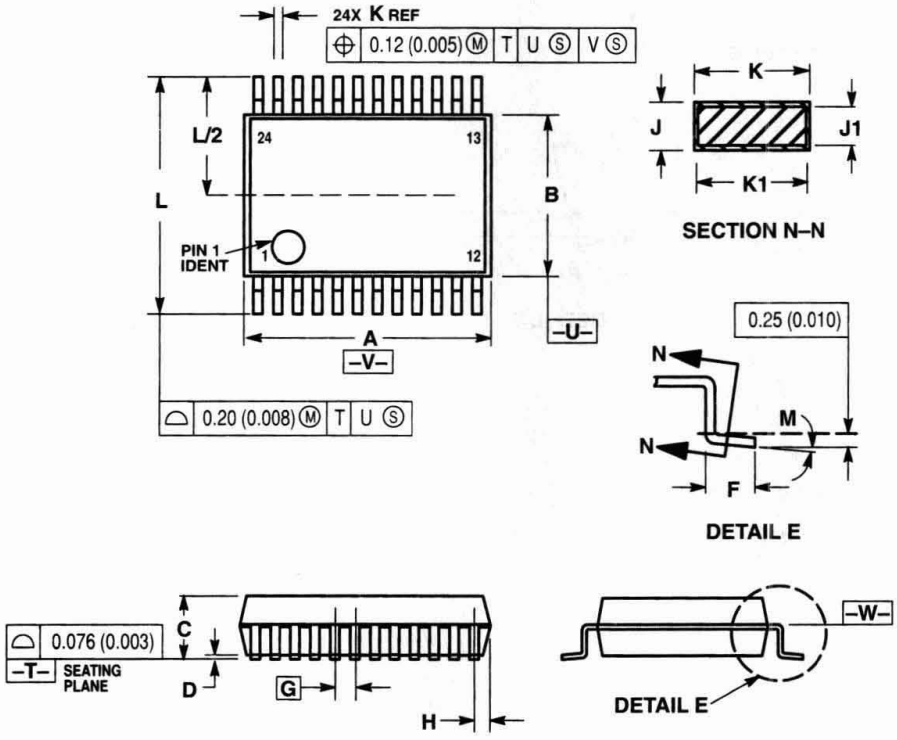

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION/INTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF K DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR INTRUSION SHALL NOT REDUCE DIMENSION K BY MORE THAN 0.07 (0.002) AT LEAST MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	8.07	8.33	0.317	0.328
B	5.20	5.38	0.205	0.212
C	1.73	1.99	0.068	0.078
D	0.05	0.21	0.002	0.008
F	0.63	0.95	0.024	0.037
G	0.65 BSC		0.026 BSC	
H	0.44	0.60	0.017	0.024
J	0.09	0.20	0.003	0.008
J1	0.09	0.16	0.003	0.006
K	0.25	0.38	0.010	0.015
K1	0.25	0.33	0.010	0.013
L	7.65	7.90	0.301	0.311
M	0°	8°	0°	8°

24–Pin Packages

DT SUFFIX
PLASTIC TSSOP PACKAGE
CASE 948H–01
ISSUE O

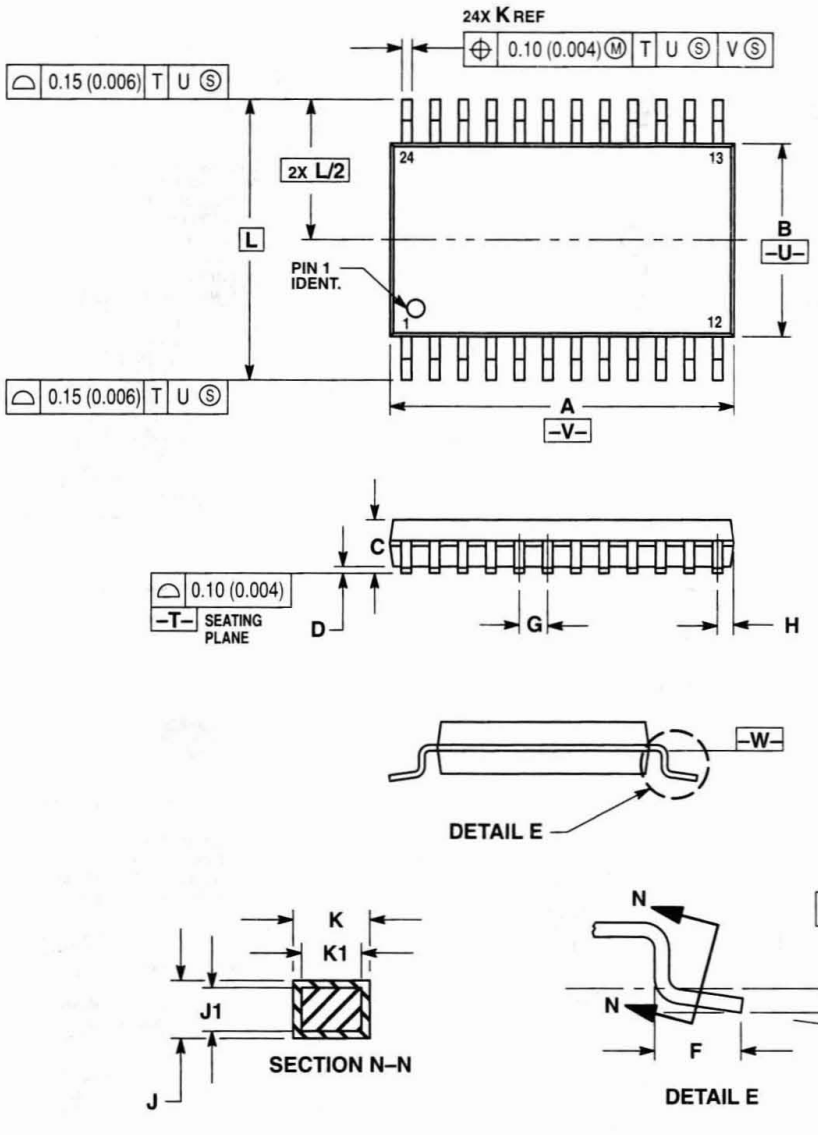

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	7.70	7.90	0.303	0.311
B	4.30	4.50	0.169	0.177
C	—	1.20	—	0.047
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.65 BSC		0.026 BSC	
H	0.27	0.37	0.011	0.015
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.19	0.30	0.007	0.012
K1	0.19	0.25	0.007	0.010
L	6.40 BSC		0.252 BSC	
M	0°	8°	0°	8°

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 776–02
ISSUE D

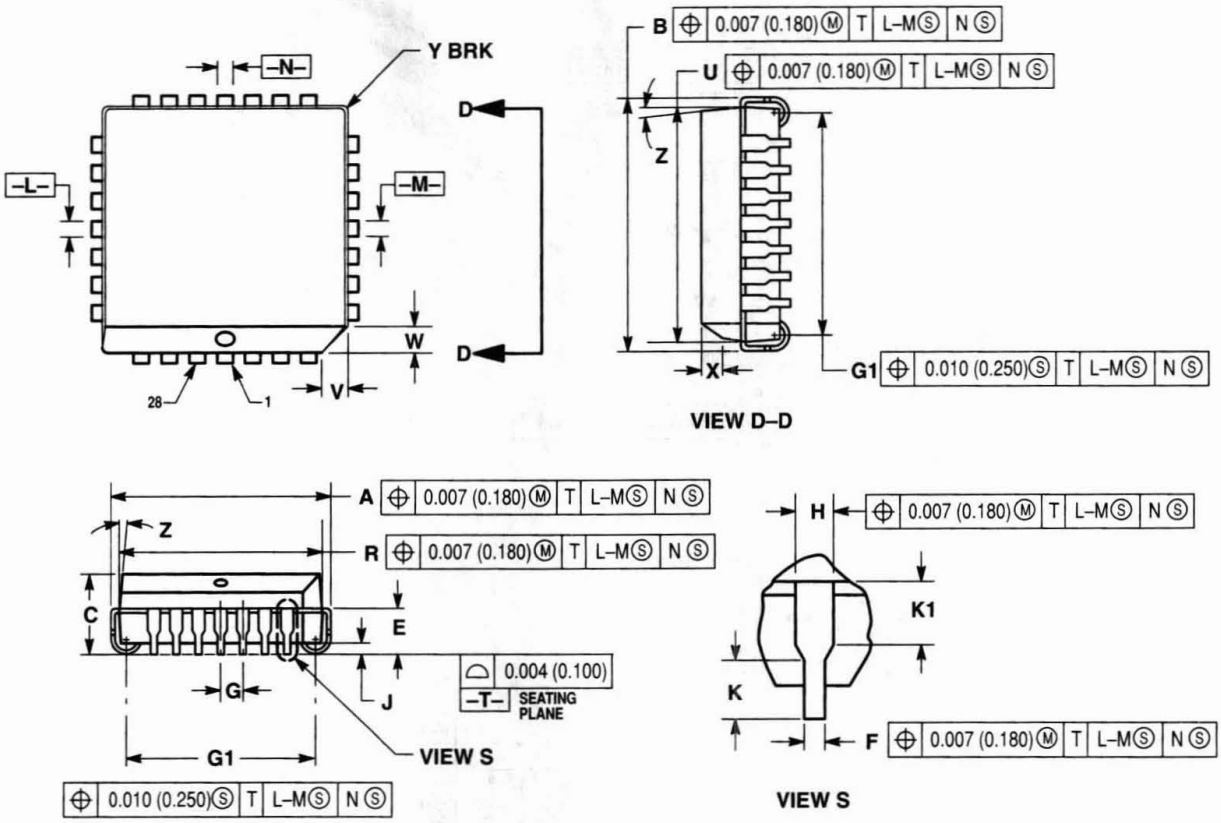



NOTES:
1. DATUMS –L–, –M–, AND –N– DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM –T–, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. CONTROLLING DIMENSION: INCH.
6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.485	0.495	12.32	12.57
B	0.485	0.495	12.32	12.57
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.450	0.456	11.43	11.58
U	0.450	0.456	11.43	11.58
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.410	0.430	10.42	10.92
K1	0.040	—	1.02	—

32–Pin Package

FA SUFFIX
PLASTIC TQFP PACKAGE
CASE 873A–02
ISSUE A

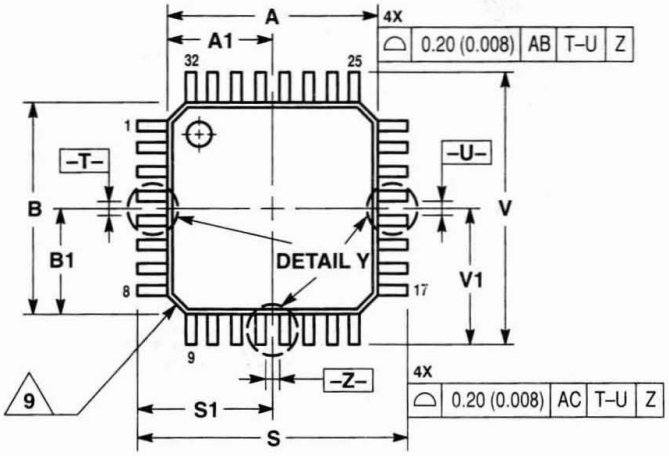



DETAIL Y

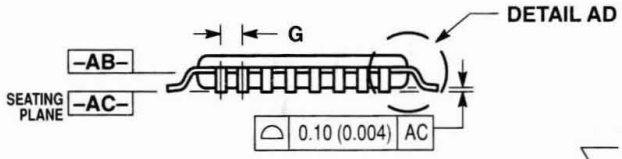



SECTION AE–AE

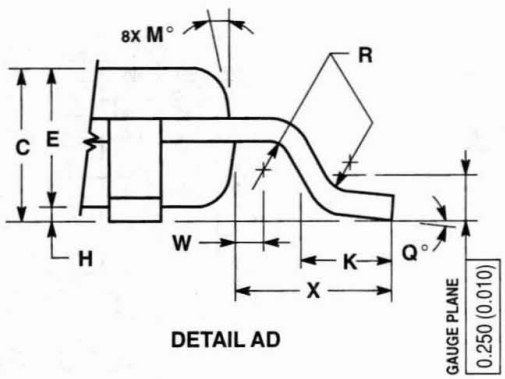

DETAIL AD

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE –AB– IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS –T–, –U–, AND –Z– TO BE DETERMINED AT DATUM PLANE –AB–.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE –AC–.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.250 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE –AB–.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.520 (0.020).
8. MINIMUM SOLDER PLATE THICKNESS SHALL BE 0.0076 (0.0003).
9. EXACT SHAPE OF EACH CORNER MAY VARY FROM DEPICTION.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	7.000 BSC		0.276 BSC	
A1	3.500 BSC		0.138 BSC	
B	7.000 BSC		0.276 BSC	
B1	3.500 BSC		0.138 BSC	
C	1.400	1.600	0.055	0.063
D	0.300	0.450	0.012	0.018
E	1.350	1.450	0.053	0.057
F	0.300	0.400	0.012	0.016
G	0.800 BSC		0.031 BSC	
H	0.050	0.150	0.002	0.006
J	0.090	0.200	0.004	0.008
K	0.500	0.700	0.020	0.028
M	12° REF		12° REF	
N	0.090	0.160	0.004	0.006
P	0.400 BSC		0.016 BSC	
Q	1°	5°	1°	5°
R	0.150	0.250	0.006	0.010
S	9.000 BSC		0.354 BSC	
S1	4.500 BSC		0.177 BSC	
V	9.000 BSC		0.354 BSC	
V1	4.500 BSC		0.177 BSC	
W	0.200 REF		0.008 REF	
X	1.000 REF		0.039 REF	

40–Pin Packages

N SUFFIX
PLASTIC DIP PACKAGE
CASE 711–03
ISSUE C



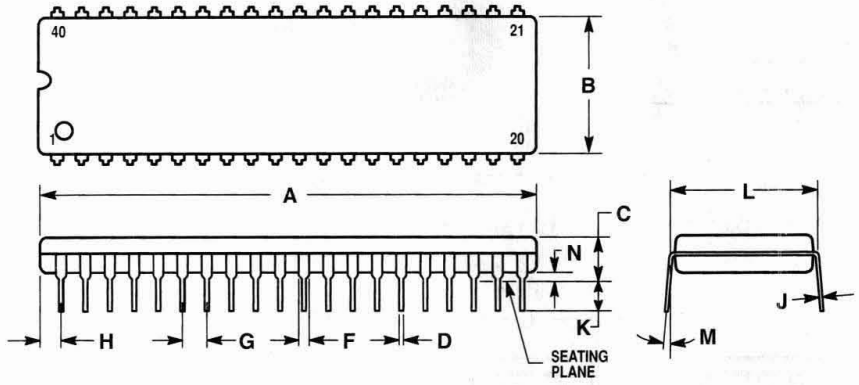

NOTES:
1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	51.69	52.45	2.035	2.065
B	13.72	14.22	0.540	0.560
C	3.94	5.08	0.155	0.200
D	0.36	0.56	0.014	0.022
F	1.02	1.52	0.040	0.060
G	2.54 BSC		0.100 BSC	
H	1.65	2.16	0.065	0.085
J	0.20	0.38	0.008	0.015
K	2.92	3.43	0.115	0.135
L	15.24 BSC		0.600 BSC	
M	0 °	15°	0 °	15°
N	0.51	1.02	0.020	0.040

48–Pin Packages

J SUFFIX
CERAMIC DIP PACKAGE
CASE 740–03
ISSUE B



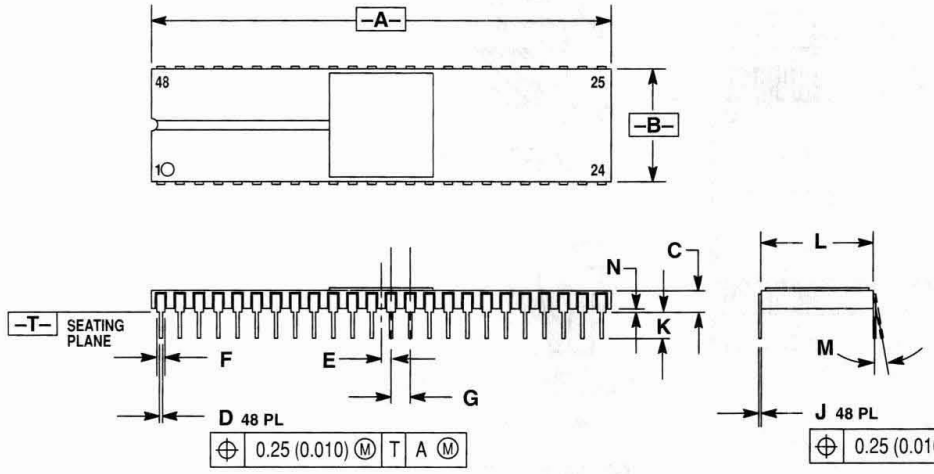

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	2.376	2.424	60.36	61.56
B	0.576	0.604	14.64	15.34
C	0.120	0.127	3.05	4.31
D	0.015	0.021	0.381	0.533
E	0.050 BSC		1.27 BSC	
F	0.030	0.055	0.762	1.397
G	0.100 BSC		2.54 BSC	
J	0.008	0.013	0.204	0.330
K	0.100	0.165	2.54	4.19
L	0.600 BSC		15.24 BSC	
M	0 °	10°	0°	10°
N	0.040	0.060	1.016	1.524

48–Pin Packages

N SUFFIX
PLASTIC DIP PACKAGE
CASE 767–02
ISSUE B

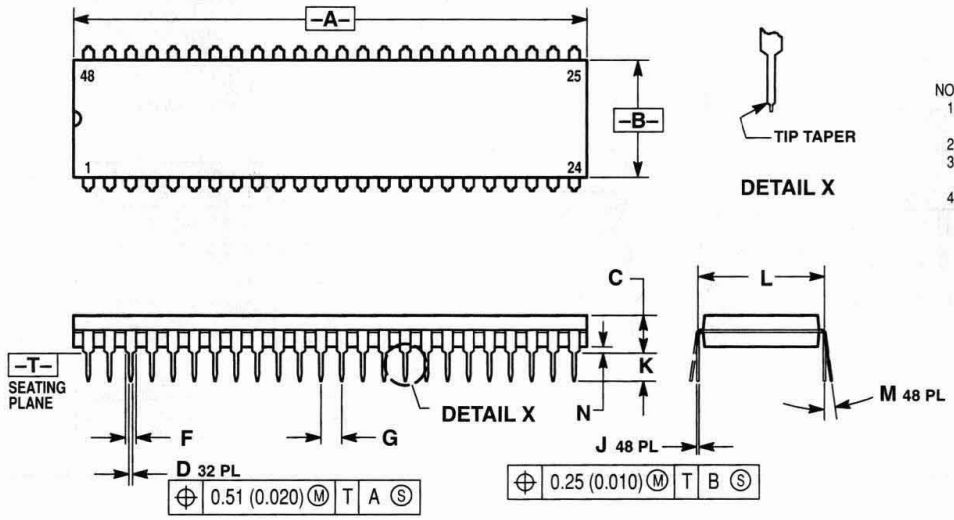

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH. MAXIMUM MOLD FLASH 0.25 (0.010).

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	2.415	2.445	61.34	62.10
B	0.540	0.560	13.72	14.22
C	0.155	0.200	3.94	5.08
D	0.014	0.022	0.36	0.55
F	0.040	0.060	1.02	1.52
G	0.100 BSC		2.54 BSC	
H	0.070 BSC		1.79 BSC	
J	0.008	0.015	0.20	0.38
K	0.115	0.150	2.92	3.81
L	0.600 BSC		15.24 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01

DT SUFFIX
PLASTIC TSSOP PACKAGE
CASE 1201–01
ISSUE A

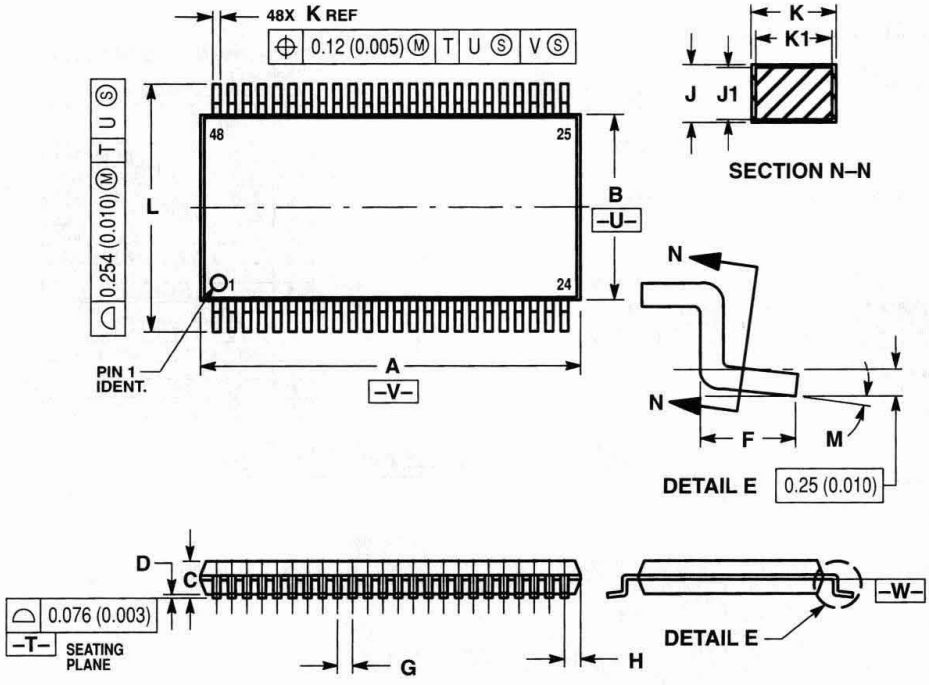

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
6. DIMENSIONS A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	12.40	12.60	0.488	0.496
B	6.00	6.20	0.236	0.244
C	—	1.10	—	0.043
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.50 BSC		0.0197 BSC	
H	0.37	—	0.015	—
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.17	0.27	0.007	0.011
K1	0.17	0.23	0.007	0.009
L	7.95	8.25	0.313	0.325
M	0°	8°	0°	8°

52–Pin Packages

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 778–02
ISSUE C

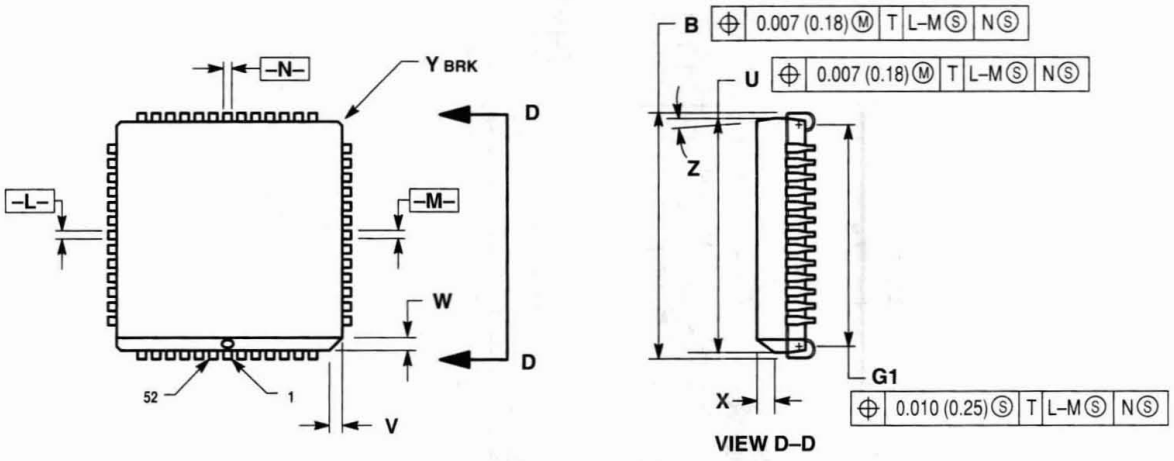

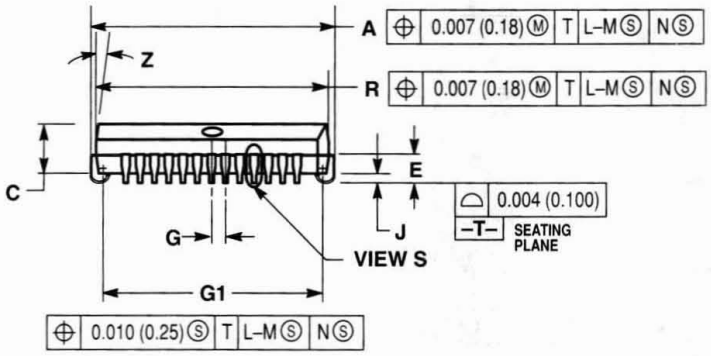

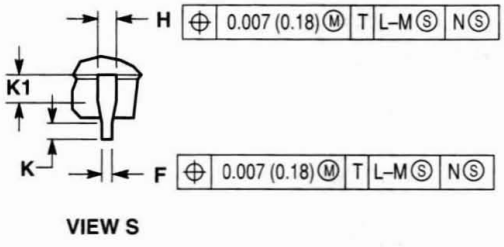



NOTES:
1. DATUMS –L–, –M–, AND –N– DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM –T–, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. CONTROLLING DIMENSION: INCH.
6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.785	0.795	19.94	20.19
B	0.785	0.795	19.94	20.19
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.750	0.756	19.05	19.20
U	0.750	0.756	19.05	19.20
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.710	0.730	18.04	18.54
K1	0.040	—	1.02	—

FA SUFFIX
PLASTIC TQFP PACKAGE
CASE 848D–03
ISSUE D

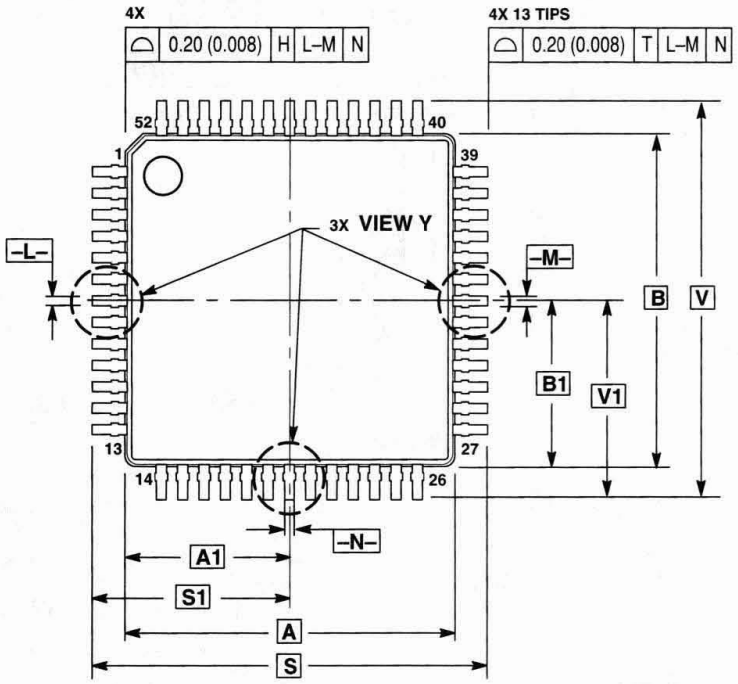

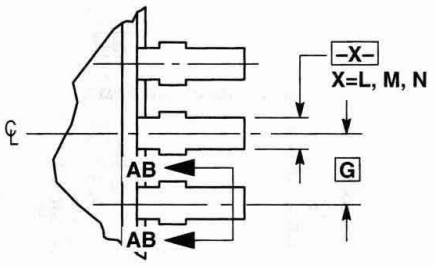

VIEW Y

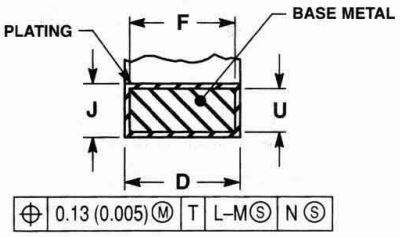

SECTION AB–AB
ROTATED 90° CLOCKWISE

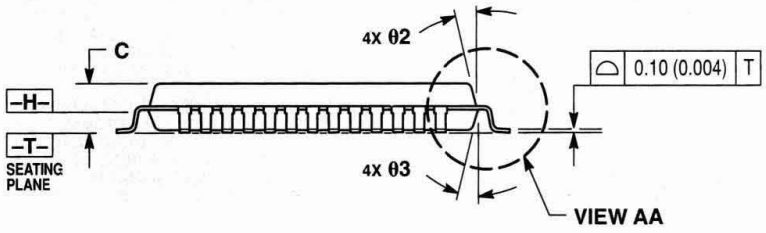

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE –H– IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS –L–, –M– AND –N– TO BE DETERMINED AT DATUM PLANE –H–.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE –T–.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED 0.46 (0.018). MINIMUM SPACE BETWEEN PROTRUSION AND ADJACENT LEAD OR PROTRUSION 0.07 (0.003).

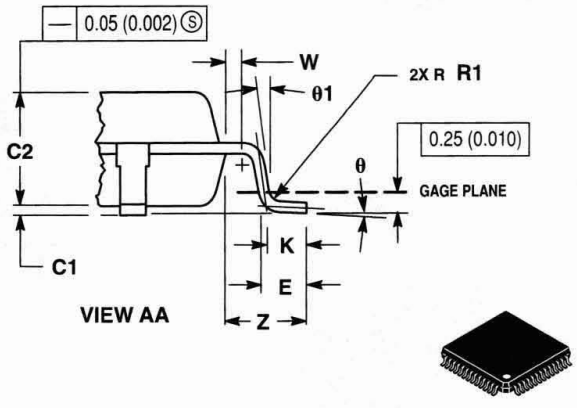

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	10.00 BSC		0.394 BSC	
A1	5.00 BSC		0.197 BSC	
B	10.00 BSC		0.394 BSC	
B1	5.00 BSC		0.197 BSC	
C	—	1.70	—	0.067
C1	0.05	0.20	0.002	0.008
C2	1.30	1.50	0.051	0.059
D	0.20	0.40	0.008	0.016
E	0.45	0.75	0.018	0.030
F	0.22	0.35	0.009	0.014
G	0.65 BSC		0.026 BSC	
J	0.07	0.20	0.003	0.008
K	0.50 REF		0.020 REF	
R1	0.08	0.20	0.003	0.008
S	12.00 BSC		0.472 BSC	
S1	6.00 BSC		0.236 BSC	
U	0.09	0.16	0.004	0.006
V	12.00 BSC		0.472 BSC	
V1	6.00 BSC		0.236 BSC	
W	0.20 REF		0.008 REF	
Z	1.00 REF		0.039 REF	
θ	0°	7°	0°	7°
θ1	0°	—	0°	—
θ2	12° REF		12° REF	
θ3	12° REF		12° REF	

DT SUFFIX
PLASTIC TSSOP PACKAGE
CASE 1202–01
ISSUE A

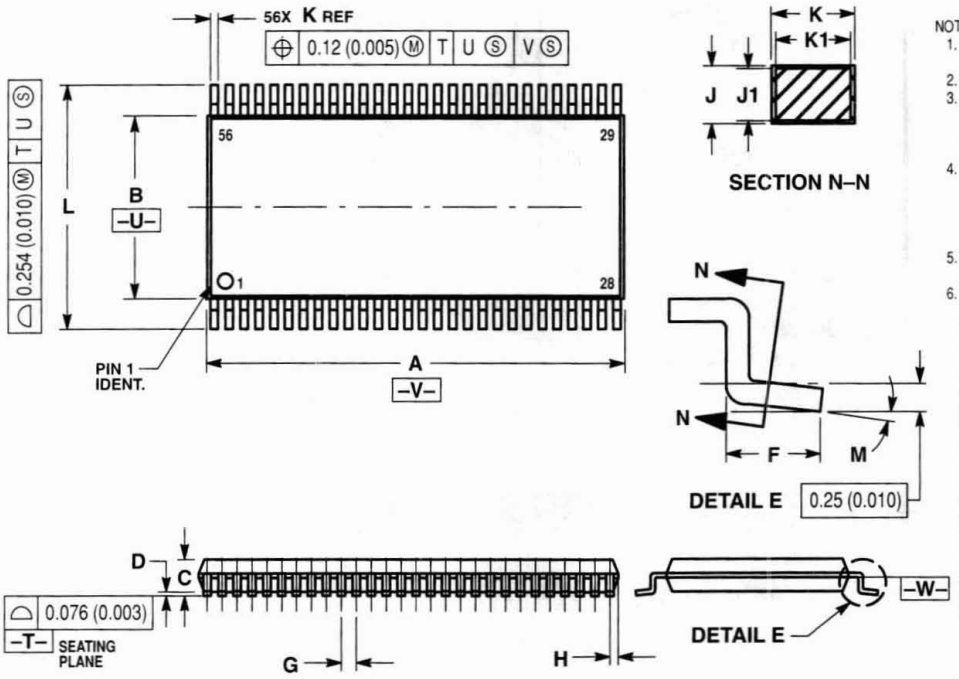

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
5. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
6. DIMENSIONS A AND B ARE TO BE DETERMINED AT DATUM PLANE –W–.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	13.90	14.10	0.547	0.555
B	6.00	6.20	0.236	0.244
C	—	1.10	—	0.043
D	0.05	0.15	0.002	0.006
F	0.50	0.75	0.020	0.030
G	0.50 BSC		0.0197 BSC	
H	0.12	—	0.005	—
J	0.09	0.20	0.004	0.008
J1	0.09	0.16	0.004	0.006
K	0.17	0.27	0.007	0.011
K1	0.17	0.23	0.007	0.009
L	7.95	8.25	0.313	0.325
M	0°	8°	0°	8°

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 779–02
ISSUE C

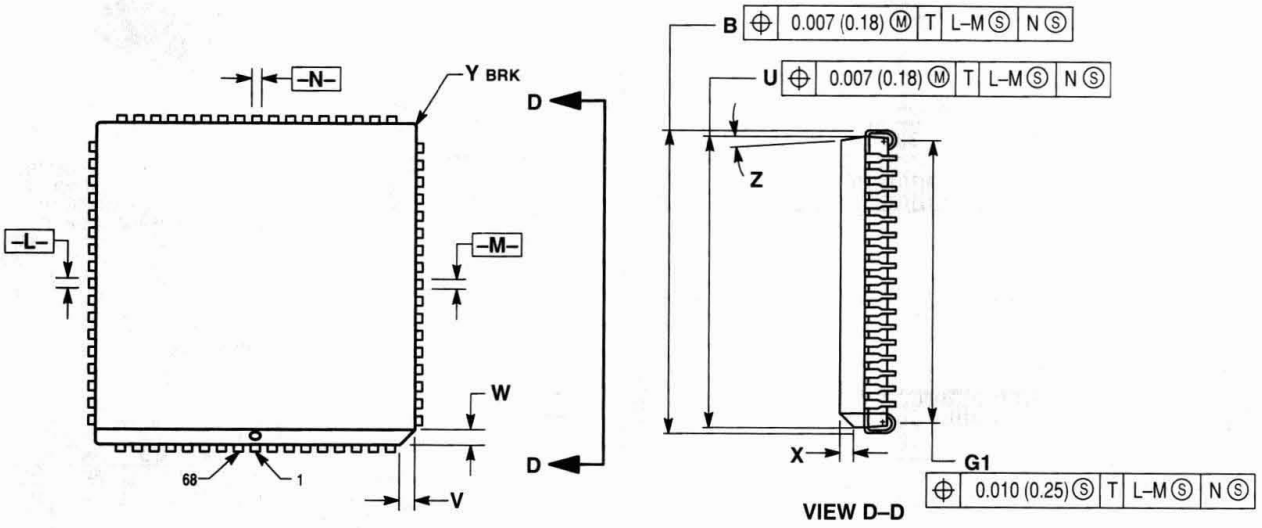

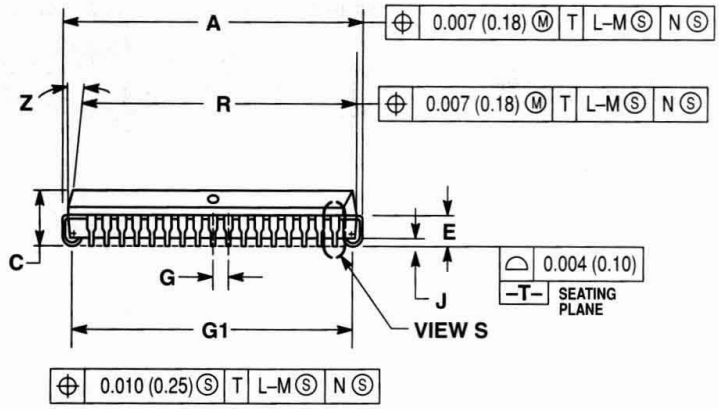

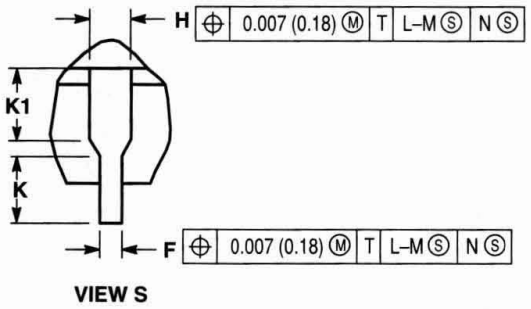



NOTES:
1. DATUMS –L–, –M–, AND –N– DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM –T–, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. CONTROLLING DIMENSION: INCH.
6. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
7. DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.985	0.995	25.02	25.27
B	0.985	0.995	25.02	25.27
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.950	0.956	24.13	24.28
U	0.950	0.956	24.13	24.28
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.910	0.930	23.12	23.62
K1	0.040	—	1.02	—

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 780A–01
ISSUE A

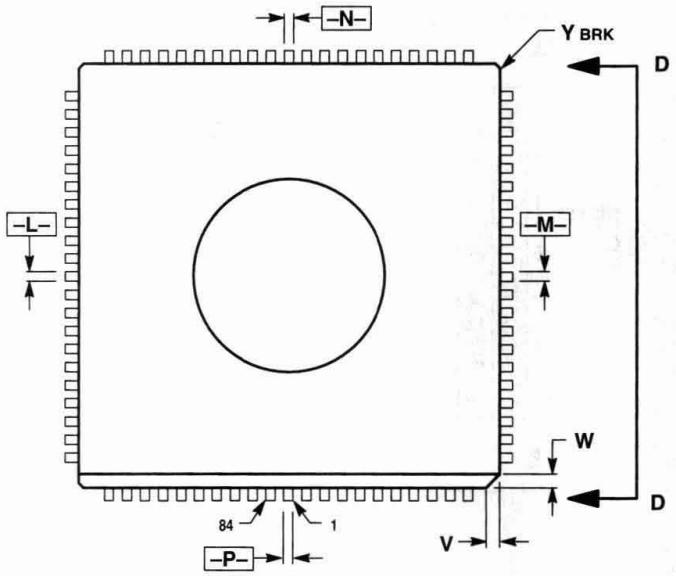

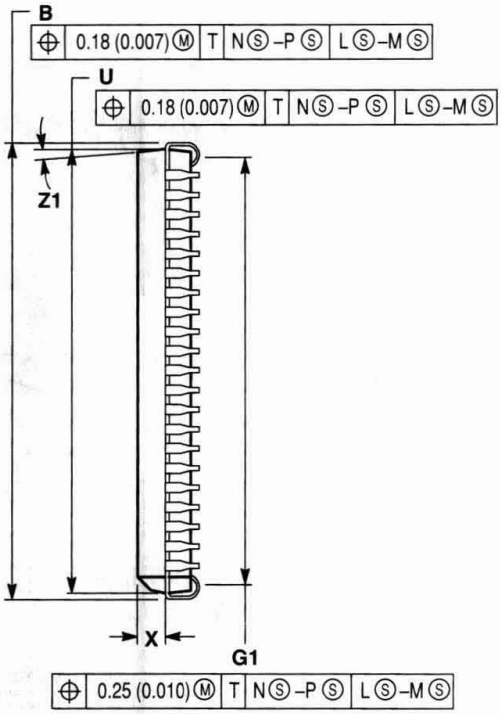

DETAIL D–D

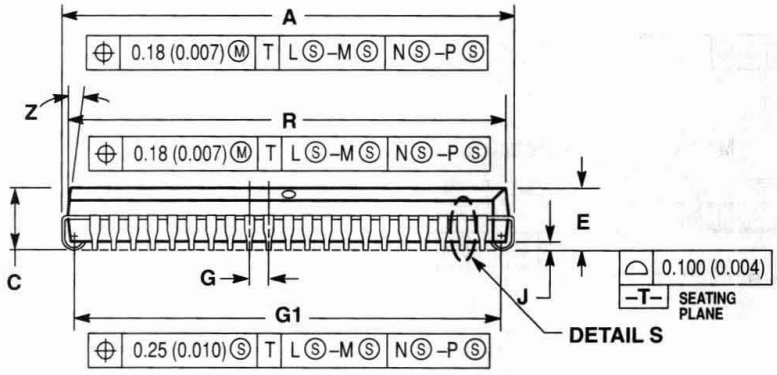

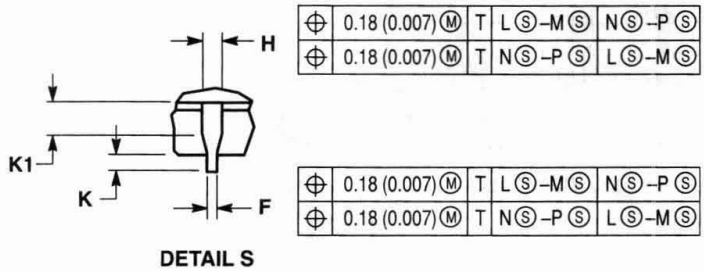

DETAIL S

NOTES:
1. DATUMS –L–, –M–, –N–, AND –P– DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PACKAGE BODY AT GLASS PARTING LINE.
2. DIMENSION G1, TRUE POSITION TO BE MEASURED AT DATUM –T–, SEATING PLANE.
3. DIMENSIONS R AND U DO NOT INCLUDE GLASS PROTRUSION. ALLOWABLE GLASS PROTRUSION IS 0.25 (0.010) PER SIDE.
4. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
5. ~~CONTROLLING DIMENSION: INCH.~~

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.185	1.195	30.10	30.35
B	1.185	1.195	30.10	30.35
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.021	0.33	0.53
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	1.150	1.156	29.21	29.36
U	1.150	1.156	29.21	29.36
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	1.110	1.130	28.20	28.70
K1	0.040	—	1.02	—
Z1	2°	10°	2°	10°



DD SUFFIX
PLASTIC QFP PACKAGE
CASE 862A–02
ISSUE B

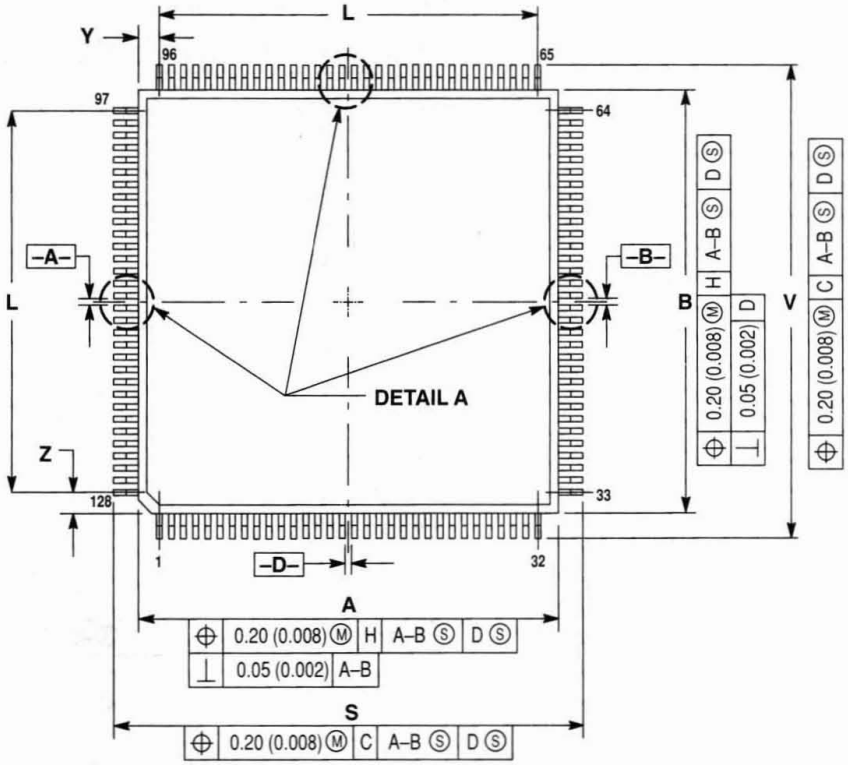

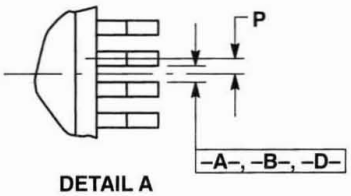

DETAIL A

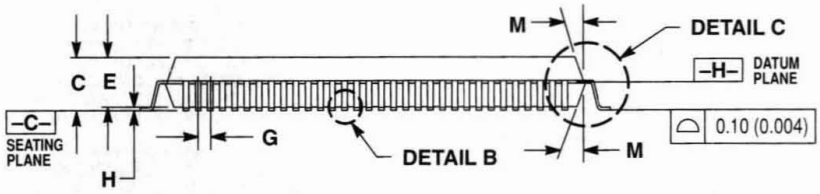

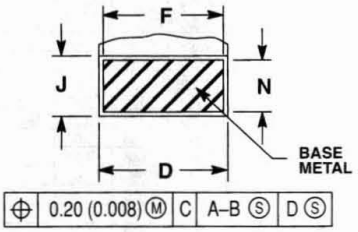

DETAIL B

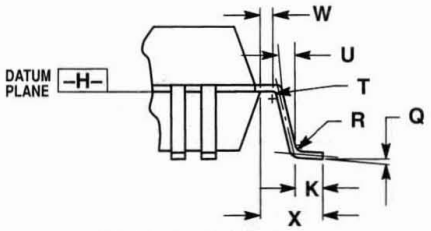

DETAIL C

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER
3. DATUM PLANE –H– IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS –A–, –B– AND –D–TO BE DETERMINED AT DATUM PLANE –H–.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE –C–.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE –H–.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	27.90	28.10	1.098	1.106
B	27.90	28.10	1.098	1.106
C	—	4.07	—	0.160
D	0.30	0.45	0.012	0.018
E	3.17	3.67	0.125	0.144
F	0.30	0.40	0.012	0.016
G	0.80 BSC		0.032 BSC	
H	0.25	0.35	0.010	0.014
J	0.13	0.23	0.005	0.009
K	0.65	0.95	0.026	0.037
L	24.80 REF		0.976 REF	
M	5 °	16 °	5 °	16 °
N	0.13	0.17	0.005	0.007
P	0.40 BSC		0.016 BSC	
Q	0 °	7 °	0 °	7 °
R	0.13	0.30	0.005	0.012
S	30.95	31.45	1.219	1.238
T	0.13	—	0.005	—
U	0 °	—	0 °	—
V	30.95	31.45	1.219	1.238
W	0.40	—	0.016	—
X	1.60 REF		0.063 REF	
Y	1.60 REF		0.063 REF	
Z	1.60 REF		0.063 REF	

DH SUFFIX
PLASTIC QFP PACKAGE
CASE 864A–03
ISSUE C



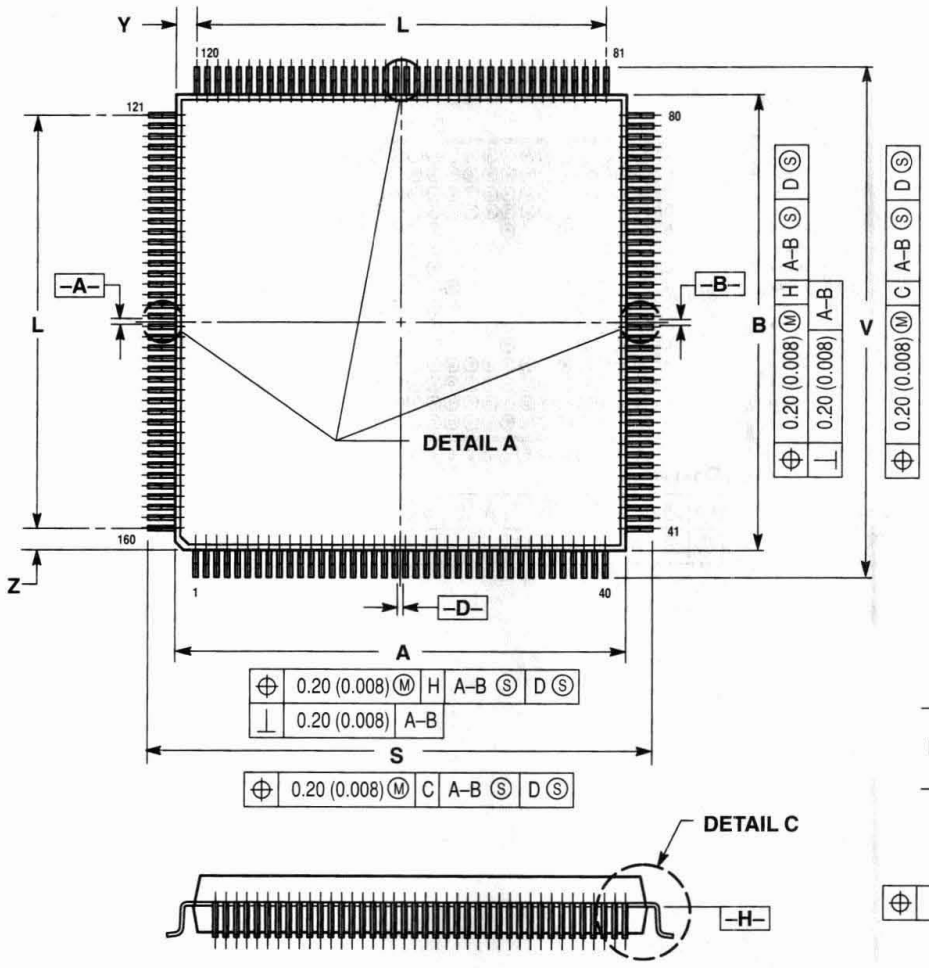



DETAIL A



SECTION B–B

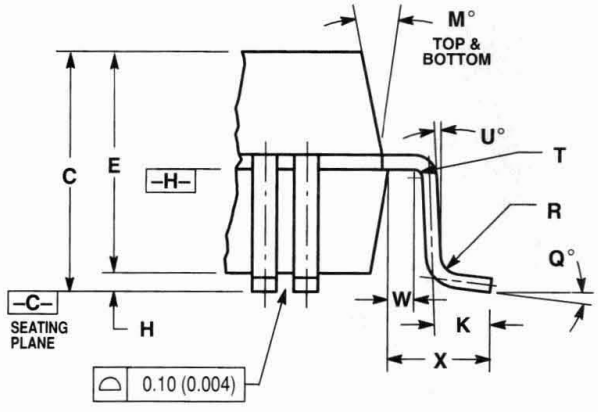

DETAIL C

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE –H– IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS –A–, –B– AND –D– TO BE DETERMINED AT DATUM PLANE –H–.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE –C–.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE –H–.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	27.90	28.10	1.098	1.106
B	27.90	28.10	1.098	1.106
C	3.35	3.85	0.132	0.152
D	0.22	0.38	0.009	0.015
E	3.20	3.50	0.126	0.138
F	0.22	0.33	0.009	0.013
G	0.65 BSC		0.026 REF	
H	0.25	0.35	0.010	0.014
J	0.11	0.23	0.004	0.009
K	0.70	0.90	0.028	0.035
L	25.35 REF		0.998 REF	
M	5°	16°	5°	16°
N	0.11	0.19	0.004	0.007
P	0.325 BSC		0.013 BSC	
Q	0°	7°	0°	7°
R	0.13	0.30	0.005	0.012
S	31.00	31.40	1.220	1.236
T	0.13	—	0.005	—
U	0°	—	0°	—
V	31.00	31.40	1.220	1.236
W	0.40	—	0.016	—
X	1.60 REF		0.063 REF	
Y	1.33 REF		0.052 REF	
Z	1.33 REF		0.052 REF	

Programmable Array
181–Pin Package

HI SUFFIX
CERAMIC PGA PACKAGE
CASE 768N–01
ISSUE O



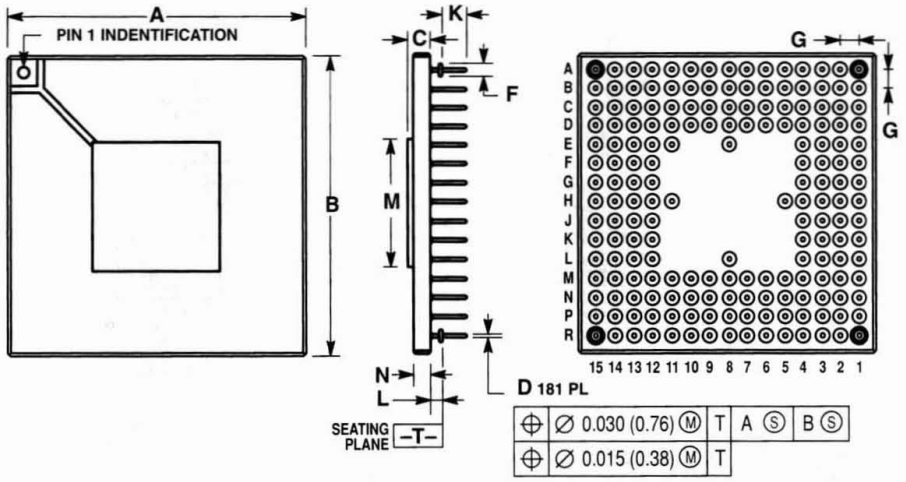

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.555	1.595	39.50	40.51
B	1.555	1.595	39.50	40.51
C	0.102	0.124	2.59	3.15
D	0.016	0.020	0.41	0.51
F	0.040	0.060	1.02	1.52
G	0.100 BSC		2.54 BSC	
K	0.110	0.150	2.79	3.81
L	0.043	0.057	1.09	1.45
M	0.655	0.675	16.64	17.15
N	0.090	0.110	2.29	2.79

DK SUFFIX
PLASTIC QFP PACKAGE
CASE 872A–01
ISSUE O



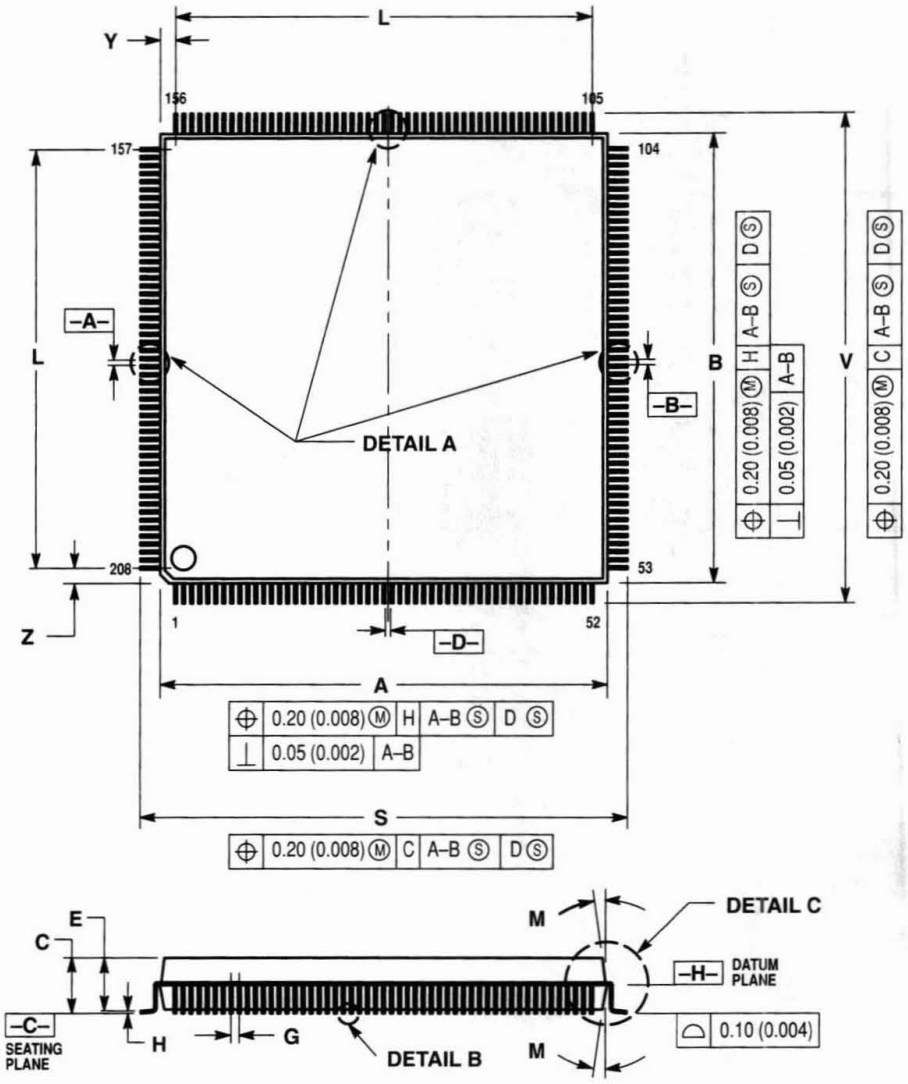

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DATUM PLANE –H– IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DATUMS –A–, –B– AND –D– TO BE DETERMINED AT DATUM PLANE –H–.
5. DIMENSIONS S AND V TO BE DETERMINED AT SEATING PLANE –C–.
6. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 (0.010) PER SIDE. DIMENSIONS A AND B DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE –H–.
7. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. DAMBAR PROTRUSION SHALL NOT CAUSE THE D DIMENSION TO EXCEED 0.38 (0.015).

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	27.90	28.10	1.098	1.106
B	27.90	28.10	1.098	1.106
C	3.45	4.10	0.136	0.161
D	0.14	0.30	0.005	0.012
E	3.20	3.60	1.126	0.142
F	0.14	0.26	0.005	0.010
G	0.50 BSC		0.020 BSC	
H	0.25	0.35	0.010	0.014
J	0.09	0.20	0.003	0.008
K	0.70	0.90	0.027	0.036
L	25.50 REF		1.004 REF	
M	5°	9°	5°	9°
N	0.09	0.18	0.003	0.007
P	0.25 BSC		0.010 BSC	
Q	0°	7°	0°	7°
R	0.13	0.30	0.005	0.012
S	31.00	31.40	1.220	1.236
T	0.13	—	0.005	—
U	0°	—	0°	—
V	31.00	31.40	1.220	1.236
W	0.40	—	0.016	—
X	1.60 REF		0.063 REF	
Y	1.25 REF		0.049 REF	
Z	1.25 REF		0.049 REF	



DETAIL A



DETAIL B
SECTION B–B
ROTATED 7° CCW

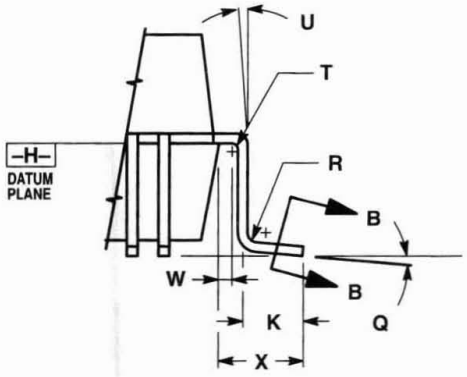

DETAIL C

KE SUFFIX
PIN GRID ARRAY PACKAGE
CASE 860F–01
ISSUE O

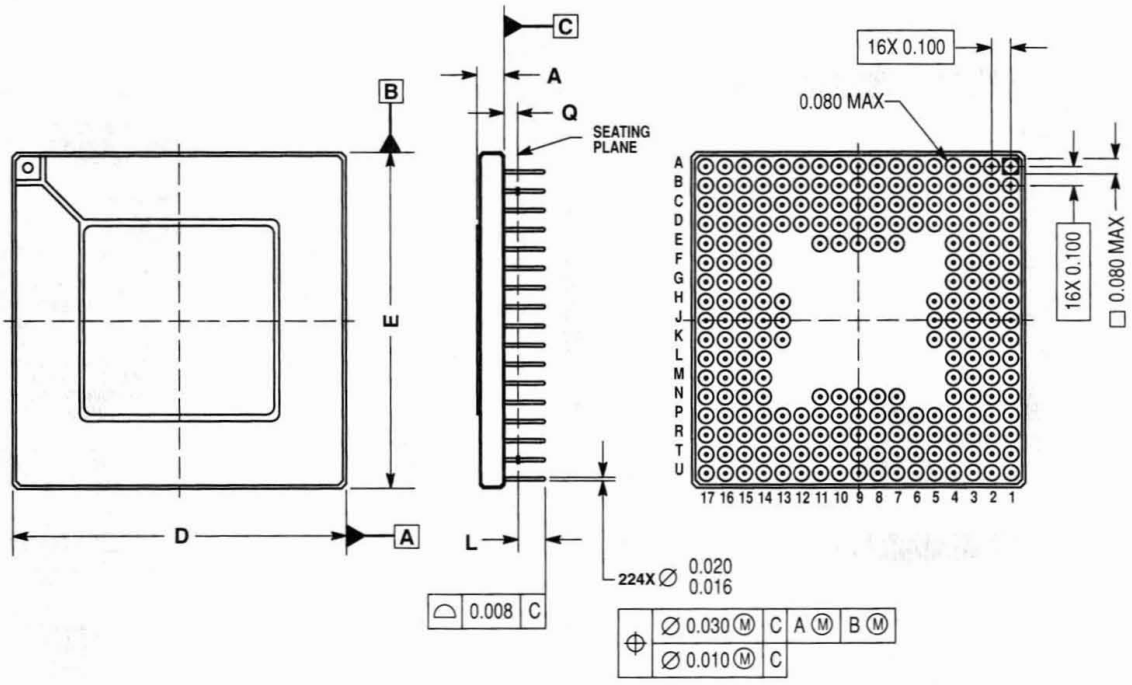



NOTES:
1. DIMENSIONS ARE IN INCHES.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
3. MINIMUM SPACING BETWEEN CONDUCTORS SHALL BE 0.020.

	INCHES	
DIM	MIN	MAX
A	0.070	0.145
D	1.740	1.780
E	1.740	1.780
L	0.100	0.200
Q	0.045	0.075

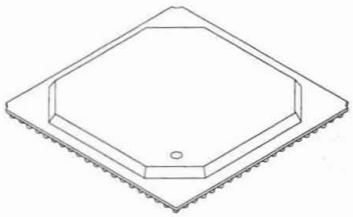

BG SUFFIX
PLASTIC BGA PACKAGE
CASE 1208A–01
ISSUE O

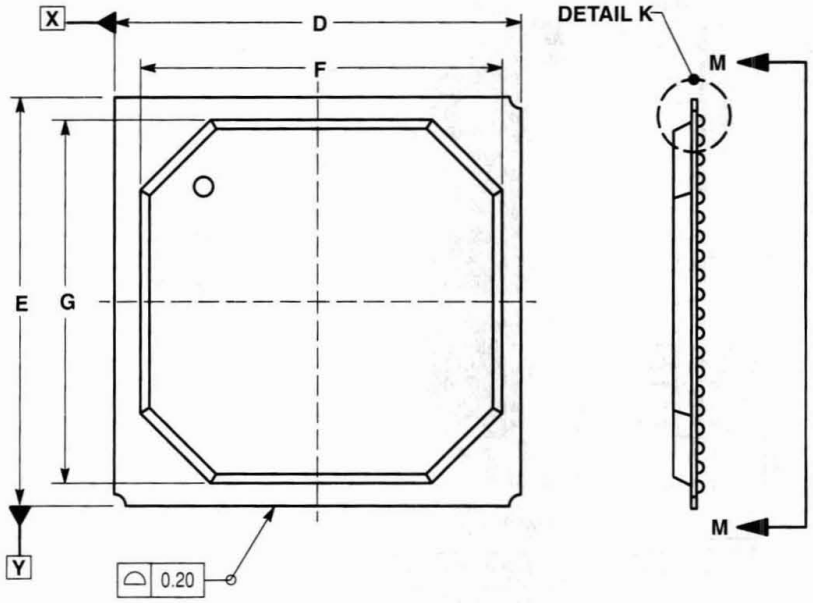

NOTES:
1. DIMENSIONS ARE IN MILLIMETERS.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
3. DIMENSION b IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER, PARALLEL TO DATUM PLANE Z.
4. DATUM Z (SEATING PLANE) IS DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.

	MILLIMETERS	
DIM	MIN	MAX
A	1.92	2.32
A1	0.50	0.70
A2	0.36 REF	
A3	1.12	1.22
b	0.60	0.90
D	27.00 BSC	
E	27.00 BSC	
F	24.00	24.70
G	24.00	24.70
e	1.27 BSC	
S	0.635 BSC	

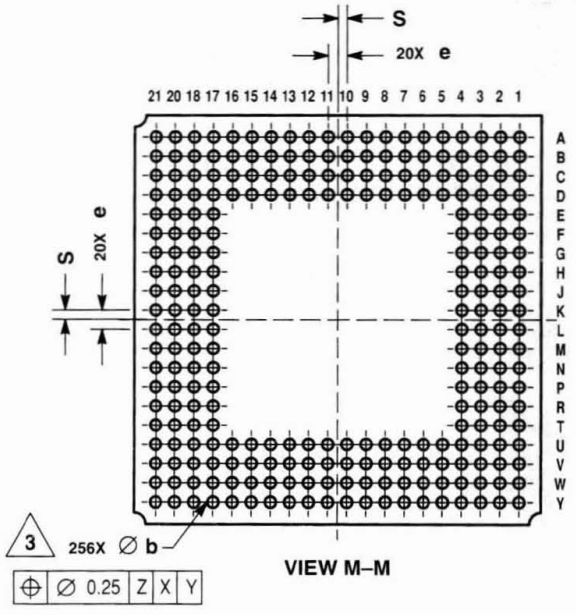

VIEW M–M

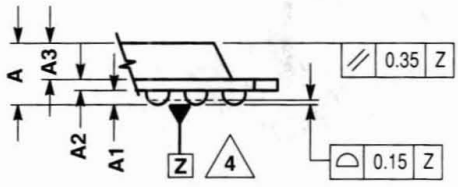

DETAIL K
ROTATED 90 °CLOCKWISE

HV SUFFIX
PIN GRID ARRAY PACKAGE
CASE 861B–01
ISSUE O

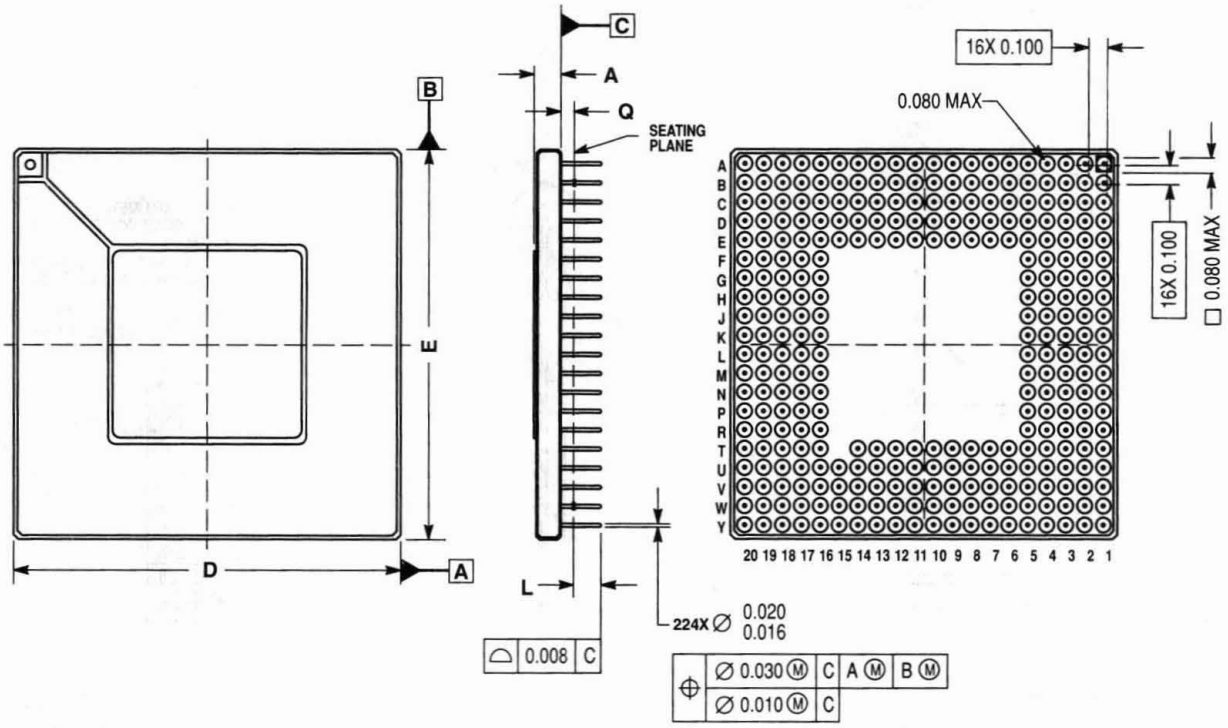



NOTES:
1. DIMENSIONS ARE IN INCHES.
2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
3. MINIMUM SPACING BETWEEN CONDUCTORS SHALL BE 0.020.

	INCHES	
DIM	MIN	MAX
A	0.070	0.145
D	2.040	2.080
E	2.040	2.080
L	0.100	0.200
Q	0.045	0.075
S	0.050 BSC	

Packaging Information

Surface Mount

Why Surface Mount?

Surface Mount Technology is utilized to offer answers to many problems that have been created in the use of insertion technology.

Limitations have been reached with insertion packages and PC board technology. Surface Mount Technology offers the opportunity to continue to advance the state–of–the–art designs that cannot be accomplished with Insertion Technology.

Surface Mount Packages allow more optimum device performance with the smaller Surface Mount configuration. Internal lead lengths, parasitic capacitance and inductance that placed limitations on chip performance have been reduced.

The lower profile of Surface Mount Packages allows more boards to be utilized in a given amount of space. They are stacked closer together and utilize less total volume than insertion populated PC boards.

Printed circuit costs are lowered with the reduction of the number of board layers required. The elimination or reduction of the number of plated through holes in the board, contributes significantly to lower PC board prices.

Automatic placement equipment is available that can place Surface Mount components at the rate of a few thousand per hour to hundreds of thousands of components per hour.

Surface Mount Technology is cost effective, allowing the manufacturer the opportunity to produce smaller units and/or offer increased functions with the same size product.

Surface Mount assembly does not require the preparation of components that are common on insertion technology lines. Surface Mount components are sent directly to the assembly line, eliminating an intermediate step.

Pin Conversion Tables

Dual–in–Line Package to PLCC Pin Conversion Data

The following table gives the equivalent I/O pinouts of Dual–In–Line Package (DIP) configuration and Plastic Leaded Chip Carrier (PLCC) packages.*

Conversion Tables

8 PIN DIP	1	2	3	4	5	6	7	8
20 PIN PLCC	2	5	7	10	12	15	17	20

14 PIN DIP	1	2	3	4	5	6	7	8	9	10	11	12	13	14
20 PIN PLCC	2	3	4	6	8	9	10	12	13	14	16	18	19	20

16 PIN DIP	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
20 PIN PLCC	2	3	4	5	7	8	9	10	12	13	14	15	17	18	19	20

20 PIN DIP	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
20 PIN PLCC	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20

24 PIN DIP	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
28 PIN PLCC	2	3	4	5	6	7	9	10	11	12	13	14	16	17	18	19	20	21	23	24	25	26	27	28

* The MC1648 has a Non–Standard Conversion Table. For more information, refer to the Motorola MECL Data Book, DL122/D.

Tape and Reel

Logic Integrated Circuits

Motorola's tape and reel packaging fully conforms to the latest EIA RS–481A specification. The antistatic embossed tape provides a secure cavity sealed with a peel–back cover tape.

Mechanical Polarization

PLCC Devices

Typical

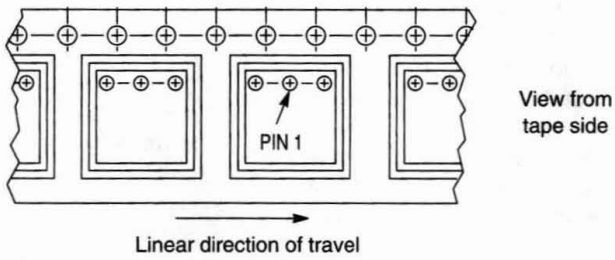

SOIC Devices

Typical

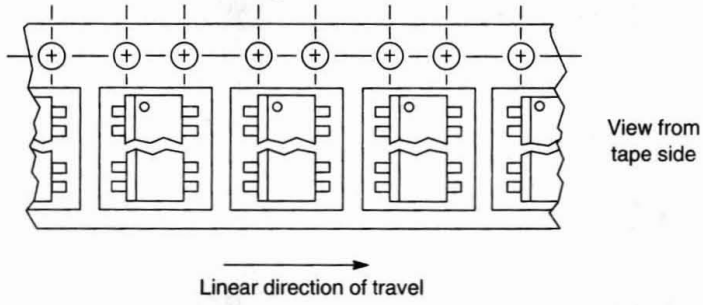

General Information

— Reel Size	13 inch (330 mm) Suffix: R2	— Units/Reel	500 to 5000 (see table)
— Tape Width	12 mm to 24 mm (see table)		

Ordering Information

To order devices which are to be delivered in Tape and Reel, add the suffix R2 to the device number being ordered.

Tape and Reel Data

Device Type	Tape Width (mm)	Device/Reel	Reel Size (inch)	Min Lot Size Per Part No. Tape and Reel
PLCC–20	16	1,000	13	3,000
PLCC–28	24	500	13	500
SO–8	12	2,500	13	5,000
SO–14	16	2,500	13	5,000
SO–16	16	2,500	13	5,000
SO–16 Wide	16	1,000	13	5,000
SO–20 Wide	24	1,000	13	5,000

Analog and Interface Integrated Circuits

In Brief . . .

Motorola Analog and Interface Integrated Circuits cover a much broader range of products than the traditional op amps/regulators/consumer–image associated with Analog suppliers. Analog circuit technology currently influences the design and architecture of equipment for all major markets. As with other integrated circuit technologies, Analog circuit design techniques and processes have been continually refined and updated to meet the needs of these diversified markets.

Operational amplifiers have utilized *SMARTMOS*™ technology for improved performance, plus innovative design and trimming concepts have evolved for improved high performance and precision characteristics. In analog power ICs, basic voltage regulators have been refined to include higher current and voltage levels, low dropout regulators, CMOS technology, and more precise three–terminal fixed and adjustable voltages. The power area continues to expand into switching regulators, power supply control and supervisory circuits, motor controllers, and battery charging controllers and protection circuits.

Analog designs also offer a wide array of line drivers, receivers and transceivers for many of the EIA, European, IEEE and IBM interface standards. Peripheral drivers for a variety of devices are also offered. In addition to these key interface functions, hard disk drive read channel circuits, 10BASE–T and Ethernet circuits are also available.

In Data Conversion a variety of CMOS and Sigma–Delta converters are available. Analog circuit technology has also provided precision low–voltage references for use in Data Conversion and other low temperature drift applications.

A host of special purpose analog devices have also been developed. These circuits find applications in telecommunications, radio, television, automotive, RF communications, and data transmission. These products have reduced the cost of RF communications, and have provided capabilities in telecommunications which make the telephone line convenient for both voice and data communications. Analog developments have also reduced the many discrete components formerly required for consumer functions to a few IC packages and have made significant contributions to the rapidly growing market for electronics in automotive applications.

The table of contents provides a perspective of the many markets served by Analog/Interface ICs and of Motorola's involvement in these areas.

Amplifiers and Comparators 4.1–1
Power Supply Circuits 4.2–1
Power/Motor Control Circuits 4.3–1
Voltage References 4.4–1
Data Conversion 4.5–1
Interface Circuits 4.6–1
Communication Circuits 4.7–1
Consumer Electronic Circuits 4.8–1
Automotive Electronic Circuits 4.9–1
Other Analog Circuits 4.10–1
Tape and Reel Options 4.11–1

© MOTOROLA, INC. 1997

Amplifiers and Comparators

In Brief . . .

For over two decades, Motorola has continually refined and updated integrated circuit technologies, analog circuit design techniques and processes in response to the needs of the marketplace. The enhanced performance of newer operational amplifiers and comparators has come through innovative application of these technologies, designs and processes. Some early designs are still available but are giving way to the new, higher performance operational amplifier and comparator circuits. Motorola has pioneered in JFET inputs, low temperature coefficient input stages, Miller loop compensation, all NPN output stages, dual–doublet frequency compensation and analog "in–the–package" trimming of resistors to produce superior high performance operational amplifiers and comparators, operating in many cases from a single supply with low input offset, low noise, low power, high output swing, high slew rate and high gain–bandwidth product at reasonable cost to the customer.

Present day operational amplifiers and comparators find applications in all market segments including motor controls, instrumentation, aerospace, automotive, telecommunications, medical, and consumer products.

	Page
Operational Amplifiers	4.1–2
Single	4.1–2
Dual	4.1–3
Quad	4.1–4
One Volt *SMARTMOS*™ Rail–to–Rail Dual Operational Amplifier	4.1–6
High Frequency Amplifiers	4.1–7
AGC	4.1–7
Miscellaneous Amplifiers	4.1–8
Bipolar	4.1–8
CMOS	4.1–8
Comparators	4.1–9
Single	4.1–9
Dual	4.1–9
Quad	4.1–9
Package Overview	4.1–10

Operational Amplifiers

Motorola offers a broad line of bipolar operational amplifiers to meet a wide range of applications. From low–cost industry–standard types to high precision circuits, the span encompasses a large range of performance capabilities. These Analog integrated circuits are available as single, dual and quad monolithic devices in a variety of temperature ranges and package styles. Most devices may be obtained in unencapsulated "chip" form as well. For price and delivery information on chips, please contact your Motorola Sales Representative or Distributor.

Table 1. Single Operational Amplifiers

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	TC_{VIO} (μV/°C) Typ	I_{IO} (nA) Max	A_{vol} (V/mV) Min	BW (A_V = 1) (MHz) Typ	SR (A_V = 1) (V/μs) Typ	Supply Voltage (V) Min	Supply Voltage (V) Max	Description	Suffix/ Package
Noncompensated											
Commercial Temperature Range (0°C to +70°C)											
LM301A	0.25	7.5	10	50	25	1.0	0.5	±3.0	±18	General Purpose	N/626, D/751
LM308A	7.0	0.5	5.0	1.0	80	1.0	0.3	±3.0	±18	Precision	N/626, D/751
Industrial Temperature Range (–25°C to +85°C)											
LM201A	0.075	2.0	10	10	50	1.0	0.5	±3.0	±22	General Purpose	N/626, D/751
Internally Compensated											
Commercial Temperature Range (0°C to +70°C)											
LF351	200 pA	10	10	100 pA	25	4.0	13	±5.0	±18	JFET Input	N/626, D/751
LF411C	200 pA	2.0	10	100 pA	25	8.0	25	+5.0	±22	JFET Input, Low Offset, Low Drift	N/626, D/751
MC1436, C	0.04	10	12	10	70	1.0	2.0	±15	±34	High Voltage	P1/626, D/751
MC1741C	0.5	6.0	15	200	20	1.0	0.5	±3.0	±18	General Purpose	P1/626, D/751
MC1776C	0.003	6.0	15	3.0	100	1.0	0.2	±1.2	±18	μPower, Programmable	P1/626, D/751
MC3476	0.05	6.0	15	25	50	1.0	0.2	±1.5	±18	Low Cost, μPower, Programmable	P1/626
MC34001	200 pA	10	10	100 pA	25	4.0	13	±5.0	±18	JFET Input	P/626, D/751
MC34001B	200 pA	5.0	10	100 pA	50	4.0	13	±5.0	±18	JFET Input	P/626, D/751
MC34071	0.5	5.0	10	75	25	4.5	10	+3.0	+44	High Performance	P/626, D/751
MC34071A	500 nA	3.0	10	50	50	4.5	10	+3.0	+44	Single Supply	P/626, D/751
MC34080B	200 pA	1.0	10	100 pA	25	16	55	±5.0	±22	Decompensated	P/626, D/751
MC34081B	200 pA	1.0	10	100 pA	25	8.0	30	±5.0	±22	High Speed, JFET Input	P/626, D/751
MC34181	0.1 nA	2.0	10	0.05	25	4.0	10	±2.5	±18	Low Power, JFET Input	P/626
TL071AC	200 pA	6.0	10	50 pA	50	4.0	13	±5.0	±18	Low Noise, JFET Input	P/626
TL071C	200 pA	10	10	50 pA	25	4.0	13	±5.0	±18	Low Noise, JFET Input	D/751
TL081AC	200 pA	6.0	10	100 pA	50	4.0	13	±5.0	±18	JFET Input	P/626
TL081C	400 pA	15	10	200 pA	25	4.0	13	±5.0	±18	JFET Input	D/751
Automotive Temperature Range (–40°C to +85°C)											
MC33071	0.5	5.0	10	75	25	4.5	10	+3.0	+44	High Performance	P/626, D/751
MC33071A	500 nA	3.0	10	50	50	4.5	10	+3.0	+44	Single Supply	P/626, D/751
MC33171	0.1	4.5	10	20	50	1.8	2.1	+3.0	+44	Low Power, Single Supply	P/626, D/751
MC33181	0.1 nA	2.0	10	0.05	25	4.0	10	±2.5	±18	Low Power, JFET Input	P/626, D/751
Extended Temperature Range (–40°C to +105°C)											
MC33201	250 nA	9.0	2.0	100	50	2.2	1.0	±0.9	±6.0	Low V Rail–to–Rail	P/626, D/751
Military Temperature Range (–55°C to +125°C)											
MC33201	400 nA	9.0	2.0	200	50	2.2	1.0	±0.9	±6.0	Low V Rail–to–Rail	P/626, D/751

Table 2. Dual Operational Amplifiers

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	TC_{VIO} (μV/°C) Typ	I_{IO} (nA) Max	A_{vol} (V/mV) Min	BW (A_V = 1) (MHz) Typ	SR (A_V = 1) (V/μs) Typ	Supply Voltage (V) Min	Supply Voltage (V) Max	Description	Suffix/ Package
Internally Compensated											
Commercial Temperature Range (0°C to +70°C)											
LF353	200 pA	10	10	100 pA	25	4.0	13	±5.0	±18	JFET Input	N/626, D/751
LF412C	200 pA	3.0	10	100 pA	25	4.0	13	+5.0	±18	JFET Input, Low Offset, Low Drift	N/626, D/751
LF442C	100 pA	5.0	10	50 pA	25	2.0	6.0	±5.0	±18	Low Power, JFET Input	N/626
LM358	0.25	6.0	7.0	50	25	1.0	0.6	±1.5 +3.0	±18 +36	Single Supply, Low Power Consumption	N/626, D/751
LM833	1.0	5.0	2.0	200	31.6	15	7.0	+2.5	±18	Low Noise, Audio	N/626, D/751
MC1458	0.5	6.0	10	200	20	1.1	0.8	±3.0	±18	Dual MC1741	P1/626, D/751
MC1458C	0.7	10	10	300	20	1.1	0.8	±3.0	±18	General Purpose	P1/626, D/751
MC3458	0.5	10	7.0	50	20	1.0	0.6	±1.5 +3.0	±18 +36	Split Supplies, Single Supply, Low Crossover Distortion	P1/626, D/751
MC4558AC	0.5	5.0	10	200	50	2.8	1.6	±3.0	±22	High Frequency	P1/626
MC4558C	0.5	6.0	10	200	20	2.8	1.6	±3.0	±18	High Frequency	P1/626, D/751
MC34002	100 pA	10	10	100 pA	25	4.0	13	±5.0	±18	JFET Input	P/626, D/751
MC34002B	100 pA	5.0	10	70 pA	25	4.0	13	±5.0	±18	JFET Input	P/626, D/751
MC34072	0.5	5.0	10	75	25	4.5	10	+3.0	+44	High Performance	P/626, D/751
MC34072A	500 nA	3.0	10	50	50	4.5	10	+3.0	+44	Single Supply	P/626, D/751
MC34082	200 pA	3.0	10	100 pA	25	8.0	30	±5.0	±22	High Speed, JFET Input	P/626
MC34083B	200 pA	3.0	10	100 pA	25	16	55	±5.0	±22	Decompensated	P/626
MC34182	0.1 nA	3.0	10	0.05	25	4.0	10	±2.5	±18	Low Power, JFET Input	P/626, D/751
TL062AC	200 pA	6.0	10	100 pA	4.0	2.0	6.0	±2.5	±18	Low Power, JFET Input	P/626, D/751
TL062C	200 pA	15	10	200 pA	4.0	2.0	6.0	±2.5	±18	Low Power, JFET Input	P/626, D/751
TL072AC	200 pA	6.0	10	50 pA	50	4.0	13	±5.0	±18	Low Noise, JFET Input	P/626
TL072C	200 pA	10	10	50 pA	25	4.0	13	±5.0	±18	Low Noise, JFET Input	D/751
TL082AC	200 pA	6.0	10	100 pA	50	4.0	13	±5.0	±18	JFET Input	P/626
TL082C	400 pA	15	10	200 pA	25	4.0	13	±5.0	±18	JFET Input	D/751
Industrial Temperature Range (−25°C to +85°C)											
LM258	0.15	5.0	10	30	50	1.0	0.6	±1.5 +3.0	±18 +36	Split or Single Supply Op Amp	N/626, D/751
Automotive Temperature Range (−40°C to +85°C)											
MC3358	5.0	8.0	10	75	20	1.0	0.6	±1.5 +3.0	±18 +36	Split or Single Supply	P1/626
MC33072	0.50	5.0	10	75	25	4.5	10	+3.0	+44	High Performance	P/626, D/751
MC33072A	500 nA	3.0	10	50	50	4.5	10	+3.0	+44	Single Supply	P/626, D/751
MC33076	0.5	4.0	2.0	70	25	7.4	2.6	±2.0	±18	High Output Current	P1/626, P2/648C, D/751
MC33077	1.0	1.0	2.0	180	150	37	11	±2.5	±18	Low Noise	P/626, D/751
MC33078	750 nA	2.0	2.0	150	31.6	16	7.0	±5.0	±18	Low Noise	N/626, D/751
MC33102 (Awake) (Sleep)	600 nA 60 nA	3.0 3.0	1.0 1.0	60 6.0	25 15	4.6 0.3	1.7 0.1	±2.5 ±2.5	±18 ±18	Sleep–Mode™ Micropower	P/626, D/751
MC33172	0.10	4.5	10	20	50	1.8	2.1	+3.0	+44	Low Power, Single Supply	P/626, D/751
MC33178	0.5	3.0	2.0	50	50	5.0	2.0	±2.0	±18	High Output Current	P/626, D/751
MC33182	0.1 nA	3.0	10	0.05	25	4.0	10	±2.5	±18	Low Power, JFET Input	P/626, D/751
MC33272A	650 nA	1.0	0.56	25 nA	31.6	5.5	11.5	±1.5	±18	High Performance	P/626, D/751
MC33282	100 pA	200 μV	5.0	50 pA	50	30	12	±2.5	±18	Low Input, Offset JFET	P/626, D/751
TL062V	200 pA	6.0	10	100 pA	4.0	2.0	6.0	±2.5	±18	Low Power, JFET Input	P/626, D/751

Table 2. Dual Operational Amplifiers (continued)

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	TC_{VIO} (μV/°C) Typ	I_{IO} (nA) Max	A_{vol} (V/mV) Min	BW (A_V = 1) (MHz) Typ	SR (A_V = 1) (V/μs) Typ	Supply Voltage (V) Min	Supply Voltage (V) Max	Description	Suffix/ Package
Extended Temperature Range (−40°C to +105°C)											
MC33202	250 nA	11	2.0	100	50	2.2	1.0	±0.9	±6.0	Low V Rail–to–Rail	P/626, D/751
MC33206										Rail–to–Rail with Enable	P/646, D/751A
MC33502	40 fA typ	0.5 typ	2.0 typ	–	100 typ	4.0 typ	4.0 typ	+0.9	+7.0	1.0 V Rail–to–Rail	P/262, D751
LM2904	0.25	10	7.0	50	100 typ	1.0	0.6	±1.5 +3.0	±13 +26	Split or Single Supply	N/262, D/751
Extended Automotive Temperature Range (−40°C to +125°C)											
TCA0372	500 nA	15	20	50	30	1.1	1.4	+5.0	+36	Power Op Amp, Single Supply	DP2/648, DW/751G
LM2904V	0.25	13	7.0	50	100 typ	1.0	0.6	±1.5 +3.0	±13 +26	Split or Single Supply	N/626, D/751
Military Temperature Range (−55°C to +125°C)											
MC33202	400 pA	11	2.0	200 pA	50	2.2	1.0	±0.9	±6.0	Low V Rail–to–Rail	P/626, D/751

Table 3. Quad Operational Amplifiers

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	TC_{VIO} (μV/°C) Typ	I_{IO} (nA) Max	A_{vol} (V/mV) Min	BW (A_V = 1) (MHz) Typ	SR (A_V = 1) (V/μs) Typ	Supply Voltage (V) Min	Supply Voltage (V) Max	Description	Suffix/ Package
Internally Compensated											
Commercial Temperature Range (0°C to +70°C)											
LF347	200 pA	10	10	100 pA	25	4.0	13	±5.0	±18	JFET Input	N/646
LF347B	200 pA	5.0	10	100 pA	50	4.0	13	±5.0	±18	JFET Input	N/646
LF444C	100 pA	10	10	50 pA	25	2.0	6.0	±5.0	±18	Low Power, JFET Input	N/646, D/751A
LM324, A	0.25	6.0	7.0	50	25	1.0	0.6	±1.5 +3.0	±16 +32	Low Power Consumption	N/646, D/751A
MC3403	0.5	10	7.0	50	20	1.0	0.6	±1.5 +3.0	±18 +36	No Crossover Distortion	P/646, D/751A
MC4741C	0.5	6.0	15	200	20	1.0	0.5	±3.0	±18	Quad MC1741	P/646, D/751A
MC34004	200 pA	10	10	100 pA	25	4.0	13	±5.0	±18	JFET Input	P/646
MC34004B	200 pA	5.0	10	100 pA	50	4.0	13	±5.0	±18	JFET Input	P/646
MC34074	0.5	5.0	10	75	25	4.5	10	+3.0	+44	High Performance	P/646, D/751A
MC34074A	500 nA	3.0	10	50	50	4.5	10	+3.0	+44	Single Supply	P/646, D/751A
MC34084	200 pA	12	10	100 pA	25	8.0	30	±5.0	±22	High Speed, JFET Input	P/646, DW/751G
MC34085B	200 pA	12	10	100 pA	25	16	55	±5.0	±22	Decompensated	P/646, DW/751G
MC34184	0.1 nA	10	10	0.05	25	4.0	10	±2.5	±18	Low Power, JFET Input	P/646, D/751A
TL064AC	200 pA	6.0	10	100 pA	4.0	2.0	6.0	±2.5	±18	Low Power, JFET Input	N/646, D/751A
TL064C	200 pA	15	10	200 pA	4.0	2.0	6.0	±2.5	±18	Low Power, JFET Input	N/646, D/751A
TL074AC	200 pA	6.0	10	50 pA	50	4.0	13	±5.0	±18	Low Noise, JFET Input	N/646
TL074C	200 pA	10	10	50 pA	25	4.0	13	±5.0	±18	Low Noise, JFET Input	N/646
TL084AC	200 pA	6.0	10	100 pA	50	4.0	13	±5.0	±18	JFET Input	N/646
TL084C	400 pA	15	10	200 pA	25	4.0	13	±5.0	±18	JFET Input	N/646
Industrial Temperature Range (−25°C to +85°C)											
LM224, A	0.15	5.0	7.0	30	50	1.0	0.6	±1.5 +3.0	±16 +32	Split Supplies or Single Supply	N/646, D/751A

Table 3. Quad Operational Amplifiers (continued)

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	TC_{VIO} (μV/°C) Typ	I_{IO} (nA) Max	A_{vol} (V/mV) Min	BW (A_V = 1) (MHz) Typ	SR (A_V = 1) (V/μs) Typ	Supply Voltage (V) Min	Supply Voltage (V) Max	Description	Suffix/ Package
Automotive Temperature Range (−40°C to +85°C)											
MC3303	0.5	8.0	10	75	20	1.0	0.6	±1.5 +3.0	±18 +36	Differential General Purpose	P/646, D/751A
MC33074	0.5	4.5	10	75	25	4.5	10	+3.0	+44	High Performance, Single Supply	P/646, D/751A
MC33074A	500 nA	3.0	10	50	50	4.5	10	+3.0	+44	High Performance	P/646, D/751A
MC33079	750 nA	2.5	2.0	150	31.6	9.0	7.0	±5.0	±18	Low Noise	N/646, D/751A
MC33174	0.1	4.5	10	20	50	1.8	2.1	+3.0	+44	Low Power, Single Supply	P/646, D/751A
MC33179	0.5	3.0	2.0	50	50	5.0	2.0	±2.0	±18	High Output Current	P/646, D/751A
MC33184	0.1 nA	10	10	0.05	25	4.0	10	±2.5	±18	Low Power, JFET Input	P/646, D/751A
MC33274A	650 nA	1.0	0.56	25 nA	31.6	5.5	11.5	±1.5	±18	High Performance	P/646, D/751A
MC33284	100 pA	2.0	5.0	50 pA	50	30	12	±2.5	±18	Low Input, Offset JFET	P/646, D/751A
TL064V	200 pA	9.0	10	100 pA	4.0	2.0	6.0	±2.5	±18	Low Power, JFET Input	N/646, D/751A
Extended Temperature Range (−40°C to +105°C)											
MC33204	250 nA	13	2.0	100	50	2.2	1.0	±0.9	±6.0	Low V Rail–to–Rail	P/646, D/751A
MC33207					50	2.2		±0.9	±6.0	Rail–to–Rail with Enable	P/648, D/751B
MC33304					25	3.0		+1.8	+12	Sleepmode, Rail–to–Rail	P/646, D/751A
LM2902	0.5	10	–	50	15	1.0	0.6	±1.5 +3.0	±13 +26	Differential Low Power	N/646, D/751A
Extended Automotive Temperature Range (−40°C to +125°C)											
LM2902V	0.5	13	–	50	15	1.0	0.6	±1.5 +3.0	±13 +26	Differential Low Power	N/646, D/751A
Military Temperature Range (−55°C to +125°C)											
MC33204	400 pA	13	2.0	200 pA	50	2.2	1.0	±0.9	±6.0	Low V Rail–to–Rail	P/646, D/751A

One Volt SMARTMOS™ Rail–to–Rail Dual Operational Amplifier

MC33502D, P

T_A = –40° to +105°C, Case 751, 626

The MC33502 operational amplifier provides rail–to–rail operation on both the input and output. The output can swing within 50 mV of each rail. This rail–to–rail operation enables the user to make full use of the entire supply voltage range available. It is designed to work at very low supply voltages (1.0 V and ground), yet can operate with a supply of up to 7.0 V and ground. Output current boosting techniques provide high output current capability while keeping the drain current of the amplifier to a minimum.

- Low Voltage, Single Supply Operation (1.0 V and Ground to 7.0 V and Ground)
- High Input Impedance: Less than 40 fA Input Current
- Typical Unity Gain Bandwidth @ 5.0 V = 5.0 MHz, @ 1.0 V = 4.0 MHz
- High Output Current (I_{SC} = 50 mA @ 5.0 V, 10 mA @ 1.0 V)
- Output Voltage Swings within 50 mV of Both Rails
- Input Voltage Range Includes Both Supply Rails
- High Voltage Gain: 100 dB
- No Phase Reversal on the Output for Over–Driven Input Signals
- Input Offset Trimmed to <500 μV Typical
- Low Supply Current (I_D = 1.2 mA, Typical)
- 600 Ω Drive Capability
- Extended Operating Temperature Range (–40° to 105°C)

APPLICATIONS

- Single Cell NiCd/Ni MH Powered Systems
- Single Cell Lithium Powered Systems
- Portable Communication Devices
- Low Voltage Active Filters
- General Systems Requiring Battery Power

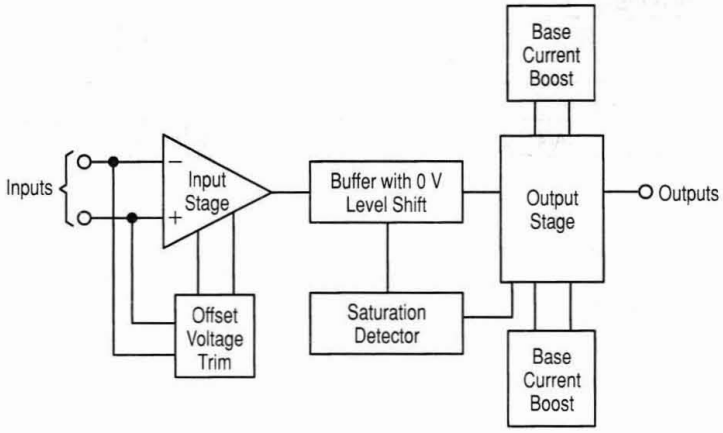

High Frequency Amplifiers

A variety of high frequency circuits with features ranging from low cost simplicity to multifunction versatility marks Motorola's line of integrated amplifiers. Devices described here are intended for industrial and communications applications. For devices especially dedicated to consumer products, i.e., TV and entertainment radio. (See the Consumer Electronics Circuits section.)

AGC Amplifiers

MC1490/MC1350 Family Wideband General Purpose Amplifiers

The MC1490 and MC1350 family are basic building blocks – AGC (Automatic Gain Controlled) RF/Video Amplifiers. These parts are recommended for applications up through 70 MHz. The best high frequency performance may be obtained by using the physically smaller SOIC version (shorter leads) – MC1350D. There are currently no other RF ICs like these, because other manufacturers have dropped their copies. Applications include variable gain video and instrumentation amplifiers, IF (Intermediate Frequency) amplifiers for radio and TV receivers, and transmitter power output control. Many uses will be found in medical instrumentation, remote monitoring, video/graphics processing, and a variety of communications equipment. The family of parts using the same basic die (identical circuit with slightly different test parameters) is listed in the following table.

Table 4. High Frequency Amplifier Specifications

Operating Temperature Range		A_V (dB)	Bandwidth @ MHz	V_{CC}/V_{EE} (Vdc)		Suffix/ Package
−40° to +85°C	0° to +70°C	Typical		Minimum	Maximum	
–	MC1350	50	45	+6.0	+18	P/626, D/751
MC1490	–	50 45 35	10 60 100			P/626

Miscellaneous Amplifiers

Motorola provides several Bipolar and CMOS special purpose amplifiers which fill specific needs. These devices range from low power CMOS programmable amplifiers and comparators to variable–gain bipolar power amplifiers.

MC3405
Dual Operational Amplifier and
Dual Voltage Comparator

This device contains two Differential Input Operational Amplifiers and two Comparators; each set capable of single supply operation. This operational amplifier–comparator circuit will find its applications as a general purpose product for automotive circuits and as an industrial "building block."

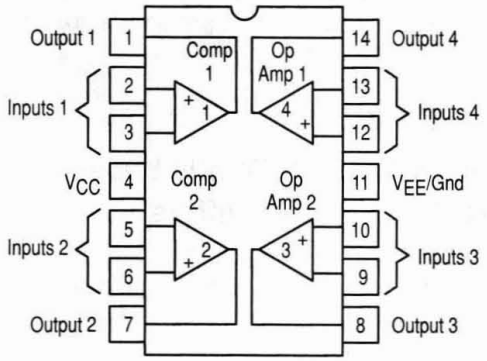

Table 5. Bipolar

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	I_{IO} (nA) Max	A_{vol} (V/mV) Min	Response (μs) Typ	Supply Voltage		Suffix/ Package
						Single	Dual	
MC3405	0.5	10	50	20	1.3	3.0 to 36	±1.5 to ±18	P/646

MC14573
Quad Programmable Operational Amplifier

MC14575
Dual Programmable Operational Amplifier and Dual Programmable Comparator

MC14576C/MC14577C
Dual Video Amplifiers

Table 6. CMOS

Function	Quantity Per Package	Single Supply Voltage Range	Dual Supply Voltage Range	Frequency Range	Device	Suffix/ Package
Operational Amplifiers	4	3.0 to 15 V	±1.5 to ±7.5 V	DC to 1.0 MHz	MC14573	P/648, D/751B
Operational Amplifiers and Comparators	2 and 2	3.0 to 15 V	±1.5 to ±7.5 V	DC to 1.0 MHz	MC14575	P/648, D/751B
Video Amplifiers	2	5.0 to 12 V(1)	±2.5 to ±6.0 V(2)	Up to 10 MHz	MC14576C MC14577C	P/626, F/904

(1) 5.0 to 10 V for surface mount package.
(2) ±2.5 to ±5.0 V for surface mount package.

Comparators

Table 7. Single Comparators

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	I_{IO} (μA) Max	A_V (V/V) Typ	I_{IO} (mA) Min	Response Time (ns)	Supply Voltage (V)	Description	Temperature Range (°C)	Suffix/ Package
Bipolar										
LM211 LM311	0.1 0.25	3.0 7.5	0.01 0.05	200 k	8.0	200	+15, –15	With strobe, will operate from single supply	–25 to +85 0 to +70	D/751 N/626, D/751
CMOS										
MC14578	1.0 pA	50	–	–	1.1	–	3.5 to 14	Requires only 10 μA from single–ended supply	–30 to +70	P/648, D/751B

Table 8. Dual Comparators

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	I_{IO} (μA) Max	A_V (V/V) Typ	I_{IO} (mA) Min	Response Time (ns)	Supply Voltage (V)	Description	Temperature Range (°C)	Suffix/ Package
Bipolar										
LM393 LM393A LM2903 LM2903V	0.25	5.0 2.0 7.0 7.0	0.05	200 k	6.0	1300 1300 1500 1500	±1.5 to ±18 or 3.0 to 36	Designed for single or split supply operation, input common mode includes ground (negative supply)	0 to +70 0 to +70 –40 to +105 –40 to +125	N/626, D/751
MC3405	0.5	10	0.05	200 k	6.0	1300	±1.5 to ±7.5 or 3.0 to 15	This device contains 2 op amps and 2 comparators in a single package	0 to +70	P/646
CMOS										
MC14575	0.001	30	0.0001	2.0 k	3.0	1000	±1.5 to ±7.5 or 3.0 to 15	This device contains 2 op amps and 2 comparators in a single package	–40 to +85	P/648, D/751B

Table 9. Quad Comparators

Device	I_{IB} (μA) Max	V_{IO} (mV) Max	I_{IO} (μA) Max	A_V (V/V) Typ	I_{IO} (mA) Min	Response Time (ns)	Supply Voltage (V)	Description	Temperature Range (°C)	Suffix/ Package
Bipolar										
LM239 LM239A LM339 LM339A LM2901 LM2901V MC3302	0.25 0.5	5.0 2.0 5.0 2.0 7.0 7.0 20	0.05 0.5	200 k 200 k 200 k 200 k 100 k 100 k 100 k	6.0	1300	±1.5 to ±18 or 3.0 to 36	Designed for single or split supply operation, input common mode includes ground (negative supply)	–25 to +85 –25 to +85 0 to +70 0 to +70 –40 to +85 –40 to +125 –40 to +85	N/646, D/751A P/646
CMOS										
MC14574	0.001	30	0.0001	2.0 k	3.0	1000	±1.5 to ±7.5 or 3.0 to 15	Externally programmable power dissipation with 1 or 2 resistors	–40 to +85	P/648, D/751B

Amplifiers and Comparators Package Overview

CASE 626
N, P, P1 SUFFIX



CASE 646
N, P SUFFIX



CASE 648, 648C
DP2, P, P2 SUFFIX

CASE 751
D SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751G
DW SUFFIX

CASE 904
F SUFFIX

Power Supply Circuits

In Brief . . .

In most electronic systems, some form of voltage regulation is required. In the past, the task of voltage regulator design was tediously accomplished with discrete devices, and the results were quite often complex and costly. Today, with bipolar monolithic regulators, this task has been significantly simplified. The designer now has a wide choice of fixed, low V_{Diff} and adjustable type voltage regulators. These devices incorporate many built–in protection features, making them virtually immune to the catastrophic failures encountered in older discrete designs.

The switching power supply continues to increase in popularity and is one of the fastest growing markets in the world of power conversion. They offer the designer several important advantages over linear series–pass regulators. These advantages include significant advancements in the areas of size and weight reduction, improved efficiency, and the ability to perform voltage step–up, step–down, and voltage–inverting functions. Motorola offers a diverse portfolio of full featured switching regulator control circuits which meet the needs of today's modern compact electronic equipment.

Power supplies, MPU/MCU–based systems, industrial controls, computer systems and many other product applications are requiring power supervisory functions which monitor voltages to ensure proper system operation. Motorola offers a wide range of power supervisory circuits that fulfill these needs in a cost effective and efficient manner. MOSFET drivers are also provided to enhance the drive capabilities of first generation switching regulators or systems designed with CMOS/TTL logic devices. These drivers can also be used in dc–to–dc converters, motor controllers or virtually any other application requiring high speed operation of power MOSFETs.

	Page
Linear Voltage Regulators	4.2–2
Fixed Output	4.2–2
Adjustable Output	4.2–4
Micropower Voltage Regulators for Portable Applications	4.2–5
80 mA Micropower Voltage Regulator	4.2–5
120 mA Micropower Voltage Regulator	4.2–6
Micropower Voltage Regulator for External Power Transistor	4.2–6
Micropower smallCAP™ Voltage Regulators with On/Off Control	4.2–7
Special Regulators	4.2–8
Voltage Regulator/Supervisory	4.2–8
SCSI Regulator	4.2–12
Switching Regulator Control Circuits	4.2–13
Single–Ended	4.2–13
Single–Ended with On–Chip Power Switch	4.2–15
Very High Voltage Single–Ended with On–Chip Power Switch	4.2–16
Double–Ended	4.2–16
CMOS Micropower DC–to–DC Converters	4.2–19
Easy Switcher™ Single–Ended with On–Chip Power Switch	4.2–20
Single–Ended GreenLine™ Controllers	4.2–22
Very High Voltage Switching Regulator	4.2–24
Critical Conduction SMPS Controller	4.2–26
Special Switching Regulator Controllers	4.2–27
Dual Channel	4.2–27
Universal Microprocessor Power Supply	4.2–27
Power Factor	4.2–28
Supervisory Circuits	4.2–31
Overvoltage Crowbar Sensing	4.2–31
Over/Undervoltage Protection	4.2–31
Micropower Undervoltage Sensing	4.2–32
Micropower Undervoltage Sensing with Programmable Output Delay	4.2–33
Undervoltage Sensing	4.2–34
Universal Voltage Monitor	4.2–35
Battery Management Circuits	4.2–36
Battery Charger ICs	4.2–36
Battery Pack ICs	4.2–38
MOSFET/IGBT Drivers	4.2–42
High Speed Dual Drivers	4.2–42
Single IGBT Driver	4.2–42
Package Overview	4.2–44

Linear Voltage Regulators

Fixed Output

These low cost monolithic circuits provide positive and/or negative regulation at currents from 100 mA to 3.0 A. They are ideal for on–card regulation employing current limiting and thermal shutdown. Low V_{Diff} devices are offered for battery powered systems.

Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

Table 1. Linear Voltage Regulators

Device	V_{out}	25°C Tol. ±%	V_{in} Max	$V_{in}–V_{out}$ Diff. Typ.	Reg_{line} Max (% V_{out})	Reg_{load} Max (% V_{out})	Typ. Temp. Coefficient mV (V_{out}) / °C	Suffix/ Package
Fixed Voltage, 3–Terminal Regulators, 0.1 Amperes								
LM2931*/A–5.0*	5.0	5.0/3.8	40	0.16	0.6	1.0	0.2	D/751, D2T/936, DT, DT–1, T/221A, Z
LP2950C*/AC*	3.0	0.5	30	0.38	0.2/0.1	0.2/0.1	0.04	DT–3.0, Z–3.0
	3.3							DT–3.3, Z–3.3
	5.0							DT–5.0, Z–5.0
MC78LXXC/AC/AB*	5.0, 8.0, 9.0	8.0/4.0	30	1.7	4.0/3.0	1.2	0.2	D/751, P/29
MC78LXXC/AC/AB*	12, 15, 18	8.0/4.0	35	1.7	2.0	1.0	0.2	D/751, P/29
MC78L24C/AC/AB*	24	8.0/4.0	40	1.7	2.0	1.0	0.2	D/751, P/29
MC79L05C/AC/AB*	–5.0	8.0/4.0	30	1.7	4.0/3.0	1.2	0.2	D/751, P/29
MC79LXXC/AC/AB*	–(12, 15, 18)	8.0/4.0	35	1.7	2.0	1.0	0.2	D/751, P/29
MC79L24C/AC/AB*	–24	8.0/4.0	40	1.7	2.0	1.0	0.2	D/751, P/29
MC33160**	5.0	5.0	40	2.0	0.8	1.0	–	P/626
Fixed Voltage, 3–Terminal Regulators, 0.5 Amperes								
MC78MXXB*/C	5.0, 6.0, 8.0, 12	4.0	35	2.0	1.0	2.0	±0.04	DT, DT–1, T/221A
MC78MXXB*/C	15, 18	4.0	35	2.0	1.0	2.0	±0.04	DT, DT–1, T/221A
MC78MXXB*/C	20, 24	4.0	40	2.0	0.25	2.0	±0.04	DT, DT–1, T/221A
MC79MXXB*/C	–(5.0, 8.0, 12, 15)	4.0	35	1.1	1.0	2.0	–0.07 to ±0.04	DT, DT–1, T/221A
MC33267*	5.05	2.0	40	0.58	1.0	1.0	–	D2T/936A, T/314D, TV
Fixed Voltage, 3–Terminal Medium Dropout Regulators, 0.8 Amperes								
MC33269–XX*	3.3, 5.0, 12	1.0	20	1.0	0.3	1.0	–	D/751, DT, T/221A, ST
MC34268	2.85	1.0	15	0.95	0.3	1.0	–	D/751, DT

Unless otherwise noted, T_J = 0° to +125°C

* T_J = –40° to +125°C

** T_A = –40° to +85°C

Table 1. Linear Voltage Regulators (continued)

Device	V_{out}	25°C Tol. ±%	V_{in} Max	V_{in}–V_{out} Diff. Typ.	Reg_{line} Max (% V_{out})	Reg_{load} Max (% V_{out})	Typ. Temp. Coefficient mV (V_{out})/°C	Suffix/ Package
Fixed Voltage, 3–Terminal Regulators, 1.0 Amperes								
MC78XXB*/C/AC	5.0, 6.0, 8.0, 12, 18	4.0/2.0	35	2.0	2.0/1.0	2.0	–0.06 to –0.22	D2T/936, T/221A
MC7824B*/C/AC	24	4.0/2.0	40	2.0	2.0/1.0	2.0/0.4	0.125	D2T/936, T/221A
MC79XXC/AC	–(5.0, 5.2, 6.0)	4.0/2.0	35	2.0	2.0/1.0	2.0	–0.2	D2T/936, T/221A
MC79XXC/AC	–(8.0, 12, 15, 18)	4.0/2.0	35	2.0	2.0/1.0	2.0/1.25	–0.12 to –0.06	D2T/936, T/221A
MC7924C	–24	4.0	40	2.0	1.0	2.0	–0.04	D2T/936, T/221A
LM340/A–XX	5.0, 6.0, 12, 15, 18	4.0/2.0	35	1.7	1.0/0.2	1.0/0.5	±0.12	T/221A
LM340–24	24	4.0	40	1.7	1.0	1.0	±0.12	T/221S
Fixed Voltage, 3–Terminal Regulators, 3.0 Amperes								
MC78TXXC/AC	5.0, 8.0, 12	4.0/2.0	35	2.5	0.5	0.6	0.04	T/221A
MC78T15C/AC	15	4.0/2.0	40	2.5	0.5	0.6	0.04	T/221A
LM323/A	5.0	4.0/2.0	20	2.3	0.5/0.3	2.0/1.0	±0.2	T/221A

Unless otherwise noted, T_J = 0° to +125°C
* T_J = –40° to +125°C
** T_A = –40° to +85°C

Table 2. Fixed Voltage Medium and Low Dropout Regulators

Device	V_{out}	25°C Tol. ±%	I_O (mA) Max	V_{in} Max	V_{in}–V_{out} Diff. Typ.	Reg_{line} Max (% V_{out})	Reg_{load} Max (% V_{out})	Typ. Temp. Coefficient mV (V_{out})/°C	Suffix/ Package
Fixed Voltage, Medium Dropout Regulators									
MC33267*	5.05	2.0	500	40	0.58	1.0	1.0	–	D2T/936A, T/314D, TV
MC34268	2.85	1.0	800	15	0.95	0.3	1.0		D/751, DT
MC33269–XX*	3.3, 5.0, 12			20	1.0				D/751, DT, T/221A, ST/318E
Fixed Voltage, Low Dropout Regulators									
LM2931*/A*	5.0	5.0/3.8	100	37	0.16	1.12	1.0	±2.5	D/751, D2T/936A, DT, DT–1, T/221A, Z
LP2950C*/AC*	3.0	1.0/0.5	100	30	0.38	0.2/0.1	0.2/0.1	0.2	DT–3.0, Z–3.0
	3.3								DT–3.3, Z–3.3
	5.0								DT–5.0, Z–5.0

Unless otherwise noted, T_J = 0° to +125°C
* T_J = –40° to +125°C

Table 2. Fixed Voltage Medium and Low Dropout Regulators (continued)

Device	V_{out}	25°C Tol. ±%	I_O (mA) Max	V_{in} Max	$V_{in}-V_{out}$ Diff. Typ.	Reg_{line} Max (% V_{out})	Reg_{load} Max (% V_{out})	Typ. Temp. Coefficient mV (V_{out}) / °C	Suffix/ Package
Fixed Voltage, Low Dropout Regulators									
LP2951C*/AC*	3.0	1.0/0.5	100	28.75	0.38	0.04/0.02	0.04/0.02	±1.0	D–3.0/751, DM–3.0/ 846A, N–3.0/626
	3.3								D–3.3/751, DM–3.3/ 846A, N–3.3/626
	5.0								D/751, DM/846A, N/626
LM2935*	5.0/5.0	5.0/5.0	500/10	60	0.45/0.55	1.0	1.0	–	D2T/936A, T/314D, TH, TV

Unless otherwise noted, T_J = 0° to +125°C
* T_J = –40° to +125°C

Adjustable Output

Motorola offers a broad line of adjustable output voltage regulators with a variety of output current capabilities. Adjustable voltage regulators provide users the capability of stocking a single integrated circuit offering a wide range of output voltages for industrial and communications applications. The three–terminal devices require only two external resistors to set the output voltage.

Table 3. Adjustable Output Regulators

Device	V_{out}	I_O (mA) Max	V_{in} Max	$V_{in}-V_{out}$ Diff. Typ.	Reg_{line} Max (% V_{out})	Reg_{load} Max (% V_{out})	Typ. Temp. Coefficient mV (V_{out}) / °C	Suffix/ Package
Adjustable Regulators								
LM317L/B*	2.0–37	100	40	1.9	0.07	1.5	±0.35	D/751, Z
LM2931C*	3.0–24	100	37	0.16	1.12	1.0	±2.5	D/751, D2T/936A, T/314D, TH, TV
LP2951C*/AC*	1.25–29	100	28.75	0.38	0.04/0.02	0.04/0.02	±1.0	D–3.0/751, DM–3.0/ 846A, N–3.0/626
								D–3.3/751, DM–3.3/ 846A, N–3.3/626
								D/751, DM/846A, N/626

Unless otherwise noted, T_J = 0° to +125°C
* T_J = –40° to +125°C
\# T_A = 0° to +70°C

Table 3. Adjustable Output Regulators (continued)

Device	V_{out}	I_O (mA) Max	V_{in} Max	$V_{in}-V_{out}$ Diff. Typ.	Reg_{line} Max (% V_{out})	Reg_{load} Max (% V_{out})	Typ. Temp. Coefficient mV (V_{out}) / °C	Suffix/ Package
Adjustable Regulators								
MC1723C#	2.0–37	150	38	2.5	0.5	0.2	±0.033	D/751, P/646
LM317M/B*	1.2–37	500	40	2.1	0.04	0.5	±0.35	DT, DT–1, T/221A
LM337M/B*	–(1.2–37)	500	40	1.9	0.07	1.5	±0.3	T/221A
MC33269*	1.25–19	800	18.75	1.0	0.3	0.5	±0.4	D/751, DT, T/221A, ST
LM317/B*	1.2–37	1500	40	2.25	0.07	1.5	±0.35	D2T/936, T/221A
LM337/B*	–(1.2–37)	1500	40	2.3	0.07	1.5	±0.3	D2T/936, T/221A
LM350/B*	1.2–33	3000	35	2.7	0.07	1.5	±0.5	T/221A

Unless otherwise noted, T_J = 0° to +125°C
* T_J = –40° to +125°C
\# T_A = 0° to +70°C

Micropower Voltage Regulators for Portable Applications

80 mA Micropower Voltage Regulator

MC78LC00H, N

T_A = –30° to +80°C, Case 1213, 1212

The MC78LC00 series voltage regulators are specifically designed for use as a power source for video instruments, handheld communication equipment, and battery powered equipment.

The MC78LC00 series features an ultra–low quiescent current of 1.1 µA and a high accuracy output voltage. Each device contains a voltage reference, an error amplifier, a driver transistor and resistors for setting the output voltage. These devices are available in either SOT–89, 3 pin, or SOT–23, 5 pin, surface mount packages.

MC78LC00 Series Features:

- Low Quiescent Current of 1.1 µA Typical
- Low Dropout Voltage (220 mV at 10 mA)
- Excellent Line Regulation (0.1%)
- High Accuracy Output Voltage (±2.5%)
- Wide Output Voltage Range (2.0 V to 6.0 V)
- Output Current for Low Power (up to 80 mA)
- Two Surface Mount Packages (SOT–89, 3 Pin, or SOT–23, 5 Pin)

ORDERING INFORMATION

Device	Output Voltage	Operating Temperature Range	Package
MC78LC30HT1	3.0	T_A = –30° to +80°C	SOT–89
MC78LC33HT1	3.3		
MC78LC40HT1	4.0		
MC78LC50HT1	5.0		
MC78LC30NTR	3.0		SOT–23
MC78LC33NTR	3.3		
MC78LC40NTR	4.0		
MC78LC50NTR	5.0		

Other voltages from 2.0 to 6.0 V, in 0.1 V increments, are available upon request. Consult factory for information.

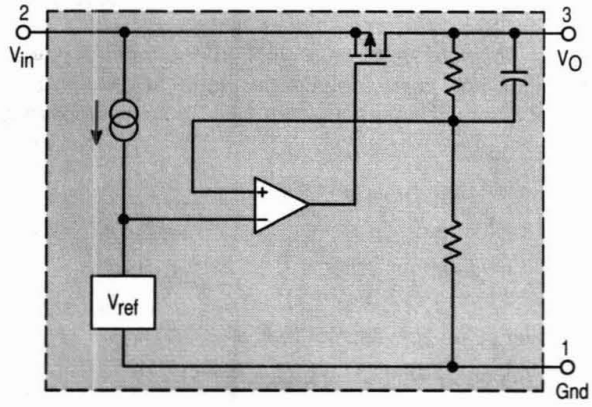

120 mA Micropower Voltage Regulator

MC78FC00H

T_A = –30° to +80°C, Case 1213

The MC78FC00 series voltage regulators are specifically designed for use as a power source for video instruments, handheld communication equipment, and battery powered equipment.

The MC78FC00 series voltage regulator ICs feature a high accuracy output voltage and ultra–low quiescent current. Each device contains a voltage reference unit, an error amplifier, a driver transistor, and resistors for setting output voltage, and a current limit circuit. These devices are available in SOT–89 surface mount packages, and allow construction of an efficient, constant voltage power supply circuit.

MC78FC00 Series Features:

- Ultra–Low Quiescent Current of 1.1 μA Typical
- Ultra–Low Dropout Voltage (100 mV at 10 mA)
- Large Output Current (up to 120 mA)
- Excellent Line Regulation (0.1%)
- Wide Operating Voltage Range (2.0 V to 10 V)
- High Accuracy Output Voltage (±2.5%)
- Wide Output Voltage Range (2.0 V to 6.0 V)
- Surface Mount Package (SOT–89)

ORDERING INFORMATION

Device	Output Voltage	Operating Temperature Range	Package
MC78FC30HT1	3.0	T_A = –30° to +80°C	SOT–89
MC78FC33HT1	3.3		
MC78FC40HT1	4.0		
MC78FC50HT1	5.0		

Other voltages from 2.0 to 6.0 V, in 0.1 V increments, are available upon request. Consult factory for information.

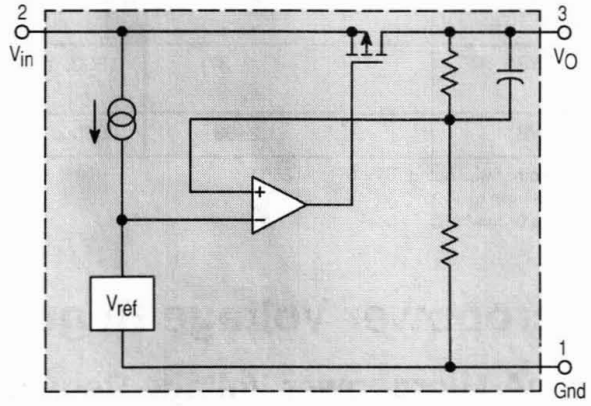

Micropower Voltage Regulator for External Power Transistor

MC78BC00N

T_A = –30° to +80°C, Case 1212

The MC78BC00 voltage regulators are specifically designed to be used with an external power transistor to deliver high current with high voltage accuracy and low quiescent current.

The MC78BC00 series are devices suitable for constructing regulators with ultra–low dropout voltage and output current in the range of several tens of mA to hundreds of mA. These devices have a chip enable function, which minimizes the standby mode current drain. Each of these devices contains a voltage reference unit, an error amplifier, a driver transistor and feedback resistors. These devices are available in the SOT–23, 5 pin surface mount packages.

These devices are ideally suited for battery powered equipment, and power sources for hand–held audio instruments, communication equipment and domestic appliances.

MC78BC00 Series Features:

- Ultra–Low Supply Current (50 μA)
- Standby Mode (0.2 μA)
- Ultra–Low Dropout Voltage (0.1 V with External Transistor and I_O = 100 mA)
- Excellent Line Regulation (Typically 0.1%/V)
- High Accuracy Output Voltage (±2.5%)

ORDERING INFORMATION

Device	Output Voltage	Operating Temperature Range	Package
MC78BC30NTR	3.0	T_A = –30° to +80°C	SOT–23
MC78BC33NTR	3.3		
MC78BC40NTR	4.0		
MC78BC50NTR	5.0		

Other voltages from 2.0 to 6.0 V, in 0.1 V increments, are available upon request. Consult factory for information.

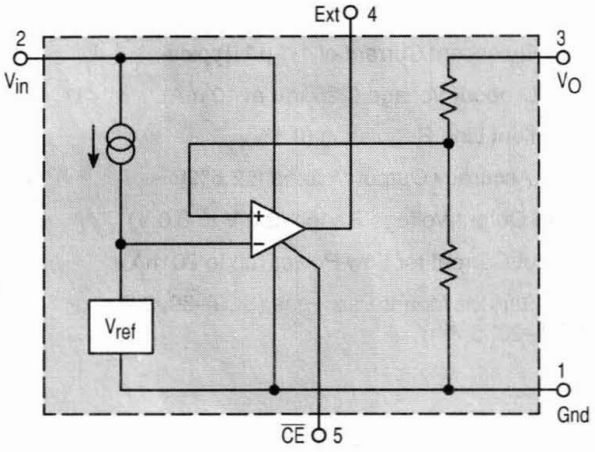

Micropower smallCAP™ Voltage Regulators with On/Off Control

MC33264D, DM

T_A = –40° to +85°C, Case 751, 846A

The MC33264 series are micropower low dropout voltage regulators available in SO–8 and Micro–8 surface mount packages and a wide range of output voltages. These devices feature a very low quiescent current (100 μA in the ON mode; 0.1 μA in the OFF mode), and are capable of supplying output currents up to 100 mA. Internal current and thermal limiting protection is provided. They require only a small output capacitance for stability.

Additionally, the MC33264 has either active HIGH or active LOW control (Pins 2 and 3) that allows a logic level signal to turn–off or turn–on the regulator output.

Due to the low input–to–output voltage differential and bias current specifications, these devices are ideally suited for battery powered computer, consumer, and industrial equipment where an extension of useful battery life is desirable.

MC33264 Features:

- Low Quiescent Current (0.3 μA in OFF Mode; 95 μA in ON Mode)
- Low Input–to–Output Voltage Differential of 47 mV at 10 mA, and 131 mV at 50 mA
- Multiple Output Voltages Available
- Extremely Tight Line and Load Regulation
- Stable with Output Capacitance of Only
  0.22 μF for 4.0 V, 4.75 V and 5.0 V Output Voltages
  0.33 μF for 2.8 V, 3.0 V, 3.3 V and 3.8 V Output Voltages
- Internal Current and Thermal Limiting
- Logic Level ON/OFF Control
- Functionally Equivalent to TK115XXMC and LP2980

ORDERING INFORMATION

Device	Operating Temperature Range	Package
MC33264D–2.8 MC33264D–3.0 MC33264D–3.3 MC33264D–3.8 MC33264D–4.0 MC33264D–4.75 MC33264D–5.0	T_A = –40° to +85°C	SO–8
MC33264DM–2.8 MC33264DM–3.0 MC33264DM–3.3 MC33264DM–3.8 MC33264DM–4.0 MC33264DM–4.75 MC33264DM–5.0		Micro–8

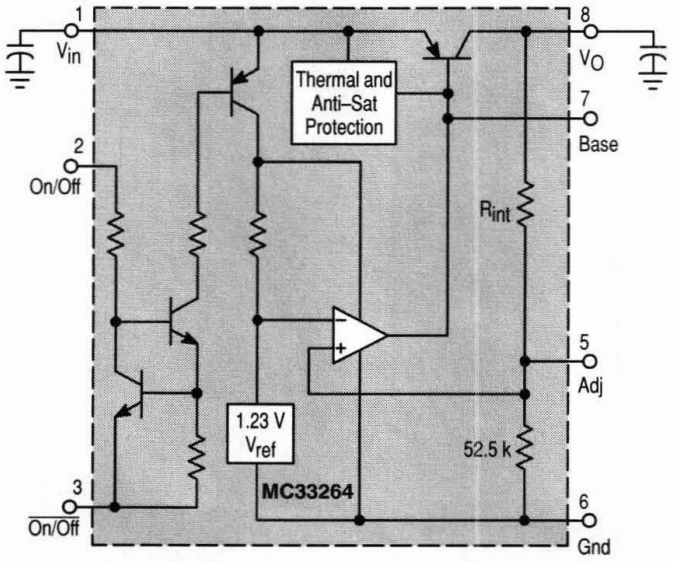

Special Regulators

Voltage Regulator/Supervisory

Table 4. Voltage Regulator/Supervisory

Device	V_{out} (V)		I_O (mA)	V_{in} (V)		Reg_{line} (mV)	Reg_{load} (mV)	T_A (°C)	Suffix/ Package
	Min	Max	Max	Min	Max	Max	Max		
MC33128*	2.9	3.1	35	3.2	7.0	n/a	30	–30 to +60	D/751B
	2.9	3.1	60				40		
	2.9	3.1	20				25		
	–2.65	–2.35	1.0				20		
MC34160	4.75	5.25	100	7.0	40	40	50	0 to +70	P/648C, DW/751G
MC33160								–40 to +85	
MC33267	4.9	5.2	500	6.0	26	50	50	–40 to +105	T/314D, TH, TV
MC33169*	4.7	6.4	–	2.7	9.5	–	–	–40 to +85	DTB/948G
	6.4	7.0							
	–2.35	–2.65							

* These ICs are intended for powering cellular phone GaAs power amplifiers and can be used for other portable applications as well.

Microprocessor Voltage Regulator and Supervisory Circuit

MC34160P, DW

T_A = 0° to +70°C, Case 648C, 751G

MC33160P, DW

T_A = –40° to +85°C, Case 648C, 751G

The MC34160 series is a voltage regulator and supervisory circuit containing many of the necessary monitoring functions required in microprocessor based systems. It is specifically designed for appliance and industrial applications offering the designer a cost effective solution with minimal external components. These integrated circuits feature a 5.0 V, 100 mA regulator with short circuit current limiting, pinned out 2.6 V bandgap reference, low voltage reset comparator, power warning comparator with programmable hysteresis, and an uncommitted comparator ideally suited for microprocessor line synchronization.

Additional features include a chip disable input for low standby current, and internal thermal shutdown for over temperature protection.

These devices are contained in a 16 pin dual–in–line heat tab plastic package for improved thermal conduction.

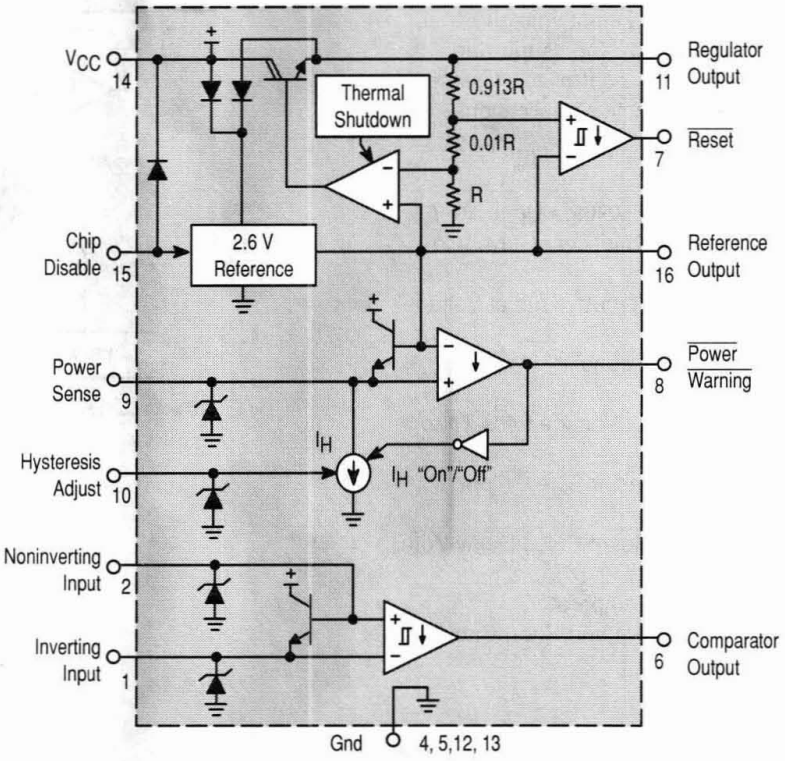

Low Dropout Regulator

MC33267T, TV

T_J = –40° to +105°C, Case 314D, 314B

The MC33267 is a positive fixed 5.0 V regulator that is specifically designed to maintain proper voltage regulation with an extremely low input–to–output voltage differential. This device is capable of supplying output currents in excess of 500 mA and contains internal current limiting and thermal shutdown protection. Also featured is an on–chip power–up reset circuit that is ideally suited for use in microprocessor based systems. Whenever the regulator output voltage is below nominal, the reset output is held low. A programmable time delay is initiated after the regulator has reached its nominal level and upon timeout, the reset output is released.

Due to the low dropout voltage specifications, the MC33267 is ideally suited for use in battery powered industrial and consumer equipment where an extension of useful battery life is desirable. This device is contained in an economical five lead TO–220 type package.

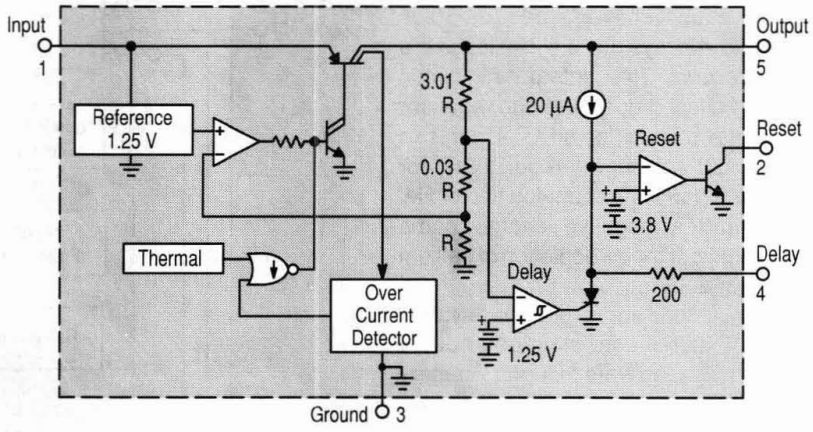

Very Low Dropout Regulator

L4949N, D

T_J = –40° to +125°C, Case 626, 751

The L4949 is a monolithic integrated 5.0 V voltage regulator with a very low dropout and additional functions such as power–on reset and input voltage sense.

It is designed for supplying the micro–computer controlled systems especially in automotive applications.

- Operating DC Supply Voltage Range 5.0 V to 28 V
- Transient Supply Voltage Up to 40 V
- Extremely Low Quiescent Current in Standby Mode
- High Precision Standby Output Voltage 5.0 V ±1%
- Output Current Capability Up to 100 mA
- Very Low Dropout Voltage Less Than 0.4 V
- Reset Circuit Sensing The Output Voltage
- Programmable Reset Pulse Delay With External Capacitor
- Voltage Sense Comparator
- Thermal Shutdown and Short Circuit Protections

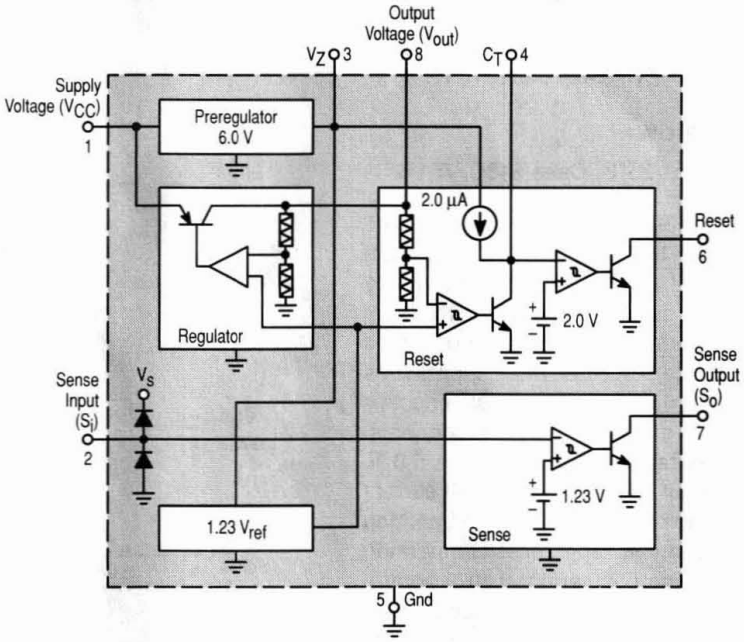

Power Management Controller

MC33128D

T_A = –30° to +60°C, Case 751B

The MC33128 is a power management controller specifically designed for use in battery powered cellular telephone and pager applications. This device contains all of the active functions required to interface the user to the system electronics via a microprocessor. This integrated circuit consists of a low dropout voltage regulator with power–up reset for MPU power, two low dropout voltage regulators for independant powering of analog and digital circuitry, and a negative charge pump voltage regulator for full depletion of gallium arsenide MESFETs.

Also included are protective system shutdown features consisting of a battery latch that is activated upon battery insertion, low battery voltage shutdown, and a thermal over temperature detector. This device is available in a 16–pin narrow body surface mount plastic package.

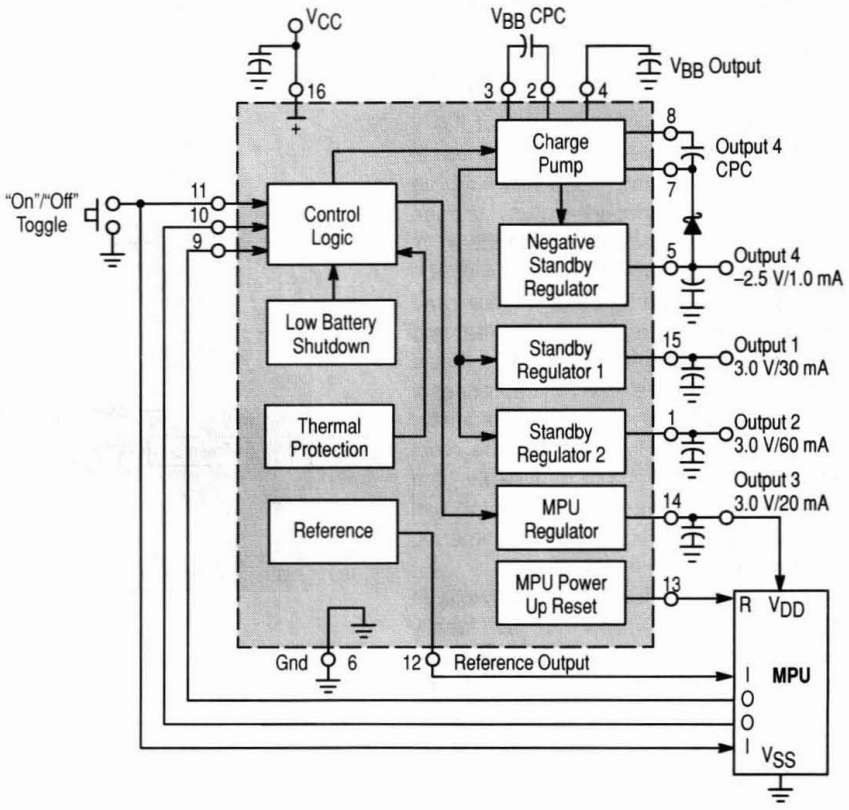

GaAs Power Amplifier Support IC

MC33169DTB

T_A = –40° to +85°C, Case 948G

The MC33169 is a support IC for GaAs Power Amplifier Enhanced FETs used in hand portable telephones such as GSM, PCN and DECT. This device provides negative voltages for full depletion of Enhanced MESFETs as well as a priority management system of drain switching, ensuring that the negative voltage is always present before turning "on" the Power Amplifier. Additional features include an idle mode input and a direct drive of the N–Channel drain switch transistor.

This product is available in two versions, –2.5 and –4.0 V. The –4.0 V version is intended for supplying RF modules for GSM and DCS1800 applications, whereas the –2.5 V version is dedicated for DECT and PHS systems.

- Negative Regulated Output for Full Depletion of GaAs MESFETs
- Drain Switch Priority Management Circuit
- CMOS Compatible Inputs
- Idle Mode Input (Standby Mode) for Very Low Current Consumption
- Output Signal Directly Drives N–Channel FET
- Low Startup and Operating Current

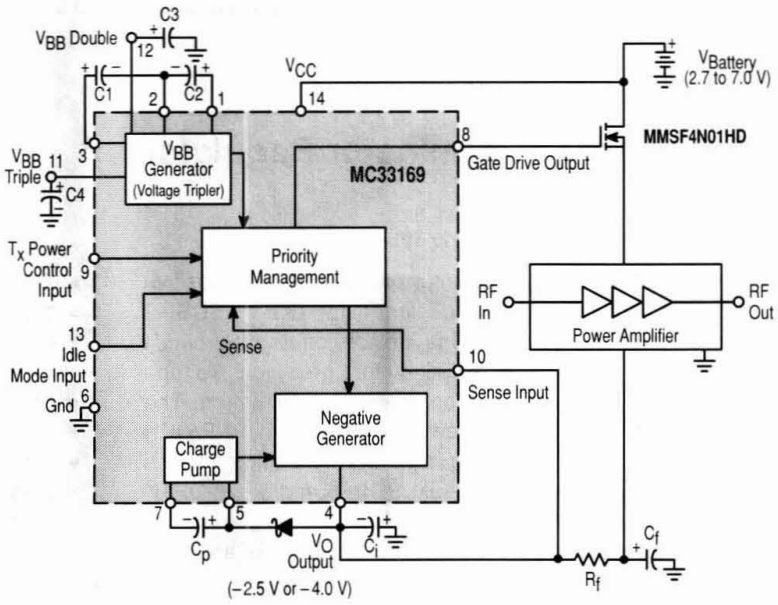

SCSI Regulator

Table 5. SCSI Regulator

Device	V_{out} (V)		I_{sink} (mA)	V_{in} (V)		Reg_{line} (%)	Reg_{load} (%)	T_J (°C)	Suffix/ Package
	Min	Max		Min	Max				
MC34268	2.81	2.89	800	3.9	20	0.3	0.5	150	D/751, DT

SCSI–2 Active Terminator Regulator

MC34268D, DT

T_J = 0° to +125°C, Case 751, 369A

The MC34268 is a medium current, low dropout positive voltage regulator specifically designed for use in SCSI–2 active termination circuits. This device offers the circuit designer an economical solution for precision voltage regulation, while keeping power losses to a minimum. The regulator consists of a 1.0 V dropout composite PNP/NPN pass transistor, current limiting, and thermal limiting. These devices are packaged in the 8–pin SOP–8 and 3–pin DPAK surface mount power packages.

Applications include active SCSI–2 terminators and post regulation of switching power supplies.

- 2.85 V Output Voltage for SCSI–2 Active Termination
- 1.0 V Dropout
- Output Current in Excess of 800 mA
- Thermal Protection
- Short Circuit Protection
- Output Trimmed to 1.4% Tolerance
- No Minimum Load Required
- Space Saving DPAK and SOP–8 Surface Mount Power Packages

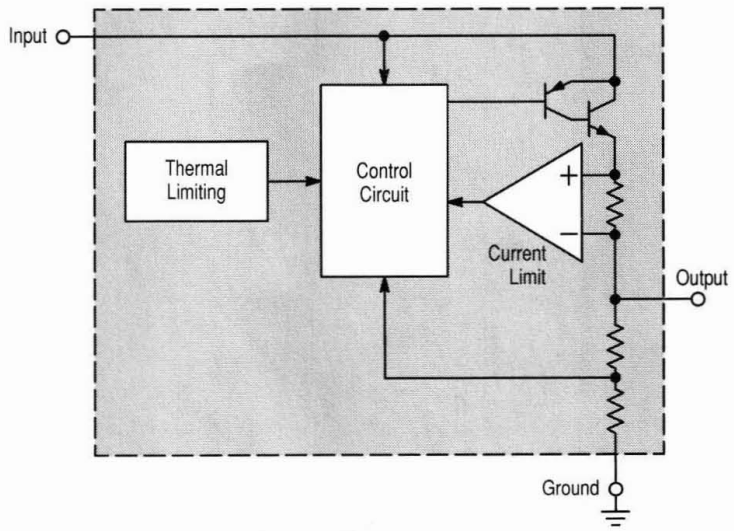

Switching Regulator Control Circuits

These devices contain the primary building blocks which are required to implement a variety of switching power supplies. The product offerings fall into three major categories consisting of single–ended and double–ended controllers, plus single–ended ICs with on–chip power switch transistors. These circuits operate in voltage, current or resonant modes and are designed to drive many of the standard switching topologies. The single–ended configurations include buck, boost, flyback and forward converters. The double–ended devices control push–pull, half bridge and full bridge configurations.

Table 6. Single–Ended Controllers

These single–ended voltage and current mode controllers are designed for use in buck, boost, flyback, and forward converters. They are cost effective in applications that range from 0.1 to 200 W power output.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Reference (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_A (°C)	Suffix/ Package
500 (Uncommitted Drive Output)	7.0 to 40	Voltage	5.0 ± 1.5%	200	MC34060A	0 to +70	D/751A
							P/646
					MC33060A	–40 to +85	D/751A
							P/646
1000 (Totem Pole MOSFET Drive Output)	4.2 to 12	Current	1.25 ± 2.0%	300	MC34129	0 to +70	D/751A
							P/646
					MC33129	–40 to +85	D/751A
							P/646
	11.5 to 30		5.0 ± 2.0%	500	UC3842A	0 to +70	D/751A
							N/626
	11 to 30		5.0 ± 1.0%		UC2842A	–25 to +85	D/751A
							N/626
	8.2 to 30		5.0 ± 2.0%		UC3843A	0 to +70	D/751A
							N/626
			5.0 ± 1.0%		UC2843A	–25 to +85	D/751A
							N/626
	11.5 to 30		5.0 ± 2.0%	500 (50% Duty Cycle Limit)	UC3844	0 to +70	D/751A
							N/626
	11 to 30		5.0 ± 1.0%		UC2844	–25 to +85	D/751A
							N/626
	8.2 to 30		5.0 ± 2.0%		UC3845	0 to +70	D/751A
							N/626
			5.0 ± 1.0%		UC2845	–25 to +85	D/751A
							N/626
	11.5 to 30		5.0 ± 2.0%	500 (Improved Oscillator Specifications with Frequency Guaranteed at 250 kHz)	UC3842B	0 to +70	D/751A
							D1/751
							N/626
					UC3842BV	–40 to +105	D/751A
							D1/751
							N/626

Table 6. Single–Ended Controllers (continued)

These single–ended voltage and current mode controllers are designed for use in buck, boost, flyback, and forward converters. They are cost effective in applications that range from 0.1 to 200 W power output.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Reference (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_A (°C)	Suffix/ Package
1000 (Totem Pole MOSFET Drive Output)	11 to 30	Current	5.0 ± 1.0%	500 (Improved Oscillator Specifications with Frequency Guaranteed at 250 kHz)	UC2842B	–25 to +85	D/751A
							D1/751
							N/626
	8.2 to 30		5.0 ± 2.0%		UC3843B	0 to +70	D/751A
							D1/751
							N/626
					UC3843BV	–40 to +105	D/751A
							D1/751
							N/626
			5.0 ± 1.0%		UC2843B	–25 to +85	D/751A
							D1/751
							N/626
	11.5 to 30		5.0 ± 2.0%	500 (50% Duty Cycle Limit)	UC3844B	0 to +70	D/751A
							D1/751
							N/626
					UC3844BV	–40 to +105	D/751A
							D1/751
							N/626
	11 to 30		5.0 ± 1.0%		UC2844B	–25 to +85	D/751A
							D1/751
							N/626
	8.2 to 30		5.0 ± 2.0%		UC3845B	0 to +70	D/751A
							D1/751
							N/626
					UC3845BV	–40 to +105	D/751A
							D1/751
							N/626
			5.0 ± 1.0%		UC2845B	–25 to +85	D/751A
							D1/751
							N/626
1000 Source 1500 Sink (Split Totem Pole Bipolar Drive Output)	11 to 18		5.0 ± 6.0%		MC44602		P2/648C
2000 (Totem Pole MOSFET Drive Output)	9.2 to 30	Current or Voltage	5.1 ± 1.0%	1000	MC34023	0 to +70	DW/751G
							FN/775
							P/648
					MC33023	–40 to +105	DW/751G
							FN/775
							P/648

Table 7. Single–Ended Controllers with On–Chip Power Switch

These monolithic power switching regulators contain all the active functions required to implement standard dc–to–dc converter configurations with a minimum number of external components.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Reference (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_A (°C)	Suffix/ Package
1500 (Uncommitted Power Switch)	2.5 to 40	Voltage	1.25 ± 5.2%(1)	100	µA78S40	0 to +70	PC/648
						–40 to +85	PV/648
			1.25 ± 2.0%		MC34063A	0 to +70	D/751
							P1/626
					MC33063A	–40 to +85	D/751
							P1/626
						–40 to +125	D/751
3400 (Uncommitted Power Switch)	2.5 to 40	Voltage	1.25 ± 2.0% and 5.05 ± 3.0%	100	MC34163	0 to +70	P/648C, DW/751G
					MC33163	–40 to +85	
3400(2) (Dedicated Emitter Power Switch)	7.5 to 40		5.05 ± 2.0%	72 ± 12% Internally Fixed	MC34166	0 to +70	D2T/936A, TH, TV, T/314D
					MC33166	–40 to +85	
5500(3) (Dedicated Emitter Power Switch)					MC34167	0 to +70	
					MC33167	–40 to +85	

(1) Tolerance applies over the specified operating temperature range.
(2) Guaranteed minimum, typically 4300 mA.
(3) Guaranteed minimum, typically 6500 mA.

Table 8. Easy Switcher™ Single–Ended Controllers with On–Chip Power Switch

The Easy Switcher™ series is ideally suited for easy, convenient design of a step–down switching regulator (buck converter), with a minimum number of external components.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Oscillator Frequency (kHz)	Output Voltage (V)	Device	T_J (°C)	Suffix/ Package
500	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40	Voltage	52 Fixed Internal	3.3 5.0 12 15 1.23 to 37	LM2574N–3.3 LM2574N–5 LM2574N–12 LM2574N–15 LM2574N–ADJ	–40 to +125	N/626
1000	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40	Voltage	52 Fixed Internal	3.3 5.0 12 15 1.23 to 37	LM2575T–3.3 LM2575T–5 LM2575T–12 LM2575T–15 LM2575T–ADJ	–40 to +125	T/314D
	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40			3.3 5.0 12 15 1.23 to 37	LM2575TV–3.3 LM2575TV–5 LM2575TV–12 LM2575TV–15 LM2575TV–ADJ		TV/314B
	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40			3.3 5.0 12 15 1.23 to 37	LM2575D2T–3.3 LM2575D2T–5 LM2575D2T–12 LM2575D2T–15 LM2575D2T–ADJ		D2T/936A

Table 8. Easy Switcher™ Single–Ended Controllers with On–Chip Power Switch (continued)

The Easy Switcher™ series is ideally suited for easy, convenient design of a step–down switching regulator (buck converter), with a minimum number of external components.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Oscillator Frequency (kHz)	Output Voltage (V)	Device	T_J (°C)	Suffix/ Package
3000	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40	Voltage	52 Fixed Internal	3.3 5.0 12 15 1.23 to 37	LM2576T–3.3 LM2576T–5 LM2576T–12 LM2576T–15 LM2576T–ADJ	–40 to +125	T/314D
	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40			3.3 5.0 12 15 1.23 to 37	LM2576TV–3.3 LM2576TV–5 LM2576TV–12 LM2576TV–15 LM2576TV–ADJ		TV/314B
	4.75 to 40 8.0 to 40 15 to 40 18 to 40 8.0 to 40			3.3 5.0 12 15 1.23 to 37	LM2576D2T–3.3 LM2576D2T–5 LM2576D2T–12 LM2576D2T–15 LM2576D2T–ADJ		D2T/936A

Table 9. Very High Voltage Single–Ended Controller with On–Chip Power Switch

This monolithic high voltage switching regulator is specifically designed to operate from a rectified ac line voltage source. Included are an on–chip high voltage power switch, active off–line startup circuitry and a full featured PWM controller with fault protection.

Power Switch Maximum Rating		Startup Input Max (V)	Operating Mode	Feedback Threshold (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_J (°C)	Suffix/ Package
V_{DS} (V)	I_{DS} (mA)							
500	2000	250	Voltage	2.6 ± 3.1%	1000	MC33362	–25 to +125	DW/751N, P/648E
700	1000	450				MC33363		
700	1000	450				MC33363A		

Table 10. Double–Ended Controllers

These double–ended voltage, current and resonant mode controllers are designed for use in push–pull, half–bridge, and full–bridge converters. They are cost effective in applications that range from 100 to 2000 watts power output.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Reference (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_A (°C)	Suffix/ Package
500 (Uncommitted Drive Outputs)	7.0 to 40	Voltage	5.0 ± 5.0%(1)	200	TL494	0 to +70	CN/648
						–25 to +85	IN/648
			5.0 ± 1.5%	300	TL594	0 to +70	CN/648
						–25 to +85	IN/648
± 500 (Totem Pole MOSFET Drive Outputs)	8.0 to 40		5.1 ± 2.0%	400	SG3525A	0 to +70	N/648
± 200 (Totem Pole MOSFET Drive Outputs)			5.0 ± 2.0%		SG3526	0 to +125(2)	N/707

Table 10. Double–Ended Controllers (continued)

These double–ended voltage, current and resonant mode controllers are designed for use in push–pull, half–bridge, and full–bridge converters. They are cost effective in applications that range from 100 to 2000 watts power output.

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Reference (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_A (°C)	Suffix/ Package
±1500 (Totem Pole MOSFET Drive Outputs)	9.6 to 20	Resonant (Zero Current)	5.1 ± 2.0%	1000	MC34066	0 to +70	DW/751G
							P/648
					MC33066	–40 to +85	DW/751G
							P/648
		Resonant (Zero Voltage)		2000	MC34067	0 to +70	DW/751G
							P/648
					MC33067	–40 to +85	DW/751G
							P/648
2000 (Totem Pole MOSFET Drive Outputs)	9.2 to 30	Current or Voltage	5.1 ± 1.0%	1000	MC34025	0 to +70	DW/751G
							FN/775
							P/648
					MC33025	–40 to +105	DW/751G
							FN/775
							P/648

(1) Tolerance applies over the specified operating temperature range.
(2) Junction Temperature Range.

CMOS Micropower DC–to–DC Converters

Variable Frequency Micropower DC–to–DC Converter

MC33463H

T_A = –30° to +80°C, Case 1213

The MC33463 series are micropower step–up switching voltage regulators, specifically designed for handheld and laptop applications, to provide regulated output voltages using a minimum of external parts. A wide choice of output voltages are available. These devices feature a very low quiescent bias current of 4.0 μA typical.

The MC33463H–XXKT1 series features a highly accurate voltage reference, an oscillator, a variable frequency modulation (VFM) controller, a driver transistor (Lx), a comparator and feedback resistive divider.

The MC33463H–XXLT1 is identical to the MC33463H–XXKT1, except that a drive pin (EXT) for an external transistor is provided.

Due to the low bias current specifications, these devices are ideally suited for battery powered computer, consumer, and industrial equipment where an extension of useful battery life is desirable.

MC33463 Series Features:

- Low Quiescent Bias Current of 4.0 μA
- High Output Voltage Accuracy of ±2.5%
- Low Startup Voltage of 0.9 V at 1.0 mA
- Wide Output Voltage Range of 2.5 V to 7.5 V Available
- High Efficiency of 80% Typical
- Surface Mount Package

ORDERING INFORMATION

Device	Output Voltage	Type	Operating Temperature Range	Package (Tape/Reel)
MC33463H–30KT1	3.0	Int. Switch	T_A = –30° to +80°C	SOT–89 (Tape)
MC33463H–33KT1	3.3			
MC33463H–50KT1	5.0			
MC33463H–30LT1	3.0	Ext. Switch Drive		SOT–89 (Tape)
MC33463H–33LT1	3.3			
MC33463H–50LT1	5.0			

Other voltages from 2.5 V to 7.5 V, in 0.1 V increments are available. Consult factory for information.

MC33463H–XXKT1

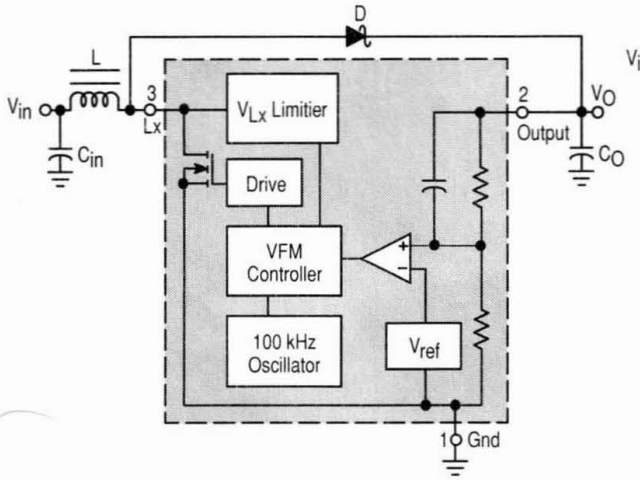

MC33463H–XXLT1

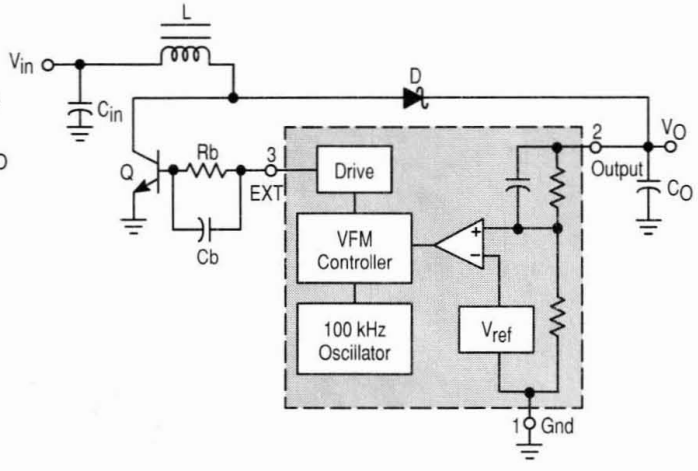

XX Denotes Output Voltage

Fixed Frequency PWM Micropower DC–to–DC Converter

MC33466H

T_A = –30° to +80°C, Case 1213

The MC33466 series are micropower switching voltage regulators, specifically designed for handheld and laptop applications, to provide regulated output voltages using a minimum of external parts. A wide choice of output voltages are available. These devices feature a very low quiescent bias current of 15 μA typical.

The MC33466H–XXJT1 series features a highly accurate voltage reference, an oscillator, a pulse width modulation (PWM) controller, a driver transistor (Lx), an error amplifier and feedback resistive divider.

The MC33466H–XXLT1 is identical to the MC33466H–XXJT1, except that a drive pin (EXT) for an external transistor is provided.

Due to the low bias current specifications, these devices are ideally suited for battery powered computer, consumer, and industrial equipment where an extension of useful battery life is desirable.

MC33466 Series Features:

- Low Quiescent Bias Current of 15 μA
- High Output Voltage Accuracy of ±2.5%
- Low Startup Voltage of 0.9 V at 1.0 mA
- Soft–Start = 500 μs
- Surface Mount Package

ORDERING INFORMATION

Device	Output Voltage	Type	Operating Temperature Range	Package (Tape/Reel)
MC33466H–30JT1 MC33466H–33JT1 MC33466H–50JT1	3.0 3.3 5.0	Int. Switch	T_A = –30° to +80°C	SOT–89 (Tape)
MC33466H–30LT1 MC33466H–33LT1 MC33466H–50LT1	3.0 3.3 5.0	Ext. Switch Drive	T_A = –30° to +80°C	SOT–89 (Tape)

Other voltages from 2.5 V to 7.5 V, in 0.1 V increments are available. Consult factory for information.

MC33466H–XXJT1

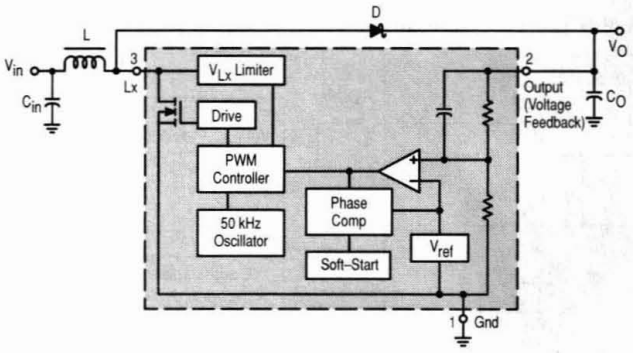

MC33466H–XXLT1

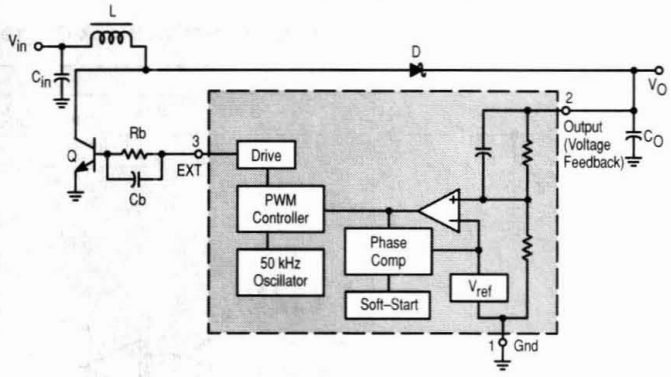

XX Denotes Output Voltage

Easy Switcher™ Single–Ended Controllers with On–Chip Power Switch

Step–Down Voltage Regulators

LM2574N–XX

T_J = –40° to +125°C, Case 626

The LM2574 series of regulators are monolithic integrated circuits ideally suited for easy and convenient design of a step–down switching regulator (buck converter). All circuits of this series are capable of driving a **0.5 A** load with excellent line and load regulation. These devices are available in fixed output voltages of 3.3 V, 5.0 V, 12 V, 15 V, and an adjustable output version.

These regulators were designed to minimize the number of external components to simplify the power supply design. Standard series of inductors optimized for use with the LM2574 are offered by several different inductor manufacturers.

Since the LM2574 converter is a switch–mode power supply, its efficiency is significantly higher in comparison with popular three–terminal linear regulators, especially with higher input voltages. In most cases, the power dissipated by the LM2574 regulator is so low, that the copper traces on the printed circuit board are normally the only heatsink needed and no additional heatsinking is required.

The LM2574 features include a guaranteed ±4% tolerance on output voltage within specified input voltages and output load conditions, and ±10% on the oscillator frequency (±2% over 0°C to +125°C). External shutdown is included, featuring 60 μA (typical) standby current. The output switch includes cycle–by–cycle current limiting, as well as thermal shutdown for full protection under fault conditions.

Features

- 3.3 V, 5.0 V, 12 V, 15 V, and Adjustable Output Versions
- Adjustable Version Output Voltage Range, 1.23 to 37 V ±4% max over Line and Load Conditions
- Guaranteed **0.5 A** Output Current
- Wide Input Voltage Range: 4.75 to 40 V
- Requires Only 4 External Components
- 52 kHz Fixed Frequency Internal Oscillator
- TTL Shutdown Capability, Low Power Standby Mode
- High Efficiency
- Uses Readily Available Standard Inductors
- Thermal Shutdown and Current Limit Protection

Applications

- Simple and High–Efficiency Step–Down (Buck) Regulators
- Efficient Pre–Regulator for Linear Regulators
- On–Card Switching Regulators
- Positive to Negative Converters (Buck–Boost)
- Negative Step–Up Converters
- Power Supply for Battery Chargers

XX = Voltage Option, i.e., 3.3, 5, 12, 15 V; and ADJ for Adjustable Output

Representative Block Diagram and Typical Application

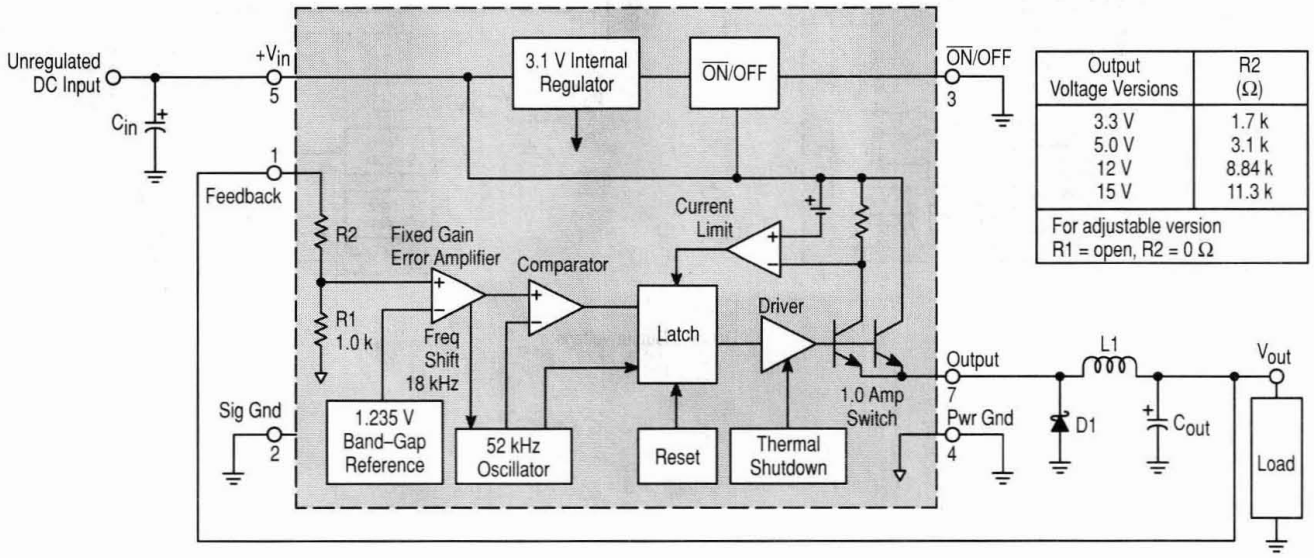

Output Voltage Versions	R2 (Ω)
3.3 V	1.7 k
5.0 V	3.1 k
12 V	8.84 k
15 V	11.3 k
For adjustable version R1 = open, R2 = 0 Ω	

Step–Down Voltage Regulators (continued)

LM2575T–XX, TV, D2T, LM2576T–XX, TV, D2T

T_J = –40° to +125°C, Case 314D, 314B, 936A

The LM2575/6 series of regulators are monolithic integrated circuits ideally suited for easy and convenient design of a step–down switching regulator (buck converter). All circuits of this series are capable of driving a **1.0 A** (LM2575) or **3.0 A** (LM2576) load with excellent line and load regulation. These devices are available in fixed output voltages of 3.3 V, 5.0 V, 12 V, 15 V, and an adjustable output version.

These regulators were designed to minimize the number of external components to simplify the power supply design. Standard series of inductors optimised for use with the LM2575/6 are offered by several different inductor manufacturers.

Since the LM2575/6 converter is a switch–mode power supply, its efficiency is significantly higher in comparison with popular three–terminal linear regulators, especially with higher input voltages. In many cases, the power dissipated by the LM2575/6 regulator is so low, that no heatsink is required or its size could be reduced dramatically.

The LM2575/6 features include a guaranteed ±4% tolerance on output voltage within specified input voltages and output load conditions, and ±10% on the oscillator frequency (±2% over 0°C to 125°C). External shutdown is included, featuring 80 μA typical standby current. The output switch includes cycle–by–cycle current limiting, as well as thermal shutdown for full protection under fault conditions.

Features

- 3.3 V, 5.0 V, 12 V, 15 V, and Adjustable Output Versions
- Adjustable Version Output Voltage Range of 1.23 V to 37 V ±4% Maximum Over Line and Load Conditions
- Guaranteed **1.0 A** (LM2575) **3.0 A** (LM2576) Output Current
- Wide Input Voltage Range: 4.75 V to 40 V
- Requires Only 4 External Components
- 52 kHz Fixed Frequency Internal Oscillator
- TTL Shutdown Capability, Low Power Standby Mode
- High Efficiency
- Uses Readily Available Standard Inductors
- Thermal Shutdown and Current Limit Protection

Applications

- Simple and High–Efficiency Step–Down (Buck) Regulators
- Efficient Pre–Regulator for Linear Regulators
- On–Card Switching Regulators
- Positive to Negative Converters (Buck–Boost)
- Negative Step–Up Converters
- Power Supply for Battery Chargers

XX = Voltage Option, i.e., 3.3, 5, 12, 15 V; and ADJ for Adjustable Output

Representative Block Diagram and Typical Application

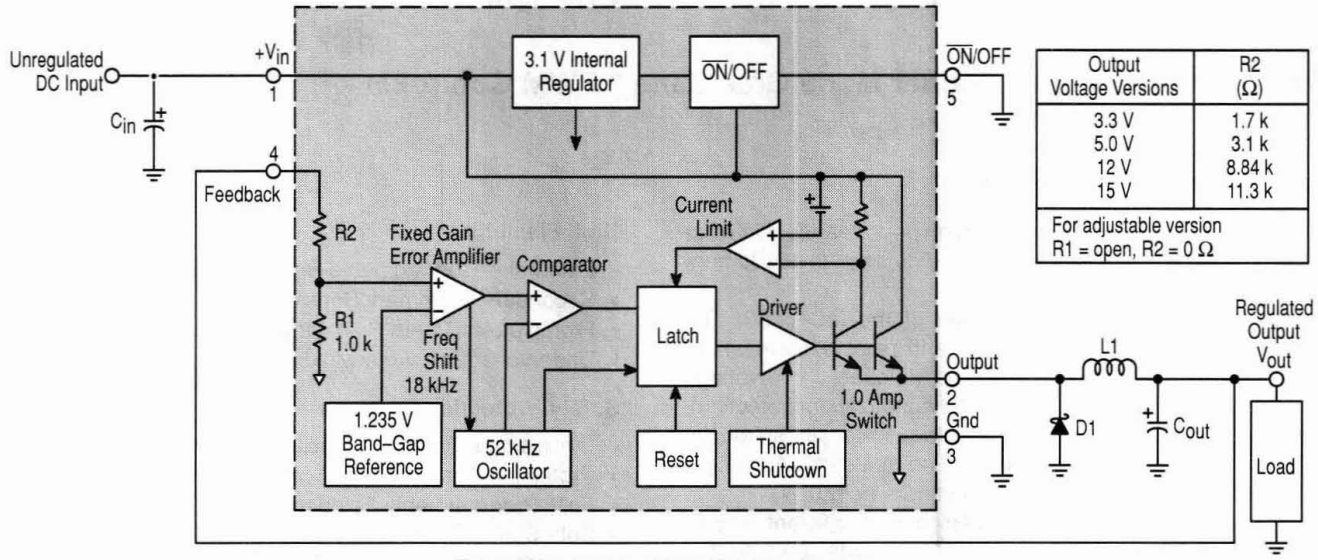

Output Voltage Versions	R2 (Ω)
3.3 V	1.7 k
5.0 V	3.1 k
12 V	8.84 k
15 V	11.3 k
For adjustable version R1 = open, R2 = 0 Ω	

This device contains 162 active transistors.

Single–Ended GreenLine™ Controllers

Enhanced Mixed Frequency Mode GreenLine™ PWM Controller:

Fixed Frequency, Variable Frequency, Standby Mode

MC44603AP, DW

T_A = –25° to +85°C, Case 648, 751G

The MC44603A is an enhanced high performance controller that is specifically designed for off–line and dc–to–dc converter applications. This device has the unique ability of automatically changing operating modes if the converter output is overloaded, unloaded, or shorted, offering the designer additional protection for increased system reliability. The MC44603A has several distinguishing features when compared to conventional SMPS controllers. These features consist of a foldback facility for overload protection, a standby mode when the converter output is slightly loaded, a demagnetization detection for reduced switching stresses on transistor and diodes, and a high current totem pole output ideally suited for driving a power MOSFET. It can also be used for driving a bipolar transistor in low power converters (< 150 W). It is optimized to operate in discontinuous mode but can also operate in continuous mode. Its advanced design allows use in current mode or voltage mode control applications.

Current or Voltage Mode Controller

- Operation up to 250 kHz Output Switching Frequency
- Inherent Feed Forward Compensation
- Latching PWM for Cycle–by–Cycle Current Limiting
- Oscillator with Precise Frequency Control

High Flexibility

- Externally Programmable Reference Current
- Secondary or Primary Sensing
- Synchronization Facility
- High Current Totem Pole Output
- Undervoltage Lockout with Hysteresis

Safety/Protection Features

- Overvoltage Protection Against Open Current and Open Voltage Loop
- Protection Against Short Circuit on Oscillator Pin
- Fully Programmable Foldback
- Soft–Start Feature
- Accurate Maximum Duty Cycle Setting
- Demagnetization (Zero Current Detection) Protection
- Internally Trimmed Reference
- Enhanced Output Drive

GreenLine Controller: Low Power Consumption in Standby Mode

- Low Startup and Operating Current
- Fully Programmable Standby Mode
- Controlled Frequency Reduction in Standby Mode
- Low dV/dT for Low EMI Radiations

High Safety Standby Ladder Mode GreenLine™ PWM Controller

MC44604P

T_A = –25° to +85°C, Case 648

The MC44604 is an enhanced high performance controller that is specifically designed for off–line and dc–to–dc converter applications.

The MC44604 is a modification of the MC44603. The MC44604 offers enhanced safety and reliable power management in its protection features (foldback, overvoltage detection, soft–start, accurate demagnetization detection). Its high current totem pole output is also ideally suited for driving a power MOSFET but can also be used for driving a bipolar transistor in low power converters (< 150 W).

In addition, the MC44604 offers a new efficient way to reduce the standby operating power by means of a patented standby ladder mode operation of the converter significantly reducing the converter consumption in standby mode.

Current or Voltage Mode Controller

- Operation Up to 250 kHz Output Switching Frequency
- Inherent Feed Forward Compensation
- Latching PWM for Cycle–by–Cycle Current Limiting
- Oscillator with Precise Frequency Control

High Flexibility

- Externally Programmable Reference Current
- Secondary or Primary Sensing
- High Current Totem Pole Output
- Undervoltage Lockout with Hysteresis

Safety/Protection Features

- Overvoltage Protection Facility Against Open Loop
- Protection Against Short Circuit on Oscillator Pin
- Fully Programmable Foldback
- Soft–Start Feature
- Accurate Maximum Duty Cycle Setting
- Demagnetization (Zero Current Detection) Protection
- Internally Trimmed Reference

GreenLine™ Controller:

- Low Startup and Operating Current
- Patented Standby Ladder Mode for Low Standby Losses
- Low dV/dT for Low EMI

High Safety Latched Mode GreenLine™ PWM Controller for (Multi)Synchronized Applications

MC44605P

T_A = –25° to +85°C, Case 648

The MC44605 is a high performance current mode controller that is specifically designed for off–line converters. The MC44605 has several distinguishing features that make it particularly suitable for multisynchronized monitor applications.

The MC44605 synchronization arrangement enables operation from 16 kHz up to 130 kHz. This product was optimized to operate with universal ac mains voltage from 80 V to 280 V, and its high current totem pole output makes it ideally suited for driving a power MOSFET.

The MC44605 protections provide well controlled, safe power management. Safety enhancements detect four different fault conditions and provide protection through a disabling latch.

Current or Voltage Mode Controller

- Current Mode Operation Up to 250 kHz Output Switching Frequency
- Inherent Feed Forward Compensation
- Latching PWM for Cycle–by–Cycle Current Limiting
- Oscillator with Precise Frequency Control
- Externally Programmable Reference Current
- Secondary or Primary Sensing (Availability of Error Amplifier Output)
- Synchronization Facility
- High Current Totem Pole Output
- Undervoltage Lockout with Hysteresis
- Low Output dV/dT for Low EMI
- Low Startup and Operating Current

Safety/Protection Features

- Soft–Start Feature
- Demagnetization (Zero Current Detection) Protection
- Overvoltage Protection Facility Against Open Loop
- EHT Overvoltage Protection (E.H.T.OVP): Protection Against Excessive Amplitude Synchronization Pulses
- Winding Short Circuit Detection (W.S.C.D.)
- Limitation of the Maximum Input Power (M.P.L.): Calculation of Input Power for Overload Protection
- Over Heating Detection (O.H.D.): to Prevent the Power Switch from Excessive Heating

Latched Disabling Mode

- When one of the following faults is detected: EHT overvoltage, Winding Short Circuit (WSCD), excessive input power (M.P.L.), power switch over heating (O.H.D.), a counter is activated
- If the counter is activated for a time that is long enough, the circuit gets definitively disabled. The latch can only be reset by removing and then re–applying power

Very High Voltage Switching Regulator

MC33362DW, P

T_J = –25° to +125°C, Case 751N, 658E

The MC33362 is a monolithic high voltage switching regulator that is specifically designed to operate from a rectified 120 VAC line source. This integrated circuit features an on–chip 500 V/2.0 A SenseFET power switch, 250 V active off–line startup FET, duty cycle controlled oscillator, current limiting comparator with a programmable threshold and leading edge blanking, latching pulse width modulator for double pulse suppression, high gain error amplifier, and a trimmed internal bandgap reference. Protective features include cycle–by–cycle current limiting, input undervoltage lockout with hysteresis, output overvoltage protection, and thermal shutdown. This device is available in a 16–lead dual–in–line and wide body surface mount packages.

- On–Chip 500 V, 2.0 A SenseFET Power Switch
- Rectified 120 VAC Line Source Operation
- On–Chip 250 V Active Off–Line Startup FET
- Latching PWM for Double Pulse Suppression
- Cycle–By–Cycle Current Limiting
- Input Undervoltage Lockout with Hysteresis
- Output Overvoltage Protection Comparator
- Trimmed Internal Bandgap Reference
- Internal Thermal Shutdown

20 W Off–Line Converter

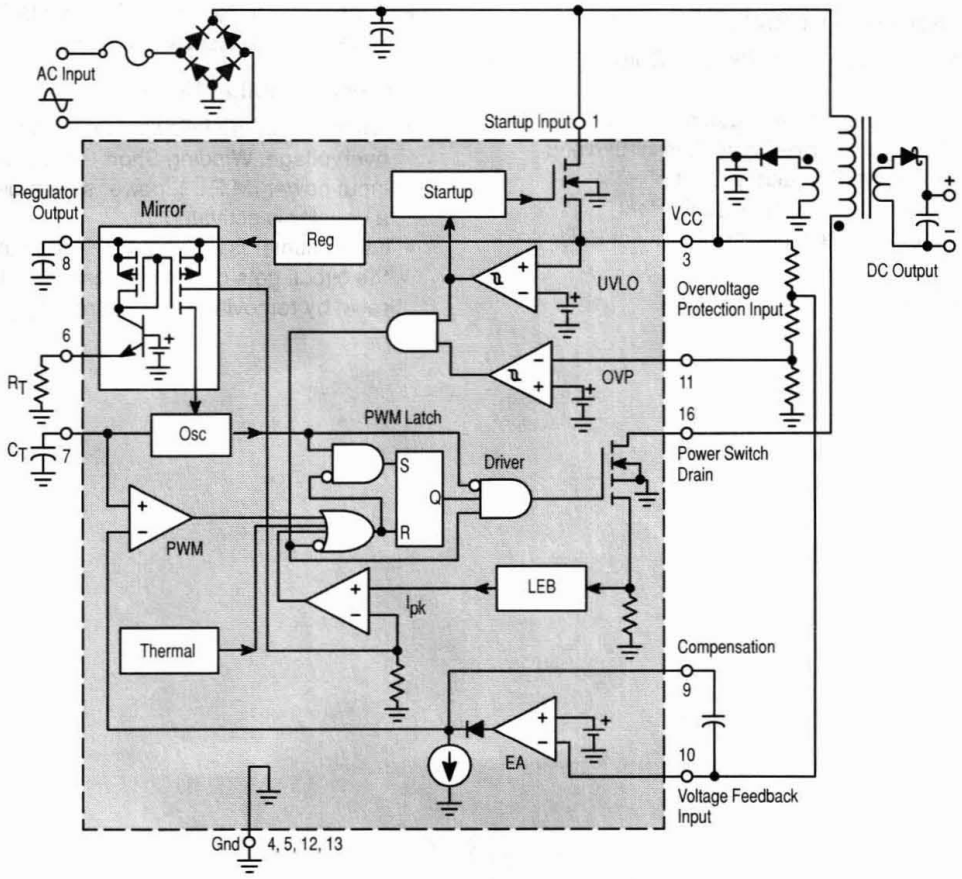

Very High Voltage Switching Regulator

MC33363DW, P, MC33363ADW, AP

T_J = –25° to +125°C, Case 751N, 648E

The MC33363 is a monolithic high voltage switching regulator that is specifically designed to operate from a rectified 240 Vac line source. This integrated circuit features an on–chip 700 V/1.0 A (1.5 A in MC33363A) SenseFET power switch, 450 V (500 V in MC33363A) active off–line startup FET, duty cycle controlled oscillator, current limiting comparator with a programmable threshold and leading edge blanking, latching pulse width modulator for double pulse suppression, high gain error amplifier, and a trimmed internal bandgap reference. Protective features include cycle–by–cycle current limiting, input undervoltage lockout with hysteresis, output overvoltage protection, and thermal shutdown. This device is available in a 16–lead dual–in–line and wide body surface mount packages.

- On–Chip 700 V, 1.0 A SenseFET Power Switch
- On–Chip 700 V, 1.5 A SenseFET Power Switch in MC33363A
- Rectified 240 Vac Line Source Operation
- On–Chip 450 V Active Off–Line Startup FET
- On–Chip 500 V Active Off–Line Startup FET in MC33363A
- Latching PWM for Double Pulse Suppression
- Cycle–By–Cycle Current Limiting
- Input Undervoltage Lockout with Hysteresis
- Output Overvoltage Protection Comparator
- Trimmed Internal Bandgap Reference
- Internal Thermal Shutdown

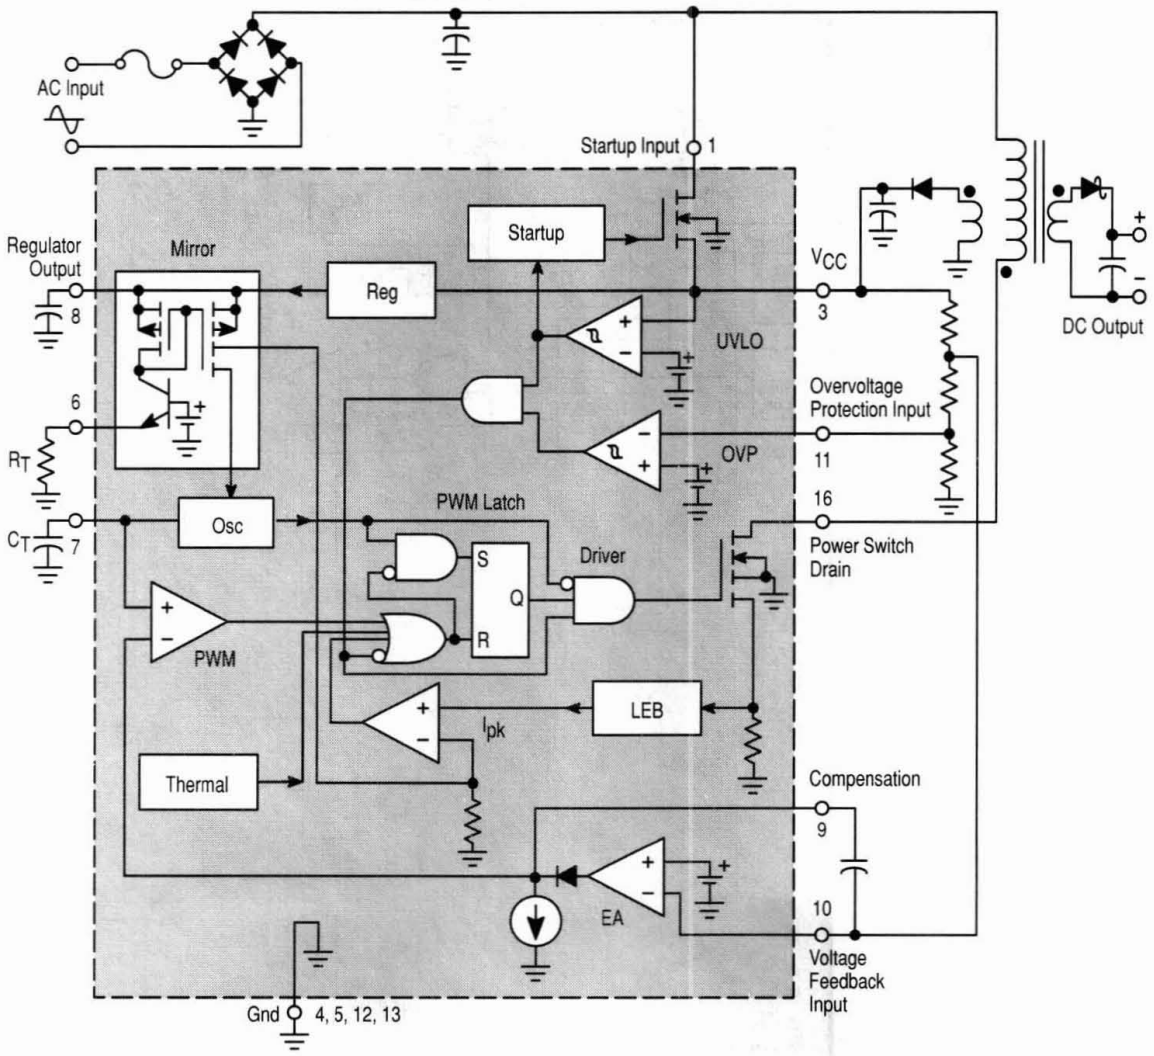

Critical Conduction SMPS Controller

MC33364D, D1, D2

T_J = –25° to +125°C, Case 751, 751B

The MC33364 series are variable frequency SMPS controllers that operate in the critical conduction mode. They are optimized for low power, high density power supplies requiring minimum board area, reduced component count, and low power dissipation. Each narrow body SOIC package provides a small footprint. Integration of the high voltage startup saves approximately 0.7 W of power compared to resistor bootstrapped circuits.

Each MC33364 features an on–board reference, UVLO function, a watchdog timer to initiate output switching, a zero current detector to ensure critical conduction operation, a current sensing comparator, leading edge blanking, and a CMOS driver. Protection features include the ability to shut down switching, and cycle–by–cycle current limiting.

The MC33364D1 is available in a surface mount SO–8 package. It has an internal 126 kHz frequency clamp. For loads which have a low power operating condition, the frequency clamp limits the maximum operating frequency, preventing excessive switching losses and EMI radiation.

The MC33364D2 is available in the SO–8 package without an internal frequency clamp.

The MC33364D is available in the SO–16 package. It has an internal 126 kHz frequency clamp which is pinned out, so that the designer can adjust the clamp frequency by connecting appropriate values of resistance and capacitance.

- Lossless Off–Line Startup
- Leading Edge Blanking for Noise Immunity
- Watchdog Timer to Initiate Switching
- Minimum Number of Support Components
- Shutdown Capability
- Over Temperature Protection
- Optional Frequency Clamp

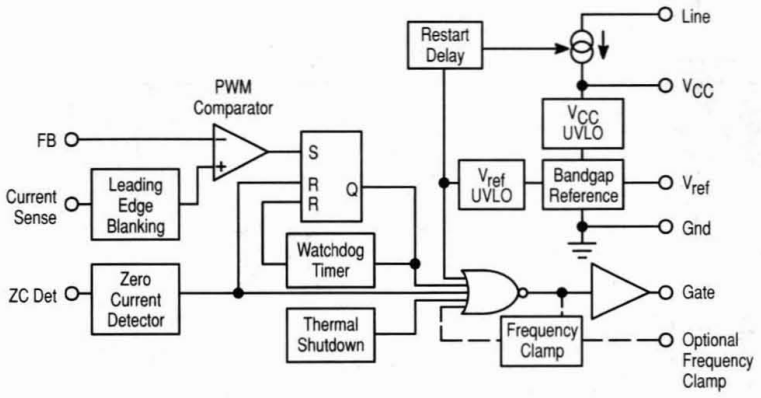

Special Switching Regulator Controllers

These high performance dual channel controllers are optimized for off–line, ac–to–dc power supplies and dc–to–dc converters in the flyback topology. They also have undervoltage lockout voltages which are optimized for off–line and lower voltage dc–to–dc converters, respectively. Applications include desktop computers, peripherals, televisions, games, and various consumer appliances.

Table 11. Dual Channel Controllers

I_O (mA) Max	Minimum Operating Voltage Range (V)	Operating Mode	Reference (V)	Maximum Useful Oscillator Frequency (kHz)	Device	T_A (°C)	Suffix/ Package
500	4.0	Voltage	1.25 ± 2.0%	700	MC34270	0 to +70	FB/873A
					MC34271		
±1000 (Totem Pole MOSFET Drive Outputs)	11 to 15.5	Current	5.0 ± 2.6%	500	MC34065	0 to +70	DW/751G
							P/648
					MC33065	–40 to +85	DW/751G
							P/648
	11 to 20				MC34065	0 to +70	DW–H/751G
							P–H/648
					MC33065	–40 to +85	DW–H/751G
							P–H/648
	8.4 to 20				MC34065	0 to +70	DW–L/751G
							P–L/648
					MC33065	–40 to +85	DW–L/751G
							P–L/648

Table 12. Universal Microprocessor Power Supply Controllers

A versatile power supply control circuit for microprocessor–based systems, this device is mainly intended for automotive applications and battery powered instruments. The circuit provides a power–on reset delay and a Watchdog feature for orderly microprocessor operation.

Regulated Outputs	Output Current (mA)	V_{CC} (V)		Reference (V)	Key Supervisory Features	Device	T_A (°C)	Package
		Min	Max					
E^2PROM Programmable Output: 24 V (Write Mode) 5.0 V (Read Mode)	150 peak	6.0	35	2.5 ± 3.2%	MPU Reset and Watchdog Circuit	TCF5600	–40 to +85	707

Table 13. Power Factor Controllers

I_O (mA) Max	Minimum Operating Voltage Range (V)	Maximum Startup Voltage (V)	Reference (V)	Features	Device	T_A (°C)	Suffix/ Package
± 500 (Totem Pole MOSFET Drive Outputs)	9.0 to 30	30	2.5 ± 1.4%	Undervoltage Lockout, Internal Startup Timer	MC34261	0 to +70	D/751
							P/626
					MC33261	–40 to +85	D/751
							P/626
				Overvoltage Comparator, Undervoltage Lockout, Internal Startup Timer	MC34262	0 to +85	D/751
							P/626
					MC33262	–40 to +105	D/751
							P/626
1500 (CMOS Totem Pole MOSFET Drive Outputs)	9.0 to 16	500	5.0 ± 1.5%	Off–Line High Voltage Startup Overvoltage Comparator, Undervoltage Lockout, Timer, Low Load Detect	MC33368	–25 to +125	D/751K
							P/648

Power Factor Controllers

MC34262D, P

T_A = 0° to +85°C, Case 751, 626

MC33262D, P

T_A = –40° to +105°C, Case 751, 626

The MC34262, MC33262 series are active power factor controllers specifically designed for use as a preconverter in electronic ballast and in off–line power converter applications. These integrated circuits feature an internal startup timer for stand alone applications, a one quadrant multiplier for near unity power factor, zero current detector to ensure critical conduction operation, transconductance error amplifier, quickstart circuit for enhanced startup, trimmed internal bandgap reference, current sensing comparator, and a totem pole output ideally suited for driving a power MOSFET.

Also included are protective features consisting of an overvoltage comparator to eliminate runaway output voltage due to load removal, input undervoltage lockout with hysteresis, cycle–by–cycle current limiting, multiplier output clamp that limits maximum peak switch current, an RS latch for single pulse metering, and a drive output high state clamp for MOSFET gate protection. These devices are available in dual–in–line and surface mount plastic packages.

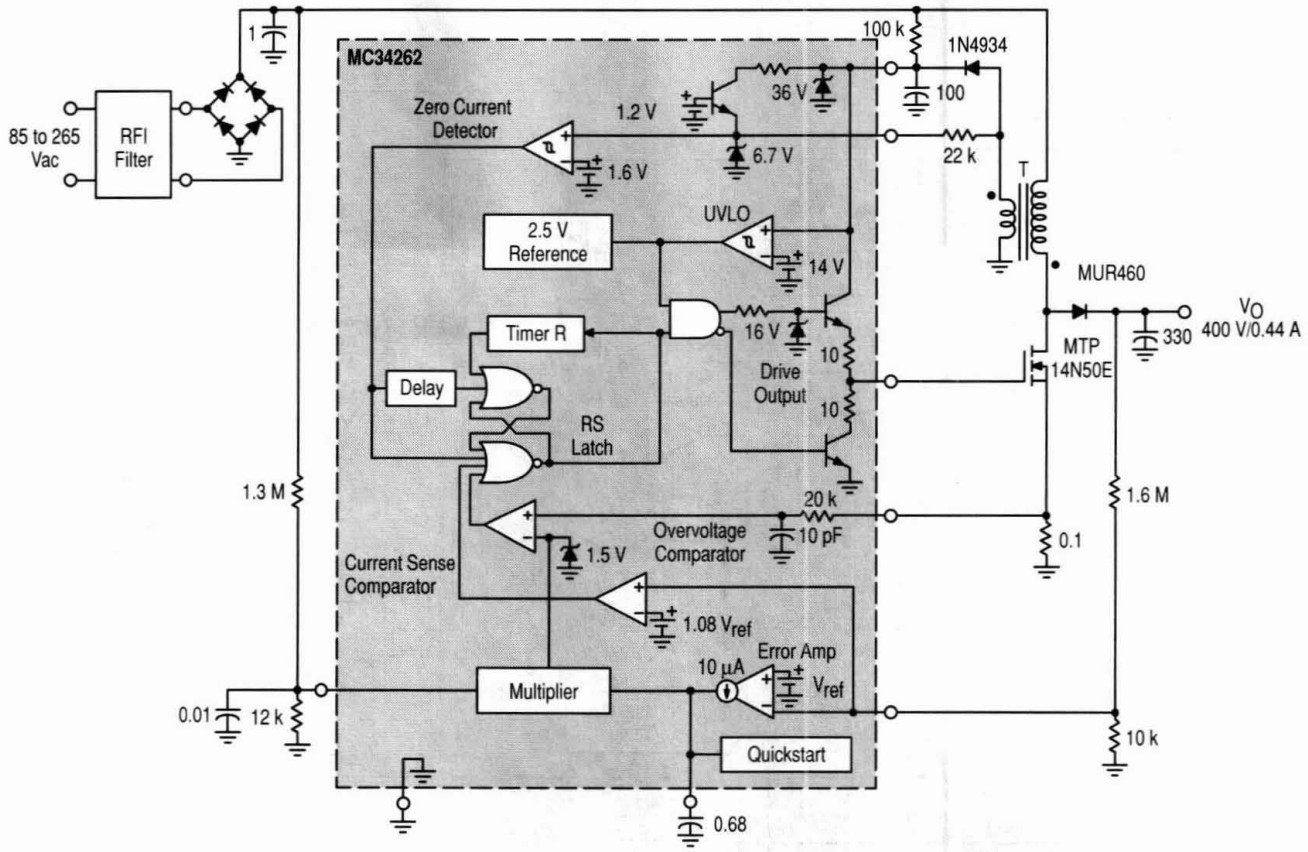

Power Factor Controllers (continued)

MC33368D, P

T_J = –25° to +125°C, Case 751K, 648

The MC33368 is an active power factor controller that functions as a boost preconverter in off–line power supply applications. MC33368 is optimized for low power, high density power supplies requiring minimum board area, reduced component count, and low power dissipation. The narrow body SOIC package provides a small footprint. Integration of the high voltage startup saves approximately 0.7 W of power compared to resistor bootstrapped circuits.

The MC33368 features a watchdog timer to initiate output switching, a one quadrant multiplier to force the line current to follow the instantaneous line voltage, a zero current detector to ensure critical conduction operation, a transconductance error amplifier, a current sensing comparator, a 5.0 V reference, an undervoltage lockout (UVLO) circuit which monitors the V_{CC} supply voltage, and a CMOS driver for driving MOSFETs. The MC33368 also includes a programmable output switching frequency clamp. Protection features include an output overvoltage comparator to minimize overshoot, a restart delay timer, and cycle–by–cycle current limiting.

- Lossless Off–Line Startup
- Output Overvoltage Comparator
- Leading Edge Blanking (LEB) for Noise Immunity
- Watchdog Timer to Initiate Switching
- Restart Delay Timer

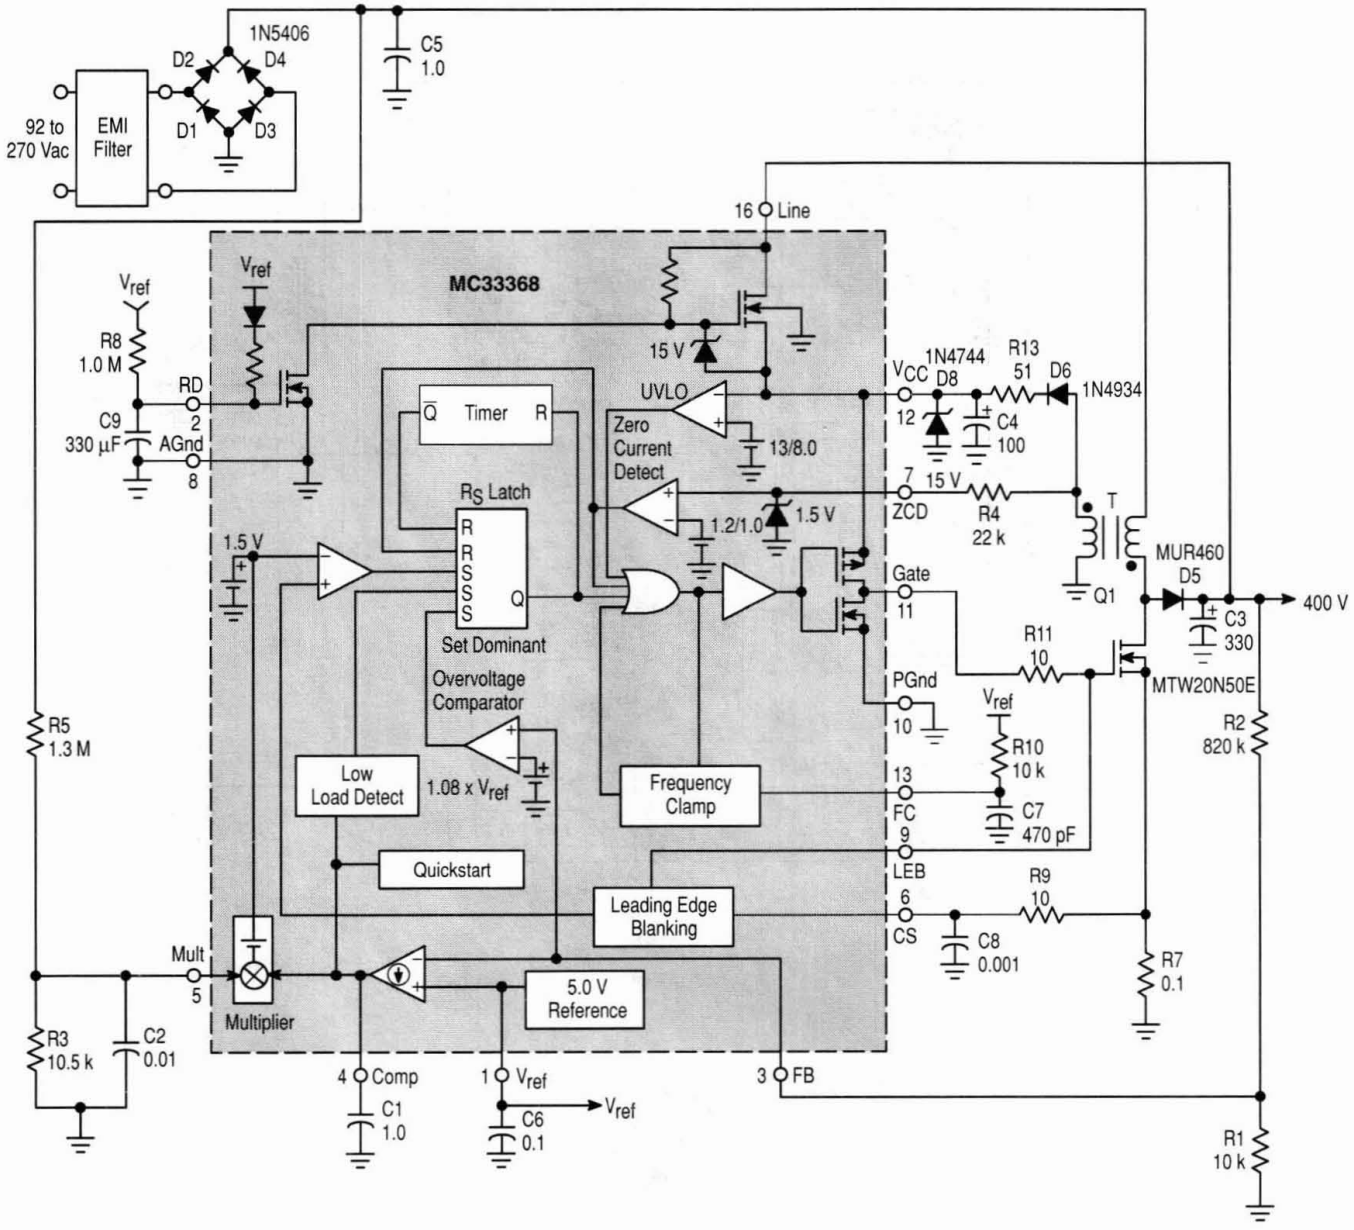

Supervisory Circuits

A variety of Power Supervisory Circuits are offered. Overvoltage sensing circuits which drive "Crowbar" SCRs are provided in several configurations from a low cost three–terminal version to 8–pin devices which provide pin–programmable trip voltages or additional features, such as an indicator output drive and remote activation capability. An over/undervoltage protection circuit is also offered.

Overvoltage Crowbar Sensing Circuit

MC3423P1, D

T_A = 0° to +70°C, Case 626, 751

This device can protect sensitive circuitry from power supply transients or regulator failure when used with an external "Crowbar" SCR. The device senses voltage and compares it to an internal 2.6 V reference. Overvoltage trip is adjustable by means of an external resistive voltage divider. A minimum duration before trip is programmable with an external capacitor. Other features include a 300 mA high current output for driving the gate of a "Crowbar" SCR, an open–collector indicator output and remote activation capability.

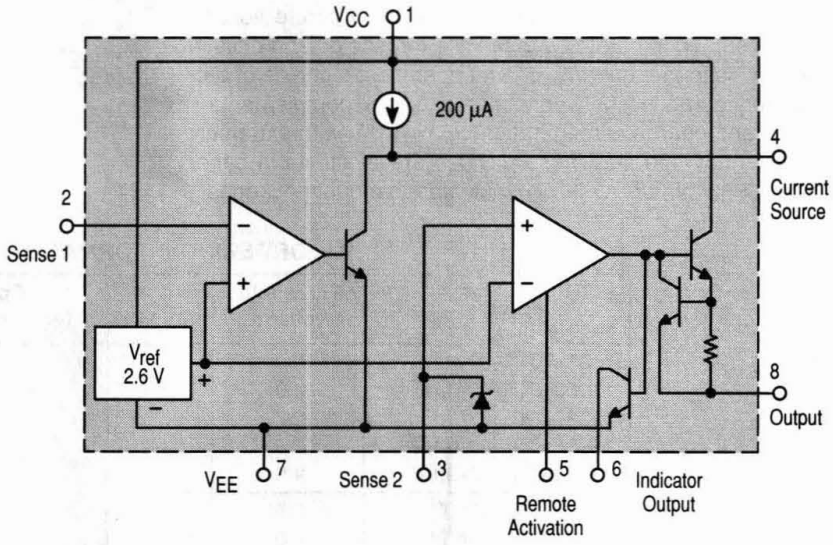

Over/Undervoltage Protection Circuit

MC3425P1

T_A = 0° to +70°C, Case 626

The MC3425 is a power supply supervisory circuit containing all the necessary functions required to monitor over and undervoltage fault conditions. This device features dedicated over and undervoltage sensing channels with independently programmable time delays. The overvoltage channel has a high current drive output for use in conjunction with an external SCR "Crowbar" for shutdown. The undervoltage channel input comparator has hysteresis which is externally programmable, and an open–collector output for fault indication.

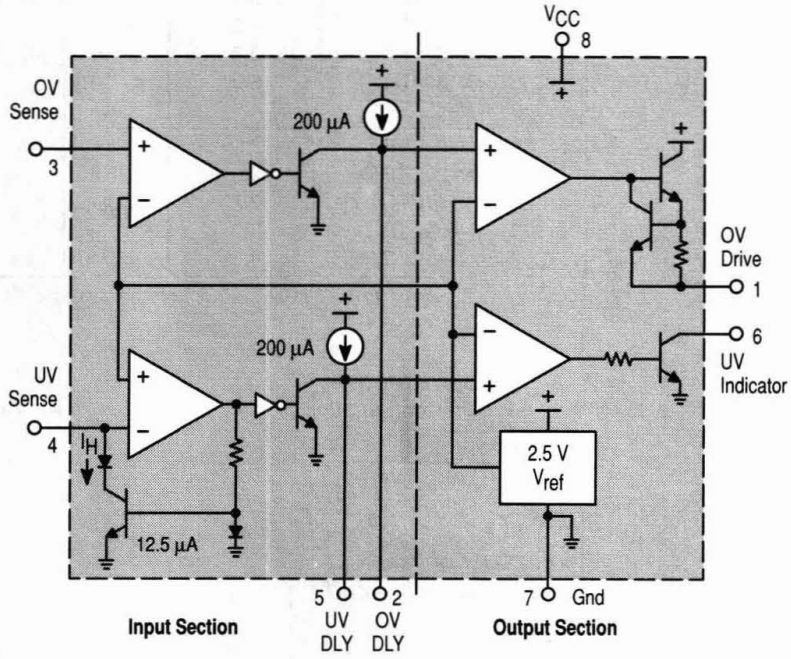

Micropower Undervoltage Sensing Circuits

MC33464H, N

T_A = –30° to +80°C, Case 1213, 1212

The MC33464 series are micropower undervoltage sensing circuits that are specifically designed for use with battery powered microprocessor based systems, where extended battery life is required. A choice of several threshold voltages from 0.9 V to 4.5 V are available. These devices feature a very low quiescent bias current of 0.8 μA typical.

The MC33464 series features a highly accurate voltage reference, a comparator with precise thresholds and built–in hysteresis to prevent erratic reset operation, a choice of output configurations between open drain or complementary MOS, and guaranteed operation below 1.0 V with extremely low standby current. These devices are available in either SOT–89 3–pin or SOT–23 5–pin surface mount packages.

Applications include direct monitoring of the MPU/logic power supply used in portable, appliance, automotive and industrial equipment.

MC33464 Features:

- Extremely Low Standby Current of 0.8 μA at V_{in} = 1.5 V
- Wide Input Voltage Range (0.7 V to 10 V)
- Monitors Power Supply Voltages from 1.1 V to 5.0 V
- High Accuracy Detector Threshold (±2.5%)
- Two $\overline{\text{Reset}}$ Output Types (Open Drain or Complementary Drive)
- Two Surface Mount Packages (SOT–89 or SOT–23 5–Pin)

ORDERING INFORMATION

Device	Threshold Voltage	Type	Operating Temperature Range	Package (Qty/Reel)
MC33464H–09AT1	0.9	Open Drain $\overline{\text{Reset}}$	T_A = –30° to +80°C	SOT–89 (1000)
MC33464H–20AT1	2.0			
MC33464H–27AT1	2.7			
MC33464H–30AT1	3.0			
MC33464H–45AT1	4.5			
MC33464H–09CT1	0.9	Compl. MOS $\overline{\text{Reset}}$		
MC33464H–20CT1	2.0			
MC33464H–27CT1	2.7			
MC33464H–30CT1	3.0			
MC33464H–45CT1	4.5			
MC33464N–09ATR	0.9	Open Drain $\overline{\text{Reset}}$		SOT–23 (3000)
MC33464N–20ATR	2.0			
MC33464N–27ATR	2.7			
MC33464N–30ATR	3.0			
MC33464N–45ATR	4.5			
MC33464N–09CTR	0.9	Compl. MOS $\overline{\text{Reset}}$		
MC33464N–20CTR	2.0			
MC33464N–27CTR	2.7			
MC33464N–30CTR	3.0			
MC33464N–45CTR	4.5			

Other voltages from 0.9 to 6.0 V, in 0.1 V increments, are available. Consult factory for information.

MC33464X–YYATZ
Open Drain Configuration

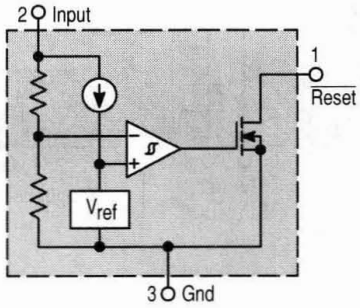

MC33464X–YYCTZ
Complementary Drive Configuration

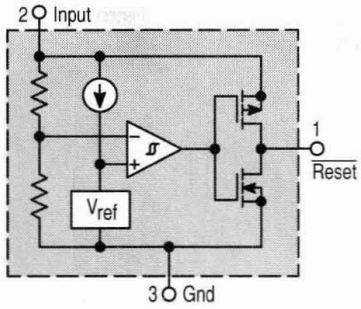

X Denotes Package Type
YY Denotes Threshold Voltage
TZ Denotes Taping Type

Micropower Undervoltage Sensing Circuits with Programmable Output Delay

MC33465N

T_A = –30° to +80°C, Case 1212

The MC33465 series are micropower undervoltage sensing circuits that are specifically designed for use with battery powered microprocessor based systems, where extended battery life is required. A choice of several threshold voltages from 0.9 V to 4.5 V are available. This device features a very low quiescent bias current of 1.0 μA typical.

The MC33465 series features a highly accurate voltage reference, a comparator with precise thresholds and built–in hysteresis to prevent erratic reset operation, a choice of output configurations between open drain or complementary, a time delayed output, which can be programmed by the system designer, and guaranteed operation below 1.0 V with extremely low standby current. This device is available in a SOT–23 5–pin surface mount package.

Applications include direct monitoring of the MPU/logic power supply used in appliance, automotive, industrial and portable equipment.

MC33465 Features:

- Extremely Low Standby Current of 1.0 μA at V_{in} = 3.5 V
- Wide Input Voltage Range (0.7 V to 10 V)
- Monitors Power Supply Voltages from 1.1 V to 5.0 V
- High Accuracy Detector Threshold (±2.5%)
- Two $\overline{\text{Reset}}$ Output Types (Open Drain or Complementary Drive)
- Programmable Output Delay by External Capacitor (100 ms typ. with 0.15 μF)
- Surface Mount Package (SOT–23 5–Pin)
- Convenient Tape and Reel (3000 per Reel)

ORDERING INFORMATION

Device	Threshold Voltage	Type	Operating Temperature Range	Package
MC33465N–09ATR	0.9	Open Drain $\overline{\text{Reset}}$	T_A = –30° to +80°C	SOT–23
MC33465N–20ATR	2.0			
MC33465N–27ATR	2.7			
MC33465N–30ATR	3.0			
MC33465N–45ATR	4.5			
MC33465N–09CTR	0.9	Compl. MOS $\overline{\text{Reset}}$		
MC33465N–20CTR	2.0			
MC33465N–27CTR	2.7			
MC33465N–30CTR	3.0			
MC33465N–45CTR	4.5			

Other voltages from 0.9 to 6.0 V, in 0.1 V increments, are available. Consult factory for information.

MC33465N–YYATR
Open Drain Output Configuration

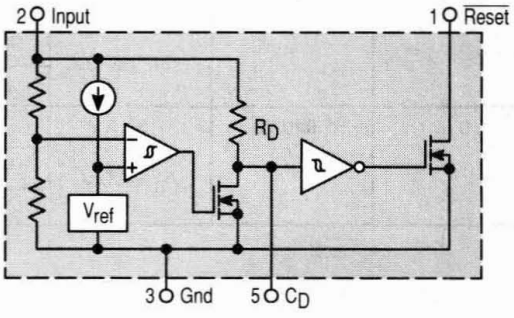

MC33465N–YYCTR
Complementary Output Configuration

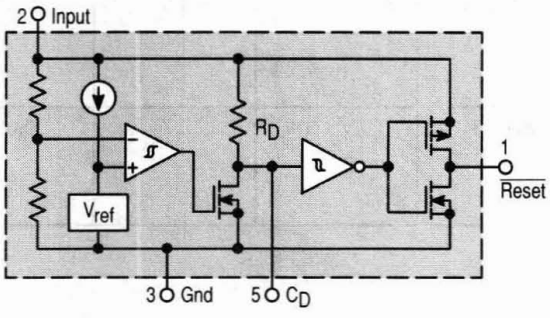

YY Denotes Threshold Voltage

Undervoltage Sensing Circuit

MC34064P–5, D–5, DM–5
T_A = 0° to +70°C, Case 29, 751, 846A

MC33064P–5, D–5, DM–5
T_A = –40° to +85°C, Case 29, 751, 846A

MC34164P–3, P–5, D–3, D–5, DM–3, DM–5
T_A = 0° to +70°C, Case 29, 751, 846A

MC33164P–3, P–5, D–3, D–5, DM–3, DM–5
T_A = –40° to +85°C, Case 29, 751, 846A

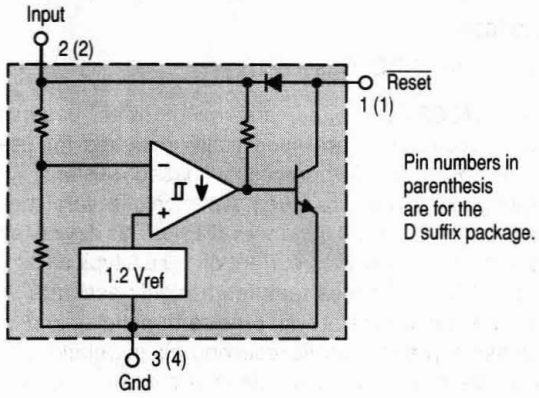

The MC34064 and MC34164 are two families of undervoltage sensing circuits specifically designed for use as reset controllers in microprocessor–based systems. They offer the designer an economical solution for low voltage detection with a single external resistor. Both parts feature a trimmed bandgap reference, and a comparator with precise thresholds and built–in hysteresis to prevent erratic reset operation.

The two families of undervoltage sensing circuits taken together, cover the needs of the most commonly specified power supplies used in MCU/MPU systems. Key parameter specifications of the MC34164 family were chosen to complement the MC34064 series. The table summarizes critical parameters of both families. The MC34064 fulfills the needs of a 5.0 V ± 5% system and features a tighter hysteresis specification. The MC34164 series covers 5.0 V ± 10% and 3.0 V ± 5% power supplies with significantly lower power consumption, making them ideal for applications where extended battery life is required such as consumer products or hand held equipment.

Applications include direct monitoring of the 5.0 V MPU/logic power supply used in appliance, automotive, consumer, and industrial equipment.

The MC34164 is specifically designed for battery powered applications where low bias current (1/25th of the MC34064's) is an important characteristic.

Table 14. Undervoltage Sense/Reset Controller Features

MC34X64 devices are specified to operate from 0° to +70°C, and MC33X64 devices operate from –40° to +85°C.

Device	Standard Power Supply Supported	Typical Threshold Voltage (V)	Typical Hysteresis Voltage (V)	Minimum Output Sink Current (mA)	Power Supply Input Voltage Range (V)	Maximum Quiescent Input Current	Suffix/ Package
MC34064/MC33064	5.0 V ± 5%	4.6	0.02	10	1.0 to 10	500 µA @ V_{in} = 5.0 V	P–5/29
							D–5/751
							DM–5/846A
MC34164/MC33164	5.0 V ± 10%	4.3	0.09	7.0	1.0 to 12	20 µA @ V_{in} = 5.0 V	P–5/29
							D–5/751
							DM–5/846A
MC34164/MC33164	3.0 V ± 5%	2.7	0.06	6.0	1.0 to 12	15 µA @ V_{in} = 3.0 V	P–3/29
							D–3/751
							DM–3/846A

Universal Voltage Monitor

MC34161P, D

T_A = 0° to +70°C, Case 626, 751

MC33161P, D

T_A = –40° to +85°C, Case 626, 751

The MC34161, MC33161 series are universal voltage monitors intended for use in a wide variety of voltage sensing applications. These devices offer the circuit designer an economical solution for positive and negative voltage detection. The circuit consists of two comparator channels each with hysteresis, a unique Mode Select Input for channel programming, a pinned out 2.54 V reference, and two open collector outputs capable of sinking in excess of 10 mA. Each comparator channel can be configured as either inverting or noninverting by the Mode Select Input. This allows over, under, and window detection of positive and negative voltages. The minimum supply voltage needed for these devices to be fully functional is 2.0 V for positive voltage sensing and 4.0 V for negative voltage sensing.

Applications include direct monitoring of positive and negative voltages used in appliance, automotive, consumer, and industrial equipment.

- Unique Mode Select Input Allows Channel Programming
- Over, Under, and Window Voltage Detection
- Positive and Negative Voltage Detection
- Fully Functional at 2.0 V for Positive Voltage Sensing and 4.0 V for Negative Voltage Sensing
- Pinned Out 2.54 V Reference with Current Limit Protection
- Low Standby Current
- Open Collector Outputs for Enhanced Device Flexibility

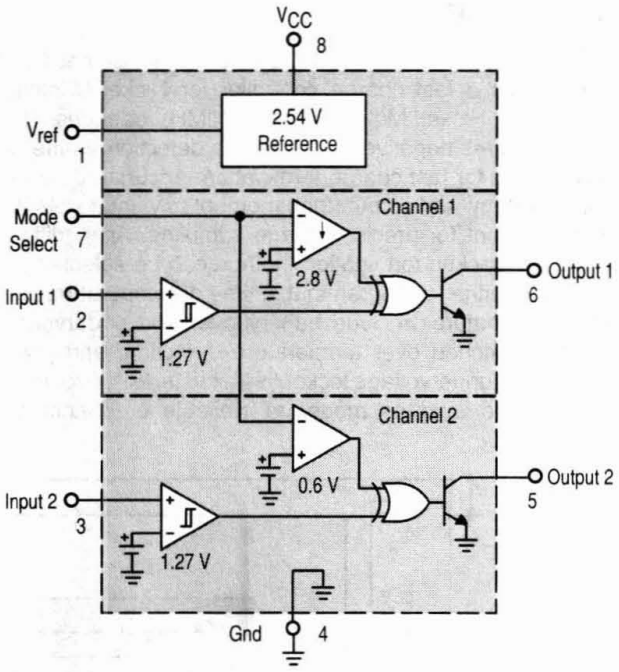

TRUTH TABLE

Mode Select Pin 7	Input 1 Pin 2	Output 1 Pin 6	Input 2 Pin 3	Output 2 Pin 5	Comments
GND	0 1	0 1	0 1	0 1	Channels 1 & 2: Noninverting
V_{ref}	0 1	0 1	0 1	1 0	Channel 1: Noninverting Channel 2: Inverting
V_{CC} (>2.0 V)	0 1	1 0	0 1	1 0	Channels 1 & 2: Inverting

POSITIVE AND NEGATIVE OVERVOLTAGE DETECTOR

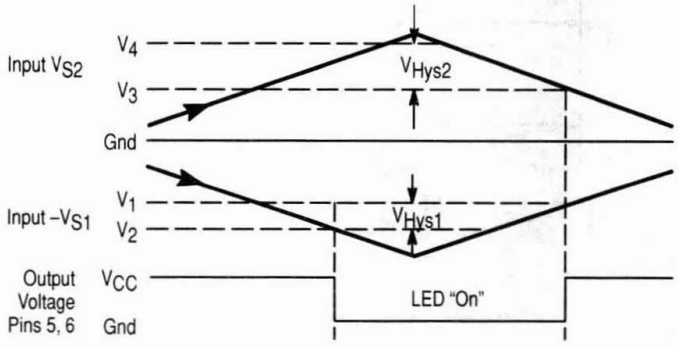

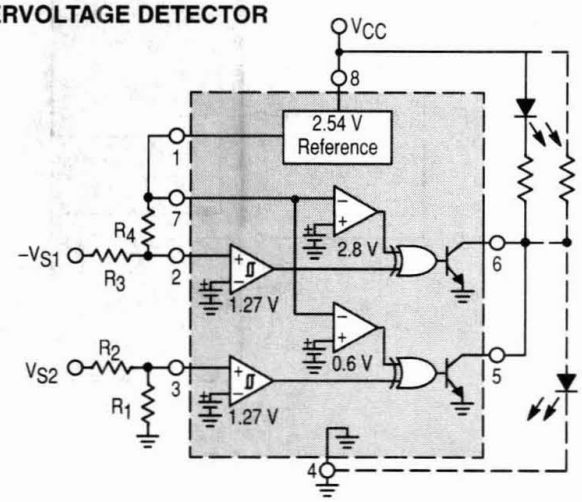

Battery Management Circuits

Battery Charger ICs

Battery Fast Charge Controller

MC33340P, D

T_A = –25° to +85°C, Case 626, 751

The MC33340 is a monolithic control IC that is specifically designed as a fast charge controller for Nickel Cadmium (NiCd) and Nickel Metal Hydride (NiMH) batteries. This device features negative slope voltage detection as the primary means for fast charge termination. Accurate detection is ensured by an output that momentarily interrupts the charge current for precise voltage sampling. An additional secondary backup termination method can be selected that consists of either a programmable time or temperature limit. Protective features include battery over and undervoltage detection, latched over temperature detection, and power supply input undervoltage lockout with hysteresis. Provisions for entering a rapid test mode are available to enhance end product testing. This device is available in an economical 8–lead surface mount package.

- Negative Slope Voltage Detection with 4.0 mV Sensitivity
- Accurate Zero Current Battery Voltage Sensing
- High Noise Immunity with Synchronous VFC/Logic
- Programmable 1 to 4 Hour Fast Charge Time Limit
- Programmable Over/Under Temperature Detection
- Battery Over and Undervoltage Fast Charge Protection
- Rapid System Test Mode
- Power Supply Input Undervoltage Lockout with Hysteresis
- Operating Voltage Range of 3.0 V to 18 V

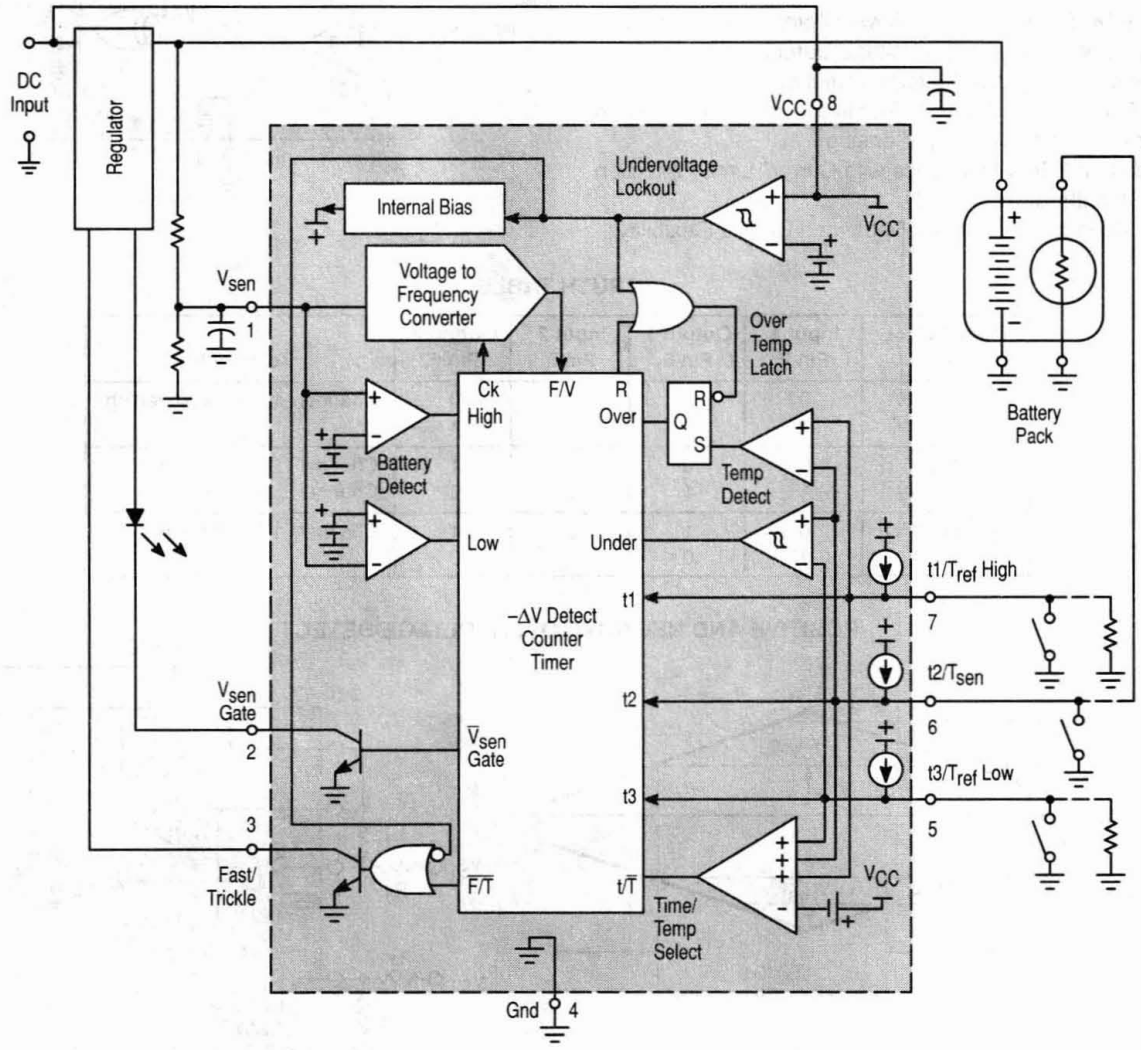

Battery Charger ICs (continued)

Power Supply Battery Charger Regulation Control Circuit

MC33341P, D

T_A = –25° to +85°C, Case 626, 751

The MC33341 is a monolithic regulation control circuit that is specifically designed to close the voltage and current feedback loops in power supply and battery charger applications. This device features the unique ability to perform source high–side, load high–side, source low–side, and load low–side current sensing, each with either an internally fixed or externally adjustable threshold. The various current sensing modes are accomplished by a means of selectively using the internal differential amplifier, inverting amplifier, or a direct input path. Positive voltage sensing is performed by an internal voltage amplifier. The voltage amplifier threshold is internally fixed and can be externally adjusted in all low–side current sensing applications. An active high drive output is provided to directly interface with economical optoisolators for isolated output power systems. This device is available in 8–lead dual–in–line and surface mount packages.

- Differential Amplifier for High–Side Source and Load Current Sensing
- Inverting Amplifier for Source Return Low–Side Current Sensing
- Noninverting Input Path for Load Low–Side Current Sensing
- Fixed or Adjustable Current Threshold in all Current Sensing Modes
- Positive Voltage Sensing in all Current Sensing Modes
- Fixed Voltage Threshold in all Current Sensing Modes
- Adjustable Voltage Threshold in all Low–Side Current Sensing Modes
- Output Driver Directly Interfaces with Economical Optoisolators
- Operating Voltage Range of 2.3 V to 16 V

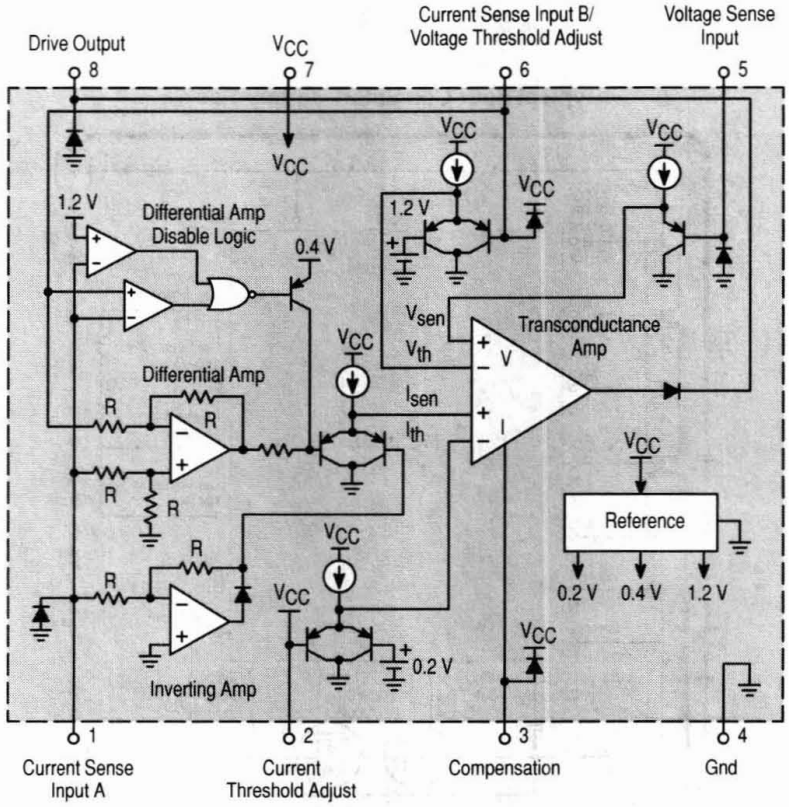

Battery Pack ICs

Lithium Battery Protection Circuit for One to Four Cell Battery Packs

MC33345DW, DTB

T_A = –25° to +85°C, Case 751D, 948E

The MC33345 is a monolithic lithium battery protection circuit that is designed to enhance the useful operating life of one to four cell rechargeable battery packs. Cell protection features consist of independently programmable charge and discharge limits for both voltage and current with a delayed current shutdown, cell voltage balancing with on–chip balancing resistors, and a virtually zero current sleepmode state when the cells are discharged. Additional features include an on–chip charge pump for reduced MOSFET losses while charging or discharging a low cell voltage battery pack, and the programmability for a one to four cell battery pack. This protection circuit requires a minimum number of external components and is targeted for inclusion within the battery pack. The MC33345 is available in standard and low profile 20 lead surface mount packages.

- Independently Programmable Charge and Discharge Limits for Both Voltage and Current
- Charge and Discharge Current Limit Detection with Delayed Shutdown
- Cell Voltage Balancing
- On–Chip Balancing Resistors
- Virtually Zero Current Sleepmode State when Cells are Discharged
- Charge Pump for Reduced Losses with a Low Cell Voltage Battery Pack
- Programmable for One, Two, Three or Four Cell Applications
- Minimum External Components for Inclusion within the Battery Pack
- Available in Low Profile Surface Mount Packages

Typical Four Cell Smart Battery Pack

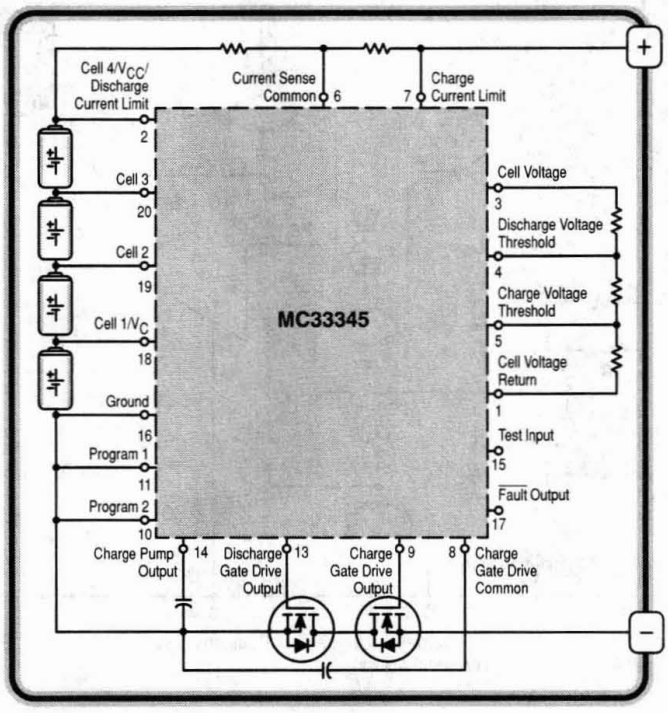

Battery Pack ICs (continued)

Lithium Battery Protection Circuit for Three or Four Cell Battery Packs

MC33346DW, DTB

T_A = –40° to +85°C, Case 751E, 948H

The MC33346 is a monolithic lithium battery protection circuit that is designed to enhance the useful operating life of three or four cell rechargeable battery packs. Cell protection features consist of independently programmable charge and discharge limits for both voltage and current with a delayed current shutdown, cell voltage balancing with on–chip balancing resistors, and virtually zero current sleepmode state when the cells are discharged. Additional features consists of a six wire microcontroller interface bus that can selectively provide a pulse output that represents the internal reference voltage, cell voltage, cell current and temperature, as well as control the states of four internal balancing and two external MOSFET switches. A microcontroller time reference output is available for gas gauge implementation. This protection circuit requires a minimum number of external components and is targeted for inclusion within the battery pack. The MC33346 is available in standard and low profile 24 lead surface mount packages.

- Independently Programmable Charge and Discharge Limits for Both Voltage and Current
- Delayed Current Shutdown
- Cell Voltage Balancing with On–Chip Resistors
- Six Wire Microcontroller Interface Bus
- Data Output for Reference, Voltage, Current, and Temperature
- Microcontroller Time Reference Output for Gas Gauging
- Virtually Zero Current Sleepmode State when Cells are Discharged
- Programmable for Three or Four Cell Applications
- Minimum External Components for Inclusion within the Battery Pack
- Available in Low Profile Surface Mount Packages

Typical Four Cell Smart Battery Pack

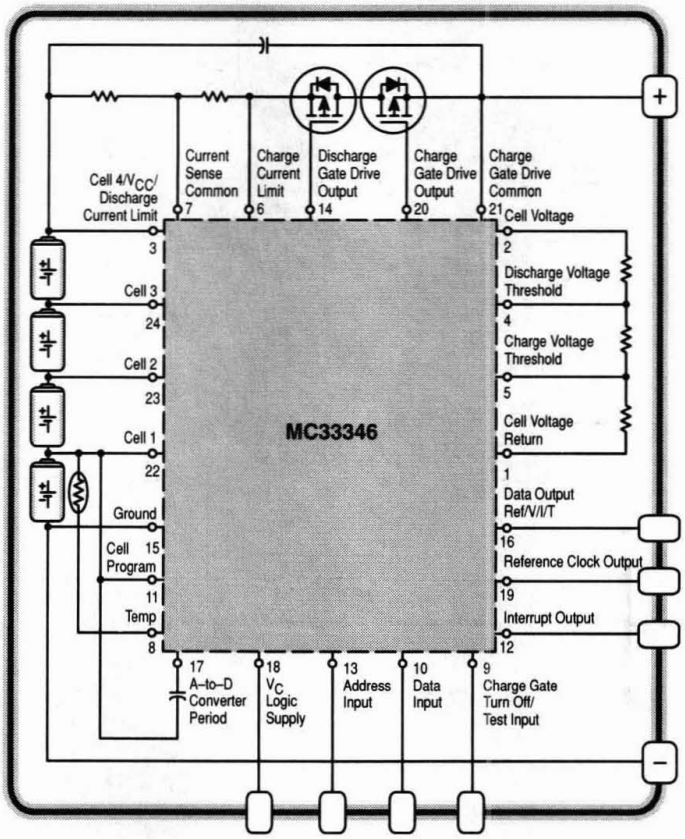

Battery Pack ICs (continued)

Lithium Battery Protection Circuit for One or Two Cell Battery Packs

MC33347D, DTB

T_A = –25° to +85°C, Case 751B, 948F

The MC33347 is a monolithic lithium battery protection circuit that is designed to enhance the useful operating life of one or two cell rechargeable battery packs. Cell protection features consist of independently programmable charge and discharge limits for both voltage and current with a delayed current shutdown, continuous cell voltage balancing with the choice of on–chip or external balancing resistors, and a virtually zero current sleepmode state when the cells are discharged. Additional features include an on–chip charge pump for reduced MOSFET losses while charging or discharging a low cell voltage battery pack, and the programmability for one or two cell battery pack. This protection circuit requires a minimum number of external components and is targeted for inclusion within the battery pack. This MC33347 is available in standard and low profile 16 lead surface mount packages.

- Independently Programmable Charge and Discharge Limits for Both Voltage and Current
- Charge and Discharge Current Limit Detection with Delayed Shutdown
- Continuous Cell Voltage Balancing
- On–Chip or External Balancing Resistors
- Virtually Zero Current Sleepmode State when Cells are Discharged
- Charge Pump for Reduced Losses with a Low Cell Voltage Battery Pack
- Programmable for One or Two Cell Applications
- Minimum External Components for Inclusion within the Battery Pack
- Available in Low Profile Surface Mount Packages

Typical Two Cell Smart Battery Pack

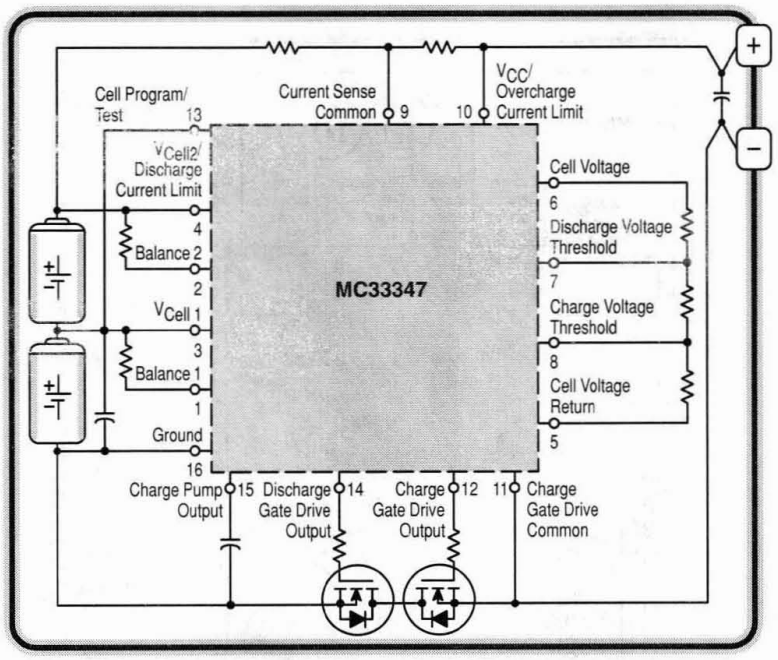

Battery Pack ICs (continued)

Lithium Battery Protection Circuit for One Cell Battery Packs

MC33348D

T_A = –25° to +85°C, Case 751

The MC33348 is a monolithic lithium battery protection circuit that is designed to enhance the useful operating life of a one cell rechargeable battery pack. Cell protection features a consist of internally trimmed charge and discharge voltage limits, discharge current limit detection with a delayed shutdown, and a virtually zero current sleepmode state when the cell is discharged. An additional feature includes an on–chip charge pump for reduced MOSFET losses while charging or discharging a low cell voltage battery pack. This protection circuit requires a minimum number of external components and is targeted for inclusion within the battery pack. This MC33348 is available in a standard 8 lead surface mount package.

- Internally Trimmed Charge and Discharge Voltage Limits
- Discharge Current Limit Detection with Delayed Shutdown
- Virtually Zero Current Sleepmode State when Cells are Discharged
- Charge Pump for Reduced Losses with a Low Cell Voltage Battery Pack
- Dedicated for One Cell Applications
- Minimum Components for Inclusion within the Battery Pack
- Available in Standard 8 Lead Surface Mount Package

Typical One Cell Smart Battery Pack

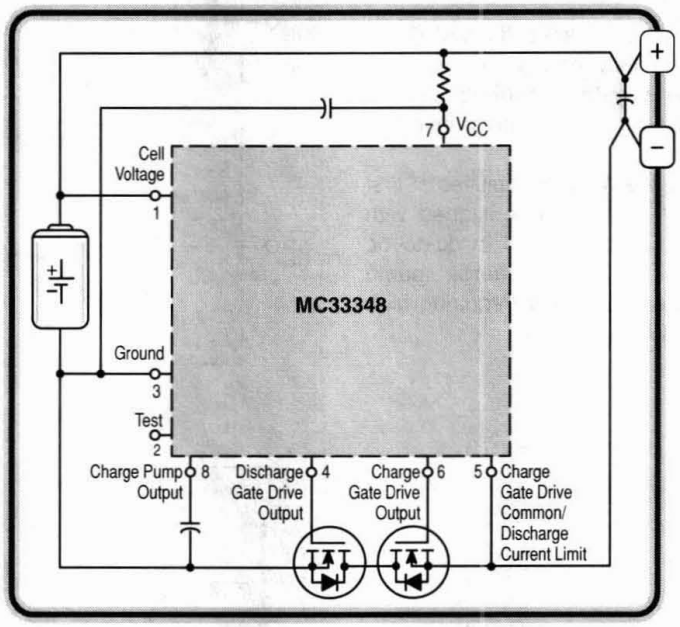

ORDERING INFORMATION

Device	Charge Overvoltage Threshold (V)	Charge Overvoltage Hysteresis (mV)	Discharge Undervoltage Threshold (V)	Discharge Current Limit Threshold (mV)	Operating Temperature Range	Package
MC33348D–1	4.20	300	2.25	400	T_A = –25° to +85°C	SO–8
MC33348D–2				200		
MC33348D–3	4.25		2.28	400		
MC33348D–4				200		
MC33348D–5	4.35		2.30	400		
MC33348D–6				200		

NOTE: Additional threshold limit options can be made available. Consult factory for information.

MOSFET/IGBT Drivers

High Speed Dual Drivers

(Inverting)

MC34151P, D

T_A = 0° to +70°C, Case 626, 751

MC33151P, D

T_A = –40° to +85°C, Case 626, 751

(Noninverting)

MC34152P, D

T_A = 0° to +70°C, Case 626, 751

MC33152P, D

T_A = –40° to +85°C, Case 626, 751

These two series of high speed dual MOSFET driver ICs are specifically designed for applications requiring low current digital circuitry to drive large capacitive loads at high slew rates. Both series feature a unique undervoltage lockout function which puts the outputs in a defined low state in an undervoltage condition. In addition, the low "on" state resistance of these bipolar drivers allows significantly higher output currents at lower supply voltages than with competing drivers using CMOS technology.

The MC34151 series is pin–compatible with the MMH0026 and DS0026 dual MOS clock drivers, and can be used as drop–in replacements to upgrade system performance. The MC34152 noninverting series is a mirror image of the inverting MC34151 series.

These devices can enhance the drive capabilities of first generation switching regulators or systems designed with CMOS/TTL logic devices. They can be used in dc–to–dc converters, motor controllers, capacitor charge pump converters, or virtually any other application requiring high speed operation of power MOSFETs.

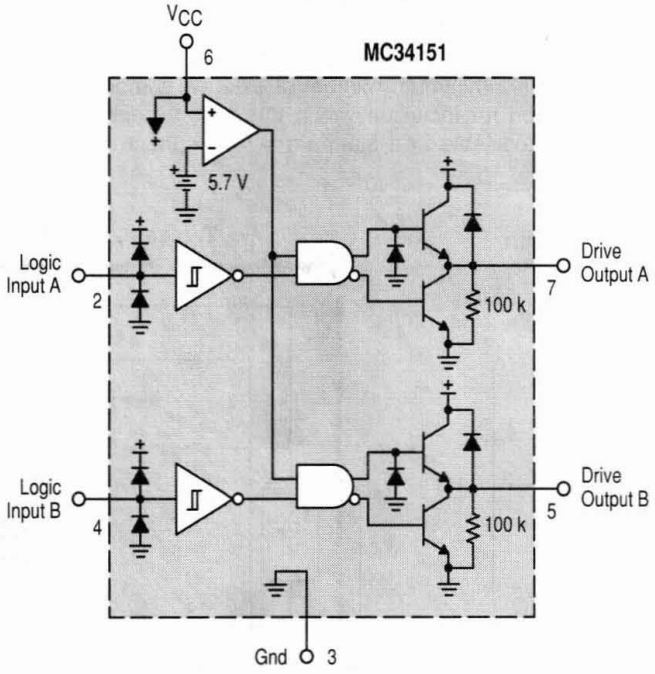

Single IGBT Driver

MC33153P, D

T_A = –40° to +105°C, Case 626, 751

The MC33153 is specifically designed to drive the gate of an IGBT used for ac induction motors. It can be used with discrete IGBTs and IBGT modules up to 100 A.

Typical applications are ac induction motor control, brushless dc motor control, and uninterruptable power supplies.

These devices are available in dual–in–line and surface mount packages and include the following features:

- High Current Output Stage : 1.0 A Source – 2.0 A Sink
- Protection Circuits for Both Conventional and SenseIGBTs
- Current Source for Blanking Timing
- Protection Against Overcurrent and Short Circuit
- Undervoltage Lockout Optimized for IGBT's
- Negative Gate Drive Capability

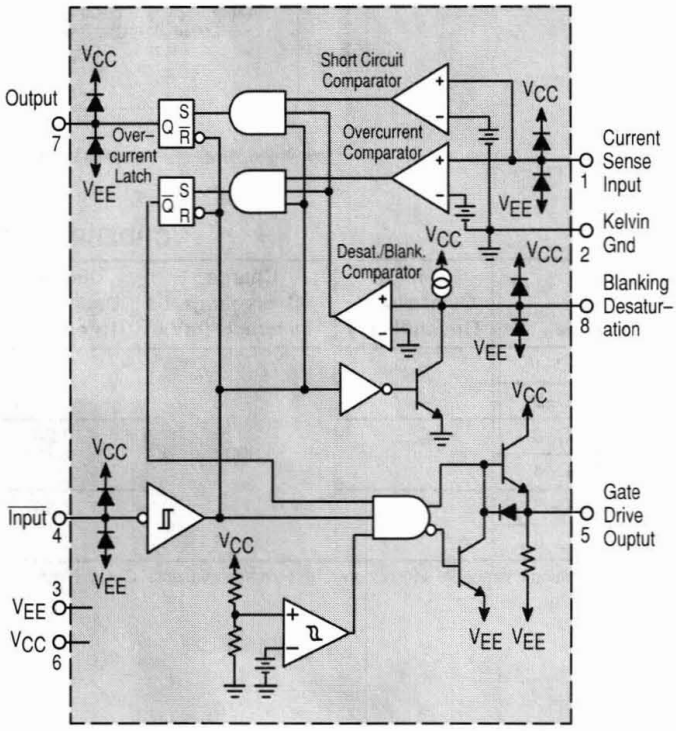

Single IGBT Gate Driver

MC33154D, P

T_A = –40° to +85°C, Case 626, 751

The MC33154 is specifically designed as an IGBT driver for high power applications including ac induction motor control, brushless dc motor control and uninterruptible power supplies.

The MC33154 is similar to the MC33153, except that the output drive is in–phase with the logic input, the output source current drive is four times higher and the supply voltage rating is higher.

Although designed for driving discrete and module IGBTs, this device offers a cost effective solution for driving power MOSFETs and Bipolar Transistors.

These devices are available in dual–in–line and surface mount packages and include the following features:

- High Current Output Stage: 4.0 A Source/2.0 A Sink
- Protection Circuits for Both Conventional and Sense IGBTs
- Programmable Fault Blanking Time
- Protection against Overcurrent and Short Circuit
- Undervoltage Lockout Optimzed for IGBTs
- Negative Gate Drive Capability
- Cost Effectively Drives Power MOSFETs and Bipolar Transistors

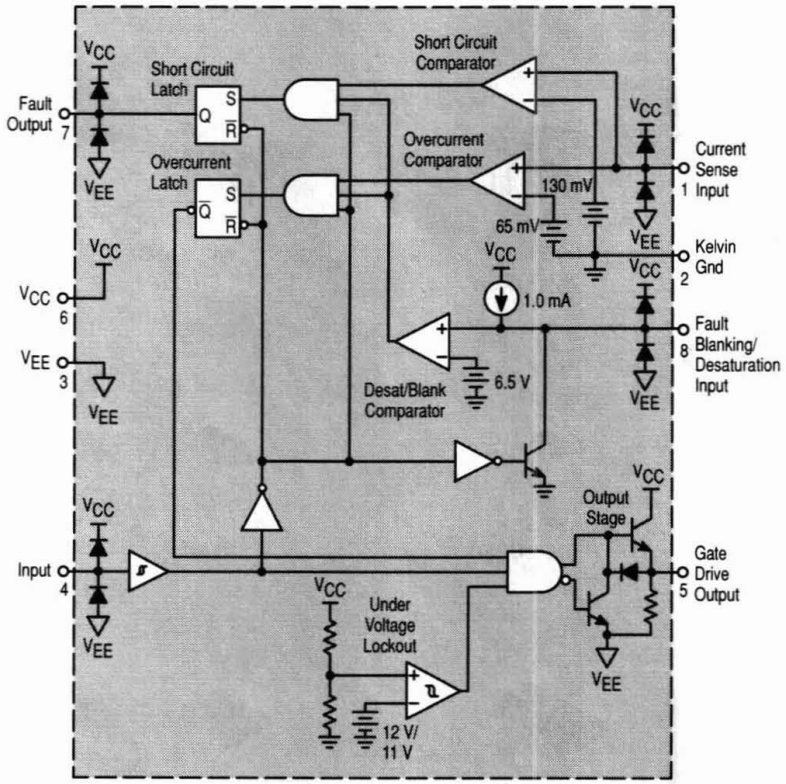

Power Supply Circuits Package Overview

CASE 29
P, Z SUFFIX



CASE 221A
T SUFFIX



CASE 314A
TH SUFFIX



CASE 314B
TV SUFFIX



CASE 314D
T SUFFIX

CASE 318E
ST SUFFIX

CASE 369
DT–1 SUFFIX

CASE 369A
DT SUFFIX

CASE 626
N, P, P1 SUFFIX



CASE 646
P SUFFIX

CASES 648, 648C
N, P, P2 SUFFIX



CASE 648E
P SUFFIX



CASE 707
N SUFFIX

CASE 751
D, D1, D2 SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW SUFFIX

CASE 751E
DW SUFFIX

CASE 751G
DW SUFFIX

CASE 751K
D SUFFIX

Power Supply Circuits Package Overview (continued)

CASE 751N
DW SUFFIX



CASE 775
FN SUFFIX

CASE 846A
DM SUFFIX

CASE 873A
FB SUFFIX

CASE 936
D2T SUFFIX

CASE 936A
D2T SUFFIX

CASE 948E
DTB SUFFIX

CASE 948F
DTB SUFFIX

CASE 948G
DTB SUFFIX

CASE 948H
DTB SUFFIX

CASE 1212
N SUFFIX

CASE 1213
H SUFFIX

Power/Motor Control Circuits

In Brief . . .

With the expansion of electronics into more and more mechanical systems, there comes an increasing demand for simple but intelligent circuits that can blend these two technologies. In the past, the task of power/motor control was once accomplished with discrete devices. But today this task is being performed by bipolar IC technology due to cost, size, and reliability constraints. Motorola offers integrated circuits designed to anticipate the requirements for both simple and sophisticated control systems, while providing cost effective solutions to meet the needs of the applications.

	Page
Power Controllers	4.3–2
Zero Voltage Switch	4.3–2
Zero Voltage Controller	4.3–3
High–Side Driver Switch	4.3–3
Motor Controllers	4.3–4
Brushless DC Motor Controllers	4.3–4
Closed Loop Brushless Motor Adapter	4.3–7
DC Servo Motor Controller/Driver	4.3–8
Stepper Motor Driver	4.3–9
Universal Motor Speed Controller	4.3–10
Package Overview	4.3–11

Power Controllers

An assortment of battery and ac line–operated control ICs for specific applications are shown. They are designed to enhance system performance and reduce complexity in a wide variety of control applications.

Zero Voltage Switch

CA3059

T_A = –40° to +85°C, Case 646

This device is designed for thyristor control in a variety of ac power switching applications for ac input voltages of 24 V, 120 V, 208/230 V, and 227 V @ 50/60 Hz.

- **Limiter–Power Supply** – Allows operation directly from an ac line.
- **Differential "On"/"Off" Sensing Amplifier** – Tests for condition of external sensors or input command signals. Proportional control capability or hysteresis may be implemented.
- **Zero–Crossing Detector** – Synchronizes the output pulses to the zero voltage point of the ac cycle. Eliminates RFI when used with resistive loads.
- **Triac Drive** – Supplies high current pulses to the external power controlling thyristor.
- **Protection Circuit** – A built–in circuit may be actuated, if the sensor opens or shorts, to remove the drive circuit from the external triac.
- **Inhibit Capability** – Thyristor firing may be inhibited by the action of an internal diode gate.
- **High Power DC Comparator Operation** – Operation in this mode is accomplished by connecting Pin 7 to 12 (thus overriding the action of the zero–crossing detector).

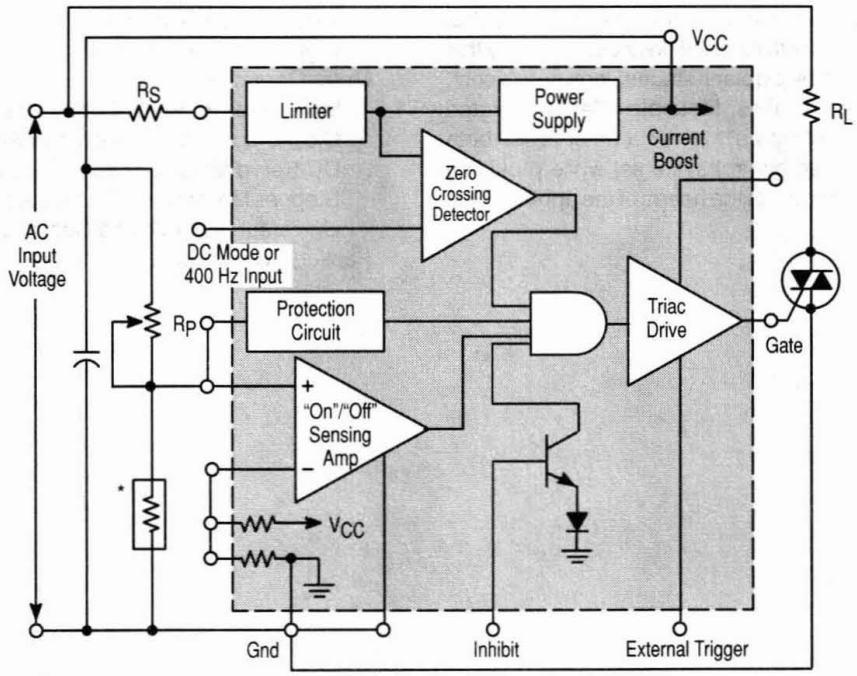

*NTC Sensor

Zero Voltage Controller

UAA2016P, D

T_A = –20° to +85°C, Case 626, 751

The UAA2016 is designed to drive triacs with the Zero Voltage technique which allows RFI free power regulation of resistive loads. Operating directly on the ac power line, its main application is the precision regulation of electrical heating systems such as panel heaters or irons.

A built–in digital sawtooth waveform permits proportional temperature regulation action over a ±1°C band around the set point. For energy savings there is a programmable temperature reduction function, and for security, a sensor failsafe inhibits output pulses when the sensor connection is broken. Preset temperature (i.e., defrost) application is also possible. In applications where high hysteresis is needed, its value can be adjusted up to 5°C around the set point. All these features are implemented with a very low external component count.

- Zero Voltage Switch for Triacs, up to 2.0 kW (MAC212A8)
- Direct AC Line Operation
- Proportional Regulation of Temperature over a 1°C Band
- Programmable Temperature Reduction
- Preset Temperature (i.e., Defrost)
- Sensor Failsafe
- Adjustable Hysteresis
- Low External Component Count

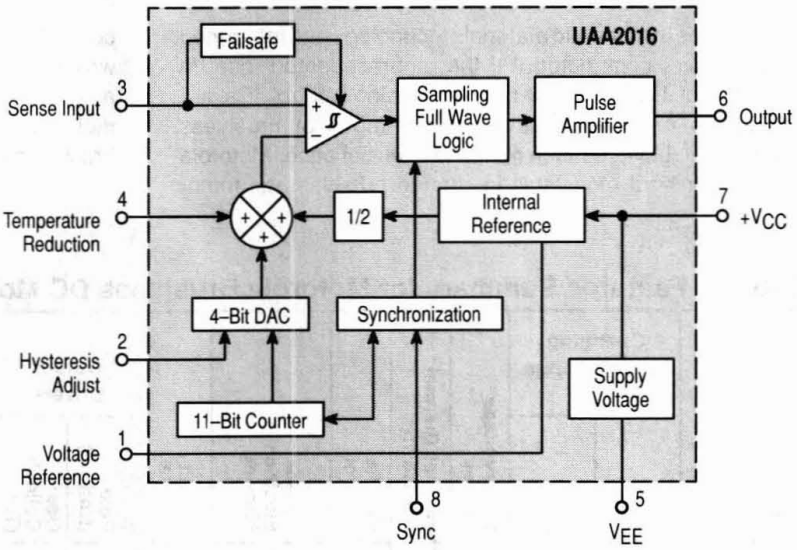

High–Side Driver Switch

MC3399T, DW

T_J = –40° to +150°C, Case 314D, 751G

The MC3399T is a high side driver switch that is designed to drive loads from the positive side of the power supply. The output is controlled by a TTL compatible Enable pin. In the "on" state, the device exhibits very low saturation voltages for load currents in excess of 750 mA. The device also protects the load from positive or negative–going high voltage transients by becoming an open circuit and isolating the transient for its duration from the load.

The MC3399T is fabricated on a Power BiMOS process which combines the best features of Bipolar and MOS technologies. The mixed technology provides higher gain PNP output devices and results in Power Integrated Circuits with reduced quiescent current.

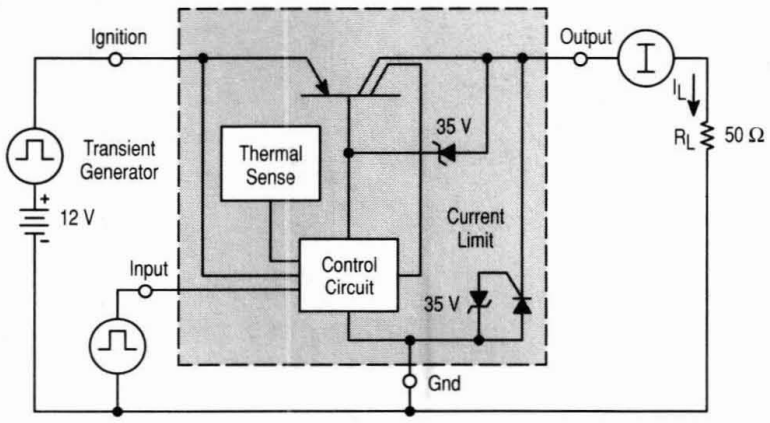

Motor Controllers

This section contains integrated circuits designed for cost effective control of specific motor families. Included are controllers for brushless, dc servo, stepper, and universal type motors.

Brushless DC Motor Controllers

Advances in magnetic materials technology and integrated circuits have contributed to the unprecedented rise in popularity of brushless dc motors. Analog control ICs are making the many features and advantages of brushless motors available at a much more economical price. Motorola offers a family of monolithic integrated brushless dc motor controllers. These ICs provide a choice of control functions which allow many system features to be easily implemented at a fraction of the cost of discrete solutions. The following table summarizes and compares the features of Motorola's brushless motor controllers.

Table 1. Features Summary for Motorola Brushless DC Motor Controllers

Device	Operating Voltage Range (V)		Undervoltage Lockout	Internal Thermal Shutdown	Fwd/Rev Control	Sensor Electrical Phasing	Output Enable	Output Drivers		6.25 V Reference Output	Current Sense Comparator Input(s)	Error Amplifier	FAULT Output	Separate Drive V_C	Brake Input	Suffix/ Package
	V_{CC}	V_C						Totem Pole (Bottom)	Open Collector (Top)							
MC33033	10–30	–	✓	✓	✓	60°/300° and 120°/240°	✓	✓	✓	✓	Noninv. Only	✓	–	–	–	P/738, DW/751D
MC33035	10–40	10–30	✓	✓	✓		✓	✓	✓	✓	Noninv. and Inv.	✓	✓	✓	✓	P/724, DW/751E

MC33033P, DW

T_A = –40° to +85°C, Case 738, 751D

The MC33033 is a lower cost second generation brushless dc motor controller which has evolved from the full featured MC33035 controller. The MC33033 contains all of the active functions needed to implement a low cost open loop motor control system. This IC has all of the key control and protection functions of the two full featured devices with the following secondary features deleted: separate drive–circuit supply and ground pins, the brake input, and the fault output signal. Like its MC33035 predecessor, the MC33033 has a control pin which allows the user to select 60°/300° or 120°/240° sensor electrical phasings.

Because of its low cost, the MC33033 can efficiently be used to control brush dc motors as well as brushless. A brush dc motor can be driven using two of the three drive output phases provided in the MC33033, while the Hall sensor input pins are selectively tied to V_{ref} or ground. Other features such as forward/reverse, output enable, speed control, current limiting, undervoltage lockout and internal thermal shutdown will still remain functional.

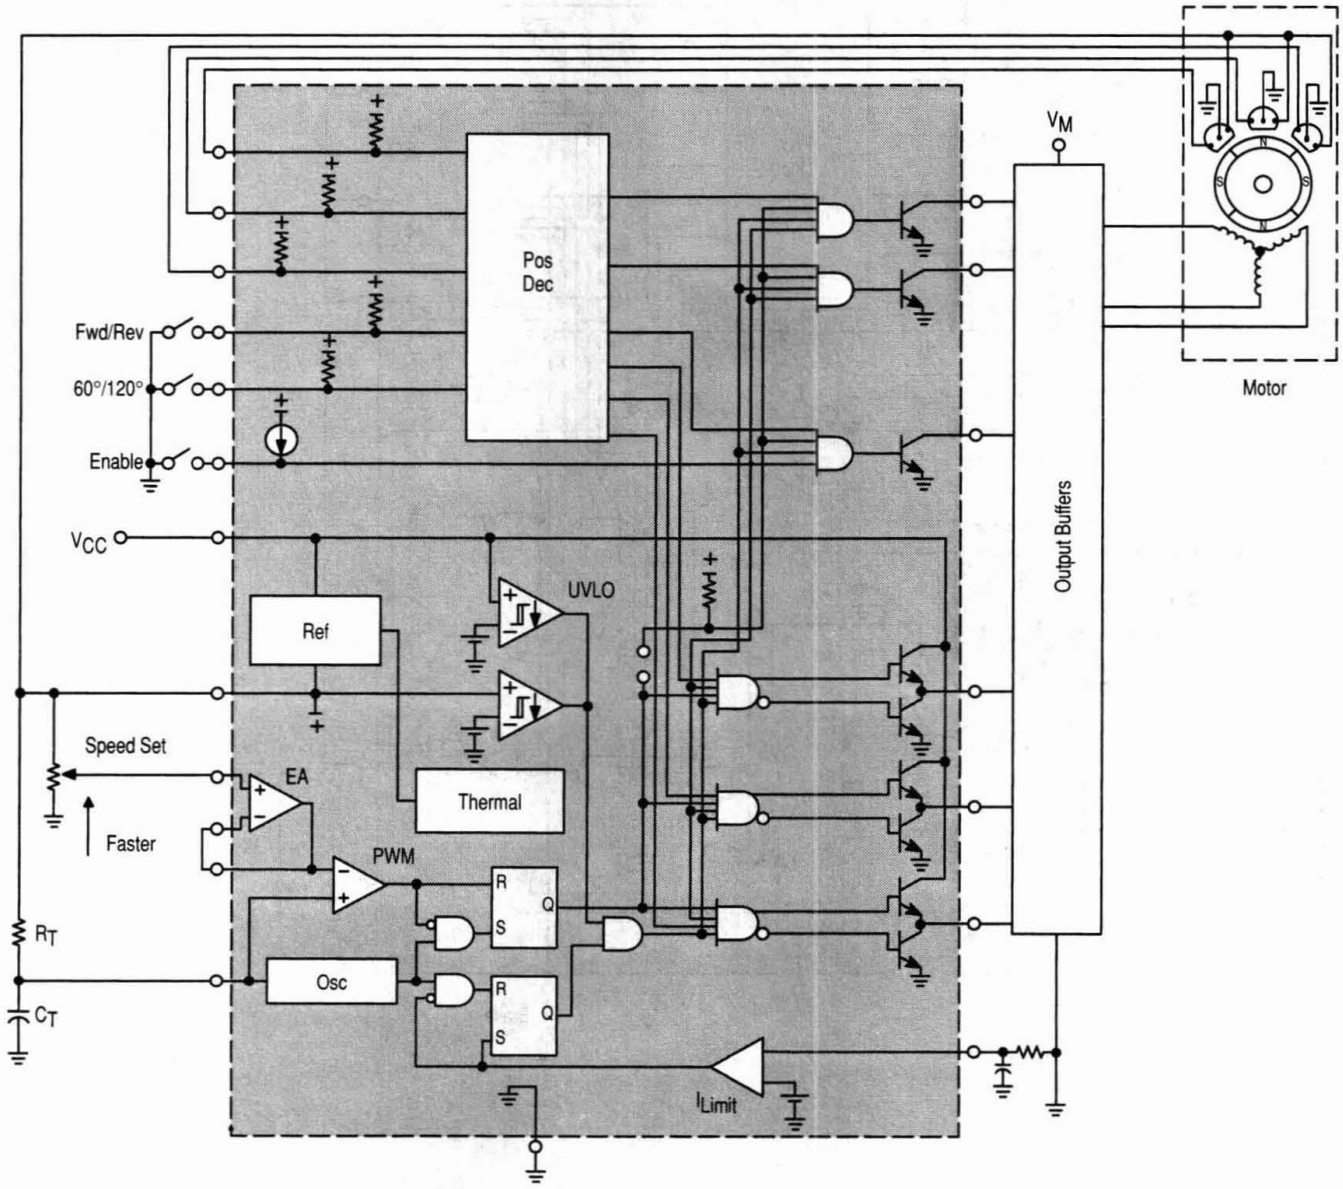

MC33035P, DW

T_A = –40° to +85°C, Case 724, 751E

The MC33035 is a second generation high performance brushless dc motor controller which contains all of the active functions required to implement a full featured open loop motor control system. While being pin–compatible with an earlier device, the MC33035 offers additional features at a lower price. The two additional features provided by the MC33035 are a pin which allows the user to select 60°/300° or 120°/240° sensor electrical phasings, and access to both inverting and noninverting inputs of the current sense comparator. The earlier devices had two part numbers which were needed to support the different sensor phasings, and the inverting input to the current sense comparator was internally grounded. All of the control and protection features of the earlier device are also provided in the MC33035.

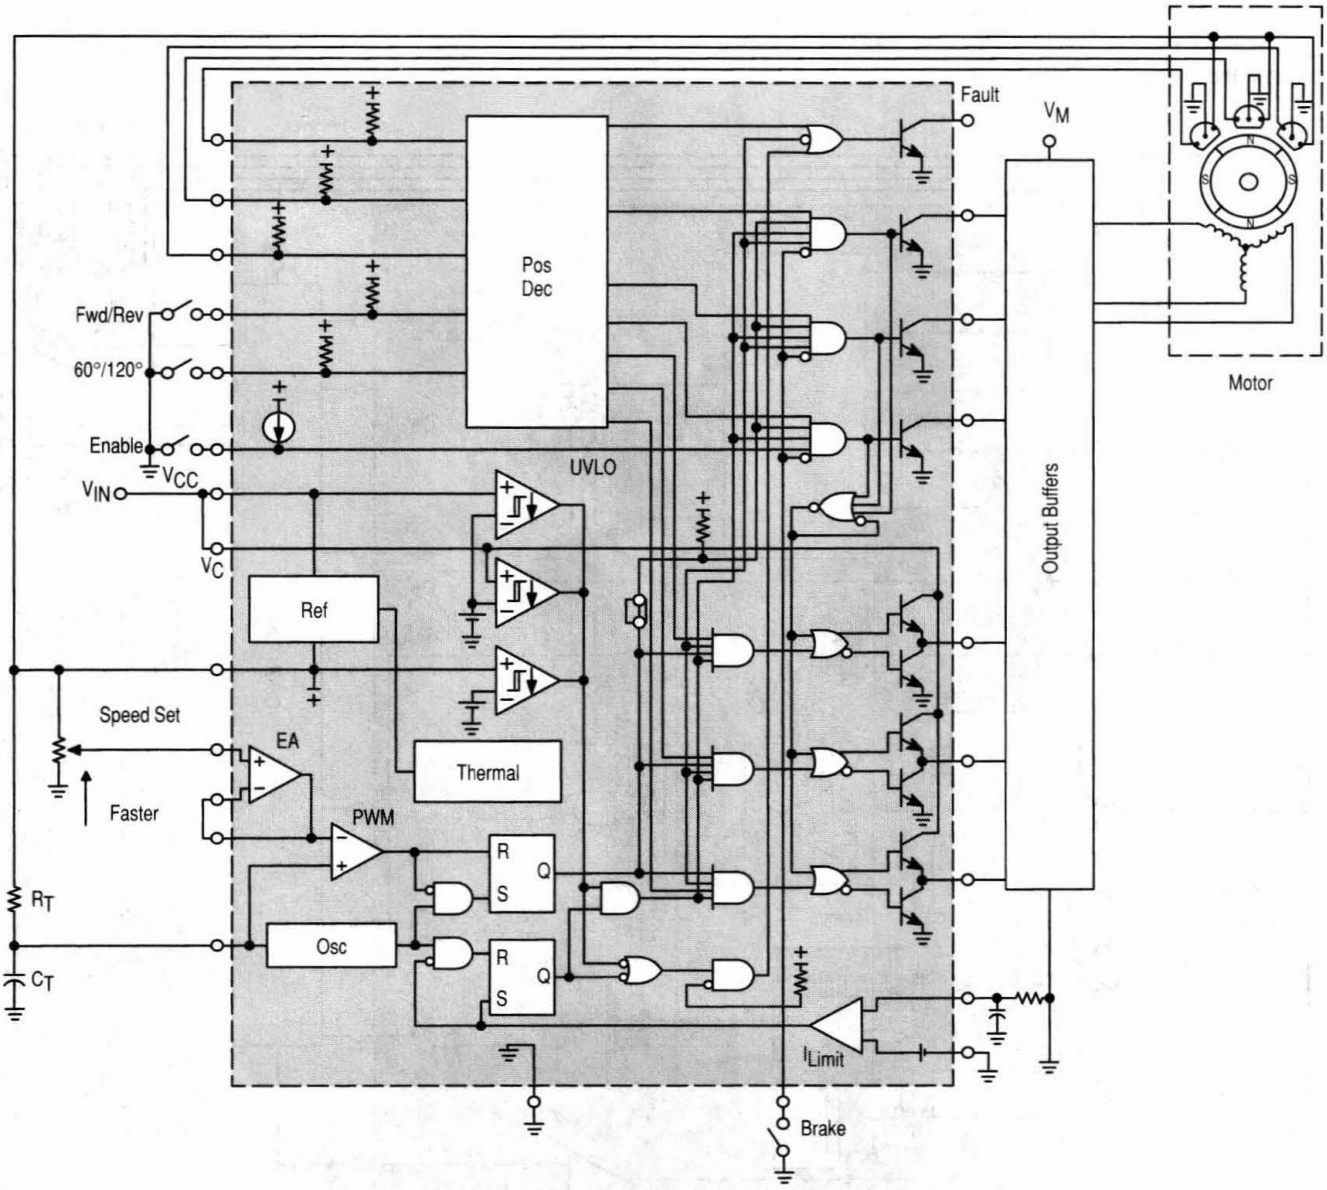

Closed Loop Brushless Motor Adapter

MC33039P, D

T_A = –40° to +85°C, Case 626, 751

The MC33039 is a high performance close loop speed control adapter specifically designed for use in brushless dc motor control systems. Implementation will allow precise speed regulation without the need for a magnetic or optical tachometer. These devices contain three input buffers each with hysteresis for noise immunity, three digital edge detectors, a programmable monostable, and an internal shunt regulator. Also included is an inverter output for use in systems that require conversion of sensor phasing. Although this device is primarily intended for use with the MC33033/35 brushless motor controllers, it can be used cost effectively in many other closed loop speed control applications.

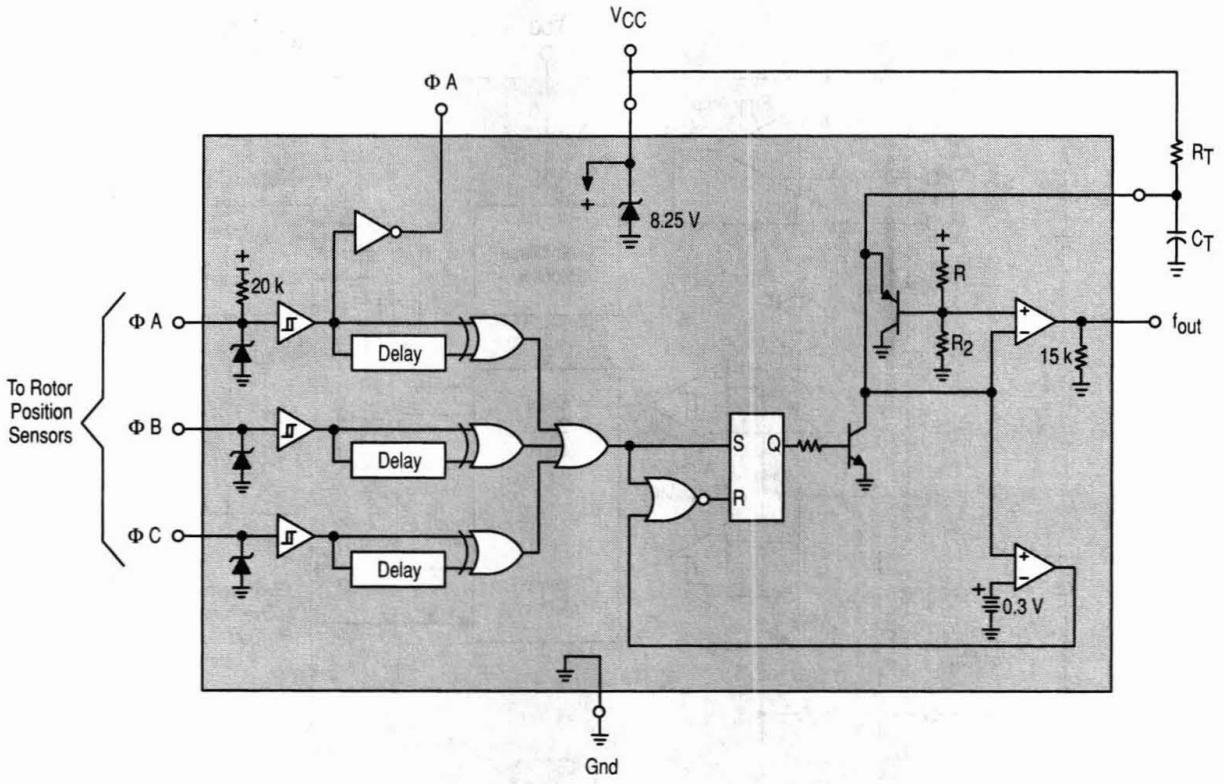

DC Servo Motor Controller/Driver

MC33030P, DW

T_A = –40° to +85°C, Case 648C, 751G

A monolithic dc servo motor controller providing all active functions necessary for a complete closed loop system. This device consists of an on–chip op amp and window comparator with wide input common mode range, drive and brake logic with direction memory, a power H switch driver capable of 1.0 A, independently programmable over current monitor and shutdown delay, and over voltage monitor. This part is ideally suited for almost any servo positioning application that requires sensing of temperature, pressure, light, magnetic flux, or any other means that can be converted to a voltage.

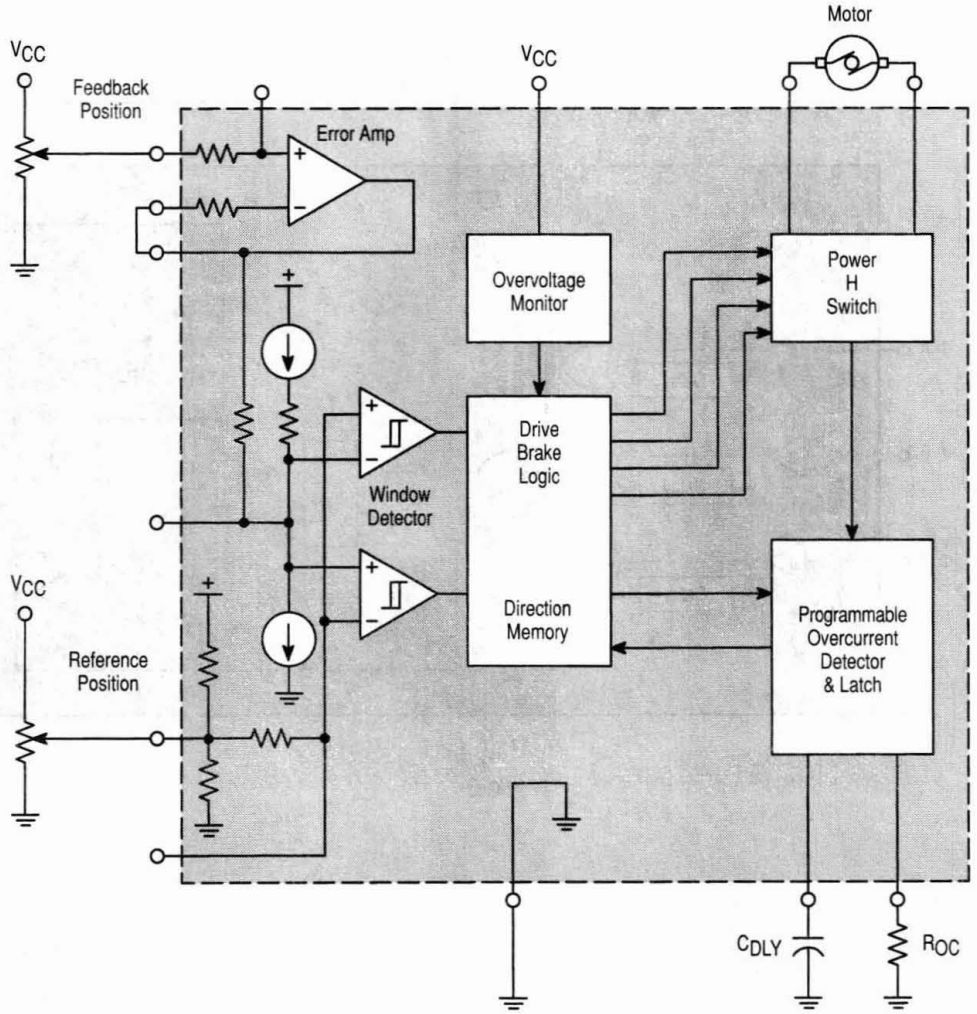

Stepper Motor Driver

MC3479P, FN

T_A = 0° to +70°C, Case 648C, 775

SAA1042V

T_A = –30° to +125°C, Case 648C

These Stepper Motor Drivers provide up to 500 mA of drive per coil for two phase 6.0 V to 24 V stepper motors. Control logic is provided to accept commands for clockwise, counter clockwise and half or full step operation. The MC3479 has an added Output Impedance Control (OIC) and a $\overline{\text{Phase A}}$ drive state indicator (not available on SAA1042 devices).

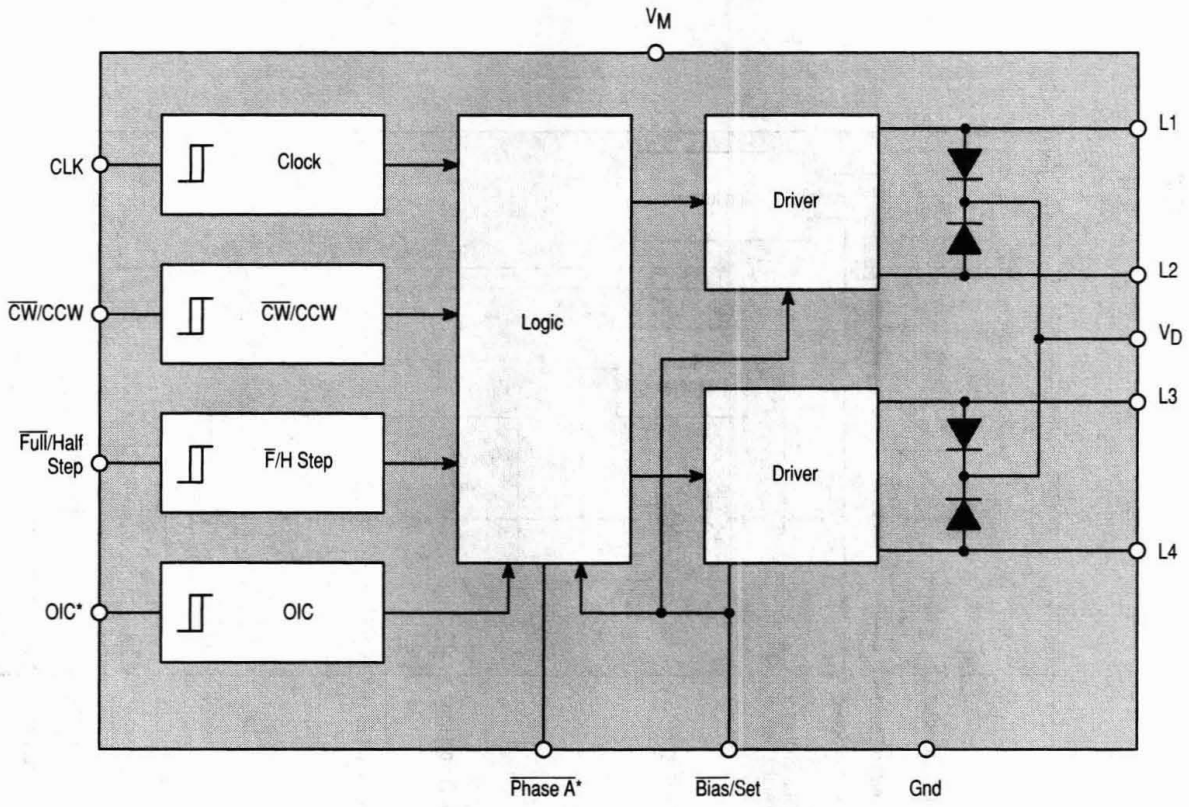

* MC3479 Only

Universal Motor Speed Controller

TDA1085C, CD

T_A = –10° to +120°C, Case 648, 751B

The TDA1085C is a phase angle triac controller having all the necessary functions for universal motor speed control in washing machines. It operates in closed loop configuration and provides two ramp possibilities.

- On-Chip Frequency to Voltage Converter
- On-Chip Ramps Generator
- Soft Start
- Load Current Limitation
- Tachogenerator Circuit Sensing
- Direct Supply from AC Line
- Security Functions Peformed by Monitor

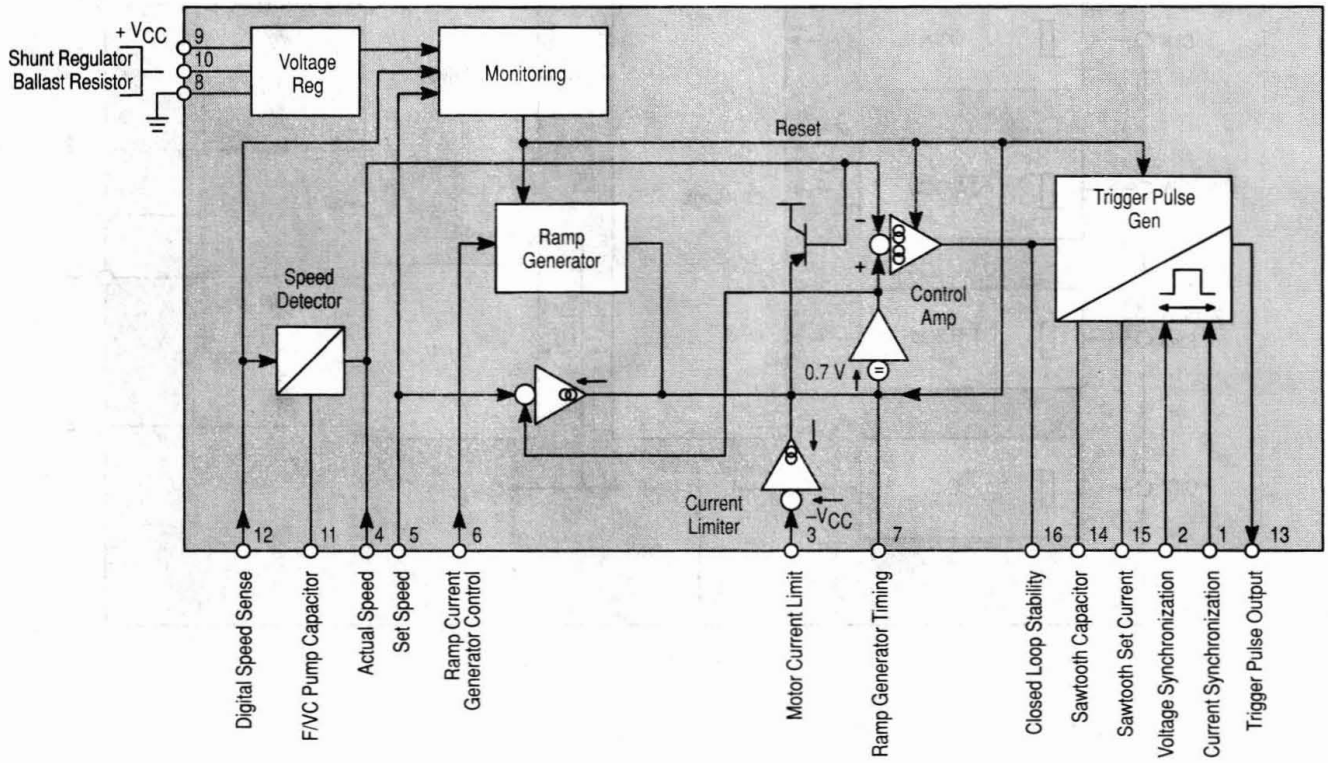

Power/Motor Control Circuits Package Overview



CASE 314D
T SUFFIX

CASE 626
B, P SUFFIX



CASE 646



CASE 648, 648C
P, V SUFFIX



CASE 724
P SUFFIX



CASE 738
P SUFFIX

CASE 751
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW SUFFIX

CASE 751E
DW SUFFIX

CASE 751G
DW SUFFIX



CASE 775
FN SUFFIX

Voltage References

In Brief . . .

Motorola's line of precision voltage references is designed for applications requiring high initial accuracy, low temperature drift, and long term stability. Initial accuracies of ±1.0%, and ±2.0% mean production line adjustments can be eliminated. Temperature coefficients of 25 ppm/°C max (typically 10 ppm/°C) provide excellent stability. Uses for the references include D/A converters, A/D converters, precision power supplies, voltmeter systems, temperature monitors, and many others.

	Page
Precision Low Voltage References	4.4–2
Package Overview	4.4–2

Precision Low Voltage References

A family of precision low voltage bandgap reference devices designed for applications requiring low temperature drift.

Table 1. Precision Low Voltage References

V_{out} (V) Typ	I_O (mA) Max	V_{out}/T ppm/°C Max	Device		Reg_{line} (mV) Max	Reg_{load} (mV) Max	Package
			0° to +70°C	–40° to +85°C			
1.235 ± 12 mV 1.235 ± 25 mV	20	80 Typ	LM385BZ–1.2 LM385Z–1.2	LM285Z–1.2	(Note 1)	1.0 (Note 2)	Z, D
2.5 ± 38 mV 2.5 ± 75 mV			LM385BZ–2.5 LM385Z–2.5	LM285Z–2.5		2.0 (Note 3)	
2.5 ± 25 mV	10	25	MC1403A	–	3.0/4.5 (Note 4)	10 (Note 5)	D
		40	MC1403				
5.0 ± 50 mV		40	MC1404P5	–	6.0 (Note 6)		P
6.25 ± 60 mV		40	MC1404P6	–			
10 ± 100 mV		40	MC1404P10	–			
2.5 to 37	100	50 Typ	TL431C, AC, BC	TL431I, AI, BI	Shunt Reference Dynamic Impedance (z) ≤ 0.5 Ω		LP, P, D, DM

Notes: 1. Micropower Reference Diode Dynamic Impedance (z) ≤ 1.0 Ω at I_R = 100 μA.
2. 10 μA ≤ I_R ≤ 1.0 mA.
3. 20 μA ≤ I_R ≤ 1.0 mA.
4. 4.5 V ≤ V_{in} ≤ 15 V/15 V ≤ V_{in} ≤ 40 V.
5. 0 mA ≤ I_L ≤ 10 mA.
6. (V_{out} + 2.5 V) ≤ V_{in} ≤ 40 V.

Voltage References Package Overview

CASE 29
LP, Z SUFFIX

CASE 626
P SUFFIX

CASE 751
D SUFFIX

CASE 846A
DM SUFFIX

Data Conversion

In Brief . . .

Motorola's line of digital–to–analog and analog–to–digital converters include several varieties to suit a number of applications.

The A/D converters include an 8–bit flash converter suitable for NTSC and PAL systems. CMOS devices include 8 to 10–bit converters, as well as other high speed digitizers.

The D/A converters have 6 and 8–bit devices, and video speed (for NTSC and PAL) devices.

	Page
Data Conversion	4.5–2
A–D Converters	4.5–2
CMOS	4.5–2
Sigma–Delta	4.5–2
D–A Converters	4.5–3
CMOS	4.5–3
Sigma–Delta	4.5–3
Package Overview	4.5–4

Data Conversion

The line of data conversion products which Motorola offers spans a wide spectrum of speed and resolution/accuracy. Features, including bus compatibility, minimize external parts count and provide easy interface to microprocessor systems. Various technologies, such as Bipolar and CMOS, are utilized to achieve functional capability, accuracy and production repeatability. Bipolar technology generally results in higher speed, while CMOS devices offer greatly reduced power consumption.

Table 1. A–D Converters

Resolution (Bits)	Device	Nonlinearity Max	Conversion Time/Rate	Input Voltage Range	Supplies (V)	Temperature Range (°C)	Suffix/ Package	Comments
CMOS								
8	MC14549B/ MC14559B	Successive Approximation Registers			+3.0 to +18	–40 to +85	P/648	Compatible with MC1408 S.A.R. 8–bit D–A Converter
Triple 8–Bit	MC44251	1 LSB	18 MHz	1.6 to 4.6 V	+5.0 ±10%	–40 to +85	FN/777, FU/824A	3 Separate Video Channels
10	MC145050	±1 LSB	21 µs	0 to V_{DD}	+5.0 ±10%	–40 to +125	P/738, DW/751D	Requires External Clock, 11–Ch MUX
	MC145051		44 µs					Includes Internal Clock, 11–Ch MUX
	MC145053						P/646, D/751A	Includes Internal Clock, 5–Ch MUX
Sigma–Delta								
16	MC145073	±1 LSB	48 kHz	1.9 Vpp	4.5 to 5.5	–40 to +85	DW/751E	Dual Channel, Sigma–Delta architecture

Table 2. D–A Converters

Resolution (Bits)	Device	Accuracy @ 25°C Max	Max Settling Time (± 1/2 LSB)	Supplies (V)	Temperature Range (°C)	Suffix/ Package	Comments
CMOS							
6	MC144110	–	–	+5.0 to +15	0 to +85	P/707, DW/751D	Serial input, Hex DAC, 6 outputs
	MC144111	–	–			P/646, DW/751G	Serial input, Quad DAC, 4 outputs
	MC144112	–	–	+2.7 to +5.5	–40 to +85	P/646, D/751A	Serial input, Quad DAC, 4 outputs
Triple 8–Bit	MC44200	±1/2 LSB	30 ns	+5.0 ±10%	–40 to +85	FU/824A	Triple Video DAC, 55 MHz, TTL
Sigma–Delta							
16, 18, 20	MC145074	See data sheet	6.0 ns	4.5 to 5.5	–40 to +85	D/751B	Dual Channel, Sigma–Delta architecture, MC145076 FIR Filter available
–	MC145076	See data sheet	–	+5.0	–40 to +85	D/751B	Dual Channel Bit Stream, 144 tap FIR Filter

Data Conversion Package Overview

CASE 646
P SUFFIX

CASE 648
P SUFFIX

CASE 649
P SUFFIX



CASE 707
P SUFFIX



CASE 738
P SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW SUFFIX

CASE 751E
DW SUFFIX

CASE 751G
DW SUFFIX



CASE 777
FN SUFFIX

CASE 824A
FU SUFFIX

Interface Circuits

In Brief . . .

Described in this section is Motorola's line of interface circuits, which provide the means for interfacing with microprocessor or digital systems and the external world, or to other systems.

Also included are devices which allow a microprocessor to communicate with its own array of memory and peripheral I/O circuits.

The line drivers, receivers, and transceivers permit communication between systems over cables of several thousand feet in length, and at data rates of up to several megahertz. The common EIA data transmission standards, several European standards, and IEEE–488 are addressed by these devices.

The peripheral drivers are designed to handle high current loads such as relay coils, lamps, stepper motors, and others. Input levels to these drivers can be TTL, CMOS, high voltage MOS, or other user defined levels. The display drivers are designed for LCD or LED displays, and provide various forms of decoding.

	Page
Enhanced Ethernet Transceiver	4.6–2
ISO 8802–3[IEEE 802.3] 10BASE–T Transceiver	4.6–3
Hex EIA–485 Transceiver with Three–State Outputs	4.6–4
Line Receivers	4.6–5
EIA Standard	4.6–5
Line Drivers	4.6–5
EIA Standard	4.6–5
Line Transceivers	4.6–5
EIA–232–E/V.28 CMOS Drivers/Receivers	4.6–5
Peripheral Drivers	4.6–6
IEEE 802.3 Transceivers	4.6–6
Inkjet Drivers	4.6–6
28–Channel Inkjet Driver	4.6–6
CMOS Display Drivers	4.6–7
Display Drivers	4.6–7
Functions	4.6–7
Package Overview	4.6–8

Enhanced Ethernet Transceiver

MC68160FB, CFB

T_A = 0° to +70°C, Case 848D

MC68160BFB

T_A = –40° to +85°C, Case 848D

The MC68160, B and C Enhanced Ethernet Interface Circuit is a BiCMOS device which supports both IEEE 802.3* Access Unit Interface (AUI) and 10BASE–T Twisted Pair (TP) Interface media connections through external isolation transformers. It encodes NRZ data to Manchester data and supplies the signals which are required for data communication via 10BASE–T or AUI interfaces. The MC68160, B and C gluelessly interface to the Ethernet controller contained in the MC68360 Quad Integrated Communications Controller (QUICC) device. The MC68160 also interfaces easily to most other industry–standard IEEE 802.3 LAN controllers.** Prior to twisted pair data reception, Smart Squelch circuitry qualifies input signals for correct amplitude, pulse width, and sequence requirements.

* MC68160B does not support all IEEE 802.3 specifications over extended temperature range. Exceptions noted in specifications.

** MC68160B, C only support Motorola controllers

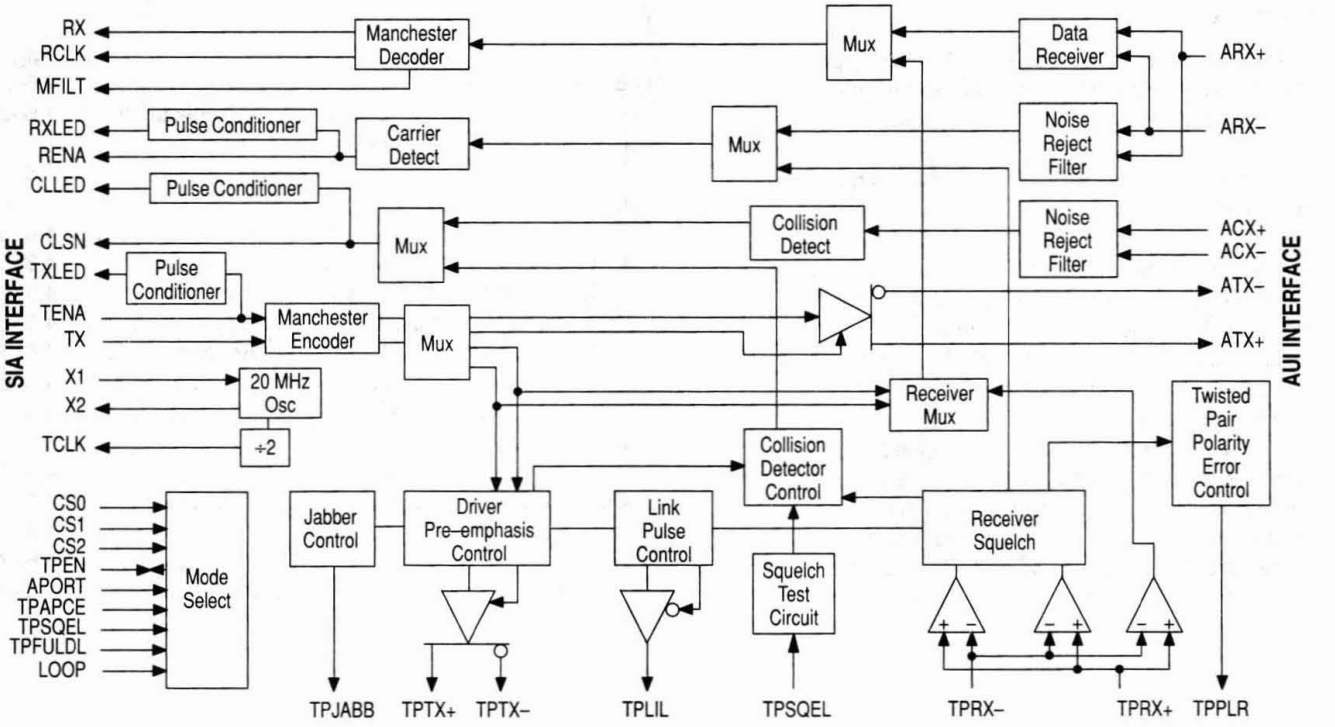

ISO 8802–3[IEEE 802.3] 10BASE–T Transceiver

MC34055DW

T_A = 0° to +70°C, Case 751E

The Motorola 10BASE–T transceiver, designed to comply with the ISO 8802–3[IEEE 802.3] 10BASE–T specification, will support a Medium Dependent Interface (MDI) in an embedded Media Attachment Unit (MAU). The interface supporting the Data Terminal Equipment (DTE) is TTL, CMOS, and raised ECL compatible, and the interface to the Twisted Pair (TP) media is supported through standard 10BASE–T filters and transformers. Differential data intended for the TP media is provided a 50 ns pre–emphasis. Data at the TP receiver is screened by Smart Squelch circuitry for specific threshold, pulse width, and sequence requirements.

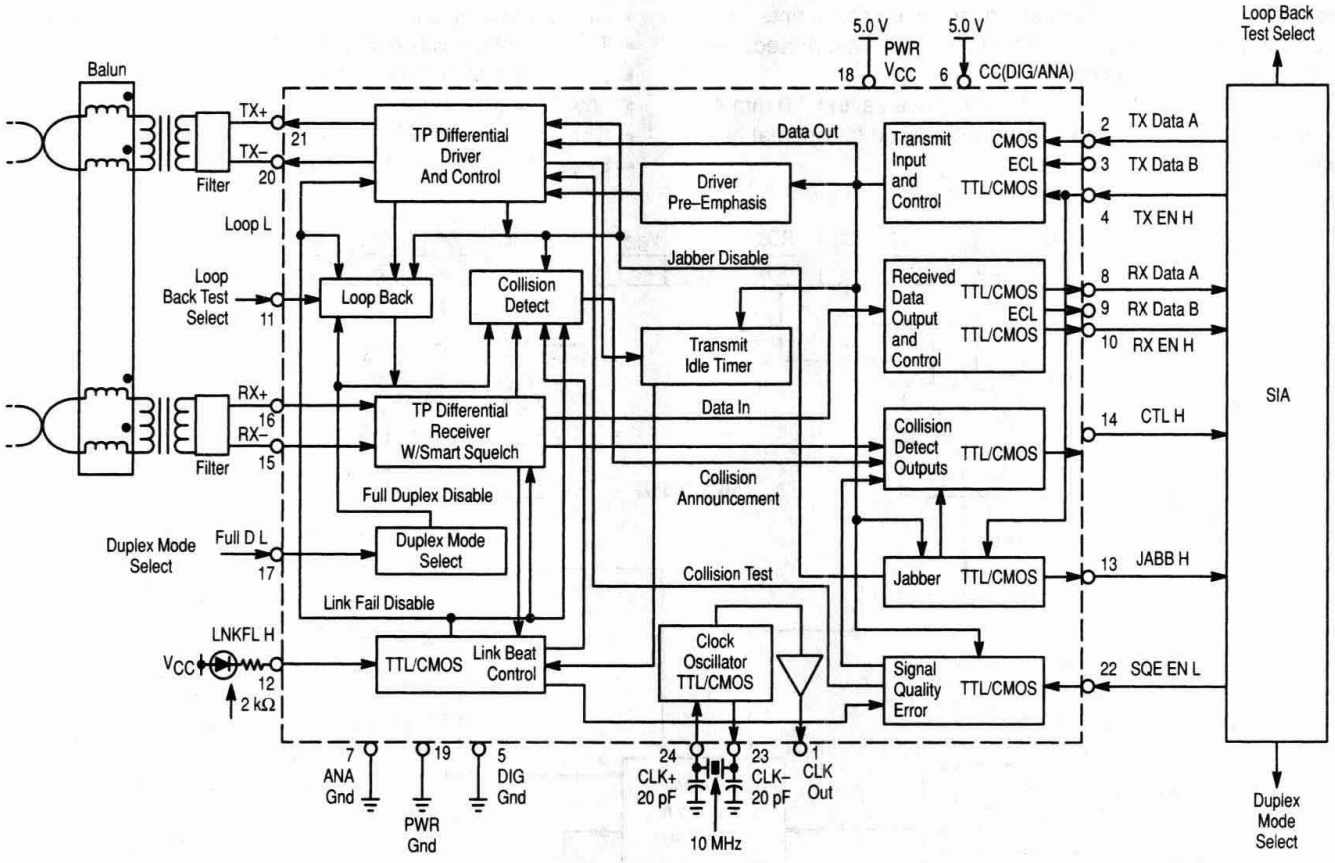

Hex EIA–485 Transceiver with Three–State Outputs

MC34058/59FTA

T_A = 0° to +70°C, Case 932

The Motorola MC34058/9 Hex Transceiver is composed of six driver/receiver combinations designed to comply with the EIA–485 standard. Features include three–state outputs, thermal shutdown for each driver, and current limiting in both directions. This device also complies with EIA–422 and CCITT Recommendations V.11 and X.27.

The devices are optimized for balanced multipoint bus transmission at rates to 20 MBPS (MC34059). The driver outputs/receiver inputs feature a wide common mode voltage range, allowing for their use in noisy environments. The current limit and thermal shutdown features protect the devices from line fault conditions.

The MC34058/9 is available in a space saving 7.0 mm 48 lead surface mount quad package designed for optimal heat dissipation.

- Meets EIA–485 Standard for Party Line Operation
- Meets EIA–422A and CCITT Recommendations V.11 and X.27
- Operating Ambient Temperature: 0°C to +70°C
- Common Mode Driver Output/Receiver Input Range: –7.0 to +12 V
- Positive and Negative Current Limiting
- Transmission Rates to 14 MBPS (MC34058) and 20 MBPS (MC34059)
- Driver Thermal Shutdown at 150°C Junction Temperature
- Thermal Shutdown Active Low Output
- Single +5.0 V Supply, ±10%
- Low Supply Current
- Compact 7.0 mm 48 Lead TQFP Plastic Package
- Skew Specified for MC34059

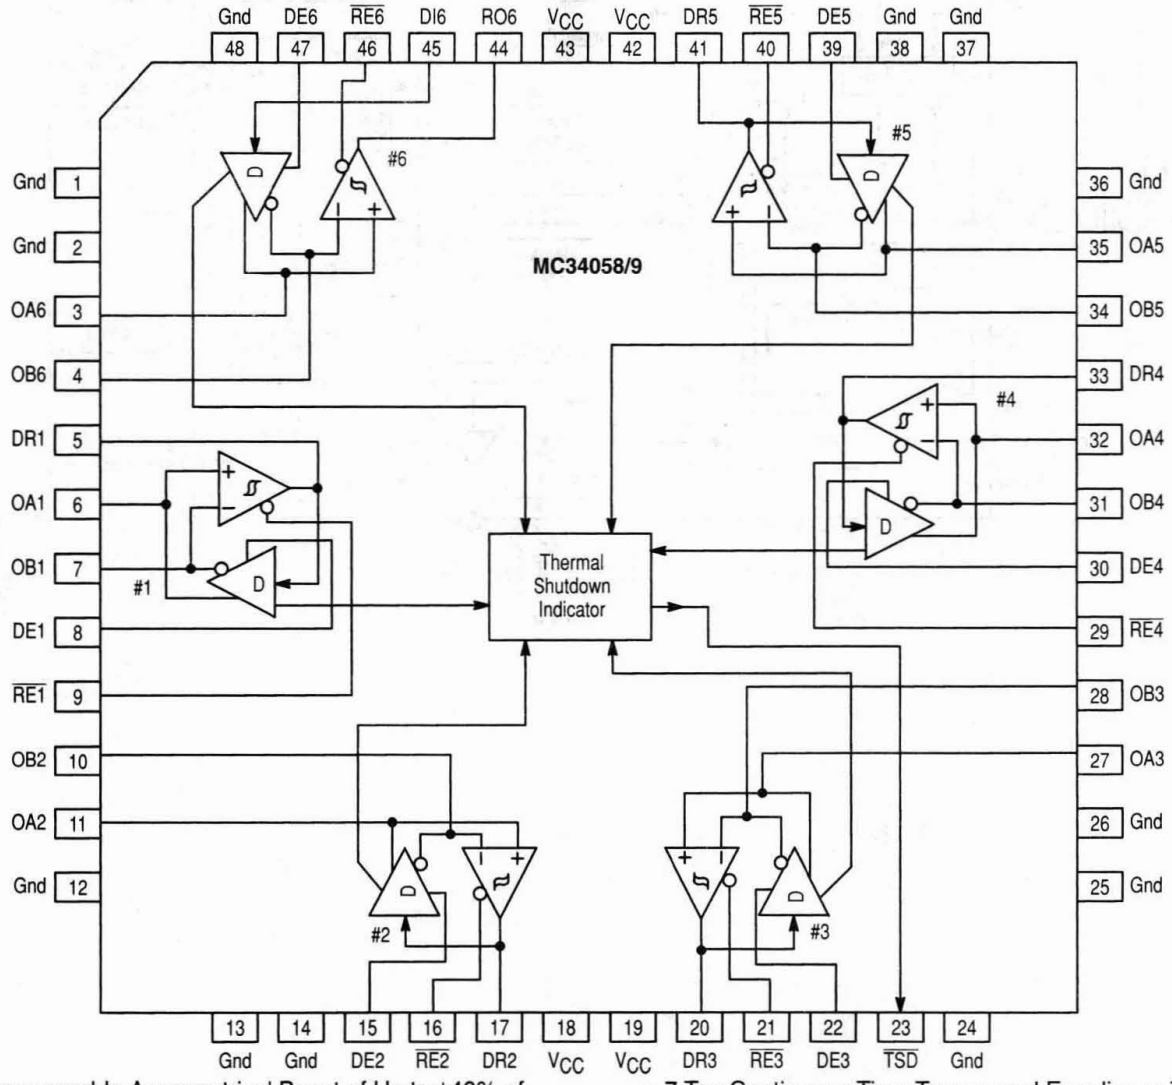

- Programmable Asymmetrical Boost of Up to ±40% of Nominal Filter Group Delay in Both Data and Servo Modes
- 7 Tap Continuous Time Transversal Equalizer with 8 Bit Programmable Tap Weights and Integrated Decision Directed Sign–Sign Least Mean Squared Adaptation

Line Receivers

Table 1. EIA Standard

S = Single Ended D = Differential	Type of Output	t_{prop} Delay Time Max (ns)	Party Line Operation	Strobe or Enable	Power Supplies (V)	Device	Suffix/ Package	Receivers Per Package	Companion Drivers	Comments
S	TP	4000	–	–	+5.0	MC14C89B, AB	P/646, D/751A	4	MC1488 MC14C88B	EIA–232–D/ EIA–562
	R(1)	85	–	–		MC1489 MC1489A				EIA–232–D

(1) R = Resistor Pull–up, TP = Totem–pole output.

Line Drivers

Table 2. EIA Standard

Output Current Capability (mA)	t_{prop} Delay Time Max (ns)	S = Single Ended D = Differential	Party Line Operation	Strobe or Enable	Power Supplies (V)	Device	Suffix/ Package	Drivers Per Package	Companion Receivers	Comments
85	35	D	✓	✓	+5.0	MC75174B MC75172B	P/648	4	–	EIA–485
15	3500	S	–		±7.0 to ±12	MC14C88B	P/646, D/751A		MC14C89B MC14C89AB	EIA–232–D/ EIA–562
10	350				±9.0 to ±12	MC1488			MC1489 MC1489A	EIA–232–D
60	300	S/D		EIA–422 ✓ EIA–423 –	±5.0	AM26LS30	PC/648	2 (422) 4 (423)	–	EIA–422 or EIA–423 Switchable
						MC26LS30	D/751B			

Table 3. Line Transceivers

Driver Prop Delay (Max ns)	Receiver Prop Delay Max (ns)	DE =Driver Enable RE =Receiver Enable	Party Line Operation	Power Supplies (V)	Device	Suffix/ Package	Drivers Per Package	Receivers Per Package	EIA Standard
23	23	DE, RE	✓	+5.0	MC34058	FTA/932	6	6	EIA–485 to 14 MBPS
					MC34059	FTA/932	6	6	EIA–485 to 20 MBPS

Table 4. EIA–232–E/V.28 CMOS Drivers/Receivers

Device	Suffix/ Package	Pins	Drivers	Receivers	Power Supplies (V)	Features
MC145403	P/738, DW/751D	20	3	5	±5.0 to ±12	
MC145404			4	4		
MC145405			5	3		
MC145406	P/648, DW/751G, SD/940B	16	3			
MC145407	P/738, DW/751D	20			+5.0	Charge Pump
MC145408	P/724, DW/751E, SD/940B	24	5	5	±5.0 to ±12	

Table 4. EIA–232–E/V.28 CMOS Drivers/Receivers (continued)

Device	Suffix/ Package	Pins	Drivers	Receivers	Power Supplies (V)	Features
MC145583	DW/751F, VF/940J	28	3	5	+3.3 to +5.0	On–board ring monitor circuit; charge pump, power down
MC145705	P/738, DW/751D	20	2	3	+5.0	Charge Pump, Power Down
MC145706			3	2		
MC145707	P/724, DW/751E	24		3		

Table 5. Peripheral Drivers

Output Current Capability (mA)	Input Capability	Propagation Delay Time Max (µs)	Output Clamp Diode	Off State Voltage Max (V)	Device	Drivers Per Package	Suffix/ Package	Logic Function
500	TTL, CMOS	1.0	✓	50	ULN2803	8	A/707	Invert
	6.0 V to 15 V MOS				ULN2804			
	TTL, 5.0 V CMOS				MC1413, B (ULN2003A)	7	P/648, D/751B	
	8.0 V to 18 V MOS				MC1416, B (ULN2004A)		P/648, D/751B	

Table 6. IEEE 802.3 Transceivers

Device	Power Supply	10 BaseT	NRZ	IEEE	Comments	Suffix/ Package
MC34055	+5.0 Vdc	Transmit and Receive over 4 Pins	Raised ECL, CMOS	802.3 Type 10BaseT	Transceiver with non–return to zero (NRZ) interface. Intended for but not restricted to concentrators and repeator applications.	DW/751E
MC68160			TTL, CMOS	802.3 Type 10BaseT/ AUI/NRZ	Interfaces gluelessly to Motorola's MC68360 communications controller.	FB/848D

Inkjet Drivers

Table 7. 28–Channel Inkjet Driver

Device	Power Supply	Comments	T_A (°C)	Suffix/ Package
MC34156	5.0 V	A 4 to 14 line decoder determines the selected output driver in each of two 14 driver banks. Two independent output enable lines permit 1 or 2 of 28 outputs. Outputs are open collector 30 V Darlington drivers capable of sinking 500 mA.	0 to +70	FN/777

CMOS Display Drivers

These CMOS devices include digit as well as matrix drivers for LEDs, LCDs, and VFDs. They find applications over a wide range of end equipment such as instruments, automotive dashboards, home computers, appliances, radios and clocks.

Table 8. Display Drivers

Display Type	Input Format	Drive Capability Per Package	On–Chip Latch	Display Control	Segment Drive Current	Device
LCD (Direct Drive)	Parallel BCD	7 Segments	✓	Blank	≈ 1.0 mA	MC14543B
				Blank, Ripple Blank		MC14544B
	Serial Binary [Compatible with the Serial Peripheral Interface (SPI) on CMOS MCUs]	33 Segments or Dots			20 μA	MC145453
Muxed LCD (1/4 Mux)		48 Segments or Dots			≈ 200 μA	MC145000
		44 Segments or Dots				MC145001
LED, Incandescent, Fluorescent(1)	Parallel BCD	7 Segments		Blank, Lamp Test	25 mA	MC14511B
				Blank, Ripple Blank, Lamp Test		MC14513B
			–	Blank	65 mA	MC14547B
Muxed LED (1/5 Mux)	Serial Binary [Compatible with the Serial Peripheral Interface (SPI) on CMOS MCUs]	5 Characters + Decimals or 25 Lamps	✓	Oscillator (Scanner), Low Power Mode, Dimming	0 to 35 mA (Peak) Adjustable	MC14489
LED (Direct Drive)	Parallel Hex	7 Segments + A thru F Indicator			10 mA(2)	MC14495–1
(Interfaces to Display Drivers)	Parallel BCD	7 Segments	–	Ripple Blank, Enable	–	MC14558B

(1) Absolute maximum working voltage = 18 V.
(2) On–chip current–limiting resistor.

Table 9. Functions

Device	Function	Package
MC14489	Multi–Character LED Display/Lamp Driver	738, 751D
MC14495–1	Hexadecimal–to–7 Segment Latch/Decoder ROM/Driver	648, 751G
MC14511B	BCD–to–7–Segment Latch/Decoder/Driver	648, 751G
MC14513B	BCD–to–7–Segment Latch/Decoder/Driver with Ripple Blanking	726, 707
MC14543B	BCD–to–7–Segment Latch/Decoder/Driver for Liquid Crystals	620, 648
MC14544B	BCD–to–7–Segment Latch/Decoder/Driver with Ripple Blanking	726, 707
MC14547B	High–Current BCD–to–7–Segment Decoder/Driver	620, 648
MC14558B	BCD–to–7–Segment Decoder	620, 648
MC145000	48–Segment Serial Input Multiplexed LCD Driver (Master)	709, 776
MC145001	44–Segment Serial Input Multiplexed LCD Driver (Slave)	707, 776
MC145453	33–Segment, Non–Multiplexed LCD Driver with Serial Interface	711, 777

Interface Circuits Package Overview



CASE 620

CASE 646
P SUFFIX

CASE 648
P, PC SUFFIX



CASE 707
A SUFFIX



CASE 709
P SUFFIX

CASE 711
P SUFFIX

CASE 724
P SUFFIX



CASE 726



CASE 738
P SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW SUFFIX

CASE 751E
DW SUFFIX

CASE 751F
DW SUFFIX

CASE 751G
DW SUFFIX

CASE 776
FN SUFFIX



CASE 777
FN SUFFIX

CASE 848D
FB SUFFIX

CASE 932
FTA SUFFIX

CASE 940B
SD SUFFIX

CASE 940J
VF SUFFIX

Communication Circuits

In Brief . . .

RF

Radio communication has greatly expanded its scope in the past several years. Once dominated by public safety radio, the 30 to 1000 MHz spectrum is now packed with personal and low cost business radio systems. The vast majority of this equipment uses FM or FSK modulation and is targeted at short range applications. From mobile phones and VHF marine radios to garage door openers and radio controlled toys, these new systems have become a part of our lifestyle. Motorola has focused on this technology, adding a wide array of new products including complete receivers processed in our exclusive 3.0 GHz MOSAIC® 1.5 process. New surface mount packages for high density assembly are available for all of these products, as well as a growing family of supporting application notes.

Telephone & Voice/Data

Traditionally, an office environment has utilized two distinctly separate wired communications systems: telecommunications and data communications. Each had its individual hardware components complement, and each required its own independent transmission line system: twisted wire pairs for Telecom and relatively high priced coaxial cable for Datacom. But times have changed. Today, Telecom and Datacom coexist comfortably on inexpensive twisted wire pairs and use a significant number of components in common. This has led to the development and enhancement of PBX (Private Branch Exchanges) to the point where the long heralded "office of the future," with simultaneous voice and data communications capability at each station, is no longer of the future at all. The capability is here today!

Motorola Semiconductor serves a wide range of requirements for the voice/data marketplace. We offer both CMOS and Analog technologies, each to its best advantage, to upgrade the conventional analog voice systems and establish new capabilities in digital communications. Early products, such as the solid–state single–chip crosspoint switch, the more recent monolithic Subscriber–Loop–Interface Circuit (SLIC), a single–chip Codec/Filter (Mono–Circuit), the Universal Digital Loop Transceivers (UDLT), basic rate ISDN (Integrated Services Digital Network), and single–chip telephone circuits are just a few examples of Motorola leadership in the voice/data area.

	Page
RF Communications	4.7–2
RF Front End ICs	4.7–2
Wideband IFs	4.7–2
Wideband Single Conversion Receivers	4.7–2
Narrowband Single Conversion Receivers	4.7–3
Narrowband Dual Conversion Receivers	4.7–3
Universal Cordless Phone Subsystem ICs	4.7–3
Transmitters	4.7–4
Balanced Modulator/Demodulator	4.7–4
Infrared Transceiver	4.7–4
Telecommunications	4.7–13
Subscriber Loop Interface Circuit	4.7–13
PBX Architecture (Analog Transmission)	4.7–14
PCM Monocircuits	4.7–14
Dual Tone Multiple Frequency Receiver	4.7–18
ISDN Voice/Data Circuits	4.7–18
Integrated Services Digital Network	4.7–18
Second Generation U–Interface Transceivers	4.7–19
Second Generation S/T–Interface Transceivers	4.7–19
U–Interface Transceiver Evaluation Kit	4.7–20
Voice/Data Communication (Digital Transmission)	4.7–21
Universal Digital Loop Transceiver	4.7–21
ISDN Universal Digital Loop Transceiver II	4.7–22
High–Speed Modem Chip Sets	4.7–23
Analog Front End ICs	4.7–27
Dual 16–Bit Linear Codec–Filter	4.7–27
Electronic Telephone Circuit	4.7–28
Tone Ringers	4.7–29
Speech Networks	4.7–30
Speakerphones	4.7–34
Voice Switched Speakerphone Circuit	4.7–34
Voice Switched Speakerphone with µProcessor Interface	4.7–36
Voice Switched Speakerphone Circuit	4.7–37
Telephone Line Interface and Speakerphone Circuit	4.7–38
Family of Speakerphone ICs	4.7–39
Telephone Accessory Circuits	4.7–41
Audio Amplifier	4.7–41
Current Mode Switching Regulator	4.7–41
300 Baud FSK Modems	4.7–42
ADPCM Transcoder	4.7–42
Calling Line Identification (CLID) Receiver	4.7–43
CVSD Modulator/Demodulator	4.7–44
Summary of Bipolar Telecommunications Circuits	4.7–45
Phase–Locked Loop Components	4.7–48
PLL Frequency Synthesizers	4.7–48
Phase–Locked Loop Functions	4.7–49
Package Overview	4.7–51

RF Communications

Table 1. RF Front End ICs

Receiver												
	Low Noise Amplifier				Mixer							
Device	Gain (dB)	Noise Figure (dB)	IIP3 (dBm)	Input P1dB (dBm)	Gain (dB)	Noise Figure (dB)	IIP3 (dBm)	P1dB (dBm)	Voltage Cont Osc	V_{CC} (V)	I_{CC} (mA)	Suffix/ Package
MC13142	17	1.8	–5.0	–15	±3.0	12	–3 to +21	3.0	Yes	2.7 to 6.5	13	D/751B, FTB/976
MC13143	–	–	–	–	±3.0	12	–3 to +21	3.0	–	1.8 to 6.5	1.0	D/751
MC13144	13 to 19	1.4	–1.0	–7.0	–	–	–	–	–	1.8 to 6.5	2 to 9	D/751
MC13145	14	1.8	–5.0	–8.0	0	13	9.0	–1.0	Yes	2.7 to 6.5	30	FTA/932
Transmitter												
	Low Power Amplifier				Mixer							
Device	PA Gain (dB)	Noise Figure (dB)	IIP3 (dBm)	Output P1dB (dBm)	P_{IFOut} (dB)	Noise Figure (dB)	IIP3 (dBm)	P1dB (dBm)	Voltage Cont Osc	V_{CC} (V)	I_{CC} (mA)	Suffix/ Package
MC13146	15	–	–	8.0	15	–	10	–	Yes	2.7 to 6.5	25	FTA/977

NOTES: All devices operate over a wide range of RF input and IF frequencies, from dc to 2.0 GHz.
Typical performance shown at 900 MHz.

Table 2. Wideband (FM/FSK) IFs

Device	V_{CC}	I_{CC}	Sensitivity (Typ)	IF	Mute	RSSI	Max Data Rate	Notes	Suffix/ Package
MC13055	3–12 V	25 mA	20 µV	40 MHz	✓	✓	2.0 Mb	Wideband Data IF, includes data shaper	P/648, D/751B
MC13155	3–6 V	7.0 mA	100 µV	250 MHz	–		10 Mb	Video Speed FM IF	D/751B

Table 3. Wideband Single Conversion Receivers – VHF

Device	V_{CC}	I_{CC}	Sensitivity (Typ)	RF Input	IF	Mute	RSSI	Max Data Rate	Notes	Suffix/ Package
MC3356	3–9 V	25 mA	30 µV	200 MHz	10.7 MHz	✓	✓	500 kb	Includes front end mixer/L.O.	P/738, DW/751D
MC13156	2–6 V	5.0 mA	2.0 µV	500 MHz	21.4 MHz	–			CT–2 FM/Demodulator	DW/751E, FB/873
MC13158	2–6 V	6.0 mA						>1.2 Mb	FM IF/Demodulator with split IF for DECT	FTB/873
MC13159	2.7–5 V	5.5 mA		600 MHz				500 kb	FM IF for PHS	DTB/948F

RF Communications (continued)

Table 4. Narrowband Single Conversion Receivers – VHF

Device	V_{CC}	I_{CC}	12 dB SINAD Sensitivity (Typ)	RF Input	IF	Mute	RSSI	Max Data Rate	Notes	Suffix/ Package
MC3357	4–8 V	5.0 mA	5.0 µV	45 MHz	455 kHz	✓	–	>4.8 kb	Ceramic Quad Detector/Resonator	P/648, D/751B
MC3359	4–9 V	7.0 mA	2.0 µV						Scan output option	P/707, DW/751D
MC3371	2–8 V	6.0 mA		60 MHz			✓	>4.8 kb	RSSI	P/648, D/751B, DTB/948F
MC3372									RSSI, Ceramic Quad Detector/Resonator	
MC13150	3–6 V	1.8 mA	1.0 µV	500 MHz			✓ 110 dB	>9.6 kb	Coilless Detector with Adjustable Bandwidth	FTB/873, FTA/977

Table 5. Narrowband Dual Conversion Receivers – FM/FSK – VHF

Device	V_{CC}	I_{CC}	12 dB SINAD Sensitivity (Typ)	RF Input	IF1	IF2 (Limiter In)	Mute	RSSI	Data Rate	Notes	Suffix/ Package
MC3362	2–7 V	3.0 mA	0.7 µV	180 MHz	10.7 MHz	455 kHz	–	✓	> 4.8 kb	Includes buffered VCO output	P/724, DW/751E
MC3363		4.0 mA	0.4 µV				✓			Includes RF amp/mute	DW/751F
MC13135			1.0 µV				–			Voltage buffered RSSI, LC Quad Detector	DW/751E, P/724
MC13136										Voltage Buffered RSSI, Ceramic Quad Detector	DW/751E

Table 6. Universal Cordless Phone Subsystem ICs

Device	V_{CC}	I_{CC}	Dual Conversion Receiver	Universal Dual PLL	Compander and Audio Interface	Voice Scrambler	Low Battery Detect	Programmable R_X, T_X Trim Gain and LBD Voltage Reference	Suffix/ Package
MC13109	2.0–5.5 V	Active Mode 6.7 mA Inactive Mode 40 µA	✓	✓	✓	–	1	–	FB/848B, FTA/932
MC13110	2.7–5.5 V	Active Mode 8.2 mA Inactive Mode 60 µA	✓	✓	✓	✓	2	✓	FB/848B
MC13111	2.7–5.5 V	Active Mode 8.2 mA Inactive Mode 60 µA	✓	✓	✓	–	2	✓	FB/848B

RF Communications (continued)

Table 7. Transmitters – AM/FM/FSK

Device	V_{CC}	I_{CC}	P_{out}	Max RF Freq Out	Max Mod Freq	Notes	Suffix/ Package
MC2833	3–8 V	10 mA	–30 dBm to +10 dBm	150 MHz	50 kHz	FM transmitter. Includes two frequency multiplier/amplifier transistors	P/648, D/751B
MC13175	2–5 V	40 mA	8.0 dBm	500 MHz	5.0 MHz	AM/FM transmitter. Single frequency PLL $f_{out} = 8 \times f_{ref}$, includes power down function	D/751B
MC13176				1.0 GHz		$f_{out} = 32 \times f_{ref}$, includes power down function	

Table 8. Balanced Modulator/Demodulator

Device	V_{CC}	I_{CC}	Function	Suffix/ Package
MC1496	3–5 V	10 mA	General purpose balanced modulator/demodulator for AM, SSB, FM detection with Carrier Balance >50 dB	P/646, D/751A

Table 9. Infrared Transceiver

Device	V_{CC}	I_{CC}	12 dB SINAD Sensitivity (Typ)	Max IF Freq	Carr Det	RSSI	Data Rate	Notes	Suffix/ Package
MC13173	3–5 V	6.5 mA	5.0 μV	10.7 MHz	✓	✓	200 kb	Includes Single Frequency PLL for T_X Carrier and R_X L_O	FTB/873

Universal Cordless Telephone Subsystem IC

MC13109FB, FTA

T_A = –20° to +85°C, Case 848B, 932

The MC13109 integrates several of the functions required for a cordless telephone into a single integrated circuit. This significantly reduces component count, board space requirements, and external adjustments. It is designed for use in both the handset and the base.

- Dual Conversion FM Receiver
  - Complete Dual Conversion Receiver – Antenna Input to Audio Output 80 MHz Maximum Carrier Frequency
  - RSSI Output
  - Carrier Detect Output with Programmable Threshold
  - Comparator for Data Recovery
  - Operates with Either a Quad Coil or Ceramic Discriminator
- Compander
  - Expander Includes Mute, Digital Volume Control and Speaker Driver
  - Compressor Includes Mute, ALC and Limiter
- Dual Universal Programmable PLL
  - Supports New 25 Channel U.S. Standard with No External Switches
  - Universal Design for Domestic and Foreign CT–1 Standards
  - Digitally Controlled Via a Serial Interface Port
  - Receive Side Includes 1st LO VCO, Phase Detector, and 14–Bit Programmable Counter and 2nd LO with 12–Bit Counter
  - Transmit Section Contains Phase Detector and 14–Bit Counter
  - MPU Clock Output Eliminates Need for MPU Crystal
- Supply Voltage Monitor
  - Externally Adjustable Trip Point
- 2.0 to 5.5 V Operation with One–Third the Power Consumption of Competing Devices

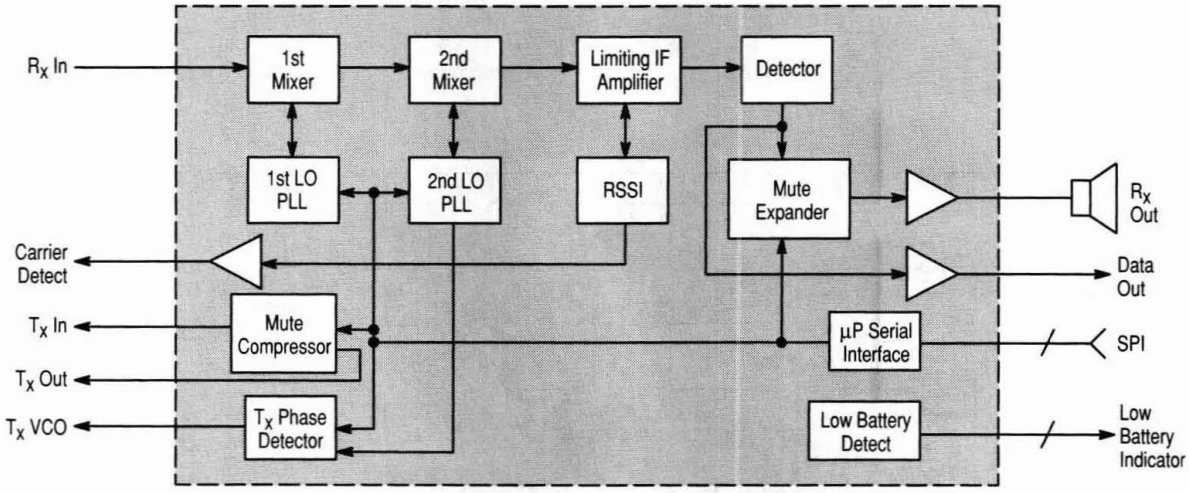

Universal Cordless Telephone Subsystem IC with Scrambler

MC13110FB

T_A = –40° to +85°C, Case 848B

The MC13110 integrates several of the functions required for a cordless telephone into a single integrated circuit. This significantly reduces component count, board space requirements, and external adjustments. It is designed for use in both the handset and the base.

- Dual Conversion FM Receiver
  - Complete Dual Conversion Receiver – Antenna In to Audio Out 80 MHz Maximum Carrier Frequency
  - RSSI Output
  - Carrier Detect Output with Programmable Threshold
  - Comparator for Data Recovery
  - Operates with Either a Quad Coil or Ceramic Discriminator
- Compander
  - Expander Includes Mute, Digital Volume Control, Speaker Driver, 3.5 kHz Low Pass Filter, and Programmable Gain Block
  - Compressor Includes Mute, 3.5 kHz Low Pass Filter, Limiter, and Programmable Gain Block
- Dual Universal Programmable PLL
  - Supports New 25 Channel U.S. Standard with New External Switches
  - Universal Design for Domestic and Foreign CT–1 Standards
  - Digitally Controlled Via a Serial Interface Port
  - Receive Side Includes 1st LO VCO, Phase Detector, and 14–Bit Programmable Counter and 2nd LO with 12–Bit Counter
  - Transmit Section Contains Phase Detector and 14–Bit Counter
  - MPU Clock Outputs Eliminates Need for MPU Crystal
- Supply Voltage Monitor
  - Provides Two Levels of Monitoring with Separate Outputs
  - Separate, Adjustable Trip Points
- Frequency Inversion Scrambler/Descrambler
  - Can Be Enabled/Disabled Via MPU Interface
  - Programmable Carrier Modulation Frequency
- 2.7 to 5.5 V Operation with One–Third the Power Consumption of Competing Devices

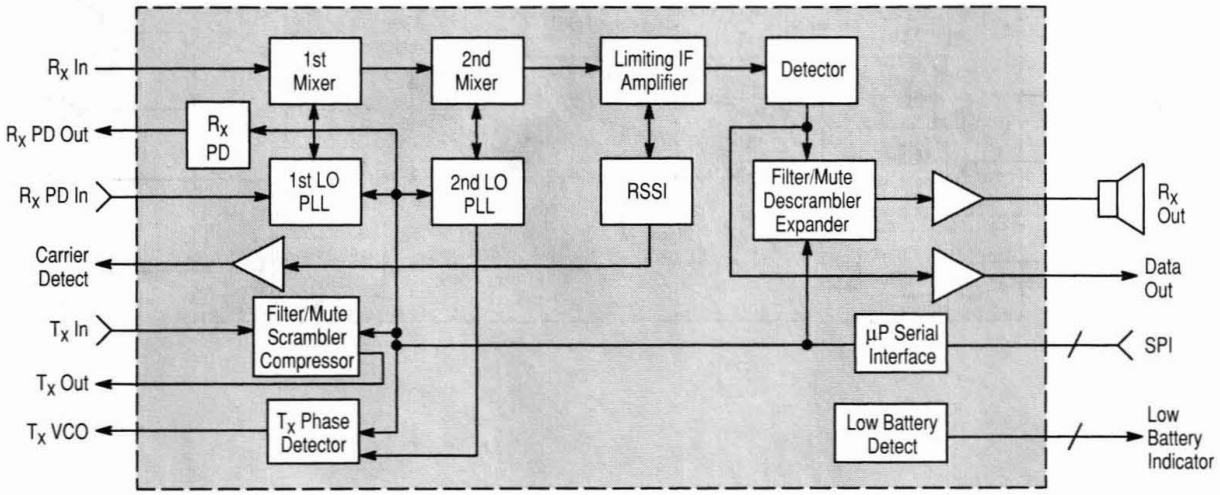

MC13111FB

T_A = –40° to +85°C, Case 848B, 932

The MC13111 integrates several of the functions required for a cordless telephone into a single integrated circuit. This significantly reduces component count, board space requirements, external adjustments, and lowers overall costs. It is designed for use in both the handset and the base.

- Dual Conversion FM Receiver
  - Complete Dual Conversion Receiver – Antenna In to Audio Out 80 MHz Maximum Carrier Frequency
  - RSSI Output
  - Carrier Detect Output with Programmable Threshold
  - Comparator for Data Recovery
  - Operates with Either a Quad Coil or Ceramic Discriminator
- Compander
  - Expander Includes Mute, Digital Volume Control, Speaker Driver, 3.5 kHz Low Pass Filter, and Programmable Gain Block
  - Compressor Includes Mute, 3.5 kHz Low Pass Filter, Limiter, and Programmable Gain Block
- Dual Universal Programmable PLL
  - Supports New 25 Channel U.S. Standard with No External Switches
  - Universal Design for Domestic and Foreign CT–1 Standards
  - Digitally Controlled Via a Serial Interface Port
  - Receive Side Includes 1st LO VCO, Phase Detector, and 14–Bit Programmable Counter and 2nd LO with 12–Bit Counter
  - Transmit Section Contains Phase Detector and 14–Bit Counter
  - MPU Clock Outputs Eliminates Need for MPU Crystal
- Supply Voltage Monitor
  - Provides Two Levels of Monitoring with Separate Outputs
  - Separate, Adjustable Trip Points
- Programmable Corner Frequency Selection
- MC13111 is Pin–for–Pin Compatible with MC13110
- 2.7 to 5.5 V Operation with One–Third the Power Consumption of Competing Devices
- AN1575: Refer to this Application Note for a List of the "Worldwide Cordless Telephone Frequencies" (List can also be found in Chapter 8 Addendum of DL128 Data Book)

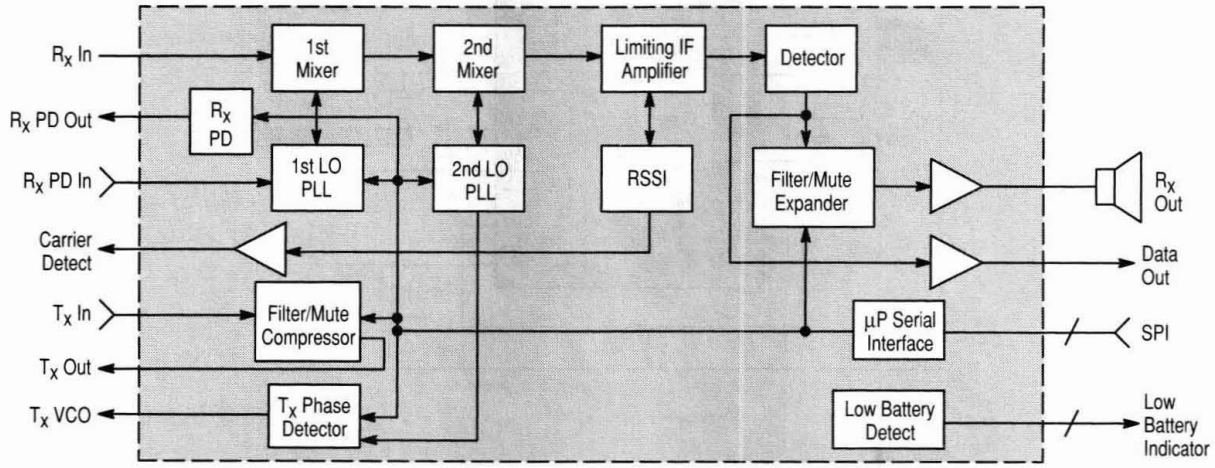

Narrowband FM Receiver

MC13135P,DW, MC13136DW

T_A = –40° to +85°C, Case 724, 751E

The MC13135 is a full dual conversion receiver with oscillators, mixers, Limiting IF Amplifier, Quadrature Discriminator, and RSSI circuitry. It is designed for use in security systems, cordless phones, and VHF mobile and portable radios. Its wide operating supply voltage range and low current make it ideal for battery applications. The Received Signal Strength Indicator (RSSI) has 65 dB of dynamic range with a voltage output, and an operational amplifier is included for a dc buffered output. Also, an improved mixer third order intercept enables the MC13135 to accommodate larger input signal levels.

- Complete Dual Conversion Circuitry
- Low Voltage: 2.0 to 6.0 Vdc
- RSSI with Op Amp: 65 dB Range
- Low Drain Current: 3.5 mA Typical
- Improved First and Second Mixer 3rd Order Intercept
- Detector Output Impedance: 25 Ω Typically

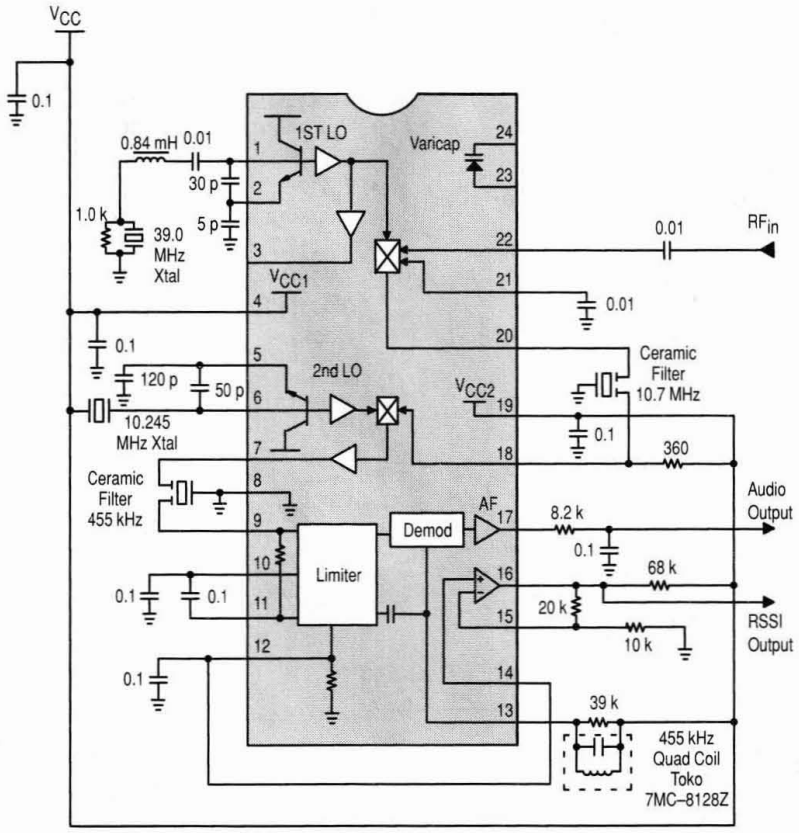

Narrowband FM Coilless Detector IF Subsystem

MC13150FTA, FTB

T_A = –40° to +85°C, Case 977, 873

The MC13150 is a narrowband FM IF subsystem targeted at cellular and other analog applications. Excellent high frequency performance is achieved, with low cost, through use of Motorola's MOSAIC 1.5™ RF bipolar process. The MC13150 has an onboard Colpitts VCO for Crystal controlled second LO in dual conversion receivers. The mixer is a double balanced configuration with excellent third order intercept. It is useful to beyond 200 MHz. The IF amplifier is split to accommodate two low cost cascaded filters. RSSI output is derived by summing the output of both IF sections. The quadrature detector is a unique design eliminating the conventional tunable quadrature coil.

Applications for the MC13150 include cellular, CT–1 900 MHz cordless telephone, data links and other radio systems utilizing narrowband FM modulation.

- Linear Coilless Detector
- Adjustable Demodulator Bandwidth
- 2.5 to 6.0 Vdc Operation
- Low Drain Current: < 2.0 mA
- Typical Sensitivity of 2.0 μV for 12 dB SINAD
- IIP3, Input Third Order Intercept Point of 0 dBm
- RSSI Range of Greater Than 100 dB
- Internal 1.4 kΩ Terminations for 455 kHz Filters
- Split IF for Improved Filtering and Extended RSSI Range

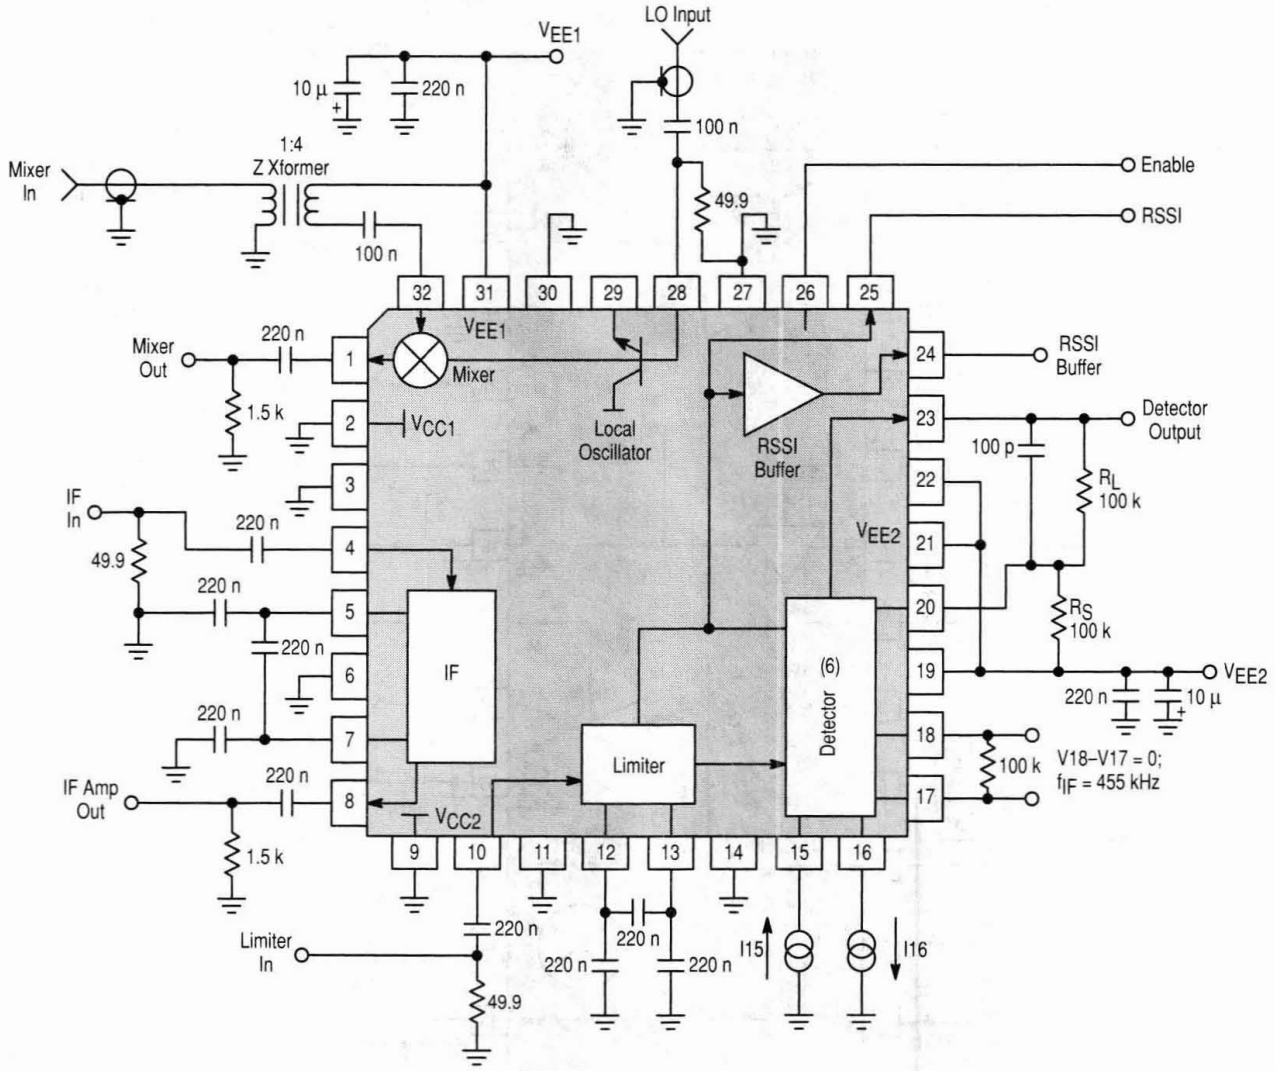

Wideband FM IF System

MC13156DW, FB

T_A = –40° to +85°C, Case 751E, 873

The MC13156 is a wideband FM IF subsystem targeted at high performance data and analog applications. Excellent high frequency performance is achieved, with low cost, through use of Motorola's MOSAIC 1.5™ RF bipolar process. The MC13156 has an onboard Colpitts VCO for PLL controlled multichannel operation. The mixer is useful to beyond 200 MHz and may be used in a differential, balanced, or single–ended configuration. The IF amplifier is split to accommodate two low cost cascaded filters. RSSI output is derived by summing the output of both IF sections. A precision data shaper has a hold function to preset the shaper for fast recovery of new data.

Applications for the MC13156 include CT–2, wideband data links, and other radio systems utilizing GMSK, FSK or FM modulation.

- 2.0 to 6.0 Vdc Operation
- Typical Sensitivity of 6.0 μV for 12 dB SINAD
- RSSI Dynamic Range Typically 80 dB
- High Performance Data Shaper for Enhanced CT–2 Operation
- Internal 300 Ω and 1.4 kΩ Terminations for 10.7 MHz and 455 kHz Filters
- Split IF for Improved Filtering and Extended RSSI Range

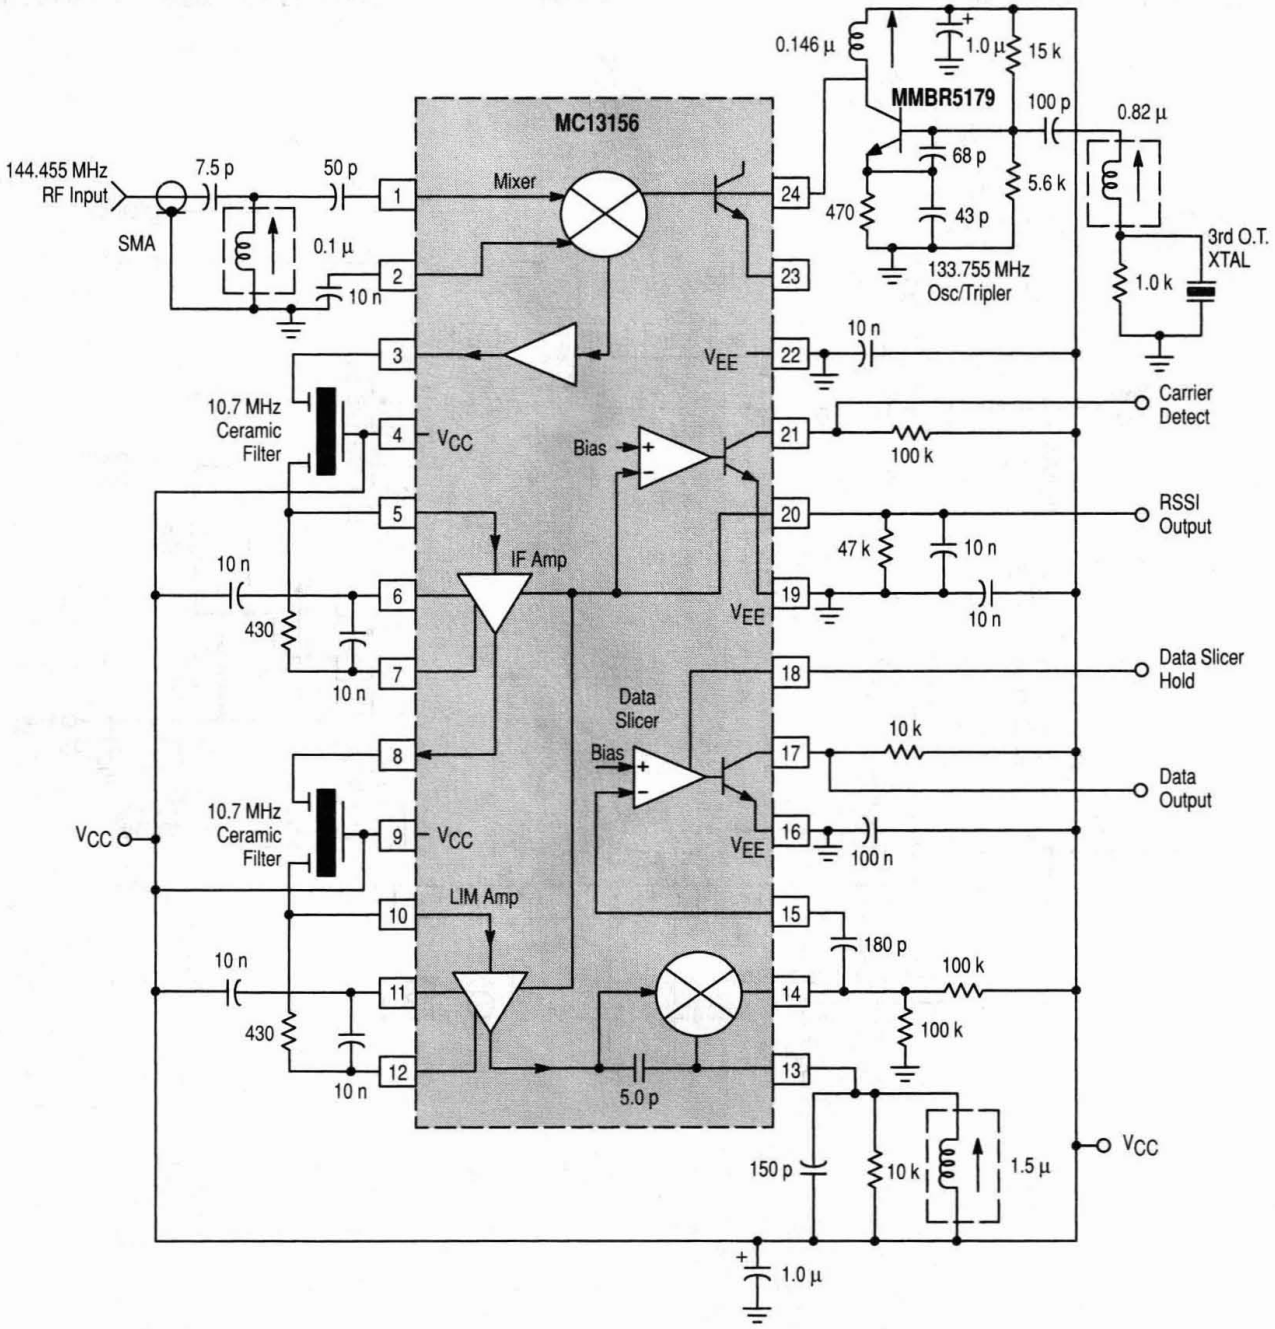

Wideband FM IF Subsystem

MC13158FTB

T_A = –40° to +85°C, Case 873

The MC13158 is a wideband IF subsystem that is designed for high performance data and analog applications. Excellent high frequency performance is achieved, with low cost, through the use of Motorola's MOSAIC 1.5™ RF bipolar process. The MC13158 has an on–board grounded collector VCO transistor that may be used with a fundamental or overtone crystal in single channel operation or with a PLL in multi–channel operation. The mixer is useful to 500 MHz and may be used in a balanced differential or single ended configuration. The IF amplifier is split to accommodate two low cost cascaded filters. RSSI output is derived by summing the output of both IF sections. A precision data shaper has an Off function to shut the output "off" to save current. An enable control is provided to power down the IC for power management in battery operated applications.

Applications include DECT, wideband wireless data links for personal and portable laptop computers and other battery operated radio systems which utilize GFSK, FSK or FM modulation.

- Designed for DECT Applications
- 1.8 to 6.0 Vdc Operating Voltage
- Low Power Consumption in Active and Standby Mode
- Greater than 600 kHz Detector Bandwidth
- Data Slicer with Special Off Function
- Enable Function for Power Down of Battery Operated Systems
- RSSI Dynamic Range of 80 dB Minimum
- Low External Component Count

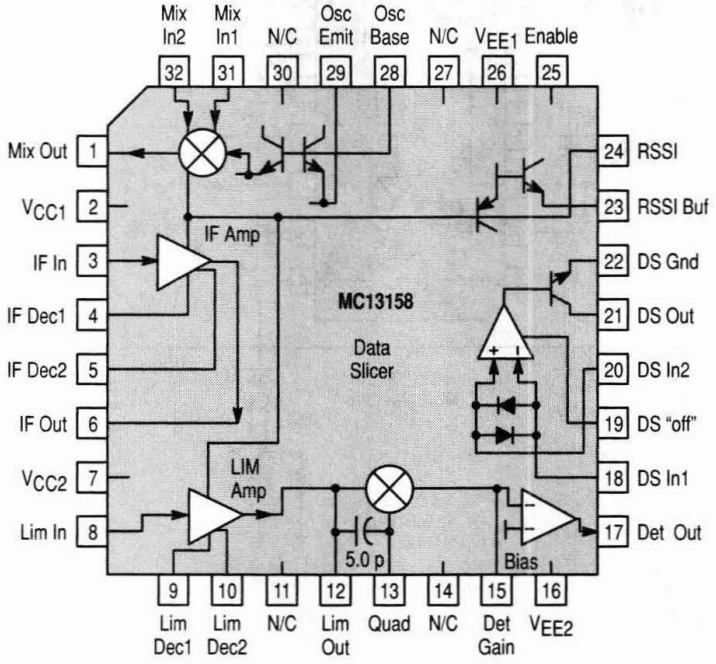

UHF, FM/AM Transmitter

MC13175/176D

T_A = 0° to +70°C, Case 751B

The MC13175 and MC13176 are one chip FM/AM transmitter subsystems designed for AM/FM communication systems operating in the 260 to 470 MHz band covered by FCC Title 47; Part 15. They include a Colpitts crystal reference oscillator, UHF oscillator, ÷8 (MC13175) or ÷32 (MC13176) prescaler, and phase detector forming a versatile PLL system. Another application is as a local oscillator in a UHF or 900 MHz receiver. MC13175/176 offer the following features:

- UHF Current Controlled Oscillator
- Use Easily Available 3rd Overtone or Fundamental Crystals for Reference
- Low Number of External Parts Required
- Low Operating Supply Voltage (1.8–5 Vdc)
- Low Supply Drain Currents
- Power Output Adjustable (Up to +10 dBm)
- Differential Output for Loop Antenna or Balun Transformer Networks
- Power Down Feature
- ASK Modulated by Switching Output "On"/"Off"
- MC13175 – $f_o = 8 \times f_{ref}$
- MC13176 – $f_o = 32 \times f_{ref}$

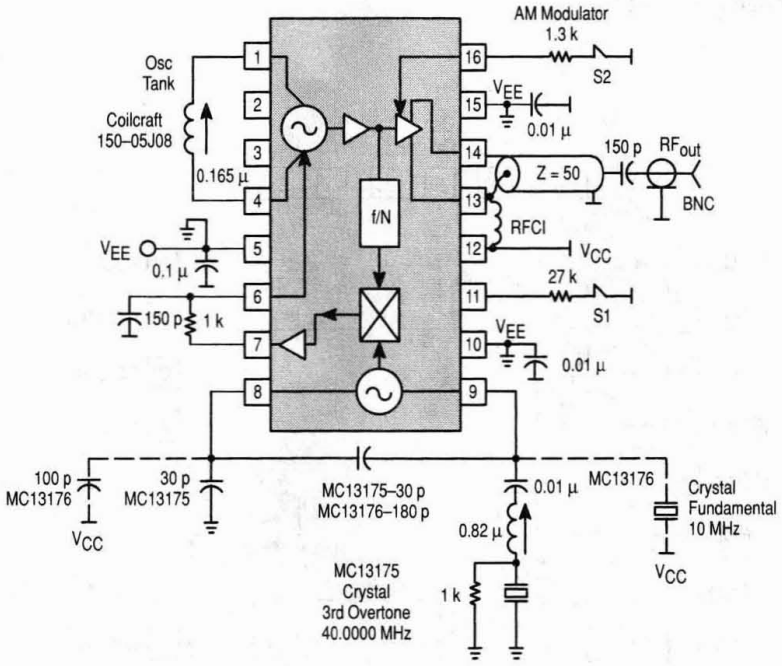

Telecommunications

Subscriber Loop Interface Circuit (SLIC)

MC33121P, FN

T_A = –40° to +85°C, Case 738, 776

With a guaranteed minimum longitudinal balance of 58 dB, the MC33121 is ideally suited for Central Office applications, as well as PBXs, and other related equipment. Protection and sensing components on the two–wire side can be non–precision while achieving required system performance. Most BORSHT functions are provided while maintaining low power consumption, and a cost effective design. Size and weight reduction over conventional transformer designs permit a higher density system.

- All Key Parameters Externally Programmable with Resistors:
  - Transmit and Receive Gains
  - Transhybrid Loss
  - Return Loss
  - DC Loop Current Limit and Battery Feed Resistance
  - Longitudinal Impedance
- Single and Double Fault Sensing and Protection
- Minimum 58 dB Longitudinal Balance (2–wire and 4–wire) Guaranteed
- Digital Hook Status and Fault Outputs
- Power Down Input
- Loop Start or Ground Start Operation
- Size & Weight Reduction Over Conventional Approaches
- Available in 20 Pin DIP and 28 Pin PLCC Packages
- Battery Voltage: –42 to –58 V (for MC33120), –21.6 to –42 V (for MC33121)

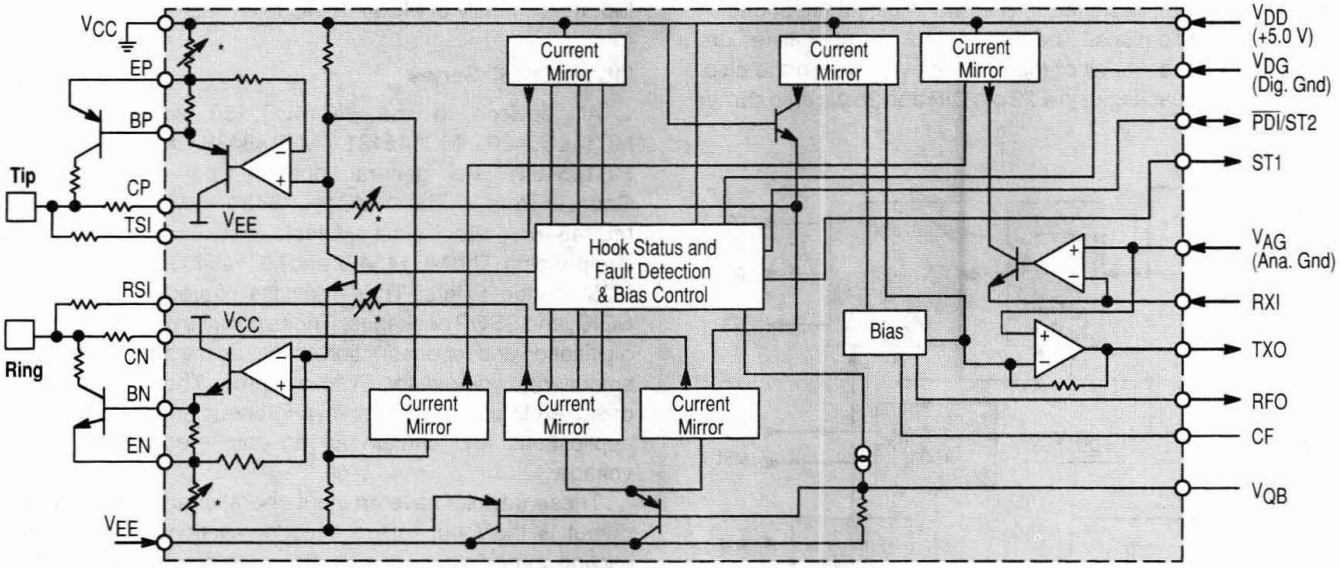

PBX Architecture (Analog Transmission)

PCM Monocircuits Codec–Filters (CMOS LSI)

MC145500 Series

Case 648, 708, 751G, 776

The Monocircuits perform the digitizing and restoration of the analog signals. In addition to these important functions, Motorola's family of pulse–code modulation monocircuits also provides the band–limiting filter functions – all on a single monolithic CMOS chip with extremely low power dissipation.

The Monocircuits require no external components. They incorporate the bandpass filter required for antialiasing and 60 Hz rejection, the A/D–D/A conversion functions for either U.S. Mu–Law or European A–Law companding formats, the low–pass filter required for reconstruction smoothing, an on–board precision voltage reference, and a variety of options that lend flexibility to circuit implementations. Unique features of Motorola's monocircuit family include wide power supply range (6.0 to 13 V), selectable on–board voltage reference (2.5, 3.1, or 3.8 V), and TTL or CMOS I/O interface.

Motorola supplies three versions in this series. The MC145503 and MC145505 are general–purpose devices in 16 pin packages designed to operate in digital telephone or line card applications. The MC145502 is the full–feature device that presents all of the options available on the chip. This device is packaged in a 22 pin DIP and 28 pin chip carrier package.

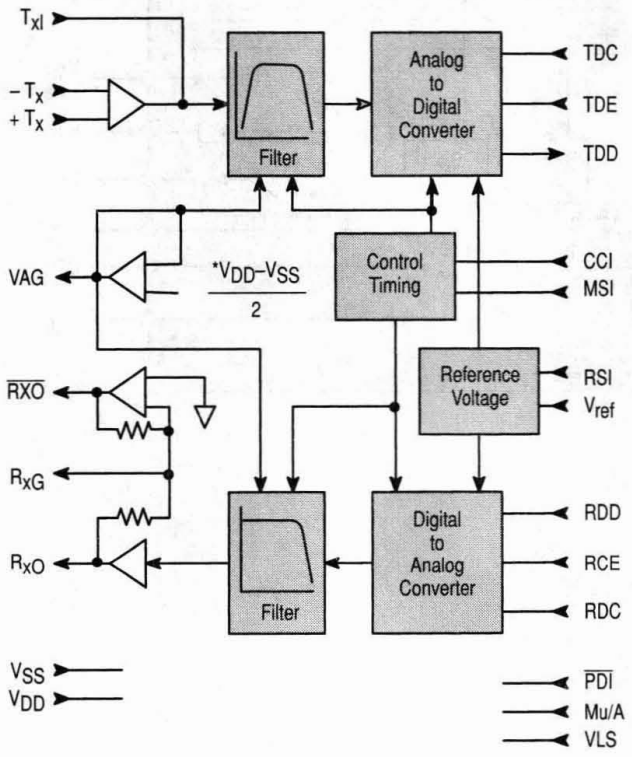

MC145554/57/64/67

Case 648, 751D, 751G, 738

These per channel PCM Codec–Filters perform the voice digitization and reconstruction as well as the band limiting and smoothing required for PCM systems. They are designed to operate in both synchronous and asynchronous applications and contain an on–chip precision voltage reference. The MC145554 (Mu–Law) and MC145557 (A–Law) are general purpose devices that are offered in 16 pin packages. The MC145564 (Mu–Law) and MC145567 (A–Law), offered in 20 pin packages, add the capability of analog loop–back and push–pull power amplifiers with adjustable gain.

All four devices include the transmit bandpass and receive lowpass filters on–chip, as well as active RC pre–filtering and post–filtering. Fully differential analog circuit design assures lowest noise. Performance is specified over the extended temperature range of –40° to +85°C.

These PCM Codec–Filters accept both industry standard clock formats. They also maintain compatibility with Motorola's family of MC3419/MC33120 SLIC products.

MC14LC5480 Series

All devices in the MC14LC5480 series (including MC14LC5480, MC145481, MC145482, MC145483 and MC145484) are general purpose per channel PCM Codec–Filters. The MC14LC5480, MC145481 and MC145484 are pin–selectable Mu–Law or A–Law companding. The MC145482 and MC145483 are 13–bit linear PCM Codec–Filters. These devices offered in 20–pin DIP, SOIC, and SSOP packages. These devices perform the voice digitization and reconstruction as well as the band limiting and smoothing required for PCM systems. These devices are designed to operate in both synchronous and asynchronous applications and contain an on–chip precision reference voltage.

These devices have an input operational amplifier whose output is the input to the encoder sections. The encoder section immediately low–pass filters the analog signal with an active R–C filter to eliminate very high frequency noise from being modulated down to the passband by the switched capacitor filter. From the active R–C filter, the analog signal is converted to a differential signal.

From this point, all analog signal processing is done differentially. This allows processing of an analog signal that is twice the amplitude allowed by the single–ended design, which reduces the significance of noise to both the inverted and non–inverted signal paths. Another advantage of the differential design is that noise injected via the power supplies is a common–mode signal that is canceled when the inverted and non–inverted signals are recombined. This dramatically improves the power supply rejection ratio.

The MC14LC5480EVK is the primary tool for evaluation and demonstration of the MC14LC5480 series.

MC14LC5480DW, SD

Case 751D, 940C–02

This 5.0 V PCM Codec–Filter offers the following features:

- Single 5.0 V Power Supply
- Typical Power Dissipation of 15 mW, Power–Down of 0.01 mW
- Fully–Differential Analog Circuit Design for Lowest Noise
- Transmit Band–Pass and Receive Low–Pass Filters On–Chip
- Active R–C Pre–Filtering and Post–Filtering
- Mu–Law and A–Law Companding by Pin Selection
- On–Chip Precision Reference Voltage (1.575 V)
- Push–Pull 300 Ω Power Drivers with External Gain Adjust

MC145481DW, SD

Case 751D, 940C–02

This 3.0 V PCM Codec–Filter offers the following features:

- Single 2.7 V to 5.25 V Power Supply
- Typical Power Dissipation of 8.0 mW at 3.0 V, Power–Down of 0.01 mW
- Fully–Differential Analog Circuit Design for Lowest Noise
- Transmit Band–Pass and Receive Low–Pass Filters On–Chip
- Active R–C Pre–Filtering and Post–Filtering
- Mu–Law and A–Law Companding by Pin Selection
- On–Chip Precision Reference Voltage of 0.886 V for a –5.0 dBm TLP at 600 Ω
- Push–Pull 300 Ω Power Drivers with External Gain Adjust

MC145482DW, SD

Case 751D, 940C–02

This 5.0 V 13–bit linear PCM Codec–Filter offers the following features:

- Single 5.0 V Power Supply
- 13–Bit Linear ADC/DAC Conversions with 2s Complement Data Format
- Typical Power Dissipation of 25 mW, Power–Down of 0.01 mW
- Fully–Differential Analog Circuit Design for Lowest Noise
- Transmit Band–Pass and Receive Low–Pass Filters On–Chip
- Trasmit High–Pass Filter May be Bypassed by Pin Selection
- Active R–C Pre–Filtering and Post–Filtering
- On–Chip Precision Reference Voltage of 1.575 V for a 0 dBm TLP at 600 Ω
- Full–Duplex Sample Rates from 7.0 to 16 k Samples/s
- 3–Terminal Input Op Amp Can Be Used, or a 2–Channel Input Multiplexer
- Receive Gain Control from 0 to –21 dB in 3.0 dB Steps in Synchronous Operation
- Push–Pull 300 Ω Power Drivers with External Gain Adjust

MC145483DW, SD

Case 751D, 940C–02

This 3.0 V 13–bit linear PCM Codec–Filter offers the following features:

- Single 3.0 V Power Supply
- 13–Bit Linear ADC/DAC Conversions with 2s Complement Data Format
- Typical Power Dissipation of 8.0 mW, Power–Down of 0.01 mW
- Fully–Differential Analog Circuit Design for Lowest Noise
- Transmit Band–Pass and Receive Low–Pass Filters On–Chip
- Trasmit High–Pass Filter May be Bypassed by Pin Selection
- Active R–C Pre–Filtering and Post–Filtering
- On–Chip Precision Reference Voltage of 0.886 V for a –5.0 dBm TLP at 600 Ω
- 3–Terminal Input Op Amp Can Be Used, or a 2–Channel Input Multiplexer
- Receive Gain Control from 0 to –21 dB in 3.0 dB Steps in Synchronous Operation
- Push–Pull 300 Ω Power Drivers with External Gain Adjust

The MC145483 is ideal as a DSP front end. In fact, the MC145483 is used in the evaluation platform for Motorola's DSP56L811. The MC145483 makes the DSP56L811EVM evaluation platform ideal for developing and implementing many messaging and audio processing algorithms.

MC145484DW, SD

Case 751D, 940C–02

This 5.0 V PCM Codec–Filter offers the following features:

- Single 5.0 V Power Supply
- Typical Power Dissipation of 15 mW, Power–Down of 0.01 mW
- Fully–Differential Analog Circuit Design for Lowest Noise
- Transmit Band–Pass and Receive Low–Pass Filters On–Chip
- Active R–C Pre–Filtering and Post–Filtering
- Mu–Law and A–Law Companding by Pin Selection
- On–Chip Precision Reference Voltage of 1.575 V for a 0 dBm TLP at 600 Ω
- Push–Pull 300 Ω Power Drivers with External Gain Adjust

MC14LC5540P, DW, FU

Case 710, 751F, 873

The MC14LC5540 ADPCM Codec is a single chip implementation of a PCM Codec–Filter and an ADPCM encoder/decoder, and therefore provides an efficient solution for applications requiring the digitization and compression of voiceband signals. This device is designed to operate over a wide voltage range, 2.7 V to 5.25 V, and as such is ideal for battery powered as well as ac powered applications. The MC14LC5540 ADPCM Codec also includes a serial control port and internal control and status registers that permit a microcomputer to exercise many built–in features.

The ADPCM Codec is designed to meet the 32 kbps ADPCM conformance requirements of CCITT Recommendation G.721 (1988) and ANSI T1.301 (1987). It also meets ANSI T1.303 and CCITT Recommendation G.723 for 24 kbps ADPCM operation, and the 16 kbps ADPCM standard, CCITT Recommendation G.726. This device also meets the PCM conformance specification of the CCITT G.714 Recommendation.

Figure 1. MC14LC5540 ADPCM Codec Block Diagram

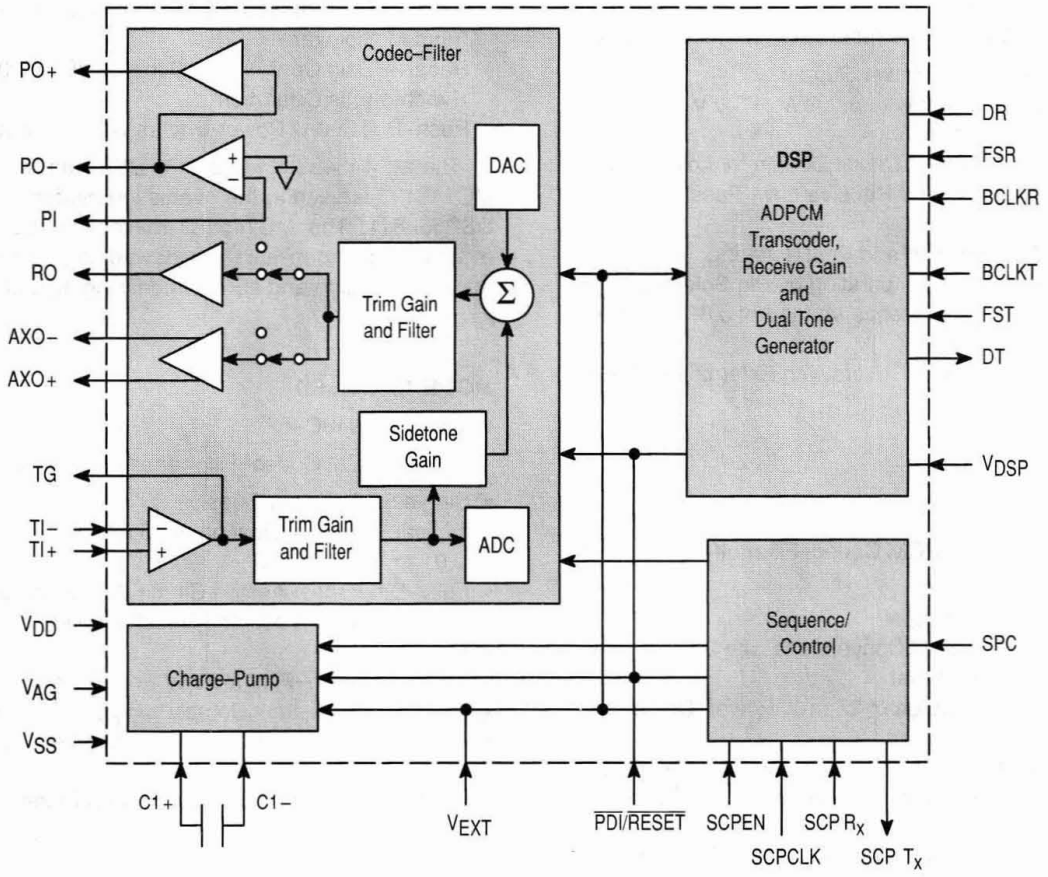

MC145537EVK

ADPCM Codec Evaluation Kit

The MC145537EVK is the primary tool for evaluation and demonstration of the MC14LC5540 ADPCM Codec. It provides the necessary hardware and software interface to access the many features and operational modes of the MC14LC5540 ADPCM Codec.

- Provides Stand Alone Evaluation on Single Board
- The kit provides Analog–to–Analog, Analog–to–Digital or Digital–to–Analog Connections – with Digital Connections being 64 kbps PCM, 32 or 24 kbps ADPCM, or 16 kbps CCITT G.726 or Motorola Proprietary ADPCM
- +5.0 V Only Power Supply, or 5.0 V Plus 2.7 to 5.25 V Supply
- Easily Interfaced to Test Equipment, Customer System, Second MC145537EVK or MC145536EVK (5.0 V Only) for Full Duplex Operation
- Convenient Access to Key Signals
- Piezo Loudspeaker
- EIA–232 Serial Computer Terminal Interface for Control of the MC14LC5540 ADPCM Codec Features
- Compatible Handset Provided
- Schematics, Data Sheets, and User's Manual Included

Figure 2. MC145537EVK Block Diagram

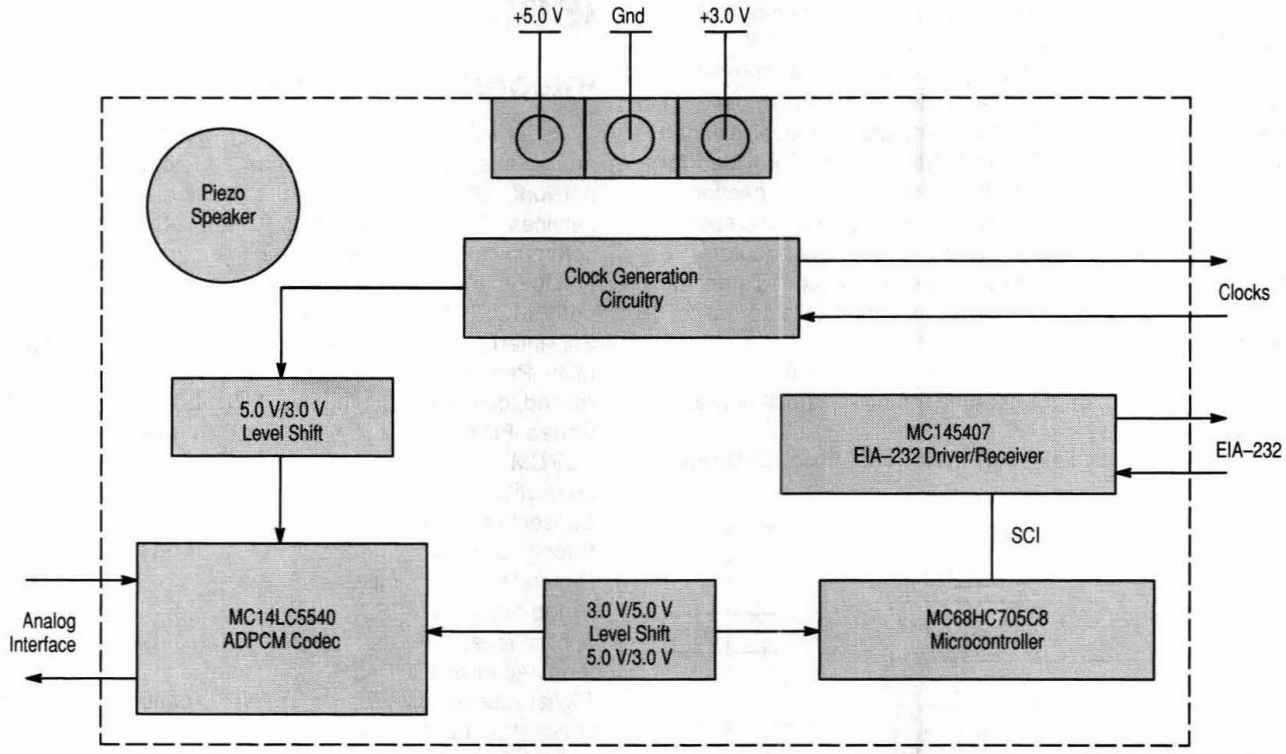

MC14LC5480EVK

PCM Codec–Filter Evaluation Kit

The MC14LC5480EVK is the primary tool for evaluation and demonstration of the following PCM and linear codec–filters.

Table 10. Mu/A–Law and Linear PCM Codec–Filters

Part Number	V_{CC}	Description
MC14LC5480	5.0 V	Mu/A–Law Companding
MC145481	3.0 V	Mu/A–Law Companding
MC145482	5.0 V	13–Bit Linear
MC145483	3.0 V	13–Bit Linear
MC145484	5.0 V	Mu/A–Law Companding

Figure 3. is a functional block diagram of the MC14LC5480EVK. The MC14LC5480EVK is comprised of two functional blocks — the clocking circuitry, and one of the PCM Codec–Filters listed in Table 10.

User I/O to the board is provided via a number of convenient connectors. First, an industry standard 4–pin RJ11 handset jack (P1) is provided to connect the handset included with the kit. Next, a 2x20 pin header (P13) is provided for access to key analog and digital signals for connection to external test equipment, a user defined system, or a second MC14LC5480EVK. And finally, two male BNC connectors (P6 and P14) provide convenient access to the codec's analog transmit and receive paths for connection to external test equipment.

The MC14LC5480EVK requires either a 5.0 V or 3.0 V supply provided through P2 at the top of the circuit board.

Figure 3. MC14LC5480EVK Functional Block Diagram

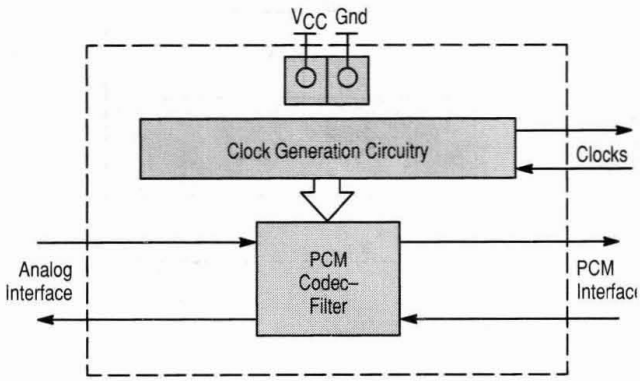

- Provides Standalone Evaluation on a Single Board
- Single 5.0 V or 3.0 V Power Supply
- Easily Interfaced to Test Equipment, Customer System, or Second MC14LC5480EVK
- Convenient Access to Key Signals
- Generous Wire Wrap Area for Application Development
- Kit Provides Analog–to–Analog, Analog–to–Digital, and Digital–to–Analog
- Compatible Handset Provided
- Kit Includes: Schematics, Data Sheets, User's Manual, and Samples of Each PCM Codec–Filter

Dual Tone Multiple Frequency Receiver

MC145436AP, DW

Case 646, 751G

This device contains the filter and decoder for detection of a pair of tones conforming to the DTMF standard with outputs in hexadecimal. Switched capacitor filter technology is used together with digital circuitry for the timing control and output circuits. The MC145436A provides excellent power–line noise and dial tone rejection.

Replaces MC145436P, DW.

ISDN Voice/Data Circuits

Integrated Services Digital Network

ISDN is the revolutionary concept of converting the present analog telephone networks to an end–to–end global digital network. ISDN standards make possible a wide variety of services and capabilities that are revolutionizing communications in virtually every industry.

Motorola's ISDN product family includes the MC14LC5472 and MC145572 U–Interface Transceivers, MC145574 S/T–Interface Transceivers, and the MC68302 Integrated Multi–Protocol Processor. These are supported by a host of related devices including the MC14LC5480 +5.0 V PCM Codec–Filter, MC145532 ADPCM Transcoder, MC14LC5540 ADPCM Codec, MC145500 family of single–chip codec/filters, MC145436A DTMF Decoder, MC33120 Subscriber Loop Interface Circuit, MC34129 Switching Power Supply Controller, and the MC145406/07 CMOS EIA 232–E Driver/ Receiver family.

Motorola's key ISDN devices fit into four ISDN network applications: a digital subscriber line card, an NT1 network termination, an ISDN terminal adapter, and an ISDN terminal. Digital subscriber line cards are used in central offices, remote concentrators, channel banks, T1 multiplexers, and other switching equipment. The NT1 network termination block illustrates the simplicity of remote U– to S/T–interface conversion. The ISDN terminal adapter and ISDN terminal block show how Motorola ICs are used to combine voice and data in PC compatible boards, digital telephones, and other terminal equipment. Expanded applications such as a PBX may include these and other Motorola ISDN circuits. Many "non–ISDN" uses, such as pairgain applications, are appropriate for Motorola's ISDN devices as well.

Second Generation U–Interface Transceivers

MC145572PB

Case 824D

MC145572FN

Case 777

The MC145572 fully conforms to ANSI T1.601–1992, the North American standard for ISDN Basic Access on a single twisted–wire pair. The transceiver achieves a remarkable 10^{-7} bit error rate performance on all ANSI specified test loops with worst–case impairments present. The state–of–the–art 0.65 micron single–chip solution uses advanced design techniques to combine precision analog signal processing elements with three digital signal coprocessors to build an adaptively equalized echo cancelling receiver.

Two modes of handling U–interface maintenance functions are provided on the MC145572. In the automatic maintenance mode the U–interface transceiver handles all ANSI specified maintenance and channel procedures internally to minimize your software development effort. Automatic procedures include generating and monitoring the cyclic redundancy check, reporting and counting far end block errors (near end block errors too), handling the ACT and DEA bits, as well as monitoring and appropriately responding to embedded operations channel messages.

The MC145572 has 275 mW maximum power dissipation. It also has an enhanced TDM interface that supports an on–chip timeslot assigner, GCI and IDL modes of operation.

The optional manual maintenance mode lets you choose an inexpensive microcontroller, such as a member of Motorola's MC68HC05 family, to control and augment the standard maintenance channel functions. This flexible feature also allows for easy implementation of proprietary maintenance functions.

Second Generation S/T–Interface Transceivers

MC145574PB

Case 873A

MC145574DW

Case 751F

The MC145574 S/T–Interface Transceivers provide a CCITT I.430 compatible interface for use in line card, network termination, and ISDN terminal equipment applications. Manufactured with Motorola's advanced 0.65 micron CMOS mixed analog and digital process technology, the MC145574 is a physical layer device capable of operating in point–to–point or point–to–multipoint passive bus arrangements. In addition, the MC145574 implements the optional NT1 Star topology, NT terminal mode and TE slave mode.

This device features outstanding transmission performance. It reliably transmits over 1 kilometer in a point–to–point application. Comparable performance is achieved in all other topologies as well. Other features include pin selectable terminal or network operating modes, industry standard microprocessor serial control port, full support of the multiframing S and Q channels, a full range of loopbacks, and low power CMOS operation, with a maximum power consumption of 90 mW.

The MC145574 has an enhanced TDM interface that supports GCI, IDL and an on–chip timeslot assigner.

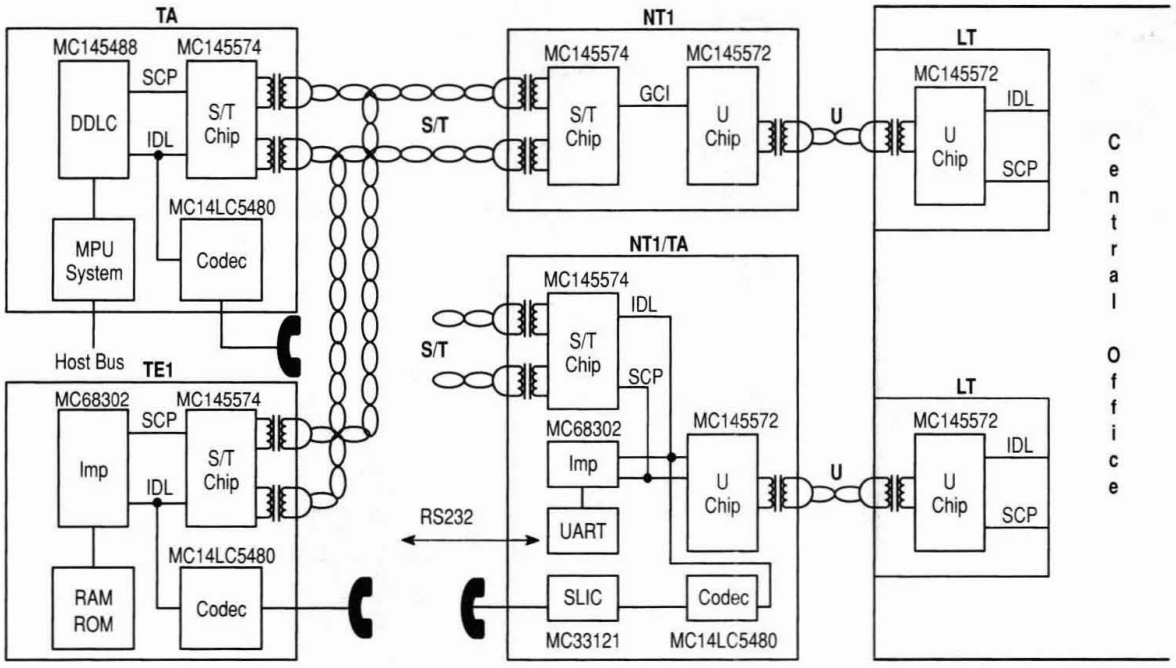

U–Interface Transceiver Evaluation Kit

MC145572EVK

This kit provides the hardware and software to evaluate the many configurations under which the MC145572EVK is able to operate. Used as a whole, it operates as both ends of the two–wire U interface that extends from the customer premises (NT1) to the switch line card (LT). The board can be functionally separated, providing independent NT1 and LT evaluation capability.

The kit provides the ability to interactively manipulate status registers in the MC145572EVK U–Interface transceiver or in the MC1455574S/T–Interface transceiver with the aid of an external terminal. The device can also be controlled using the MC68302 Integrated Multiprotocol Processor application development system to complete a total Basic Rate ISDN evaluation solution.

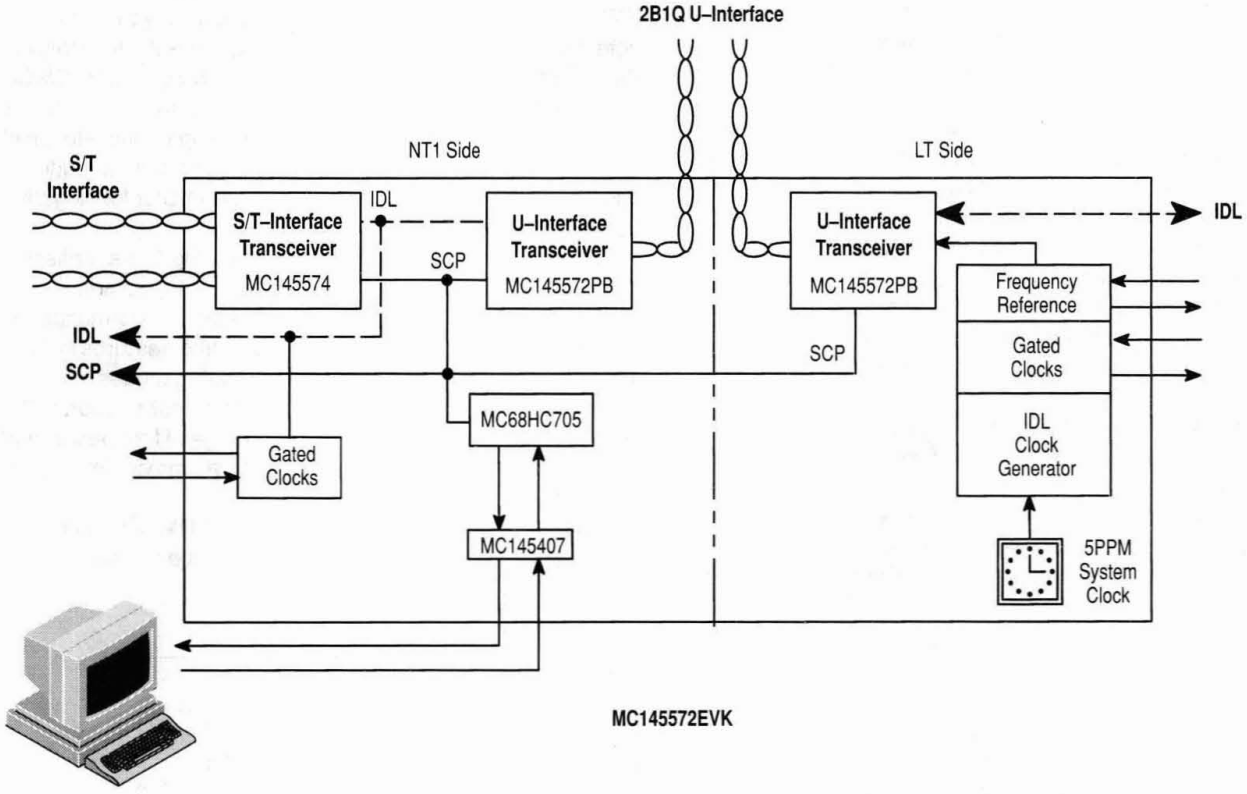

MC145572EVK

Voice/Data Communication (Digital Transmission)

2–Wire Universal Digital Loop Transceiver (UDLT)

MC145422P, DW Master Station

Case 708, 751E

MC145426P, DW Slave Station

Case 708, 751E

The UDLT family of transceivers allows the use of existing twisted–pair telephone lines (between conventional telephones and a PBX) for the transmission of digital data. With the UDLT, every voice–only telephone station in a PBX system can be upgraded to a digital telephone station that handles the complex voice/data communications with no increase in cabling costs.

In implementing a UDLT–based system the A/D to D/A conversion function associated with each telset is relocated from the PBX directly to the telset. The SLIC (or its equivalent circuit) is eliminated since its signaling information is transmitted digitally between two UDLTs.

The UDLT master–slave system incorporates the modulation/demodulation functions that permit data communications over a distance up to 2 kilometers. It also provides the sequence control that governs the exchange of information between master and slave. Specifically, the master resides on the PBX line card where it transmits and receives data over the wire pair to the telset. The slave is located in the telset and interfaces the monocircuit to the wire pair. Data transfer occurs in 10–bit bursts (8 bits of data and 2 signaling bits), with the master transmitting first, and the slave responding in a synchronized half–duplex transmission format.

UDLTs utilize a 256 kilobaud Modified Differential Phase Shift Keyed (MDPSK) burst modulation technique for transmission to minimize radio frequency, electromagnetic, and crosstalk interference. Implementation through CMOS technology takes advantage of low–power operation, increased reliability, and the proven capabilities to perform complex telecommunications functions.

Functional Features

- Provides Synchronous Duplex 64 kbits/Second Voice/Data Channel and Two 8 kbits/Second Signaling Data Channels Over One 26 AWG Wire Pair Up to 2 km.
- Compatible with Existing and Evolving Telephone Switch Architectures and Call Signaling Schemes
- Automatic Detection Threshold Adjustment for Optimum Performance Over Varying Signal Attenuations
- Protocol Independent
- Single 5.0 V to 8.0 V Power Supply

MC145422 Master UDLT

- 2.048 MHz Master Clock
- Pin Controlled Power–Down and Loop–Back Features
- Variable Data Clock – 64 kHz to 2.56 MHz
- Pin Controlled Insertion/Extraction of 8 kbits/Seconds Channel into LSB of 64 kbits/Second Channel for Simultaneous Routing of Voice and Data Through PCM Voice Path of Telephone Switch

MC145426 Slave UDLT

- Compatible with MC145500 Series and Later PCM Codec–Filters
- Automatic Power–Up/Down Feature
- On–Chip Data Clock Recovery and Generation
- Pin Controlled 500 Hz D3 or CCITT Format PCM Tone Generator for Audible Feedback Applications

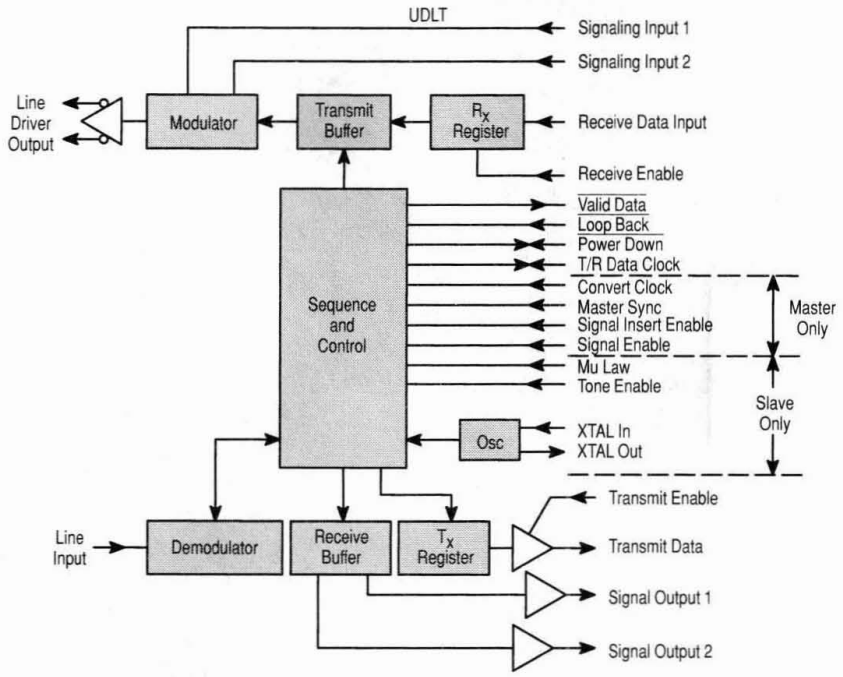

2–Wire ISDN Universal Digital Loop Transceiver II (UDLT II)

MC145421P, DW Master
Case 709, 751E

MC145425P, DW Slave
Case 709, 751E

Similar to the MC145422/26 UDLT, but provide synchronous full duplex 160 kbps voice and data communication in a 2B + 2D format for ISDN compatibility on a single twisted pair up to 1 km. Single 5.0 V power supply, protocol independent.

High–Speed Modem Chip Sets

The Motorola family of analog modem systems is a complete line of software upgradable modem solutions for a wide variety of PC, multimedia, and embedded applications. Each family member includes the basic data, fax, and voice modem features such as 33.6 kbps V.34 capability, as well as K56flex™ compatibility. All systems are software upgradable to ITU–T V.PCM. When ordering these modems, all major integrated circuits and requisite software are included under one part number. Depending on the requirements of their system application, developers can choose between two passive or one active modem chip set. The two passive (or controller–less) solutions are the MS143452SK ISA modem chip set and the MS143455SK PCI modem chip set. The MS143450SK External Active Modem chip set does not require special host software and can be implemented as a standalone device.

The analog modem systems family also features reference design kits (RDKs) for rapid system implementation, and evaluation kits (EVKs) for more engineering intensive system and software development in conjunction with the Motorola modem software. Evaluation kits are intended to provide a system evaluation and software development platform to Motorola customers. Reference design kits are not intended for detailed system evaluation and software development. RDKs will: demonstrate lowest cost implementation, be certified for electrical emissions and electrical safety, and be homologated for target countries. RDKs also allow for customers to evaluate modem/fax and voice performance.

Analog Modem Systems Family Chip Sets and Software

Series	Host Controller	Host Data Pump
MS143450SK	No	No
MS143452SK	Yes	No
MS143455SK	Yes	No

Series	DSP Controller	DSP Data Pump	ISDN–Capable
MS143450SK	Yes	Yes	No
MS143452SK	No	Yes	No
MS143455SK	No	Yes	No

External Active Modem Chip Set and Software

MS143450SK

The Motorola MS143450SK is a complete analog modem chip set and software for retail and embedded modem applications. The MS143450SK DSP–based modem controller and data pump are upgradable via software download. This ensures that Motorola upgrades or improvements of modem software can rapidly be incorporated into any end product. The MS143450SK's modem and voice functions utilize a Motorola DSP56300 general purpose DSP core. The DSP56300 family is a 1X (one instruction per clock cycle) full 24–bit DSP architecture and is well suited for modem and audio DSP applications.

Included with the MS143450SK is Motorola's complete suite of modem software. With the Motorola software, developers can rapidly incorporate an upgradable high–performance communications solution into their system.

Two development kits are available for the MS143450SK External Active Modem Chip Set and Software; the MC143450EVK Evaluation Kit and the MC143450RDK Reference Design Kit. The MC143450EVK is targeted at modem developers wanting to adapt existing DAAs to the Motorola modem chip set. The MC143450RDK is a turn–key design for the Motorola external active modem.

The MC143450RDK is designed with minimum cost and rapid implementation in mind. It allows the developer to evaluate modem and voice feature performance and to perform a detailed system cost analysis. An evaluation software license is included along with schematics, complete Bill of Materials (BOM), layout recommendations, and Gerber files for PCB fabrication. The MC143450RDK is also designed to pass all electrical and safety certifications required by national certification bodies worldwide. This includes regulations such as FCC Part 68 and FCC Part 15 in the United States.

The MC143450EVK mezzanine card architecture allows developers to design their own DAA circuitry or add additional memory as needed. The MC143450EVK allows developers to perform the same performance analysis as in the MC143450RDK.

Integrated Circuits Included

- MC143416 Dual 16–Bit Linear Codec–Filter
- DSP56303 24–Bit Digital Signal Processor

Software Included

- Active Modem Controller and Data Pump Software

Features

- High Performance 24–Bit DSP
- High Quality Dual Integrated Codec
- ITU–T V.80 (Video Ready), Enhanced Caller ID, Plug and Play Support, and Distinctive Ring
- Data/Fax/Voice Features

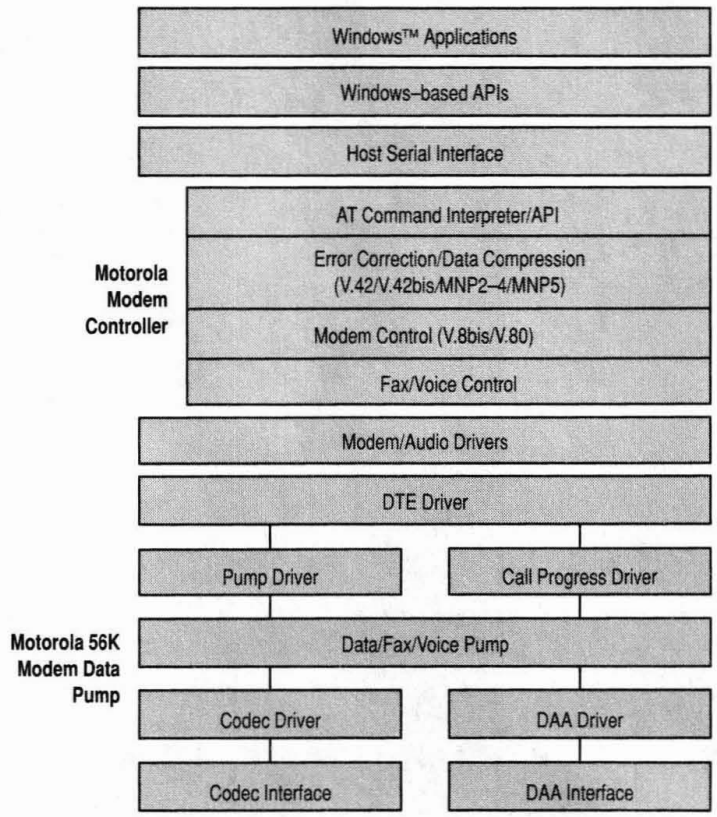

ISA Passive Modem Chip Set and Software

MS143452SK

The MS143452SK is a passive modem, developed using Motorola's DSP56303 24–Bit Digital Signal Processor (DSP). It is implemented with the control code running on the host PC and the data pump code running on the DSP. The main features of the MS143452SK are: a V.34/56 kbps PCM data modem using V.42/MNP®4 error correction and a V.42bis/MNP5 data compression, a V.17 fax modem using a TIA/EIA 578 Class I fax, and a voice modem supporting a full–duplex speakerphone with telephone answering machine.

The modem system is shown in the block diagram. The application software uses the ISA interface to send and receive data/control information to and from the MS143452SK. The control code includes error correction, data compression, and Hayes™ AT command sets implemented on the host computer. The MS143452SK utilizes a single DSP56303 processor performing data pump operations.

The MC143452RDK is the reference design kit for the MS143452SK chip set, and is designed with minimum cost and rapid implementation in mind. It allows the developer to evaluate modem and voice feature performance and to perform a detailed system cost analysis. An evaluation software license is included along with schematics, complete Bill of Materials (BOM), layout recommendations, and Gerber files for PCB fabrication. The MC143452RDK is also designed to pass all electrical and safety certifications required by national certification bodies worldwide. This includes regulations such as FCC Part 68 and FCC Part 15 in the United States.

Integrated Circuits Included

- MC143416 Dual 16–Bit Linear Codec–Filter
- DSP56303 24–Bit Digital Signal Processor

Software Included

- ISA Passive Modem Controller and Data Pump Software

Features

- Programmable DSP Using External SRAM for Data/Fax/Voice Modems
- Control Code Implemented on Host PC
- Domestic Caller ID
- Distinctive Ring
- Data/Fax/Voice Modem with Host–Based Controller
- Operation System Support: Windows™ 95 and Windows NT™

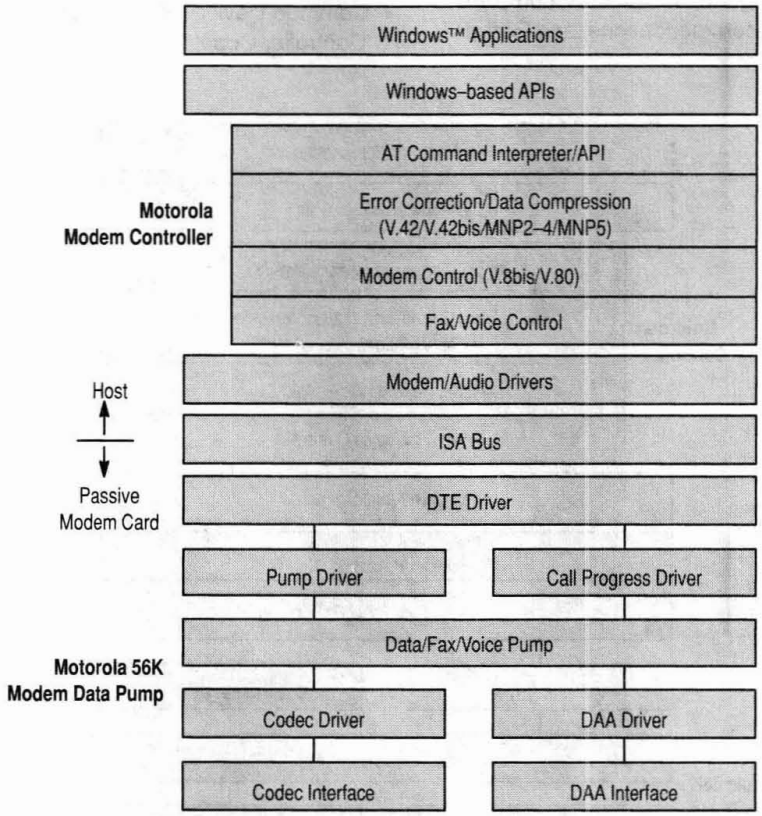

PCI Passive Modem Chip Set and Software

MS143455

The MS143455SK is a passive modem, developed using Motorola's DSP56303 24–Bit Digital Signal Processor (DSP). It is implemented with the control code running on the host PC and the data pump code running on the DSP. The main features of the MS143455SK are: a V.34/56 kbps PCM data modem using V.42/MNP®4 error correction and a V.42bis/MNP5 data compression, a V.17 fax modem using a TIA/EIA 578 Class I fax, and a voice modem supporting a full–duplex speakerphone with telephone answering machine. The MS143455SK is a complete modem chip set with a Windows™ 95 and Windows NT™ device driver and a PCI interface.

The modem system is shown in the block diagram. The application software uses the PCI interface to send and receive data/control information to and from the MS143455SK. The control code includes error correction, data compression, and Hayes™ AT command sets implemented on the host computer. The MS143455SK utilizes a single DSP56303 processor performing data pump operations.

The MC143455RDK is the reference design kit for the MS143455SK chip set, and is designed with minimum cost and rapid implementation in mind. It allows the developer to evaluate modem and voice feature performance and to perform a detailed system cost analysis. An evaluation software license is included along with schematics, complete Bill of Materials (BOM), layout recommendations, and Gerber files for PCB fabrication. The MC143455RDK is also designed to pass all electrical and safety certifications required by national certification bodies worldwide. This includes regulations such as FCC Part 68 and FCC Part 15 in the United States.

Integrated Circuits Included

- MC143416 Dual 16–Bit Linear Codec–Filter (COder/DECoder)
- DSP56303 24–Bit Digital Signal Processor
- PCI Bus Interface Controller ASIC

Software Included

- PCI Passive Modem Controller and Data Pump Software

Features

- High–Performance K56flex™ Data, Voice, and Fax Modem Which Interfaces Popular Communications Applications
- Controller–Less (Host–Based Controller) for Lowest Cost and Minimum Utilization of Host CPU Resources
- Operating System Support Device Drivers Included: Windows 95 and Windows NT Device Drivers
- High–Performance 24–Bit DSP with Adjustable Control Features for Market Differentiation
- High Quality Dual Integrated Codec–Filter Analog Front End (AFE)
- Common Device Driver Software for ISA and PCI Controller Code

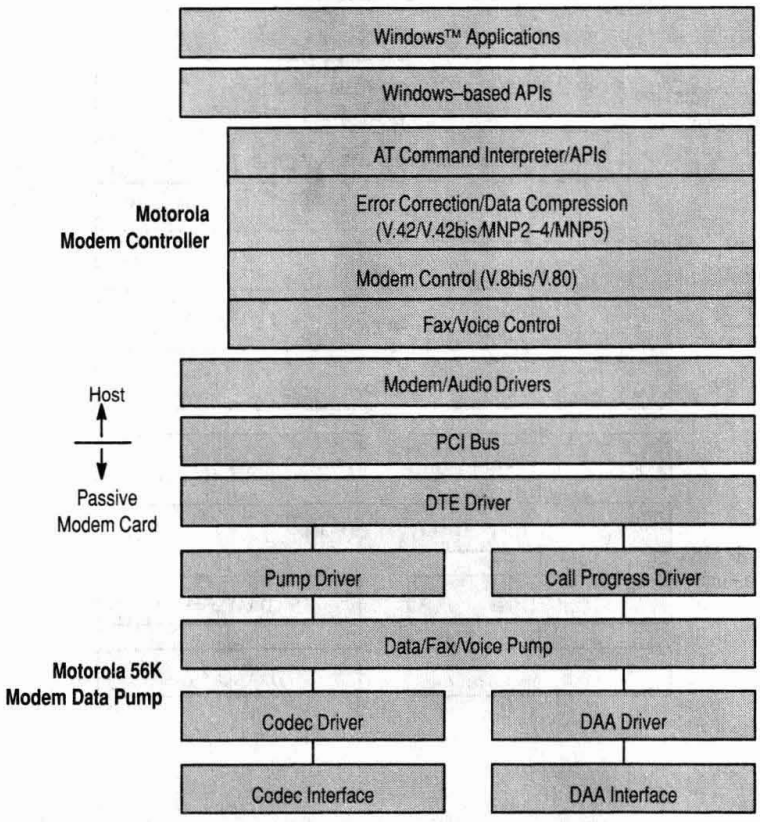

Analog Front End ICs

Dual 16–Bit Linear Codec–Filter

MC143416PB

Case 824D

The MC143416 Dual 16–Bit Linear Codec–Filter is a single–chip implementation of the data conversion interface required to design high–speed modems meeting a wide range of standards such as ITU–T V.34 and PCM modem. It includes two high performance Analog–to–Digital (A/D) and Digital–to–Analog (D/A) data converters. The device performs all filtering operations related to the conditioning and sample rate conversion of signals to and from the data interface. Output from both codecs (COder/DECoder) is in 16–bit 2s complement format.

The MC143416 includes the necessary logic needed to generate all clocks (oversampling, intermediate frequency, and baud rate) required to perform the data processing operations involved in the oversampling conversion of voice and data signals. Sample rates are fully programmable in the range of 8 kilosamples/second (ks/s) to 16 ks/s, including 8000, 9600, 11025, 12000, and 16000 samples/second. The bandwidth of the MC143416 is 0.425 * Sample Frequency (FS).

The MC143416 includes two Synchronous Serial Interfaces (SSIs) through which an external Digital Signal Processor (DSP) can configure and monitor the operation of the device. Digital sample data is transferred to and from the codecs through the serial ports. In addition, information can be written and read to the control and status registers of the device via the serial port, transparent to the flow of sample data. When used in a high speed modem application, the MC143416 provides the analog front end interface required to support modem and voice features.

MC143416 Features:

- Fully–Differential Analog Circuit Design for Lowest Noise
- Two High Performance Sigma–Delta A/D and D/A Converters
- Band–Pass and Low–Pass Filtering for Both Codecs is Performed On–Chip
- Power Monitor Circuit
- Single 5.0 V ± 5% Power Supply
- Two Configurable Serial Ports
- On–Chip Precision Reference Voltage
- On–Chip Speaker Driver and Mixer with Programmable Gain — Capable of Delivering 15 mW of Power into a Small Speaker (32 Ω)
- Bandwidth is 0.425 * FS
- No External Filtering Required Because of Flat Response Over Passband
- Capable of Providing the Analog Front End for Wide Range of Modem Standards

Figure 4. MC143416 Block Diagram

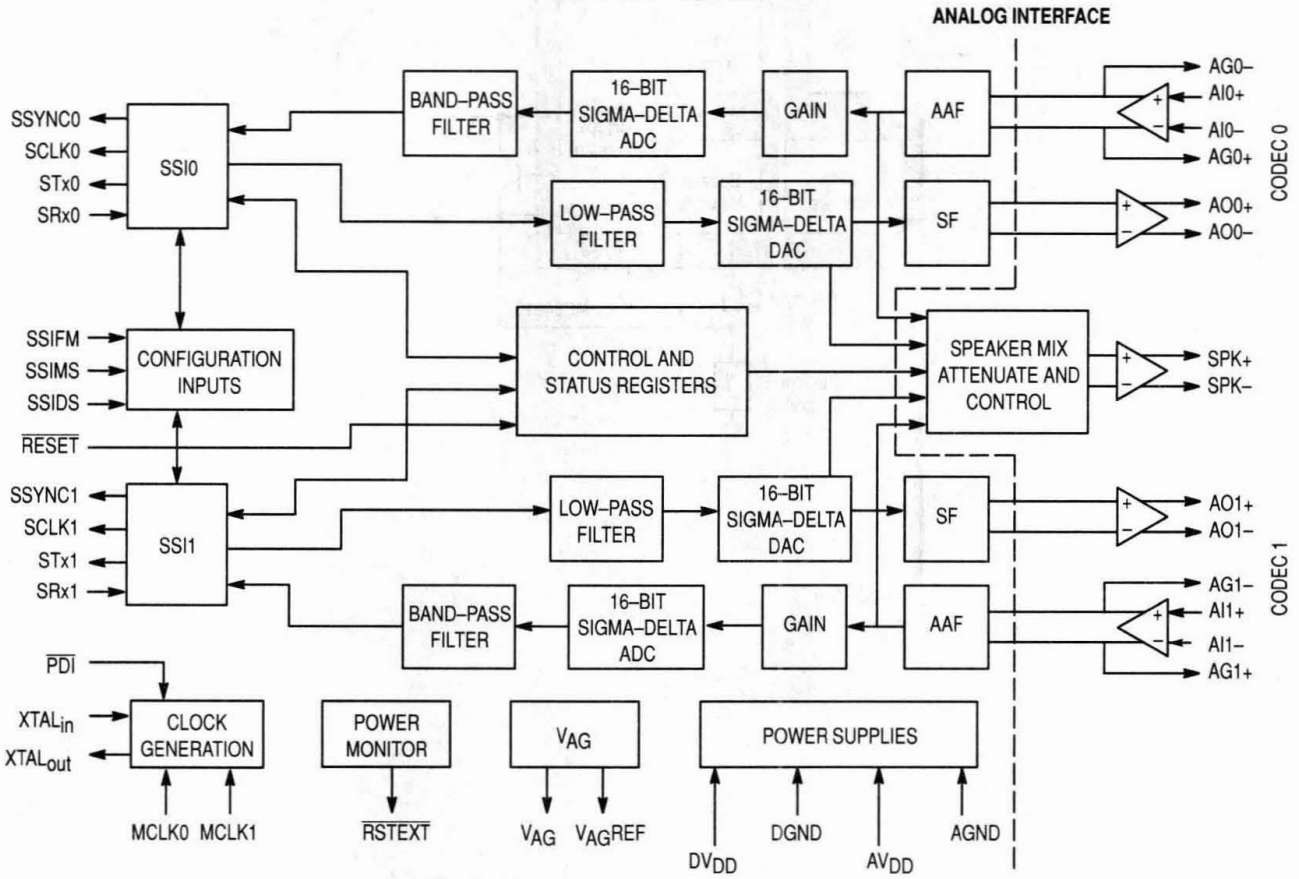

Electronic Telephone

The Complete Electronic Telephone Circuit

MC34010P, FN

T_A = –20° to +60°C, Case 711, 777

The conventional transformer–driven telephone handset is undergoing major innovations. The bulky transformer is disappearing. So are many of its discrete components, including the familiar telephone bell. They are being replaced with integrated circuits that perform all the major handset functions simply, reliably and inexpensively . . . functions such as 2–to–4 wire conversion, DTMF dialing, tone ringing, and a variety of related activities.

The culmination of these capabilities is the Electronic Telephone Circuit, the MC34010. These ICs place all of the above mentioned functions on a single monolithic chip.

These telephone circuits utilize advanced bipolar analog (I^2L) technology and provide all the necessary elements of a modern tone–dialing telephone. The MC34010 even incorporates an MPU interface circuit for the inclusion of automatic dialing in the final system.

- Provides all basic telephone functions, including DTMF dialer, tone ringer, speech network and line voltage regulator
- DTMF generator uses low cost ceramic resonator with accurate frequency synthesis technique
- Tone ringer drives piezoelectric transducer and satisfies EIA–470 requirements
- Speech network provides 2–to–4 wire conversion with adjustable sidetone utilizing an electret transmitter
- On–chip regulator insures stable operation over wide range of loop lengths
- I^2L technology provides low 1.4 V operation and high static discharge immunity
- Microprocessor interface port for automatic dialing features

Also Available

A broad line of additional telephone components for customizing systems design.

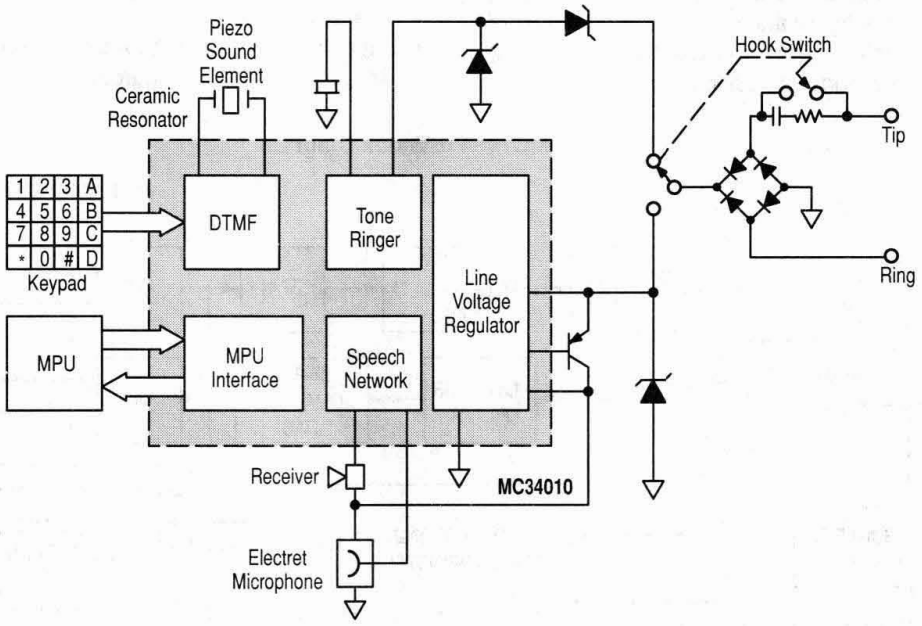

Tone Ringers

The MC34017 Tone Ringer is designed to replace the bulky bell assembly of a telephone, while providing the same function and performance under a variety of conditions. The operational requirements spelled out by the FCC and EIA–470, simply stated, are that a ringer circuit MUST function when a ringing signal is provided, and MUST NOT ring when other signals (speech, dialing, noise) are on the line. The tone ringers described below were designed to meet those requirements with a minimum of external components.

MC34017P, D

T_A = –20° to +60°C, Case 626, 751

- Complete Telephone Bell Replacement Circuit with Minimum External Components
- On–Chip Diode Bridge and Transient Protection
- Direct Drive for Piezoelectric Transducers
- Push Pull Output Stage for Greater Output Power Capability
- Base Frequency Options
  - MC34017–1: 1.0 kHz
  - MC34017–2: 2.0 kHz
  - MC34017–3: 500 Hz
- Input Impedance Signature Meets Bell and EIA Standards
- Rejects Rotary Dial Transients

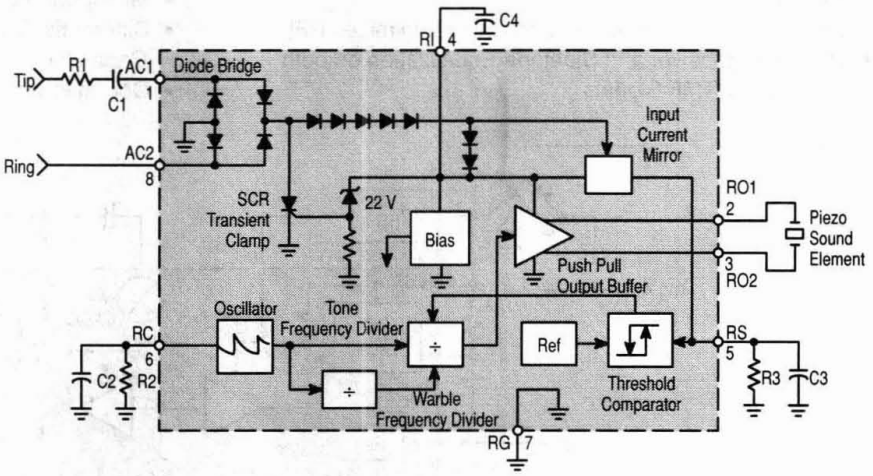

MC34217P, D

T_A = –20° to +60°C, Case 626, 751

- Complete Telephone Bell Replacement
- On–Chip Diode Bridge
- Internal Transient Protection
- Differential Output to Piezo Transducer for Louder Sound
- Input Impedance Signature Meets Bell and EIA Standards
- Rejects Rotary Dial and Hook Switch Transients
- Base Frequency and Warble Frequencies are Independently Adjustable
- Adjustable Base Frequency
- Reduced Number of Externals

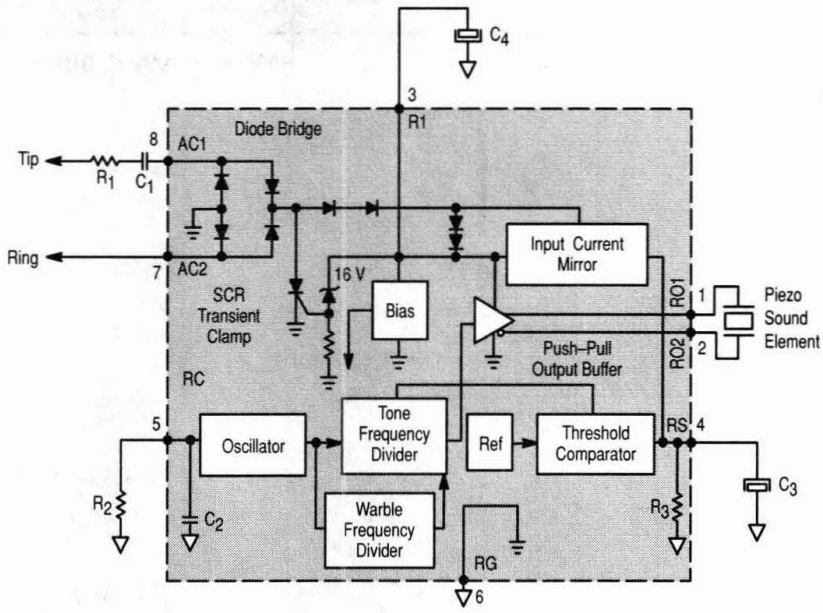

Speech Networks

Telephone Speech Network with Dialer Interface

MC34114P, DW

T_A = –20° to +70°C, Case 707, 751D

- Operation Down to 1.2 V
- Adjustable Transmit, Receive, and Sidetone Gains by External Resistors
- Differential Microphone Amplifier Input Minimizes RFI
- Transmit, Receive, and Sidetone Equalization on both Voice and DTMF Signals
- Regulated 1.7 V Output for Biasing Microphone
- Regulated 3.3 V Output for Powering External Dialer
- Microphone and Receive Amplifiers Muted During Dialing
- Differential Receive Amplifier Output Eliminates Coupling Capacitor
- Operates with Receiver Impedances of 150 Ω and Higher

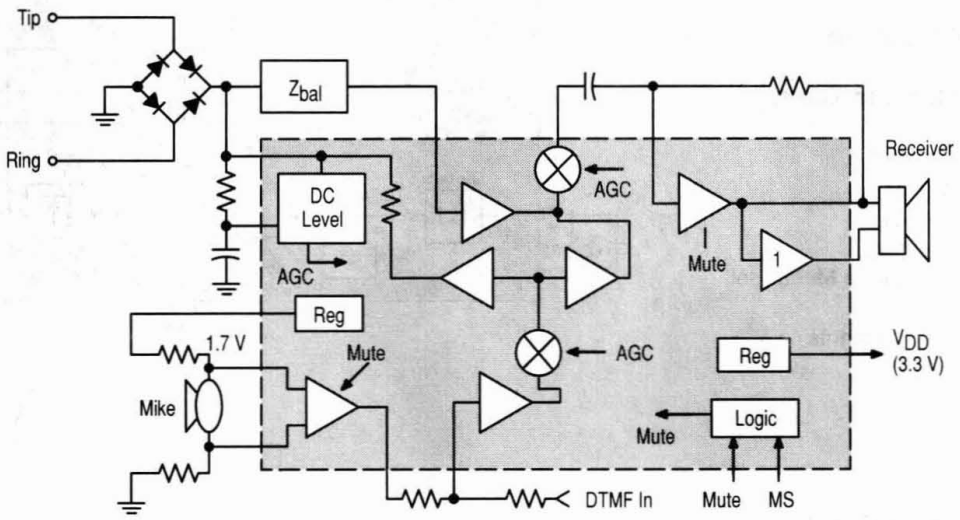

Cordless Universal Telephone Interface

MC34016DW, P

T_A = –20° to +70°C, Case 751D, 738

The MC34016 is a telephone line interface meant for use in cordless telephone base stations for CT0, CT1, CT2 and DECT. The circuit forms the interface towards the telephone line and performs all speech and line interface functions like dc and ac line termination, 2–4 wire conversion, automatic gain control and hookswitch control. Adjustment of transmission parameters is accomplished by two 8 bit registers accessible via the integrated serial bus interface and by external components.

- DC Masks for Voltage and Current Regulation
- Supports Passive or Active AC Set Impedance Applications
- Double Wheatstone Bridge Sidetone Architecture
- Symmetrical Inputs and Outputs with Large Signal Swing Capability
- Gain Setting and Mute Function for T_X and R_X Amplifiers
- Very Low Noise Performance
- Serial Bus Interface SPI Compatible
- Operation from 3.0 to 5.5 V

FEATURES

Line Driver Architecture

- Two DC Masks for Voltage Regulation
- Two DC Masks for Current Regulation
- Passive or Active Set Impedance Adjustment
- Double Wheatstone Bridge Architecture
- Automatic Gain Control Function

Transmit Channel

- Symmetrical Inputs Capable of Handling Large Voltage Swing
- Gain Select Option via Serial Bus Interface
- Transmit Mute Function, Programmable via Bus
- Large Voltage Swing Capability at the Telephone Line

Receive Channel

- Double Sidetone Architecture for Optimum Line Matching
- Symmetrical Outputs Capable of Producing High Voltage Swing
- Gain Select Option via Serial Bus Interface
- Receive Mute Function, Programmable via Serial Bus

Serial Bus Interface

- 3–Wire Connection to Microcontroller
- One Programmable Output Meant for Driving a Hookswitch
- Two Programmable Outputs Capable of Driving Low Ohmic Loads
- Two 8–Bit Registers for Parameter Adjustment

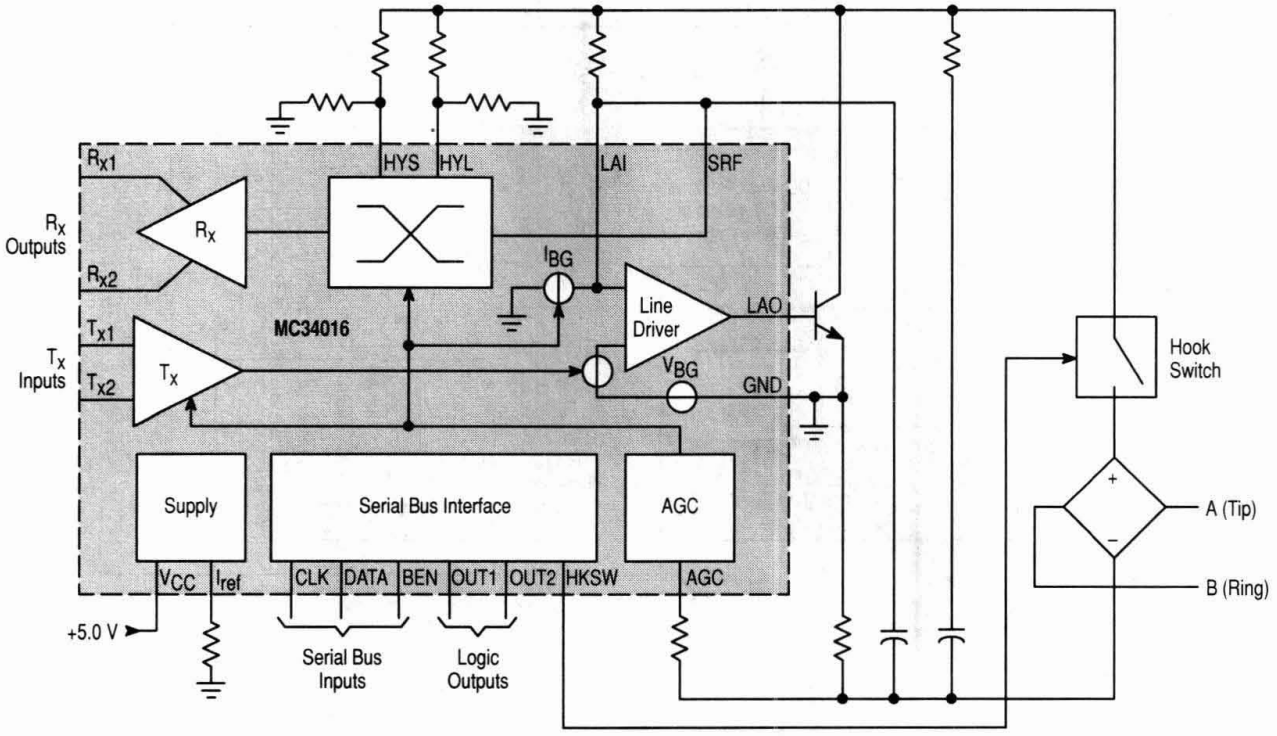

Programmable Telephone Line Interface Circuit with Loudspeaker Amplifier

MC34216DW

T_A = 0° to +70°C, Case 751F

The MC34216 is developed for use in telephone applications where besides the standard telephone functions also the group listening–in feature is required. In cooperation with a microcontroller, the circuit performs all basic telephone functions including DTMF generation and pulse–dialing. The listening–in part includes a loudspeaker amplifier, an anti–howling circuit and a strong supply. In combination with the TCA3385, the ringing is performed via the loudspeaker.

FEATURES

Line Driver and Supply

- DC and AC Termination of the Line
- Selectable Masks: France, U.K., Low Voltage
- Current Protection
- Adjustable Set Impedance for Resistive and Complex Termination
- Efficient Supply Point for Loudspeaker Amplifier and Peripherals

Handset Operation

- Transmit and Receive Amplifiers
- Adjustable Sidetone Network
- Line Length AGC
- Microphone and Earpiece Mute
- Earpiece Gain Increase Switch
- Microphone Squelch Function
- Transmit Amplifier Soft Clipping

Dialing and Ringing

- Generates DTMF, Pilot Tones and Ring Signal
- Interrupter Driver for Pulse–Dialing
- Low Current While Pulse–Dialing
- Optimized for Ringing via Loudspeaker
- Programmable Ring Melodies
- Uses Inexpensive 500 kHz Resonator

Loudspeaking Facility

- Integrated Loudspeaker Amplifier
- Peak–to–Peak Limiter Prevents Distortion
- Programmable Volume
- Anti–Howling Circuitry for Group Listening–In
- Interfacing for Handsfree Conversation

Application Areas

- Corded Telephony with Group Listening–In
- Cordless Telephony Base Station with Group Listening–In
- Telephones with Answering Machines
- Fax, Intercom, Modem

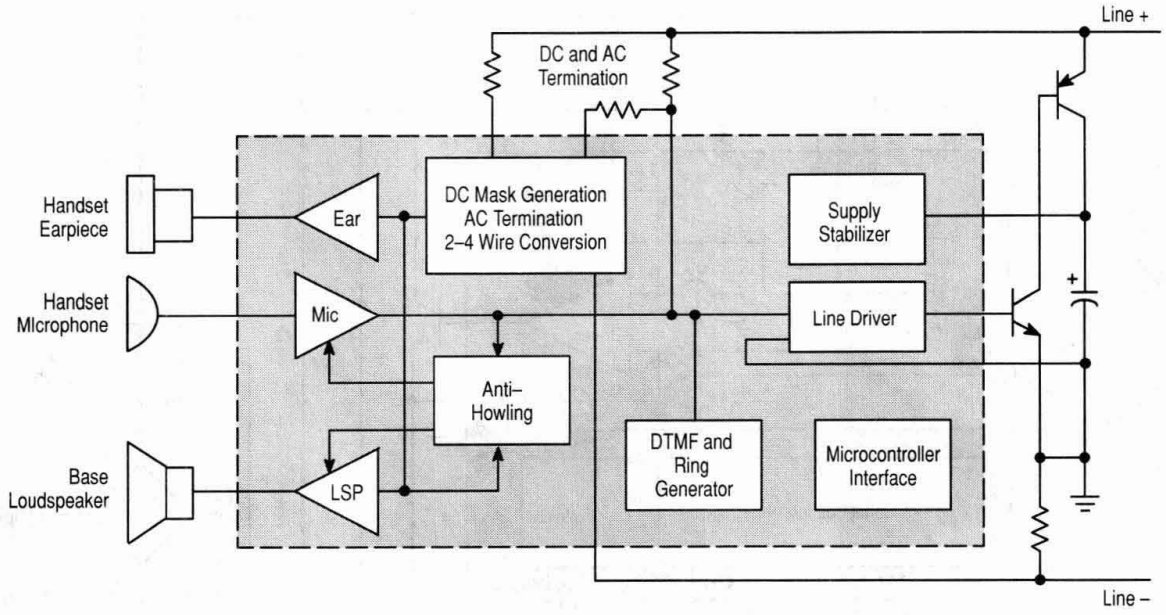

Telephone Line Interface

TCA3388DP, FP

T_A = 0° to +70°C, Case 738, 751D

The TCA3388 is a telephone line interface circuit which performs the basic functions of a telephone set in combination with a microcontroller and a ringer. It includes dc and ac line termination, the hybrid function with 2 adjustable sidetone networks, handset connections and an efficient supply point.

FEATURES

Line Driver and Supply

- DC and AC Termination of the Telephone Line
- Selectable DC Mask: France, U.K., Low Voltage
- Current Protection
- Adjustable Set Impedance for Resistive and Complex Termination
- Efficient Supply Point for Peripherals
- Hook Status Detection

Handset Operation

- Transmit and Receive Amplifiers
- Double Anti–Sidetone Network
- Line Length AGC
- Microphone and Earpiece Mute
- Transmit Amplifier Soft Clipping

Dialing and Ringing

- Interrupter Driver for Pulse–Dialing
- Reduced Current Consumption During Pulse–Dialing
- DTMF Interfacing
- Ringing via External Ringer

Application Areas

- Corded Telephony
- Cordless Telephony Base Station
- Answering Machines
- Fax
- Intercom
- Modem

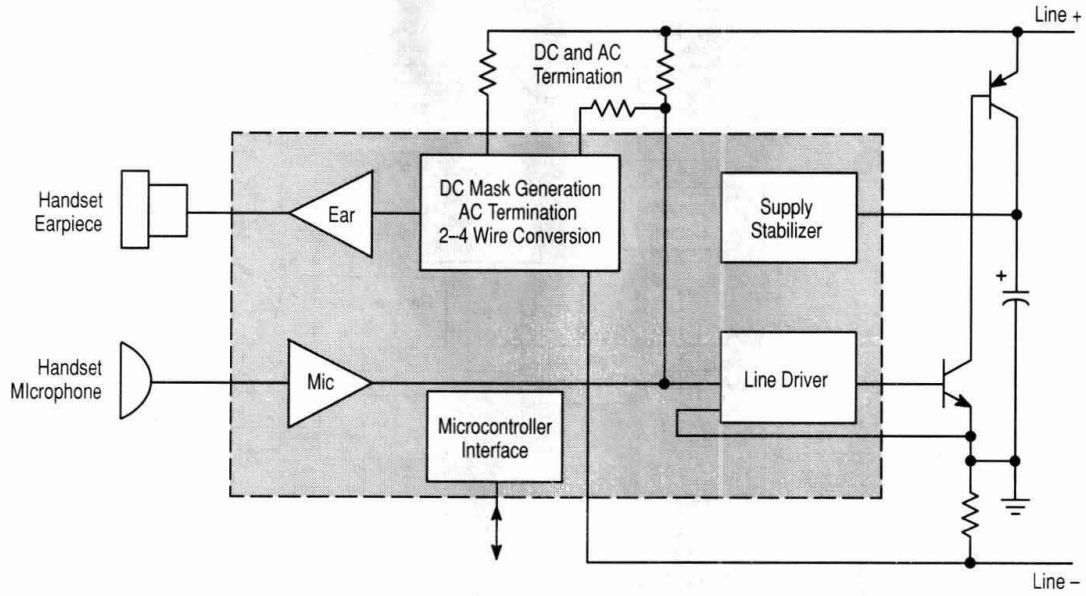

Speakerphones

Voice Switched Speakerphone Circuit

MC34018P, DW

T_A = –20° to +60°C, Case 710, 751F

The MC34018 Speakerphone integrated circuit incorporates the necessary amplifiers, attenuators, and control functions to produce a high quality hands–free speakerphone system. Included are a microphone amplifier, a power audio amplifier for the speaker, transmit and receive attenuators, a monitoring system for background sound level, and an attenuation control system which responds to the relative transmit and receive levels as well as the background level. Also included are all necessary regulated voltages for both internal and external circuitry, allowing line–powered operation (no additional power supplies required). A Chip Select pin allows the chip to be powered down when not in use. A volume control function may be implemented with an external potentiometer. MC34018 applications include speakerphones for household and business uses, intercom systems, automotive telephones, and others.

- All Necessary Level Detection and Attenuation Controls for a Hands–Free Telephone in a Single Integrated Circuit
- Background Noise Level Monitoring with Long Time Constant
- Wide Operating Dynamic Range Through Signal Compression
- On–Chip Supply and Reference Voltage Regulation
- Typical 100 mW Output Power (into 25 Ω) with Peak Limiting to Minimize Distortion
- Chip Select Pin for Active/Standby Operation
- Linear Volume Control Function

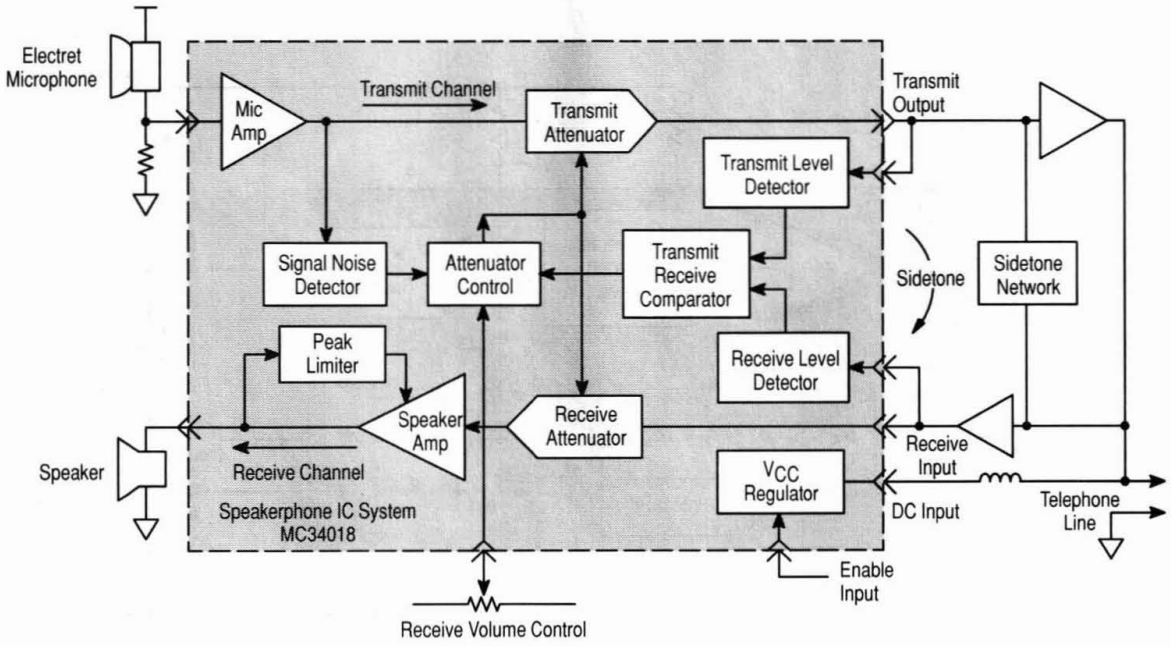

Voice Switched Speakerphone Circuit

MC34118P, DW

T_A = −20° to +60°C, Case 710, 751F

The MC34118 Voice Switched Speakerphone circuit incorporates the necessary amplifiers, attenuators, level detectors, and control algorithm to form the heart of a high quality hands–free speakerphone system. Included are a microphone amplifier with adjustable gain and mute control, Transmit and Receive attenuators which operate in a complementary manner, level detectors at input and output of both attenuators,and background noise monitors for both the transmit and receive channels. A dial tone detector prevents the dial tone from being attenuated by the Receive background noise monitor circuit. Also included are two line driver amplifiers which can be used to form a hybrid network in conjunction with an external coupling transformer. A high–pass filter can be used to filter out 60 Hz noise in the receive channel, or for other filtering functions. A Chip Disable pin permits powering down the entire circuit to conserve power on long loops where loop current is at a minimum.

The MC34118 may be operated from a power supply, or it can be powered from the telephone line, requiring typically 5.0 mA. The MC34118 can be interfaced directly to Tip and Ring (through a coupling transformer) for stand–alone operation, or it can be used in conjunction with a handset speech network and/or other features of a featurephone.

- Improved Attenuator Gain Range: 52 dB Between Transmit and Receive
- Low Voltage Operation for Line–Powered Applications (3.0 to 6.5 V)
- 4–Point Signal Sensing for Improved Sensitivity
- Background Noise Monitors for Both Transmit and Receive Paths
- Microphone Amplifier Gain Set by External Resistors – Mute Function Included
- Chip Disable for Active/Standby Operation
- On Board Filter Pinned–Out for User Defined Function
- Dial Tone Detector Inhibits Receive Idle Mode During Dial Tone Presence
- Compatible with MC34119 Speaker Amplifier

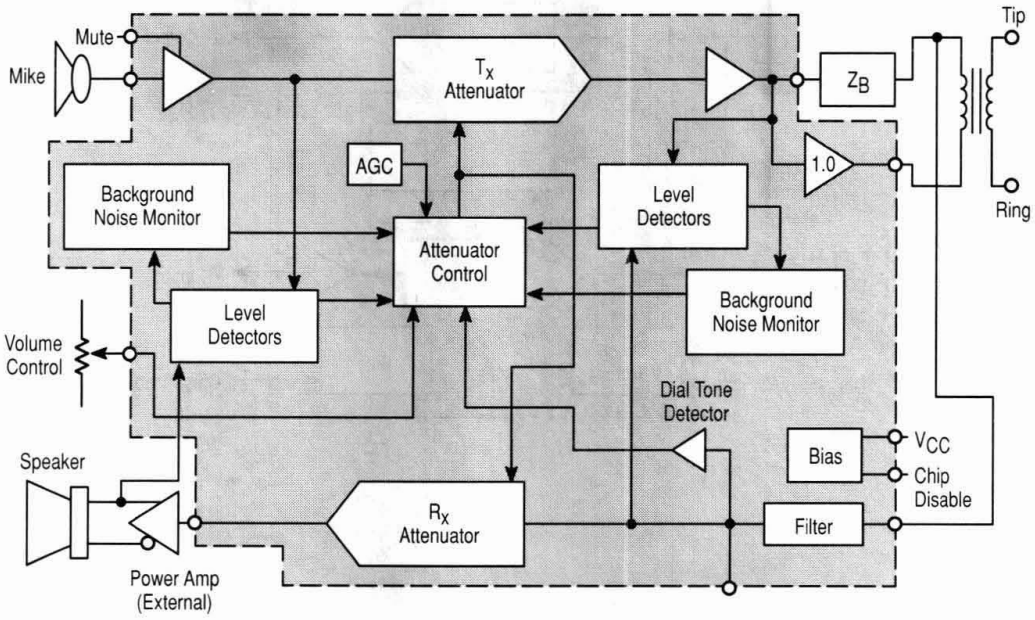

Voice Switched Speakerphone with μProcessor Interface

MC33218AP, DW

T_A = –40° to +85°C, Case 724, 751E

The MC33218A, Voice Switched Speakerphone circuit incorporates the necessary amplifiers, attenuators, level detectors, and control algorithm to form the heart of a high quality hands–free speakerphone system. Included are a microphone amplifier with adjustable gain, and mute control, transmit and receive attenuators which operate in a complementary manner, and level detectors and background noise monitors for both paths. A dial tone detector prevents dial tone from being attenuated by the receive background noise monitor. A Chip Disable pin permits powering down the entire circuit to conserve power.

Also included is an 8–bit serial μprocessor port for controlling the receive volume, microphone mute, attenuator gain, and operation mode (force to transmit, force to receive, etc.). Data rate can be up to 1.0 MHz. The MC33218A can be operated from a power supply, or from the telephone line, requiring typically 3.8 mA. It can also be used in intercoms and other voice–activated applications.

- Low Voltage Operation: 2.5 to 6.0 V
- 2–Point Sensing, Background Noise Monitor in Each Path
- Chip Disable Pin for Active/Standby Operation
- Microphone Amplifier Gain Set by External Resistors – Mute Function Included
- Dial Tone Detector to Inhibit Receive Idle Mode During Dial Tone Presence
- Microprocessor port for controlling:
  - Receive Volume Level (16 Steps)
  - Attenuator Range (26 or 52 dB, Selectable)
  - Microphone Mute
  - Force to Transmit, Receive, Idle or Normal Voice Switched Operation
- Compatible with MC34119 Speaker Amplifier

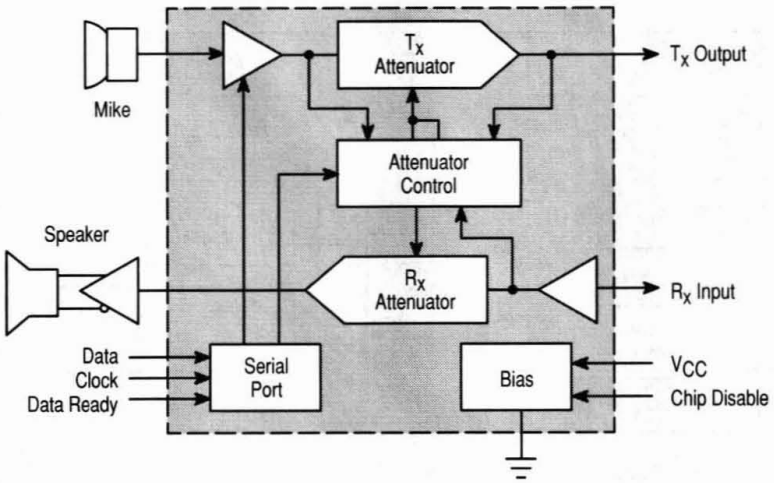

Voice Switched Speakerphone Circuit

MC33219AP, ADW

T_A = –40° to +85°C, Case 724, 751E

The MC33219A Voice Switched Speakerphone Circuit incorporates the necessary amplifiers, attenuators, level detectors, and control algorithm to form the heart of a high quality hands–free speakerphone system. Included are a microphone amplifier with adjustable gain, and mute control, transmit and receive attenuators which operate in a complementary manner, and level detectors and background noise monitors. A dial tone detector prevents dial tone from being attenuated by the receive background noise monitor. A Chip Disable pin permits powering down the entire circuit to conserve power.

The MC33219A may be operated from a power supply, or it can be powered from the telephone line requiring typically 4.0 mA. The MC33219A can be interfaced directly to Tip and Ring (through a coupling transformer for stand–alone operation, or it can be used in conjuction with a handset speech network and/or other features of a featurephone.

- Low Voltage Operation: 2.7 to 6.0 V
- 2–Point Sensing, Background Noise Monitor in Each Path
- Chip Disable Pin for Active/Standby Operation
- Microphone Amplifier Gain Set by External Resistors – Mute Function Included
- Dial Tone Detector to Inhibit Receive Idle Mode During Dial Tone Presence
- Volume Control Range: 34 dB
- Compatible with MC34119 Speaker Amplifier

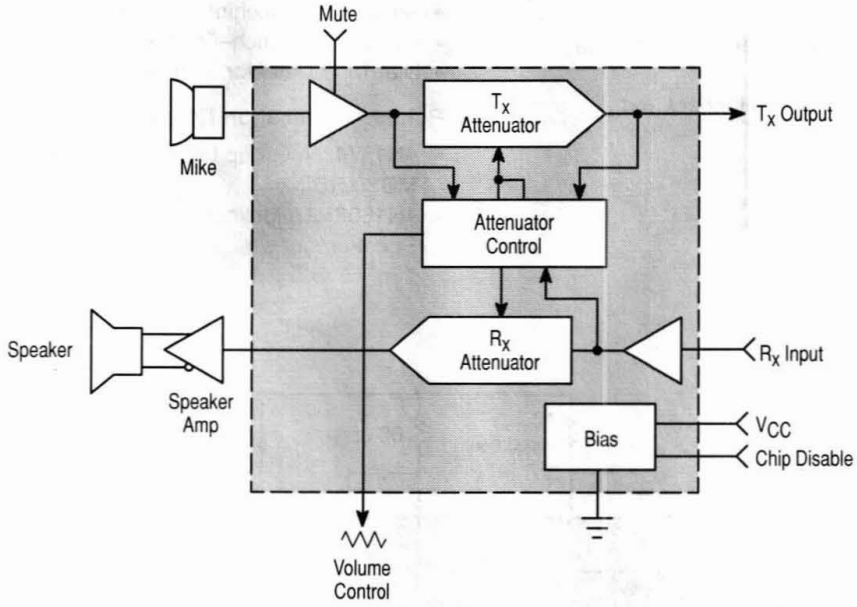

Telephone Line Interface and Speakerphone Circuit

MC33215B, FB

T_A = –20° to +70°C, Case 858, 848B

The MC33215 is developed for use in fully electronic telephone sets with speakerphone functions. The circuit performs the ac and dc line termination, 2–4 wire conversion, line length AGC and DTMF transmission. The speakerphone part includes a half duplex controller with signal and noise monitoring, base microphone and loudspeaker amplifiers and an efficient supply. The circuit is designed to operate at low line currents down to 4.0 mA enabling parallel operation with a classical telephone set.

FEATURES

Line Driver and Supply

- AC and DC Termination of Telephone Line
- Adjustable Set Impedance for Real and Complex Termination
- Efficient Supply Point for Loudspeaker Amplifier and Peripherals
- Two Stabilized Supply Points for Handset and Base Microphones
- Separate Supply Arrangement for Handset and Speakerphone Operation

Handset Operation

- Transmit and Receive Amplifiers
- Differential Microphone Inputs
- Sidetone Cancellation Network
- Line Length AGC
- Microphone and Earpiece Mute
- Separate Input for DTMF and Auxiliary Signals
- Parallel Operation Down to 4.0 mA of Line Current

Speakerphone Operation

- Handsfree Operation via Loudspeaker and Base Microphone
- Integrated Microphone and Loudspeaker Amplifiers
- Differential Microphone Inputs
- Loudspeaker Amplifier can be Powered and Used Separately from the Rest of the Circuit
- Integrated Switches for Smooth Switch–Over from Handset to Speakerphone Operation
- Signal and Background Noise Monitoring in Both Channels
- Adjustable Switching Depth for Handsfree Operation
- Adjustable Switch–Over and Idle Mode Timing
- Dial Tone Detector in the Receive Channel

Related Application Notes

- AN1574: "A Group Listening–In Application for the MC33215".
- AN1608: "Guidelines for the Speaker in a Line–Powered Speakerphone".

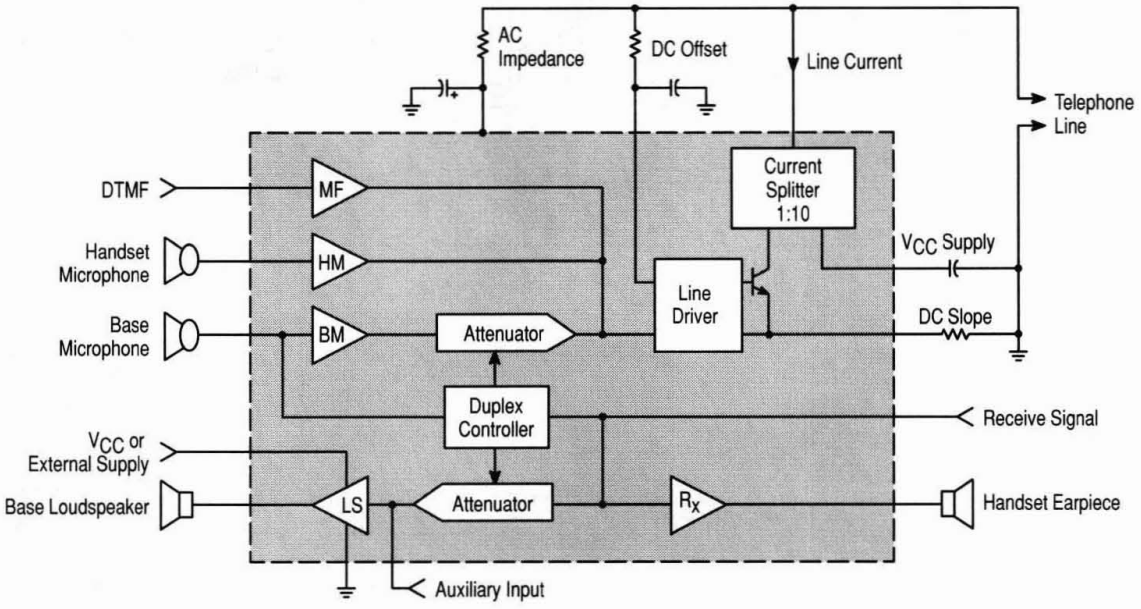

Table 11. The Motorola Family of Speakerphone Integrated Circuits

MC34018	MC34118	MC33218A
Two point sensing with slow idle, background noise monitor in T_X path only	Four point sensing with both fast and slow idle modes, background noise monitors in both R_X and T_X paths	Two point sensing with slow idle, background noise monitors in both R_X and T_X paths
No dial tone detector in receive path	Receive path has dial tone detector	Receive path has dial tone detector
Attenuator Characteristics: • Range: 44 dB • Tolerance: ±4.0 dB • Gain tracking not specified • White noise is constant	Attenuator Characteristics: • Range: 52 dB • Tolerance: ±2.0 dB • Gain Tracking: <1.0 dB • White noise reduces with volume	Attenuator Characteristics: • Range: 52 or 26 dB (selectable) • Tolerance: ±3.0 dB • Gain Tracking: <1.0 dB • White noise reduces with volume
External hybrid required	Hybrid amplifiers on board	External hybrid required
Speaker amplifier is on board (34 dB, 100 mW)	External speaker amplifier required (MC34119)	External speaker amplifier required (MC34119)
Filtering is external	Configurable filter on board	Filtering is external
Microphone amplifier has fixed gain and no muting	Microphone amplifier has adjustable gain and mute input	Microphone amplifier has adjustable gain, and can be muted through μP port
Supply Voltage: 4.0 V to 11 V	Supply Voltage: 2.8 V to 6.5 V	Supply Voltage: 2.5 V to 6.5 V
Supply Current: 6.5 mA typ., 9.0 mA max	Supply Current: 5.5 mA typ., 8.0 mA max	Supply Current: 4.0 mA typ., 5.0 mA max
Speaker amplifier reduces gain to prevent clipping	Receive gain is reduced as supply voltage falls to prevent clipping	Receive gain is reduced as supply voltage falls to prevent clipping
Volume control is linear. Cannot override voice switched operation except through additional circuitry. Attenuator gain is fixed at 44 dB (slightly variable). No microphone mute.	Volume control is linear, and microphone mute has separate pin. Cannot override voice switched operation except through additional circuitry. Attenuator gain is fixed at 52 dB.	8–bit μP serial port controls: • Volume control (16 steps) • Microphone mute • Range selection (26 dB or 52 dB) • Force to transmit, idle, receive, or normal voice switched operation
28 Pin DIP and SOIC packages	28 Pin DIP and SOIC packages	24 Pin narrow DIP and SOIC packages
External Required: • 12 Resistors • 11 Capacitors (≤1.0 μF) • 8 Capacitors (>1.0 μF)	External Required: • 14 Resistors • 12 Capacitors (≤1.0 μF) • 9 Capacitors (>1.0 μF)	External Required: • 12 Resistors • 11 Capacitors (≤1.0 μF) • 4 Capacitors (>1.0 μF)
Temperature Range: –20° to +60°C	Temperature Range: –20° to +60°C	Temperature Range: –40° to +85°C

Table 11. The Motorola Family of Speakerphone Integrated Circuits

MC34018	MC34118	MC33218A
Two point sensing with slow idle, background noise monitor in T_X path only	Four point sensing with both fast and slow idle modes, background noise monitors in both R_X and T_X paths	Two point sensing with slow idle, background noise monitors in both R_X and T_X paths
No dial tone detector in receive path	Receive path has dial tone detector	Receive path has dial tone detector
Attenuator Characteristics: • Range: 44 dB • Tolerance: ±4.0 dB • Gain tracking not specified • White noise is constant	Attenuator Characteristics: • Range: 52 dB • Tolerance: ±2.0 dB • Gain Tracking: <1.0 dB • White noise reduces with volume	Attenuator Characteristics: • Range: 52 or 26 dB (selectable) • Tolerance: ±3.0 dB • Gain Tracking: <1.0 dB • White noise reduces with volume
External hybrid required	Hybrid amplifiers on board	External hybrid required
Speaker amplifier is on board (34 dB, 100 mW)	External speaker amplifier required (MC34119)	External speaker amplifier required (MC34119)
Filtering is external	Configurable filter on board	Filtering is external
Microphone amplifier has fixed gain and no muting	Microphone amplifier has adjustable gain and mute input	Microphone amplifier has adjustable gain, and can be muted through µP port
Supply Voltage: 4.0 V to 11 V	Supply Voltage: 2.8 V to 6.5 V	Supply Voltage: 2.5 V to 6.5 V
Supply Current: 6.5 mA typ., 9.0 mA max	Supply Current: 5.5 mA typ., 8.0 mA max	Supply Current: 4.0 mA typ., 5.0 mA max
Speaker amplifier reduces gain to prevent clipping	Receive gain is reduced as supply voltage falls to prevent clipping	Receive gain is reduced as supply voltage falls to prevent clipping
Volume control is linear. Cannot override voice switched operation except through additional circuitry. Attenuator gain is fixed at 44 dB (slightly variable). No microphone mute.	Volume control is linear, and microphone mute has separate pin. Cannot override voice switched operation except through additional circuitry. Attenuator gain is fixed at 52 dB.	8–bit µP serial port controls: • Volume control (16 steps) • Microphone mute • Range selection (26 dB or 52 dB) • Force to transmit, idle, receive, or normal voice switched operation
28 Pin DIP and SOIC packages	28 Pin DIP and SOIC packages	24 Pin narrow DIP and SOIC packages
External Required: • 12 Resistors • 11 Capacitors (≤1.0 µF) • 8 Capacitors (>1.0 µF)	External Required: • 14 Resistors • 12 Capacitors (≤1.0 µF) • 9 Capacitors (>1.0 µF)	External Required: • 12 Resistors • 11 Capacitors (≤1.0 µF) • 4 Capacitors (>1.0 µF)
Temperature Range: –20° to +60°C	Temperature Range: –20° to +60°C	Temperature Range: –40° to +85°C

Table 11. The Motorola Family of Speakerphone Integrated Circuits (continued)

MC33219A	MC33215
Two point sensing with slow idle, background noise monitors in both R_X and T_X paths	Speech network + speakerphone. Two point sensing with slow idle, background noise monitors in both R_X & T_X paths
Receive path has dial tone detector	Receive path dial tone detector
Attenuator Characteristics: • Range: 52 dB • Tolerance: ±3.0 dB • Gain Tracking: <1.0 dB • White noise reduces with volume	Attenuator Characteristics: • Range: 50 dB (Adjustable) • Tolerance: ±4.0 dB • Gain Tracking: <1.0 dB • White noise reduces with gain
External hybrid required	Includes speech network, and AGC
External speaker amplifier required (MC34119)	Includes speaker amplifier with separate supply and mute
Filtering is external	Filtering is external
Microphone amplifier has adjustable gain and a mute input	Microphone paths have fixed gain, and mute control
Supply Voltage: 2.7 V to 6.5 V	Line Powered, 2.4 V to 10 V
Supply Current: 3.0 mA typ., 5.0 mA max	Total internal supply current ≈5.0 mA
Receive gain is reduced as supply voltage falls to prevent clipping	Speaker amplifier reduces gain to prevent clipping
Volume control is linear, and microphone mute has separate pin. Attenuator range fixed at 52 dB. Cannot override voice switched operation except through additional circuitry.	Volume control is linear. Logic inputs control mute based on operating mode. Standard dialer interface. Cannot override voice switched operation except through additional circuitry.
24 Pin narrow DIP and SOIC packages	42 Pin Shrink DIP, 52 Pin QFP
External Required: • 12 Resistors • 11 Capacitors (≤1.0 µF) • 4 Capacitors (>1.0 µF)	External Required: • 30 Resistors • 19 Capacitors (≤1.0 µF) • 11 Capacitors (>1.0 µF) • Dialer + Hookswitch
Temperature Range: –40° to +85°C	Temperature Range: –20° to +70 °C

Telephone Accessory Circuits

Audio Amplifier

MC34119P, D

T_A = 0° to +70°C, Case 626, 751

A low power audio amplifier circuit intended (primarily) for telephone applications, such as speakerphones. Provides differential speaker outputs to maximize output swing at low supply voltages (2.0 V min.). Coupling capacitors to the speaker, and snubbers, are not required. Overall gain is externally adjustable from 0 to 46 dB. A Chip Disable pin permits powering–down to mute the audio signal and reduce power consumption.

- Drives a Wide Range of Speaker Loads (16 to 100 Ω)
- Output Power Exceeds 250 mW with 32 Ω Speaker
- Low Distortion (THD = 0.4% Typical)
- Wide Operating Supply Voltage (2.0 V to 16 V) – Allows Telephone Line Powered Applications.
- Low Quiescent Supply Current (2.5 mA Typical)
- Low Power–Down Quiescent Current (60 μA Typical)

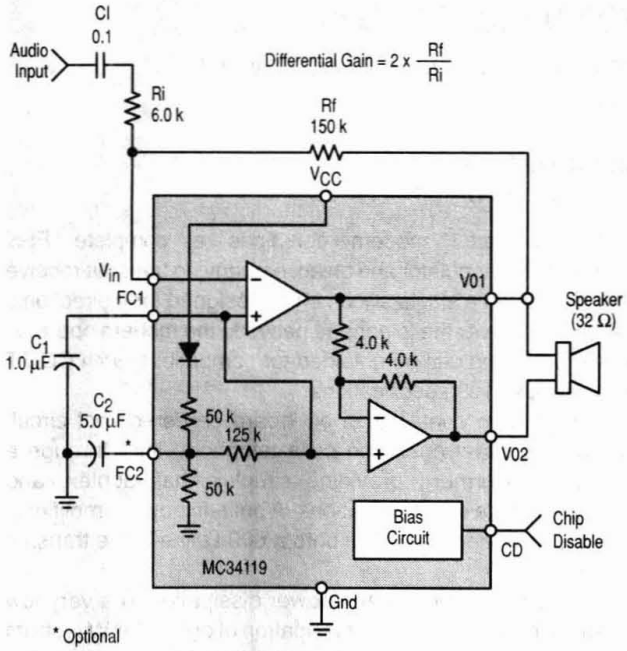

Current Mode Switching Regulator

MC34129P, D

T_A = 0° to +70°C, Case 646, 751A

High performance current mode switching regulator for low–power digital telephones. Unique internal fault timer provides automatic restart for overload recovery. A start/run comparator is included to implement bootstrapped operation of V_{CC}.

Although primarily intended for digital telephone systems, these devices can be used cost effectively in many other applications. On–chip functions and features include:

- Current Mode Operation to 300 kHz
- Automatic Feed Forward Compensation
- Latching PWM for Cycle–By–Cycle Current Limiting
- Latched–Off or Continuous Retry after Fault Timeout
- Soft–Start with Maximum Peak Switch Current Clamp
- Internally Trimmed 2% Bandgap Reference
- Input Undervoltage Lockout

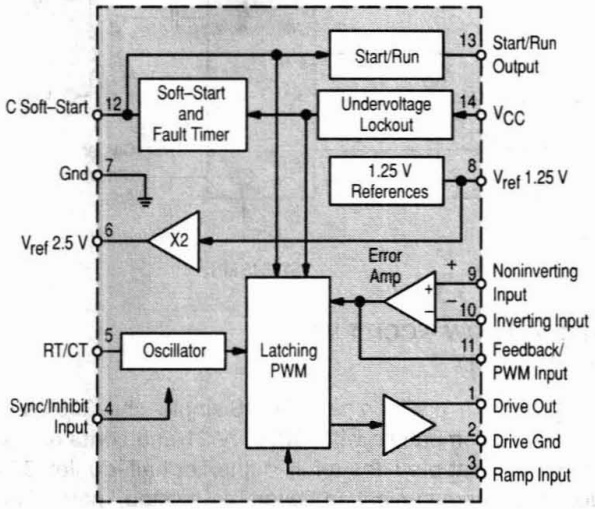

300 Baud FSK Modems

MC145442P, DW Modem – CCITT V.21
Case 738, 751D

MC145443P, DW Modem – Bell 103
Case 738, 751D

This powerful modem combines a complete FSK modulator/demodulator and an accompanying transmit/receive filter system on a single silicon chip. Designed for bidirectional transmission over the telephone network, the modem operates at 300 baud and can be obtained for compatibility with CCITT V.21 and Bell 103 specifications.

The modem contains an on–board carrier–detect circuit that allows direct operation on a telephone line (through a simple transformer), providing simplex, half–duplex, and full–duplex data communications. A built–in power amplifier is capable of driving –9.0 dBm onto a 600 Ω line in the transmit mode.

CMOS processing keeps power dissipation to a very low 45 mW, with a power–down dissipation of only 1.0 mW . . . from a single 5.0 V power supply. Available in a 20 pin dual–in–line P suffix, and a wide body surface mount DW suffix.

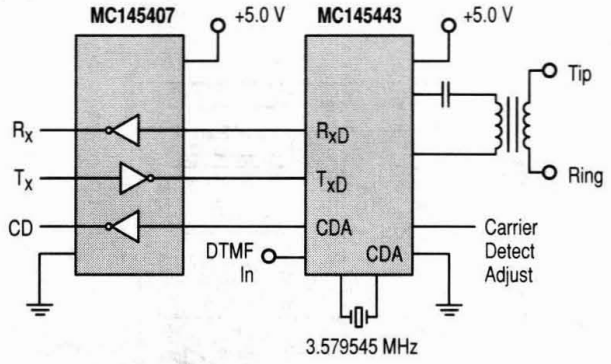

MC145444H, DW – CCITT V.21
Case 804, 751D

This device is a silicon gate CMOS single–chip 300 baud modem. It is compatible with CCITT V.21 and contains the entire circuit that provides a full–duplex or half–duplex 300 baud data communication over a twisted pair. The MC145444 is capable of driving 0 dBm into a 600 Ω load with a single 5.0 V power supply. In addition, this device features an on–board DTMF generator, call progress detector, and 2100 Hz answer tone generator. This device also features a three–wire serial interface for a microcontroller.

MC145446AFW – CCITT V.21
Case 751M

This device includes the DTMF generator and call progress tone detector (CPTD) as well as the other circuitry needed for full–duplex, half–duplex, or simplex 300 baud data communication over a pair of telephone lines. It is intended for use with telemeter system or remote control system applications.

The differential line driver is capable of driving 0 dBm into a 600 Ω load. The transmit attenuator is programmable in 1.0 dB steps.

ADPCM Transcoder

MC145532DW, L
Case 751G, 620

The MC145532 Adaptive Differential Pulse Code Modulation (ADPCM) Transcoder provides a low cost, full–duplex, single–channel transcoder to (from) a 64 kbps PCM channel from (to) either a 16 kbps, 24 kbps, 32 kbps, or 64 kbps channel.

- Complies with CCITT Recommendation G.721 (1988)
- Complies with the American National Standard (T1.301–1987)
- Full–Duplex, Single–Channel Operation
- Mu–Law or A–Law Coding is Pin Selectable
- Synchronous or Asynchronous Operation
- Easily Interfaces with any Member of Motorola's PCM Codec–Filter Monocircuit Family or Other Industry Standard Codecs
- Serial PCM and ADPCM Data Transfer Rate from 64 kbps to 5.12 Mbps
- Power Down Capability for Low Cost Consumption
- The Reset State is Automatically Initiated when the Reset Pin is Released.
- Simple Time Slot Assignment Timing for Transcoder Applications
- Single 5.0 V Power Supply
- Evaluation Kit MC145536 EVK Supports the MC145532 as well as the MC14LC5480 PCM Codec–Filter. (See PBX Architecture Pages for More Information.)

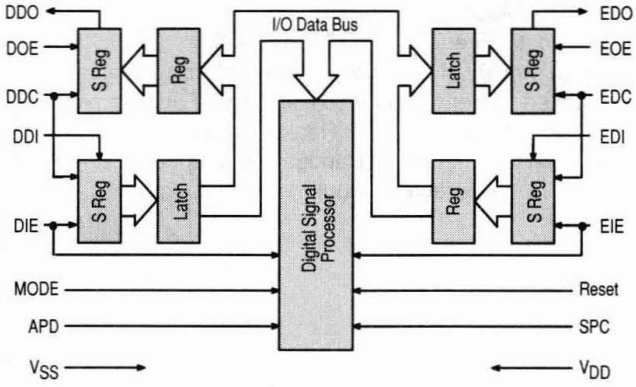

Calling Line Identification (CLID) Receiver with Ring Detector

MC14LC5447P, DW

Case 648, 751G

The MC14LC5447 is designed to demodulate Bell 202 1200 baud FSK asynchronous data. Its primary application is in products that will be used to receive and display the calling number, or the message waiting indicator sent to subscribers from participating central office facilities of the public switched telephone network. The device also contains a carrier detect circuit and telephone ring detector which may be used to power up the device.

Applications include adjunct boxes, answering machines, feature phones, fax machines, and computer interface products.

Replaces MC145447P, DW.

- Ring Detector On–Chip
- Ring Detect Output for MCU Interrupt
- Power–Down Mode Less Than 1.0 μA
- Single Supply: 3.5 V to 6.0 V
- Pin Selectable Clock Frequencies: 3.68 MHz, 3.58 MHz, or 455 kHz
- Two–Stage Power–Up for Power Management Control

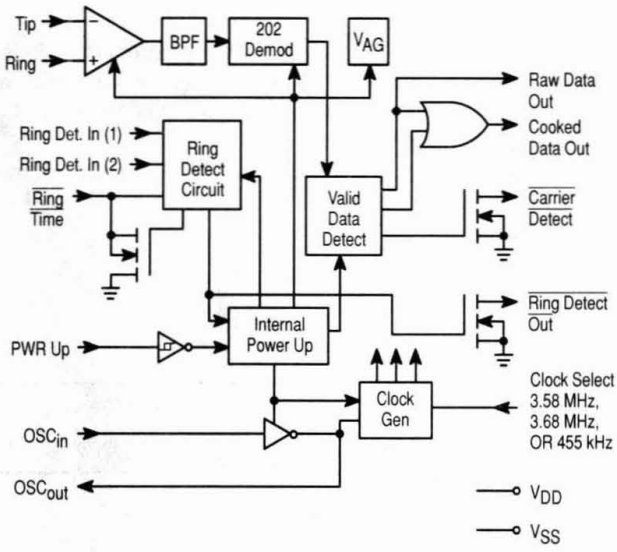

Calling Line ID Receiver Evaluation Kit

MC145460EVK

The MC145460EVK is a low cost evaluation platform for the MC14LC5447. The MC145460EVK facilitates development and testing of products that support the Bellcore customer premises equipment (CPE) data interface, which enables services such as Calling Number Delivery (CND). The MC14LC5447 can be easily incorporated into any telephone, FAX, PBX, key system, answering machine, CND adjunct box or other telephone equipment with the help of the MC145460EVK development kit.

- Easy Clip–On Access to Key MC14LC5447 Signals
- Generous Prototype Area
- Configurable for MC14LC5447 Automatic or External Power Up Control
- EIA–232 and Logic Level Ports for Connection to any PC or MCU Development Platform
- Carrier Detect, Ring Detect and Data Status LEDs
- Optional Tip and Ring Input Protection Network
- MC145460EVK User Guide, MC14LC5447 Data Sheet, and Additional MC14LC5447 Sample Included

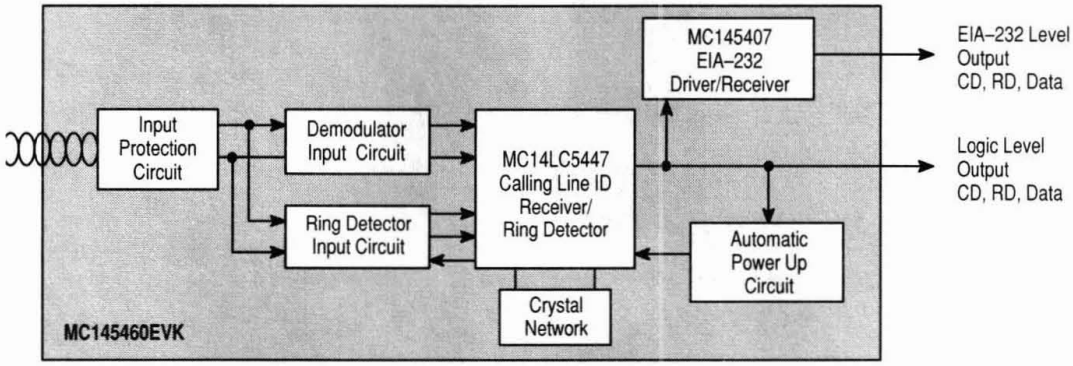

Continuously Variable Slope Delta (CVSD) Modulator/Demodulator

MC34115P, DW
T_A = 0° to +70°C, Case 648, 751G

MC3418P, DW
T_A = 0° to +70°C, Case 648, 751G

Provides the A/D–D/A function of voice communications by digital transmission. Designed for speech synthesis and commercial telephone applications. A single IC provides both encoding and decoding.

- Encode and Decode Functions on the Same Chip with a Digital Input
- CMOS Compatible Digital Output
- Digital Input Threshold Selectable (V_{CC}/2 reference provided on Chip)
- MC34115 Has a 3–Bit Algorithm (General Communications)
- MC3418 Has a 4–Bit Algorithm (Commercial Telephone)

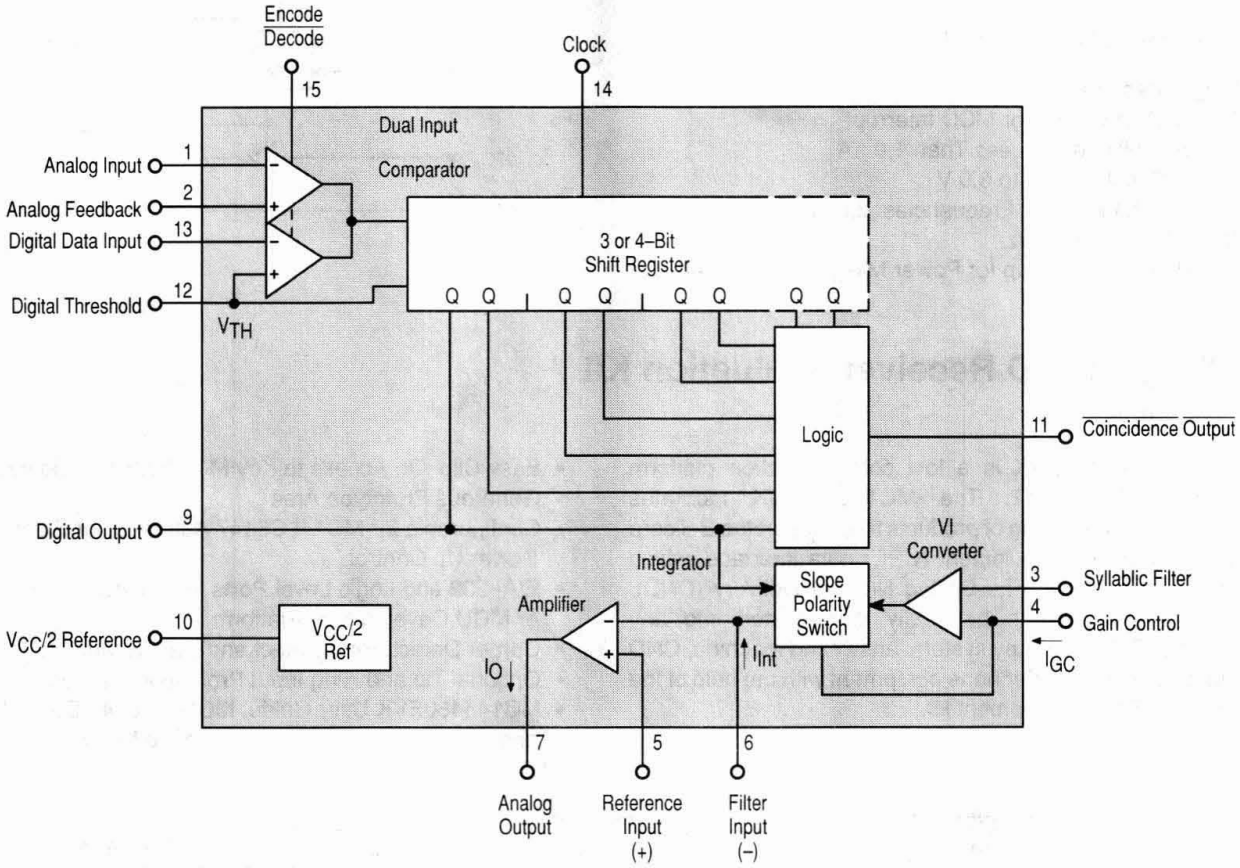

Table 12. Summary of Bipolar Telecommunication Circuits

Function	Features	Suffix/ Package	Device
Subscriber Loop Interface Circuits (SLICs)			
Central Office, Remote Terminals, PBX Applications	All gains externally programmable, most BORSHT functions, current limit adjustable to 50 mA, 58 dB Longitudinal Balance, –21.6 V to –42 V.	P/738, FN/776	MC33121
Central Office, Remote Terminals, PBX Applications	All gains externally programmable, most BORSHT functions, current limit adjustable to 50 mA, 58 dB Longitudinal Balance, –42 V to –58 V.	P/738, FN/776	MC33120
Complete Telephone Circuit			
POTS Circuit + MPU Dialing	Speech network, tone ringer, dc loop current interface, DTMF dialer with serial port control.	P/711, FN/777	MC34010
Tone Ringers			
Adjustable Tone Ringer	Single–ended output, meets FCC requirements, adjustable REN, different warble rates.	P/626, D/751	MC34012–1, 2, 3
Adjustable Tone Ringer	Differential output, meets FCC requirements, adjustable REN, different warble rates.	P/626, D/751	MC34017–1, 2, 3
Adjustable Tone Ringer	Differential output, meets FCC requirements, adjustable REN, single warble rates.	P/626, D/751	MC34217
Ring Signal Converter	Switching regulator to convert ringing voltage to regulated dc output. Provides ring detect output.	DP/626, FP/751	TCA3385
Speech Networks			
Speech Network + Speakerphone	Line powered IC provides handset and speakerphone modes, dialer interface, ac/dc terminations, and AGC. Efficient supply design provides 90% of loop current to the speaker amplifier. Speaker amplifier may be used independently. Handset operation to 4.0 mA.	B/858, FB/848B	MC33215
Basic Phone Line Interface	Loop current interface, speech network, line length compensation, speech/dialing modes, Bell System compliant.	P/707, DW/751D	MC34014
Cordless Universal Telephone Interface	For cordless telephone base for CT0, CT1, CT2 and DECT. European dc masks, double wheatstone bridge sidetone circuit. SPI port for masks, AGC hookswitch, mute and gain settings. Requires 5.0 V and µP.	P/738, DW/751D	MC34016
Basic Phone Line Interface	Loop current interface, speech network, line length compensation, speech/dialing modes, Bell System and foreign countries.	P/707, DW/751D	MC34114
Programmable Telephone Line Interface Circuit with Loudspeaker Amplifier	Group listening–in, DTMF and tones generator, ring generator, country programmable, SPI interface.	DW/751F	MC34216
European Speech Network, Programmable Speaker Amplifier	Line powered. European dc masks, DTMF and pilot tone generator, listening–in mode with anti–howling. 2–wire bus control masks, DTMF tones, speaker gain, pulse dialing, mute, AGC. Requires MCU.	DW/751	MC34216A
European Speech Network	Loop current interface, speech network, line length compensation, speech/dialing modes, programmable masks for French, U.K., low voltage and PABX systems.	DP/738, FP/751	TCA3388

Summary of Bipolar Telecommunications Circuits (continued)

Function	Features	Suffix/ Package	Device
Speakerphone Circuits			
Speech Network + Speakerphone	Line powered IC provides handset and speakerphone modes, dialer interface, ac/dc terminations, and AGC. Efficient supply design provides 90% of loop current to the speaker amplifier. Speaker amplifier may be used independently. Handset operation to 4.0 mA.	B/858, FB/848B	MC33215
Complete Speaker Phone with Speaker Amplifier	All level detection (2 pt.), attenuators, and switching controls, mike and speaker amp.	P/710, DW/751F	MC34018
Complete Speaker Phone with Hybrid, Filter	All level detection (4 pt.), attenuators, and switching controls, mike amp with mute, hybrid, and filter.	P/710, DW/751F	MC34118
Complete Speaker Phone with MPU Interface	All level detection, attenuators, and switching controls, mike amp, MPU interface for: volume control, mode selection, mike mute.	P/724, DW/751E	MC33218A
Basic Low Cost Speakerphone	All level detection, attenuators and switching controls, Mike amplifier with Mute, low voltage operation.	P/724, DW/751E	MC33219A
Audio Amplifiers			
1 Watt Audio Amp	1.0 W output power into 16 Ω, 35 V maximum.	D/751	MC13060
Low Voltage Audio Amp	400 mW, 8.0 to 100 Ω, 2.0 to 16 V, differential outputs, chip–disable input pin.	P/626, D/751	MC34119
Companders			
Basic Compander	2.1 V to 7.0 V, no precision externals, 80 dB range, –40° to +85°C, independent compressor and expander.	P/646, D/751A	MC33110
Compander with Features	3.0 V to 7.0 V, no precision externals, 80 dB range, –40° to +85°C, independent compressor and expander, pass through and mute functions, two op amps.	P/648, D/751B	MC33111
Switching Regulator			
Current Mode Regulator	For phone line power applications, soft–start, current limiting, 2% accuracy.	P/646, D/751A	MC34129
Voice Encoder/Decoders			
Continuously Variable Slope Modulator/Demodulator (CVSD)	Telephone quality voice encoding/decoding, variable clock rate, 3–bit coding, for secure communications, voice storage/retrieval, answering machines, 0° to 70°C.	P/738, DW/751G	MC34115
	Same as above except 4–bit coding.	P/738, DW751G	MC3418

Figure 5. The Motorola Family of Handset Telecom Integrated Circuits

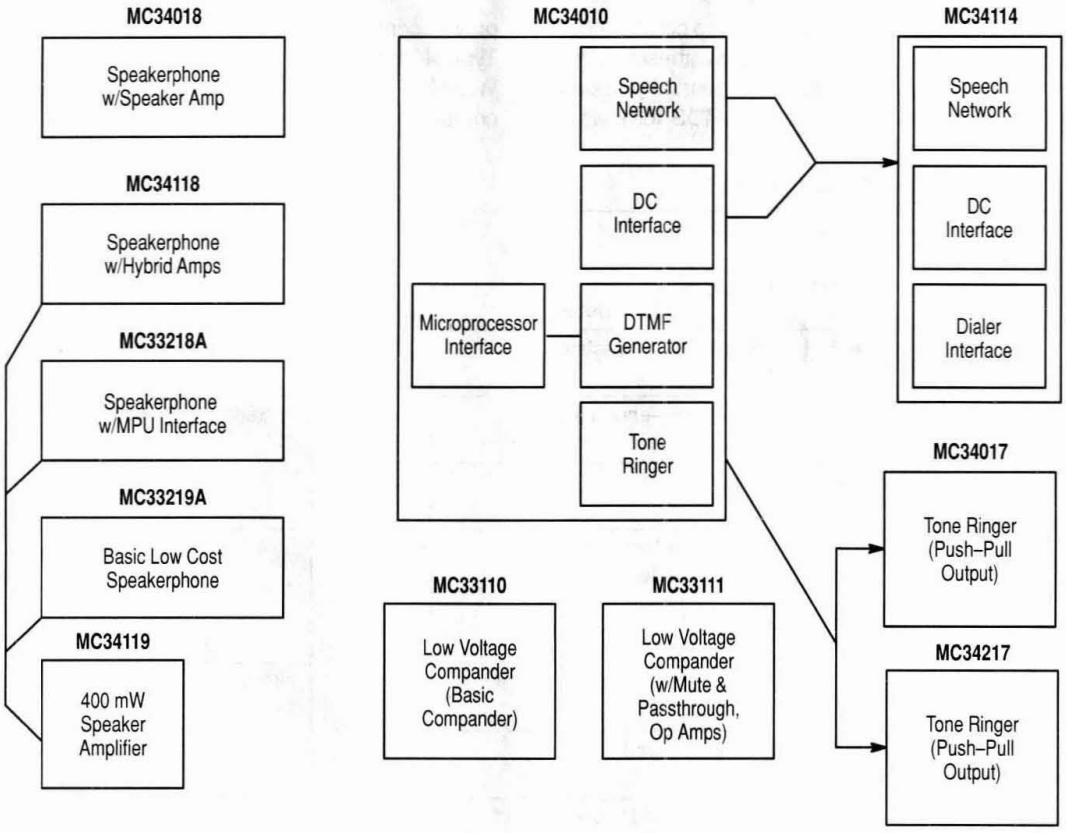

Phase–Locked Loop Components

Motorola offers a choice of phase–locked loop components ranging from complete functional frequency synthesizers for dedicated applications to a wide selection of general purpose PLL circuit elements. Technologies include CMOS for lowest power consumption and bipolar for high speed operation. Typical applications include TV, CATV, radios, scanners, WLANs, cordless telephones plus home and personal computers.

Table 13. PLL Frequency Synthesizers

Frequency (MHz)	Supply Voltage (V)	Nominal Supply Current (mA)	Phase Detector	Standby	Interface	Device	Suffix/ Case
4 @ 5 V	4.5 to 12	6 @ 5 V	Single–ended 3–state	No	Parallel	MC145106	P/707, DW/751D
15 @ 5 V	3 to 9	–	Two single–ended 3–state		Serial	MC145149*	P/738, DW/751D
		7.5 @ 5 V	Analog			MC145159–1	P/738, DW/751D
20 @ 5 V	3 to 9	7.5 @ 5 V	Single–ended 3–state, double–ended		4–Bit	MC145145–2	P/707, DW/751D
						MC145146–2	P/738, DW/751D
					Parallel	MC145151–2	P/710, DW/751F
			Double–ended			MC145152–2	P/710, DW/751F
			Single–ended 3–state, double–ended		Serial	MC145155–2	P/707, DW/751D
						MC145156–2	P/707, DW/751D
						MC145157–2	P/648, DW/751G
						MC145158–2	P/648, DW/751G
60 @ 3 V	2.5 to 5.5	3 @ 3 V	Two single–ended 3–state	Yes		MC145162*	P/648, D/751B
60 @ 2 V	1.8 to 3.6	1.5 @ 1.8 V				MC145165*	P/648, D/751B
60 @ 3 V	2.5 to 5.5	3 @ 3 V			Parallel	MC145166*	P/648, DW/751G
					Serial	MC145167*	P/648, DW/751G
100 @ 3 V 185 @ 5 V	2.5 to 5.5	2 @ 3 V 6 @ 5 V	Single–ended 3–state, Double–ended	No	Serial	MC145170–1	P/648, D/751B, DT/948C

* Dual PLL

PLL Frequency Synthesizers (continued)

Frequency (MHz)	Supply Voltage (V)	Nominal Supply Current (mA)	Phase Detector	Standby	Interface	Device	Suffix/ Case
1100	4.5 to 5.5	7 @ 5 V	Current source/sink, double–ended	Yes	Serial	MC145190	F/751J, DT/948D
						MC145191	F/751J, DT/948D
1100	2.7 to 5	6 @ 2.7 V				MC145192	F/751J, DT/948D
1100	2.7 to 5.5	12	Two current source/sink, double–ended			MC145220*	F/803C, DT/948D
1200, 400	1.8 to 3.6	5	Loop 1 = Current source/sink Loop 2 = Three–state			MC145225*	FTA/873C
2000	4.5 to 5.5	12 @ 5 V	Current source/sink, double–ended			MC145200	F/751J, DT/948D
2000	4.5 to 5.5	12 @ 5 V				MC145201	F/751J, DT/948D
2000	2.7 to 5.5	4 @ 3 V				MC145202	F/751J, DT/948D
2200, 400	1.8 to 3.6	7	Loop 1 = Current source/sink Loop 2 = Three–state			MC145230*	FTA/873C

* Dual PLL

NOTE: Evaluation kits available for the MC145190, MC145191, MC145192, MC145200, MC145201, MC145202, and MC145220. Order part number MC145_ _ _EVK.

Table 14. Phase–Locked Loop Functions

Device	Function	Pins	DIP	SM
MC1648	Voltage Controlled Oscillator	14	P,L	D,FN
MC1658	Voltage Controlled Multivibrator	16	P,L	D,FN
MC12002	Analog Mixer	14	P	–
MC12009	480 MHz ÷5/6 Dual Modulus Prescaler	16	P	–
MC12011	550 MHz ÷8/9 Dual Modulus Prescaler	16	P	–
MC12013	550 MHz ÷10/11 Dual Modulus Prescaler	16	P	–
MC12015	225 MHz ÷32/33 Dual Modulus Prescaler	8	P	D
MC12016	225 MHz ÷40/41 Dual Modulus Prescaler	8	P	D
MC12017	225 MHz ÷64/65 Dual Modulus Prescaler	8	P	D
MC12018	520 MHz ÷128/129 Dual Modulus Prescaler	8	P	D
MC12019	225 MHz ÷20/21 Dual Modulus Prescaler	8	P	D
MC12022LVA	1.1 GHz ÷64/65, ÷128/129 Low Voltage Dual Modulus Prescaler	8	P	D
MC12022LVB	1.1 GHz ÷64/65, ÷128/129 Low Voltage Dual Modulus Prescaler	8	P	D
MC12023	225 MHz ÷64 Prescaler	8	P	D
MC12026A	1.1 GHz ÷8/9, ÷16/17 Dual Modulus Prescaler	8	P	D
MC12026B	1.1 GHz ÷8/9, ÷16/17 Dual Modulus Prescaler	8	P	D
MC12028A	1.1 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12028B	1.1 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D

Phase–Locked Loop Functions (continued)

Device	Function	Pins	DIP	SM
MC12033A	2.0 GHz ÷32/33, ÷64/65 Low Voltage Dual Modulus Prescaler	8	P	D
MC12033B	2.0 GHz ÷32/33, ÷64/65 Low Voltage Dual Modulus Prescaler	8	P	D
MC12034A	2.0 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12034B	2.0 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12038A	1.1 GHz ÷64/65, ÷127/128, ÷255/256 Low Power Dual Modulus Prescaler	8	P	D
MC12040	Phase-Frequency Detector	14,20	P	–
MC12052A	1.1 GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler	8	–	D, SD
MC12053A	1.1 GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler With Stand-By Mode	8	–	D, SD
MC12054A	2.0 GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler	8	–	D, SD
MC12058	1.1 GHz ÷126/128. ÷254/256 Low Power Dual Modulus Prescaler	8	–	D, SD
MC12061	Crystal Oscillator	16	P	–
MC12066	1.3 GHz ÷64/256 Prescaler	8	–	D
MC12079	2.8 GHz ÷64/128/256 Prescaler	8	P	D
MC12080	1.1 GHz ÷10/20/40/80 Prescaler	8	P	D
MC12089	2.8 GHz ÷64/128 Prescaler	8	P	D
MC12093	1.1 GHz ÷2/4/8 Low Power Prescaler With Stand-By Mode	8	–	D, SD
MC12095	2.5 GHz ÷2/4 Low Power Prescaler With Stand-By Mode	8	–	D, SD
MC12098	2.5 GHz ÷8192 Prescaler	8	–	D, SD
MCH/K12140	Phase-Frequency Detector	8	–	D
MC12147	Low Power Voltage Controlled Oscillator Buffer	8	–	D, SD
MC12148	Low Power Voltage Controlled Oscillator	8	–	D, SD, P
MC12149	Ultra Low Power Voltage Controlled Oscillator	8	–	D, SD
MC12179	500–2800 MHz Single Channel Frequency Synthesizer	8	–	D
MC12181	125–1000 MHz Frequency Synthesizer	16	–	D

Communications Circuits Package Overview

CASE 620
L SUFFIX

CASE 626
P SUFFIX



CASE 646
P SUFFIX

CASE 648
P SUFFIX



CASE 707
P SUFFIX



CASE 708
P SUFFIX



CASE 709
P SUFFIX



CASE 710
P SUFFIX

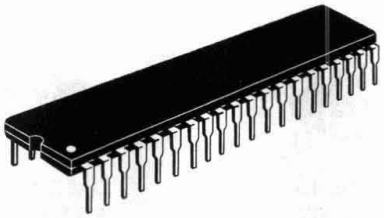

CASE 711
P SUFFIX

CASE 724
P SUFFIX

CASE 726
L SUFFIX



CASE 738
DP, P SUFFIX

CASE 751
D SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW, FP SUFFIX

CASE 751E
DW SUFFIX

CASE 751F
DW SUFFIX

Communications Circuits Package Overview (continued)

CASE 751G
DW SUFFIX

CASE 751J
F SUFFIX

CASE 751M
FW SUFFIX

CASE 776
FN SUFFIX



CASE 777
FN SUFFIX



CASE 779
FN SUFFIX

CASE 803C
F SUFFIX



CASE 804
H SUFFIX

CASE 824D
PB SUFFIX

CASE 848B
FB SUFFIX



CASE 858
B SUFFIX

CASE 873
FB, FTB, FU SUFFIX

CASE 873A
PB SUFFIX

CASE 873C
FTA SUFFIX

CASE 932
FTA SUFFIX

CASE 940C
SD SUFFIX

CASE 948C
DT SUFFIX

CASE 948D
DT SUFFIX

CASE 948F
DTB SUFFIX

CASE 976
FTB SUFFIX

CASE 977
FTA SUFFIX

Consumer Electronic Circuits

In Brief . . .

These integrated circuits reflect Motorola's continuing commitment to semiconductor products necessary for consumer system designs. This tabulation is arranged to simplify selection of consumer integrated circuit devices that satisfy the primary functions for home entertainment products, including television, hi–fi audio and AM/FM radio.

	Page
Entertainment Radio Receiver Circuits	4.8–2
Entertainment Receiver RF/IF	4.8–2
C–Quam® AM Stereo Decoders	4.8–2
Audio Amplifiers	4.8–2
Video Circuits	4.8–3
Encoders	4.8–3
TV Decoder	4.8–3
Video Capture Chip Sets	4.8–3
TV Picture–in–Picture	4.8–3
Comb Filters	4.8–3
Deflection	4.8–3
TV IF Circuits	4.8–3
Tuner PLL Circuits	4.8–4
Modulator	4.8–4
Video Data Converters	4.8–4
Monitor Subsystem	4.8–4
Miscellaneous	4.8–4
Circuit Descriptions and Diagrams	4.8–5
Package Overview	4.8–18

Entertainment Radio Receiver Circuits

Table 1. Entertainment Receiver RF/IF

Function	Features	Suffix/ Package	Device
E.T.R.® Front End	Mixer/VCO/Wideband AGC/IF Amp for Electronically Tuned AM Stereo Receivers	P/648, D/751B	MC13025
AMax® Front End	Mixer/VCO/Wideband AGC/IF Amp plus Audio Noise Blanking	DW/751D, P/738	MC13027
Dual Conversion AM Tuner	1st Mixer/OSC, 2nd Mixer/OSC, High Gain IF, AGC, Wideband AGC, Detector	DW/751F	MC13030

Table 2. C–Quam® AM Stereo Decoders

Function	Features	Suffix/ Package	Device
AM Stereo Decoder	Medium Voltage 6 to 10 V, Basic Decoder	P/738	MC13020
Advanced AM Stereo Decoder	Medium Voltage 4 to 10 V, Decoder, IF Amp, Signal Quality Detector and Audio Blend	P/710, DW/751F	MC13022
Advanced AM Stereo Decoder	Medium Voltage 4 to 10 V, Decoder, IF Amp, Signal Quality Detector and Audio Blend. (MC13022A has 10 dB more audio output than MC13022.)	P/710, DW/751F	MC13022A
AM Stereo Tuner	Low Voltage 1.8 to 8 V for Manually Tuned Radio Mass Market	P/724, DW/751E	MC13024
Low Voltage AM Stereo Decoder	IF Amp/Decoder for Advanced C–Quam Receivers. 2.2 to 12 V Operation, Audio Blend, Adjustable Audio Output Levels	P/648, D/751B	MC13028A
Medium Voltage AM Stereo Decoder	IF Amp/Decoder for Advanced C–Quam Receivers. AM/FM Switch and Audio Mute Included, 4 to 10 V Operation.	DW/751D, H/738	MC13029A
Advanced AM Stereo Tuner with FM Stereo Decoder	Medium Voltage 4 to 10 V, RF Mixer, L. O., IF, AM/FM Switching, Signal Quality, Muting, and Audio Blend Functions, FM Stereo Decoder. For E.T.R. Products.	P/738, DW/751D	MC13035
AM/FM Stereo Decoder	Medium Voltage 4 to 10 V, IF Amp, AM/FM Switching, Signal Quality, Muting, and Audio Blend Functions, FM Stereo Decoder. For E.T.R. Products.	P/648, DW/751B	MC13037
AMax Stereo Decoder	AM Stereo Decoder with the features of the MC13022A plus an Audio Noise Blanker. To be used with the MC13027 AMax Front End device.	DW/751F, P/710	MC13122

Table 3. Audio Amplifiers

Function	P_O (Watts)	V_{CC} Vdc Max	V_{in} @ Rated P_O mV Typ	I_D mA Typ	R_L (Ohms)	Suffix/ Package	Device
Mini Watt SOIC Audio Amp	1.0 W	35	80	11	16	D/751	MC13060
Low Power Audio Amp	500 mW	16	–	2.5 mA	8 – ∞	D/751, P/626, DTB/948J	MC34119

Video Circuits

Table 4. Video Circuits

Function	Features	Suffix/ Package	Device
Encoders			
Video Overlay Synchronizer	Complete Color TV Video Overlay Synchronizer, remote or local system control and RGB encoder.	P/711, FN/777	MC1378
Advanced RGB to PAL/NTSC Encoder	RGB and Sync inputs, Composite Video and S–VHS out; PAL/NTSC selectable; subcarrier from crystal or external source.	P/738, DW/751D	MC13077
TV Decoder			
Chroma 4 Multistandard Decoders (TV Set)	PAL/NTSC/SECAM decoding, Composite Video/S–VHS Inputs, RGB Outputs, horizontal and vertical drive outputs, geometry correction and beam current monitor, digital internal filters, no external tank, 16:9 capability, μP and crystal controlled.	P/711	MC44002
	Same as MC44002, but without SECAM decoding.	P/711	MC44007
Video Capture Chip Sets			
Chroma 4 Multistandard Video Processor (Multimedia)	PAL/NTSC/S–VHS input, RGB/YUV outputs; horizontal and vertical timing outputs; all digital internal filters, no external tanks; μP and crystal controlled.	FN/777, FU/824E	MC44011
Chroma Digital Delay Line	For PAL and SECAM applications of the MC44011, MC44002, MC44007.	P/648, DW/751G	MC44140
Triple 8–Bit Video A/D	Video clamps for RGB/YUV, 18 MHz, High Z TTL outputs.	FN/777, FU/824A	MC44251
TV Picture–in–Picture			
Picture–in–Picture (PIP) Controller	Completely self–contained NTSC picture–in–picture function.	B/859	MC44461
Y–C Picture–in–Picture (PIP) Controller	Completely self–contained NTSC picture–in–picture function, with Y–C input and output capability, for use in high performance S–Video systems.	B/859	MC44462
Replay and Multiple Picture–in–Picture (PIP) Controller	Offers either multiple PIP windows or several seconds of replay. Used with external DRAM.	B/859	MC44463
Multi–Standard PIP Controller	PAL/NTSC and SECAM operation, 50/60 Hz; 4:3 or 16:9; RGB/YUV I/O; external DRAM.	B/859	MC44465
YUV/RGB PIP Controller	Complete self–contained NTSC PIP function with YUV or RGB I/O compatibility. "V" chip parental control.	B/859	MC44468
Comb Filters			
Enhanced Comb Filter	Fast 8–Bit A/D Converter, Two 8–Bit D/A Converters, Two Line–Delay Memories, utilizes NTSC Subcarrier Frequency clock, CMOS Technology.	FU/898	MC141620
Advanced Comb Filter (ACF)	Composite Video input; YC outputs in digital and analog form; all digital internal filters.	FU/898	MC141621A
Advanced Comb Filter – II (ACF–II)	Composite Video input; YC outputs in digital and analog form; all digital internal filters; vertical enhancer circuit.	P/898	MC141622A
Advanced Comb Filter – I (ACF–I)	Low cost Ih filter.	FU/873 SP/TBD	MC141624
Advanced PAL/NTSC Comb Filter	Composite Video input; YC outputs in digital and analog form; all digital internal filters.	FB/898	MC141627
Deflection			
Horizontal Processor	Linear balanced phase detector, oscillator and predriver, adjustable DC loop gain and duty cycle.	P/626	MC1391
TV IF Circuits			
IF Amplifier	1st and 2nd video IF amplifiers, 50 dB gain at 45 MHz, 60 dB AGC range.	D/751, P/626	MC1350
Advanced Multi–Standard TV Video/Sound IF	Complete video/sound IF system for all standard modulation techniques including NTSC, PAL, and SECAM.	P/710, DW/751F	MC44302A

Table 4. Video Circuits (continued)

Function	Features	Suffix/ Package	Device
Tuner PLL Circuits			
PLL Tuning Circuits	1.3 GHz, 10 mV sensitivity selectable prescaler (MC44817), op amp, 4 band buffers, 3–wire bus interface, lock detect.	D/751B	MC44817, B
	1.3 GHz, 10 mV sensitivity prescaler, op amp, 4 band buffers, I^2C interface, lock detect.	D/751B	MC44818
	Similar to MC44817, with lower power consumption, push–pull lock detector output, no divide–by–8 bypass, in a TSSOP package.	DTB/948F	MC44827
	Similar to MC44818, with lower power consumption, push–pull lock detector output, in a TSSOP package.	DTB/948F	MC44828
	1.3 GHz prescaler, 10 mV sensitivity 50 to 950 MHz, op amp, 3 band buffers, Mixer/Osc Decoder and I^2C Bus.	D/751A	MC44829
	1.3 GHz, 10 mV sensitivity selectable prescaler, op amp, 4 band buffers, I^2C interface, 3 DACs for automatic tuner alignment.	M/967	MC44864, MC44868
	Similar to the MC44828, with high speed I^2C interface, on–chip dc/dc converter.	DTB/948F	MC44871
Modulator			
UHF TV Modulator	Multi–standard PLL tuned UHF TV modulator with AM or FM sound.	DTB/948E, DW/751D	MC44353, MC44354, MC44355
Video Data Converters			
Triple 8–Bit Video A/D	Video clamps for RGB/YUV, 18 MHz conversion, high Z outputs.	FN/777, FU/824A	MC44251
Triple 8–Bit Video DAC	TTL inputs, 75 Ω drive outputs.	FB/824	MC44200
Monitor Subsystem			
Multimode Color Monitor Processor	Adaptable to 30 kHz to 64 kHz horizontal, 45 to 100 Hz vertical frequency, multiple sync including sync–on–green, horizontal and vertical drive outputs, double PLL, 70 MHz RGB pre–amps, contrast and brightness controls.	B/859	MC13081X
RGB Video Processor	80 MHz bandwidth, blank and clamp inputs, main contrast and subcontrast controls.	P/738	MC13280AY
	Same as above, except 100 MHz bandwidth.	P/738	MC13281B
	Same as above, except 100 MHz bandwidth and pin compatible with MC13282A.	P/724	MC13281A
RGB Video Processor with OSD Inputs	100 MHz bandwidth, blank and clamp inputs, main contrast and subcontrast controls, OSD inputs, OSD contrast control, pin compatible with MC13281A.	P/724	MC13282A
	Same as above, except 130 MHz bandwidth.	P/724	MC13283
Miscellaneous			
Subcarrier Reference Generator	Provides continuous subcarrier sine wave and 4x subcarrier, locked to incoming burst.	P/626, D/751	MC44144
Dual Video Amplifiers	Gain @ 4.43 MHz = 6.0 dB ±1.0 dB, fixed gain, internally compensated, CMOS Technology.	P/626, F/904	MC14576C
	Gain @ 5.0 MHz = 10 dB max, 10 MHz = 6.0 dB max, adjustable gain, internally compensated, CMOS Technology.	P/626, F/904	MC14577C
Transistor Array	One differential pair and 3 isolated transistors, 15 V, 50 mA.	P/646, D/751A	MC3346

Video Capture Block Diagram

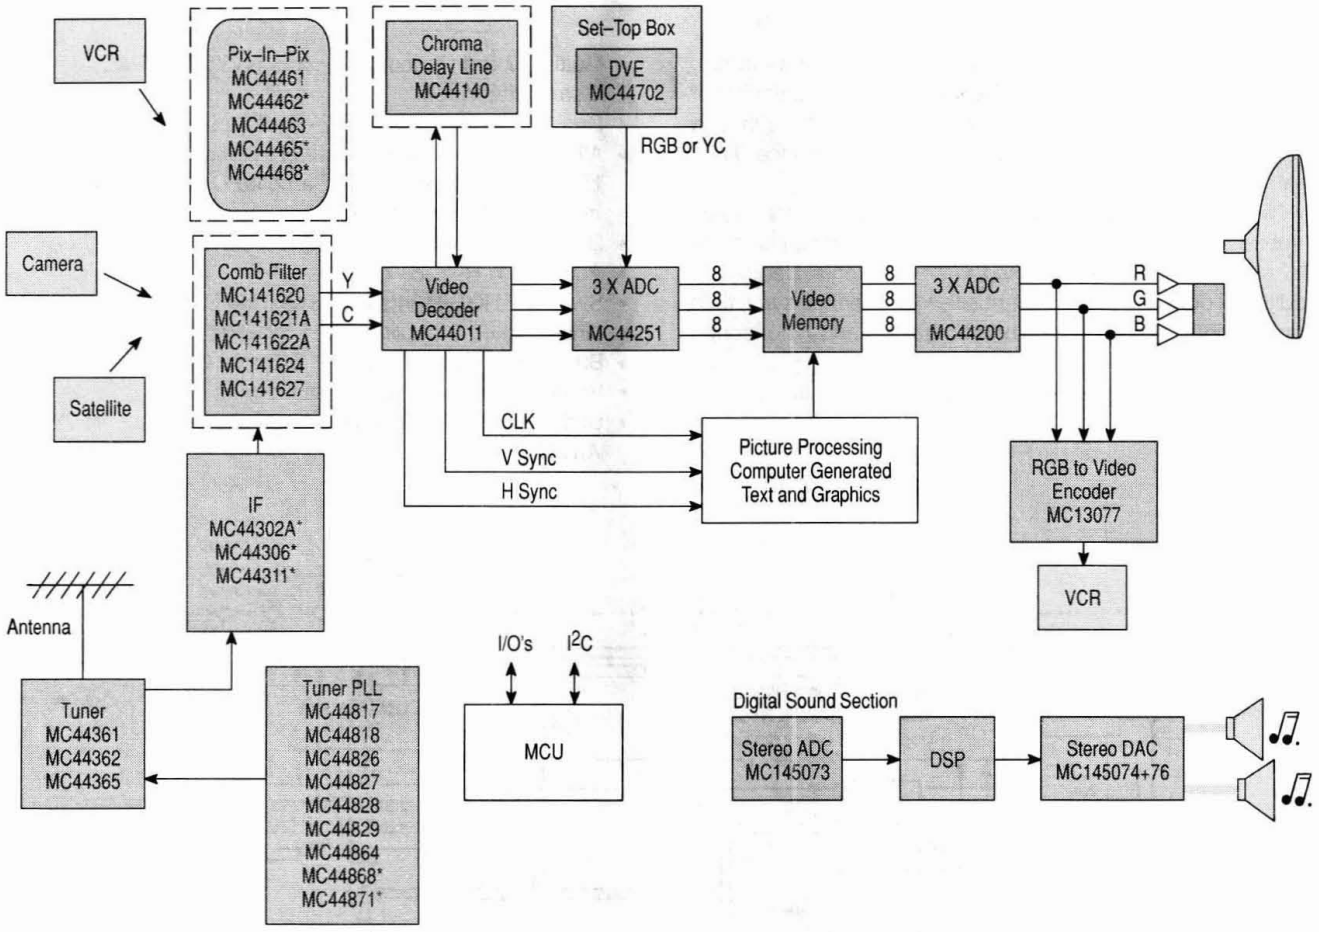

* In Development

Digitally Controlled Video Processor for Multimedia Applications

MC44011FN, FB

Case 777, 824E

The MC44011, a member of the MC44xxx Chroma 4 family, is designed to provide RGB or YUV outputs from a variety of inputs. The inputs may be either PAL or NTSC composite video (two inputs), S–VHS, RGB, and color difference (R–Y, B–Y).

The MC44011 provides a sampling clock output for use by a subsequent analog to digital converter. The sampling clock (6.0 to 40 MHz) is phase–locked to the horizontal frequency. Additional outputs include composite sync, vertical sync, field identification, luminance, burst gate, and horizontal frequency.

Control of the MC44011, and reading of status flags is accomplished via an I^2C bus.

- Multistandard Decoder, Accepts NTSC and PAL Composite Video
- Dual Composite Video or S–VHS Inputs
- All Chroma and Luma Channel Filtering, and Luma Delay Line are Integrated Using Sampled Data Filters Requiring no External components
- Digitally Controlled via I^2C Bus
- Auxiliary Y, R–Y, B–Y Inputs
- Switched RGB Inputs with Separate Saturation Control
- Line–Locked Sampling Clock for Digitizing Video Signals
- Burst Gate Pulse Output for External Clamping
- Vertical Sync and Field Ident Outputs
- Software Selectable YUV or RGB Outputs Able to Drive A/D Converters

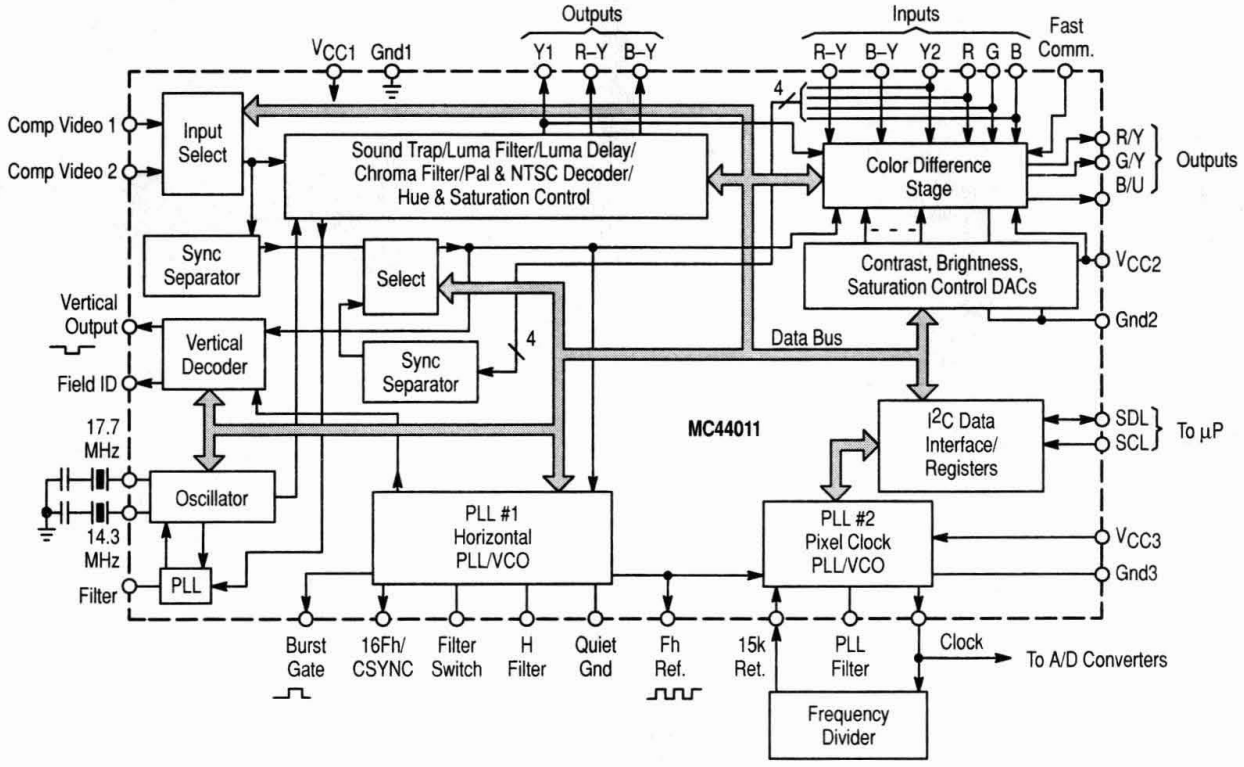

Triple 8–Bit A/D Converter

MC44251FN, FU

Case 777, 824A

The MC44251 contains three independent parallel analog to digital converters. Each ADC consists of 256 latching comparators and an encoder. Input clamps allow for AC coupling of the input signals, and dc coupling is also allowed. For video processing performance enhancements, a dither generator with subsequent digital correction is provided to each ADC. The outputs of the MC44251 can be set to a high impedance state.

These A/Ds are especially suitable as front end converters in TV picture processing.

- 18 MHz Maximum Conversion Speed (MC44251)
- Input Clamps Suitable for RGB and YUV Applications
- Built–in Dither Generator with Subsequent Digital Correction
- Single 5.0 V Power Supply

Simplified Diagram of One of the ADCs

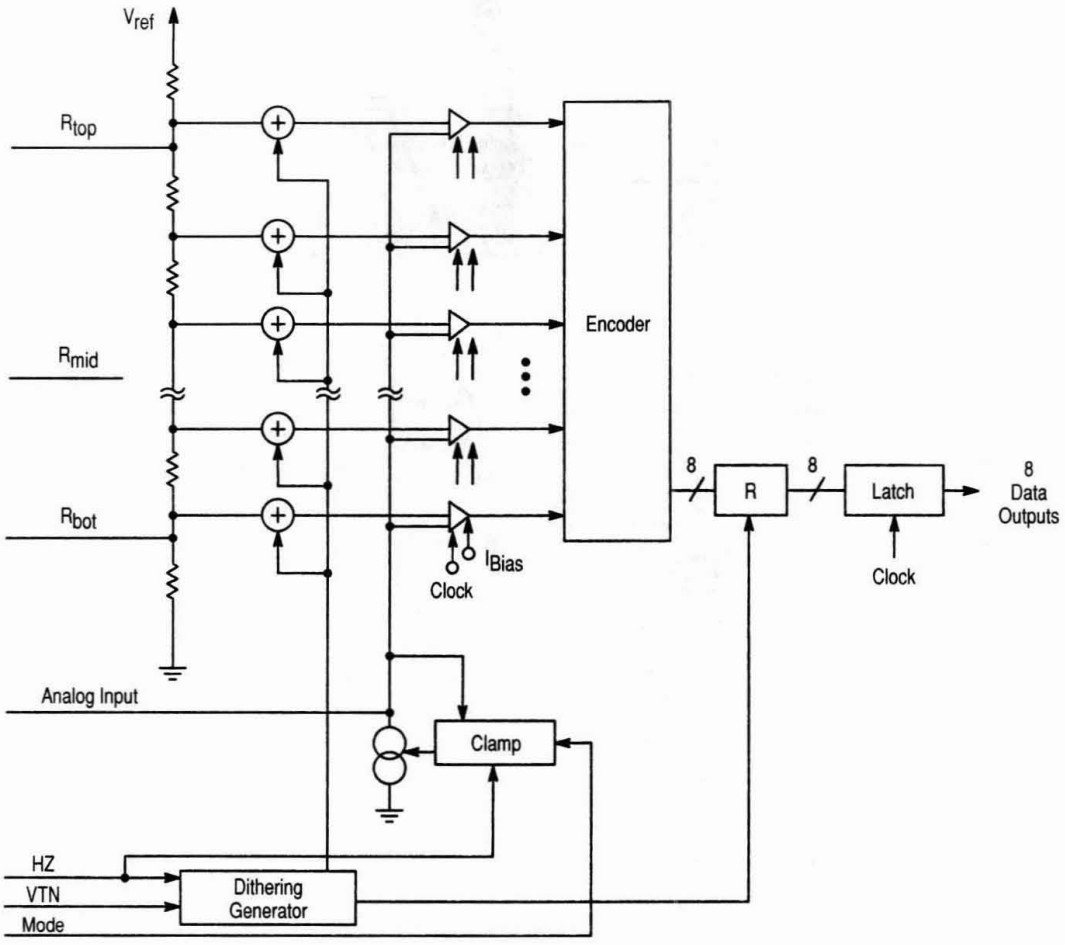

Color TV Block Diagram

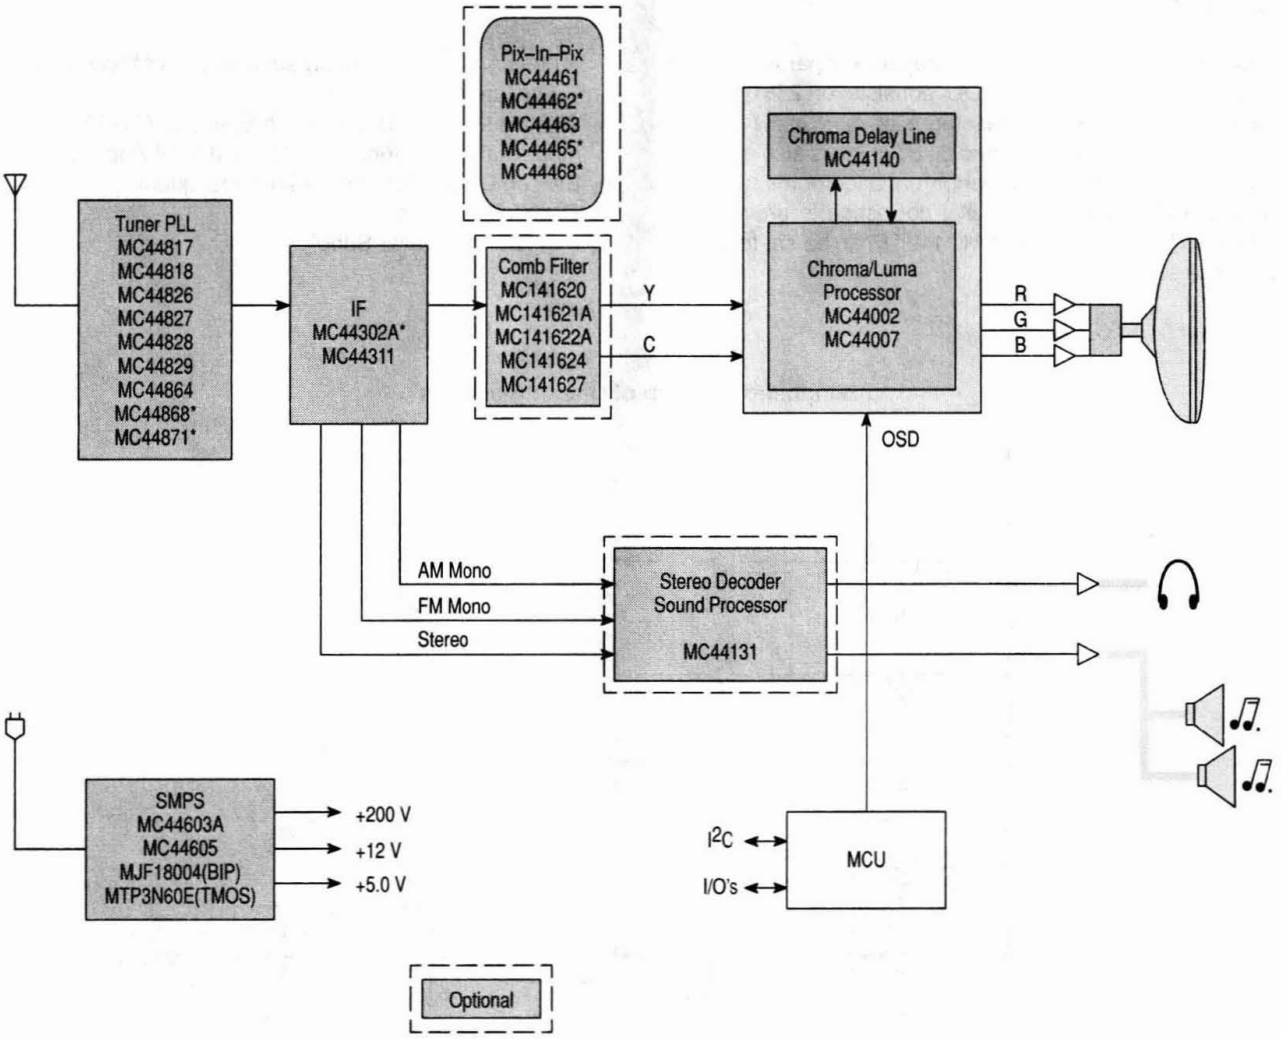

* In Development

Multistandard Video/Timebase Processor

MC44002P, MC44007P

Case 711

The MC44002/7 is a highly advanced circuit which performs most of the basic functions required for a color TV. All of its advanced features are under processor control via an I^2C bus, enabling potentiometer controls to be removed completely. In this way the component count may be reduced dramatically to allow significant cost savings and the possibility of implementing sophisticated automatic test routines. Using the MC44002/7, TV manufacturers will be able to build a standard chassis for anywhere in the world.

- Operation from a Single 5.0 V Supply; Typical Current Consumption Only 120 mA
- Full PAL/SECAM/NTSC Capability (MC44002 Only)
- MC44007 Decodes PAL/NTSC Only
- Dual Composite Video or S–VHS Inputs
- All Chroma/Luma Channel Filtering, and Luma Delay Line are Integrated Using Sampled Data Filters Requiring No External Components
- Filters Automatically Commutate with Change of Standard
- Chroma Delay Line is Realized with Companion Device (MC44140)
- RGB Drives Incorporate Contrast and Brightness Controls and Auto Gray Scale
- Switched RGB Inputs with Saturation Control
- Auxiliary Y, R–Y, B–Y Inputs
- Line Timebase Featuring H–Phase Control and Switchable Phase Detector Gain and Time Constant
- Vertical Timebase Incorporating the Vertical Geometry Corrections
- E–W Parabola Drive Incorporating the Horizontal Geometry Corrections
- Beam Current Monitor with Breathing Compensation
- 16:9 Display Mode Capability

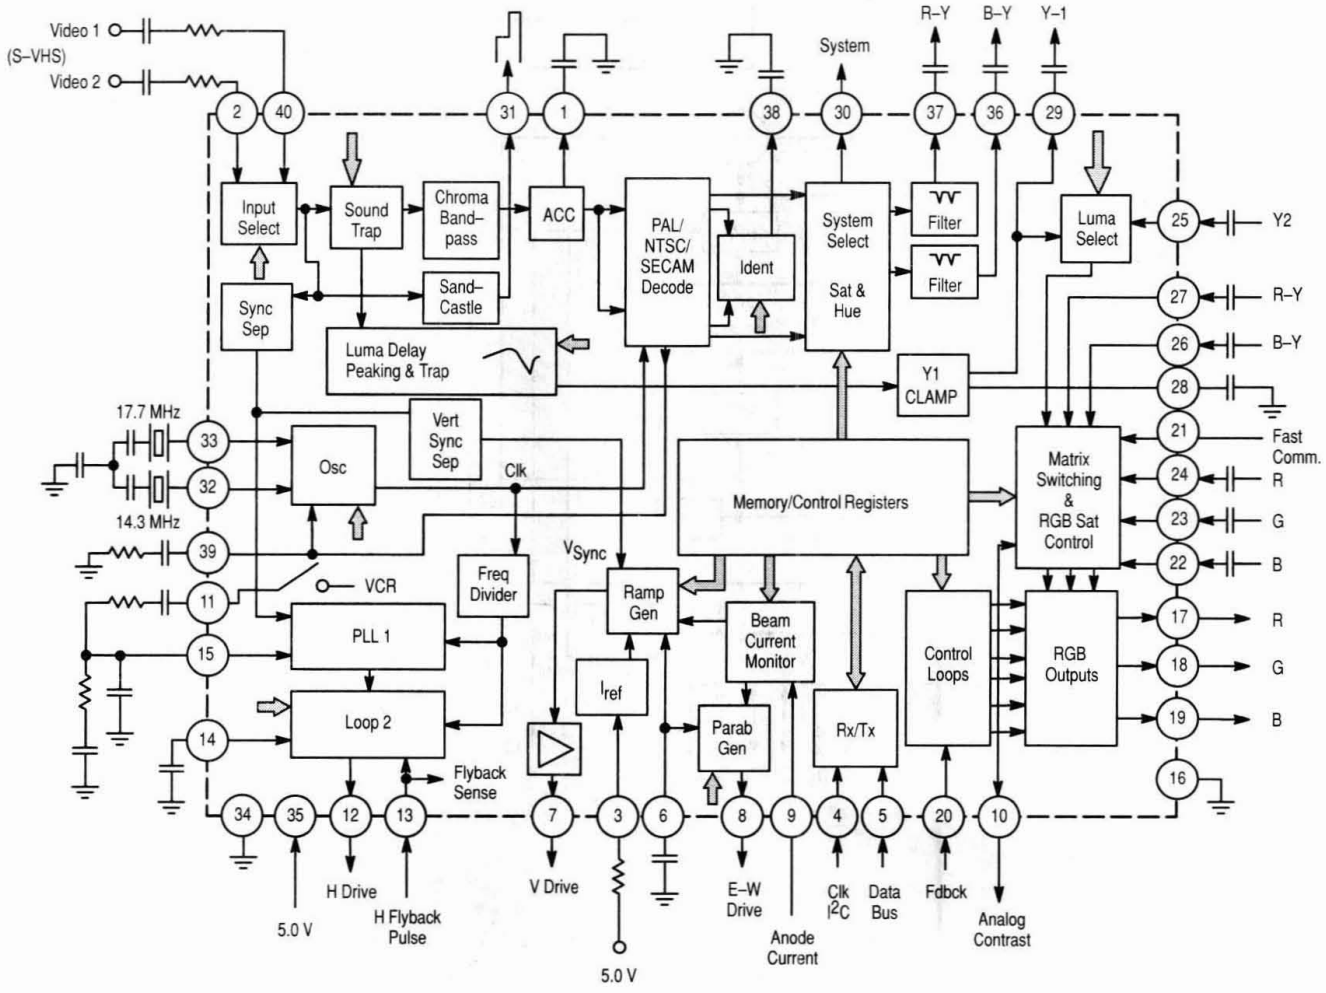

Advanced NTSC Comb Filter

MC141621FB

Case 898

The MC141621 is an advanced NTSC comb filter for VCR and TV applications. It separates the luminance (Y) and chrominance (C) signals from the NTSC composite video signal by using digital signal processing techniques. This filter allows a video signal input of an extended frequency bandwidth by using a 4.0 F_{SC} clock. In addition, the filter minimizes dot crawl and cross color effects. The built–in A/D and D/A converters allow easy connections to analog video circuits.

- Built–in High Speed 8–Bit A/D Converter
- Two Line Memories (1820 Bytes)
- Advanced Combing Process
- Two 8–Bit D/A Converters
- Built–in Clamp Circuit
- On–Chip Reference Voltage Regulator for ADC
- Digital Interface Mode

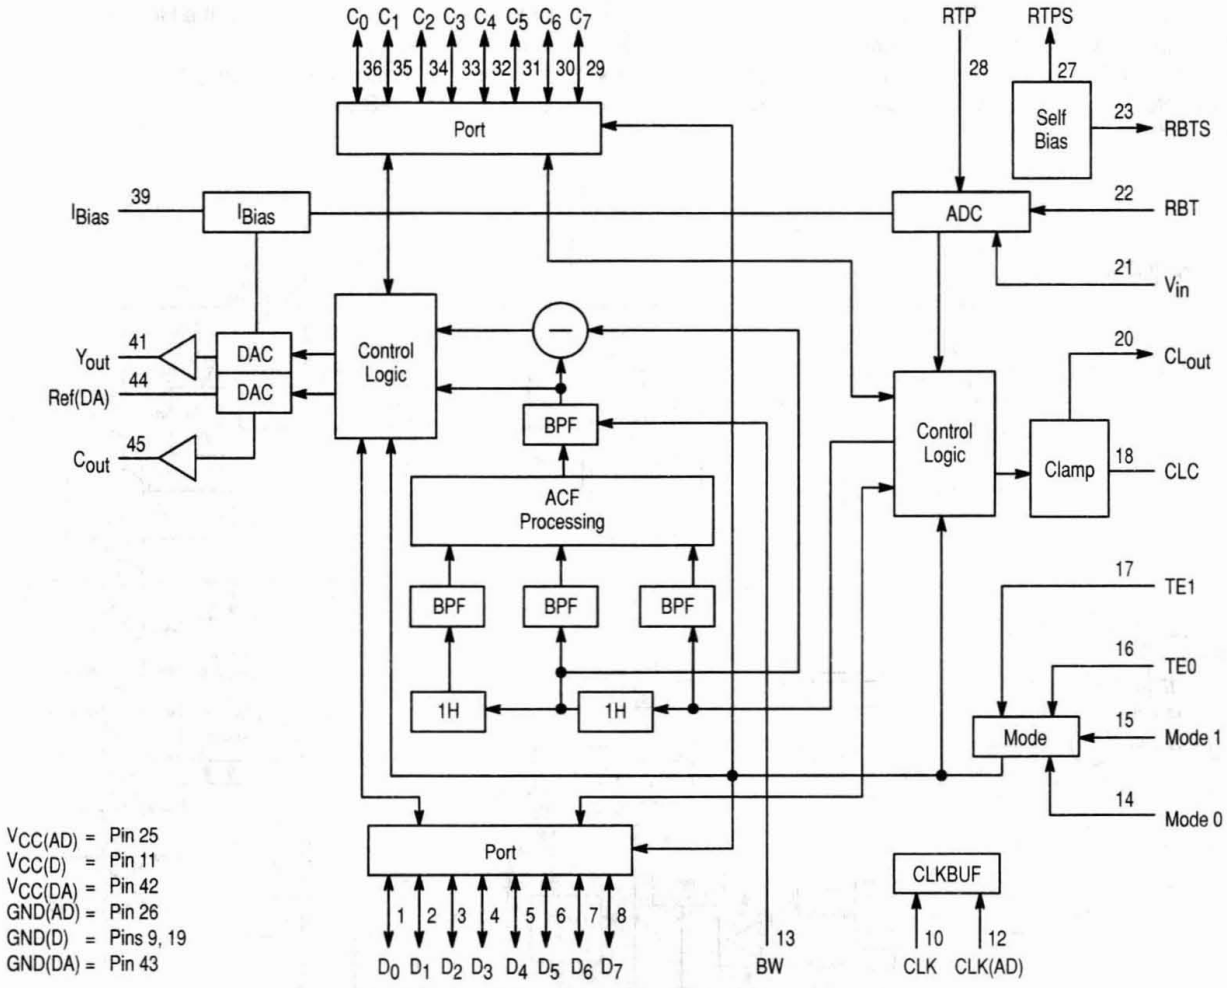

Advanced Comb Filter–II (ACF–II)

MC141622AFU

Case 898

The Advanced Comb Filter–II is a video signal processor for VCRs and TVs. It's function is to separate the Luminance Y and Chrominance C signals from the NTSC composite video signal. The ACF–II minimizes dot–crawl and cross–color. A built–in PLL provides a 4xfsc clock from either an NTSC subcarrier signal or a 4xfsc input. This allows a video signal input of an extended frequency bandwidth. The built–in vertical enhancer circuit improves the quality of the Luminance Y signal. The built–in A/D and D/A converters allow easy connection to analog video circuits.

- Built–in High Speed 8–Bit A/D Converter
- Two Line Memories (1820 Bytes)
- Advanced Comb–II Process
- Vertical Enhancer Circuit
- Two High Speed 8–Bit D/A Converters
- 4xfsc PLL Circuit
- Built–in Clamp Circuit
- Digital Interface Mode
- On–Chip Reference Voltage Regulator for A/D Converter

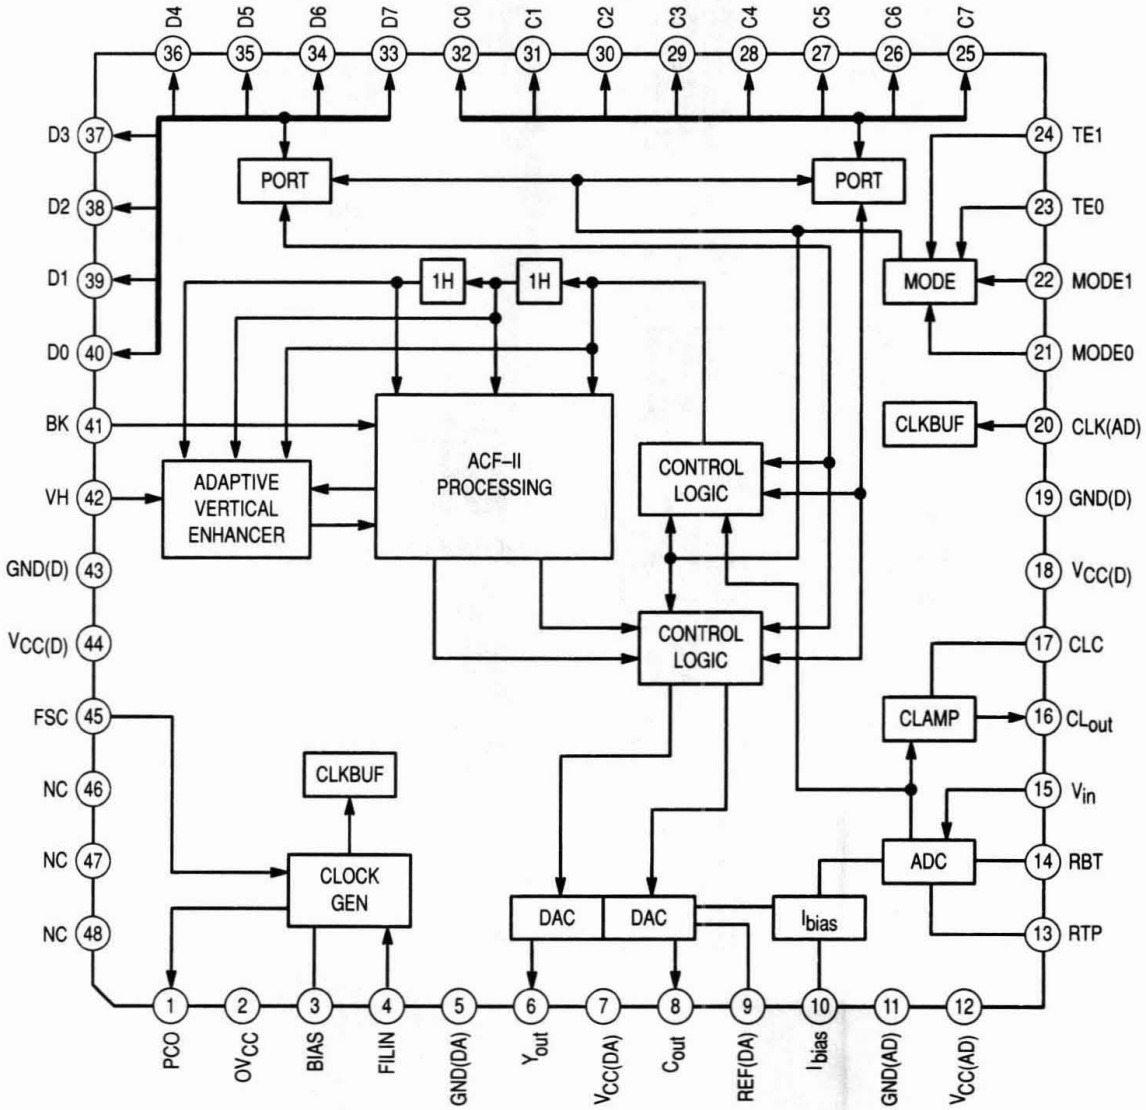

Set–Top Block Diagram

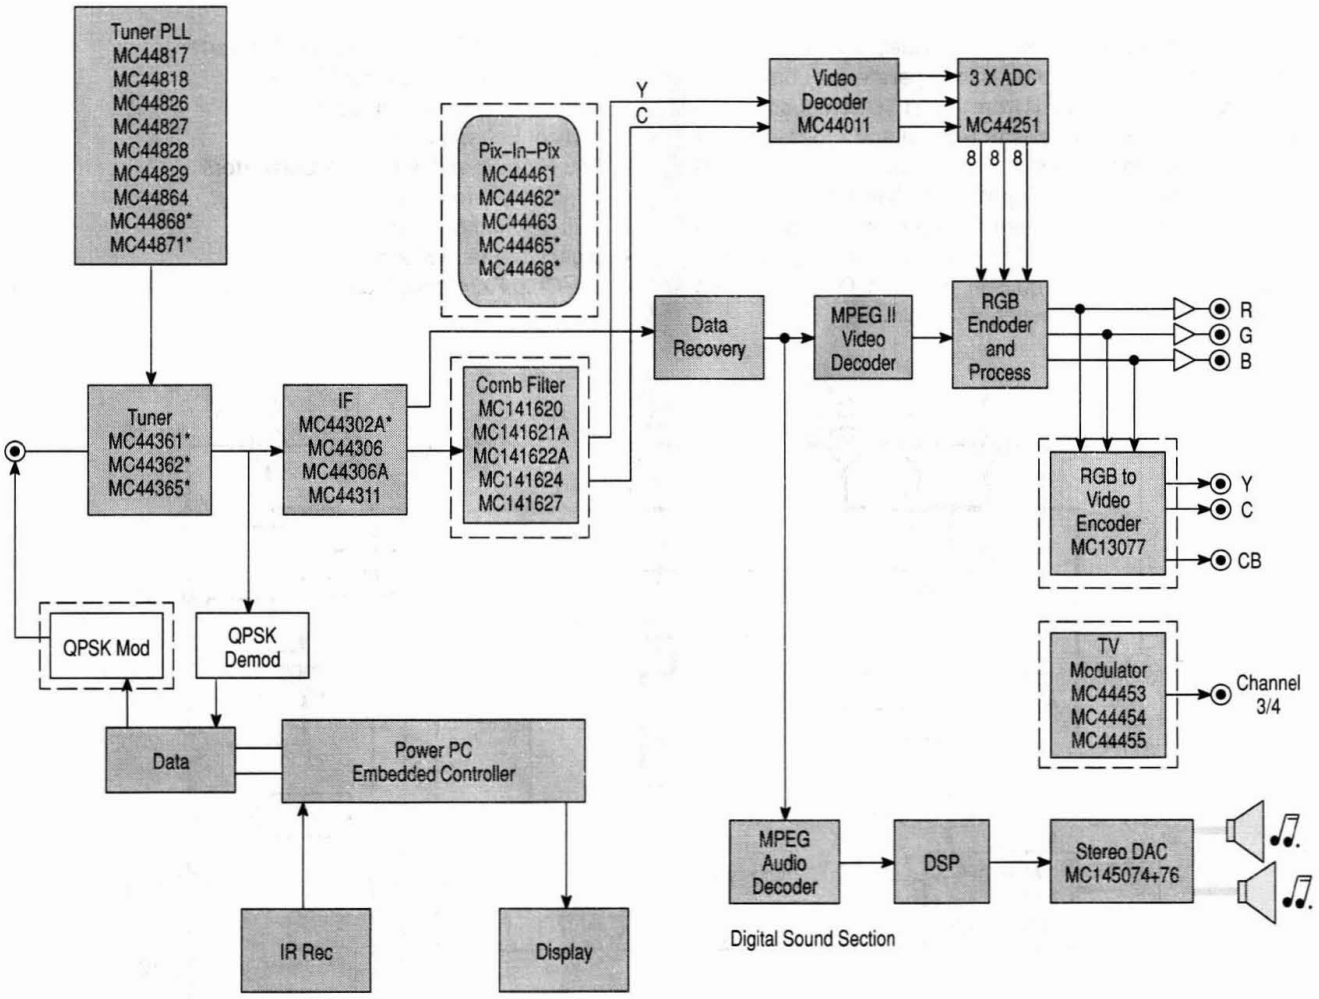

* In Development

PLL Tuning Circuits with 3–Wire Bus

MC44817BD, D

Case 751B

The MC44817/17B are tuning circuits for TV and VCR tuner applications. They contain on one chip all the functions required for PLL control of a VCO. The integrated circuits also contain a high frequency prescaler and thus can handle frequencies up to 1.3 GHz.

The MC44817 has programmable 512/1024 reference dividers while the MC44817B has a fixed reference divider of 1024.

The MC44817/17B are manufactured on a single silicon chip using Motorola's high density bipolar process, MOSAIC™ (Motorola Oxide Self Aligned Implanted Circuits).

- Complete Single Chip System for MPU Control (3–Wire Bus). Data and Clock Inputs are IIC Bus Compatible
- Divide–by–8 Prescaler Accepts Frequencies up to 1.3 GHz
- 15 Bit Programmable Divider Accepts Input Frequencies up to 165 MHz
- Reference Divider: Programmable for Division Ratios 512 and 1024. The MC44817B has a Fixed 1024 Reference Divider
- 3–State Phase/Frequency Comparator
- Operational Amplifier for Direct Tuning Voltage Output (30 V)
- Four Integrated PNP Band Buffers for 40 mA (V_{CC1} to 14.4 V)
- Output Options for the Reference Frequency and the Programmable Divider
- Bus Protocol for 18 or 19 Bit Transmission
- Extra Protocol for 34 Bit for Test and Further Features
- High Sensitivity Preamplifier
- Circuit to Detect Phase Lock
- Fully ESD Protected

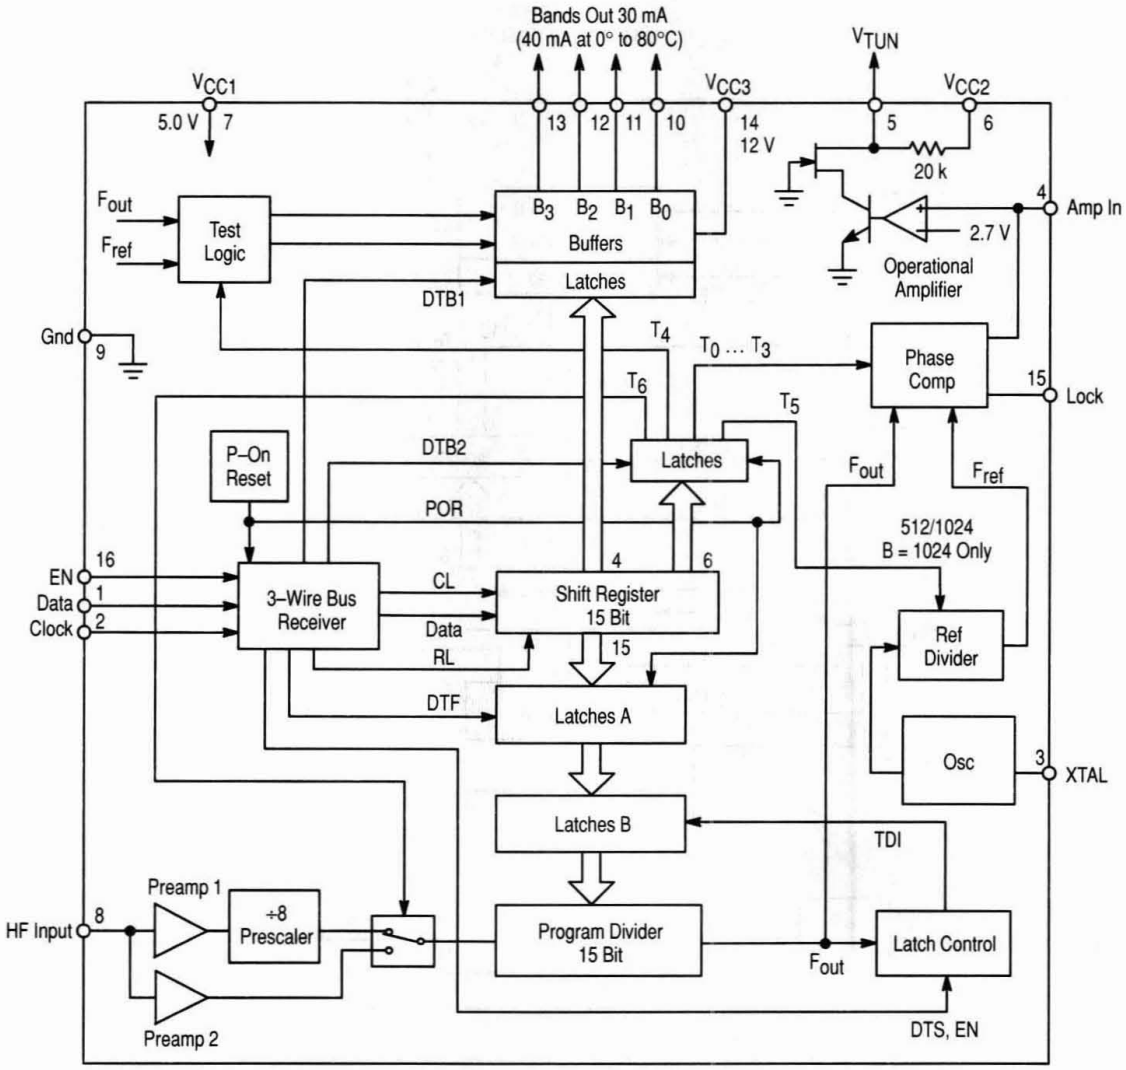

PLL Tuning Circuit with I²C Bus

MC44818D

Case 751B

The MC44818 is a tuning circuit for TV and VCR tuner applications. It contains, on one chip, all the functions required for PLL control of a VCO. This integrated circuit also contains a high frequency prescaler and thus can handle frequencies up to 1.3 GHz. The MC44818 is a pin compatible drop–in replacement for the MC44817, where the only difference is the MC44818 has a fixed divide–by–8 prescaler (cannot be bypassed) and the MC44817 uses the three wire bus.

The MC44818 has programmable 512/1024 reference dividers and is manufactured on a single silicon chip using Motorola's high density bipolar process, MOSAIC™ (Motorola Oxide Self Aligned Implanted Circuits).

- Complete Single Chip System for MPU Control (I²C Bus). Data and Clock Inputs are 3–Wire Bus Compatible
- Divide–by–8 Prescaler Accepts Frequencies up to 1.3 GHz
- 15 Bit Programmable Divider Accepts Input Frequencies up to 165 MHz
- Reference Divider: Programmable for Division Ratios 512 and 1024.
- 3–State Phase/Frequency Comparator
- Operational Amplifier for Direct Tuning Voltage Output (30 V)
- Four Integrated PNP Band Buffers for 40 mA (V_{CC1} to 14.4 V)
- Output Options for the Reference Frequency and the Programmable Divider
- High Sensitivity Preamplifier
- Circuit to Detect Phase Lock
- Fully ESD Protected

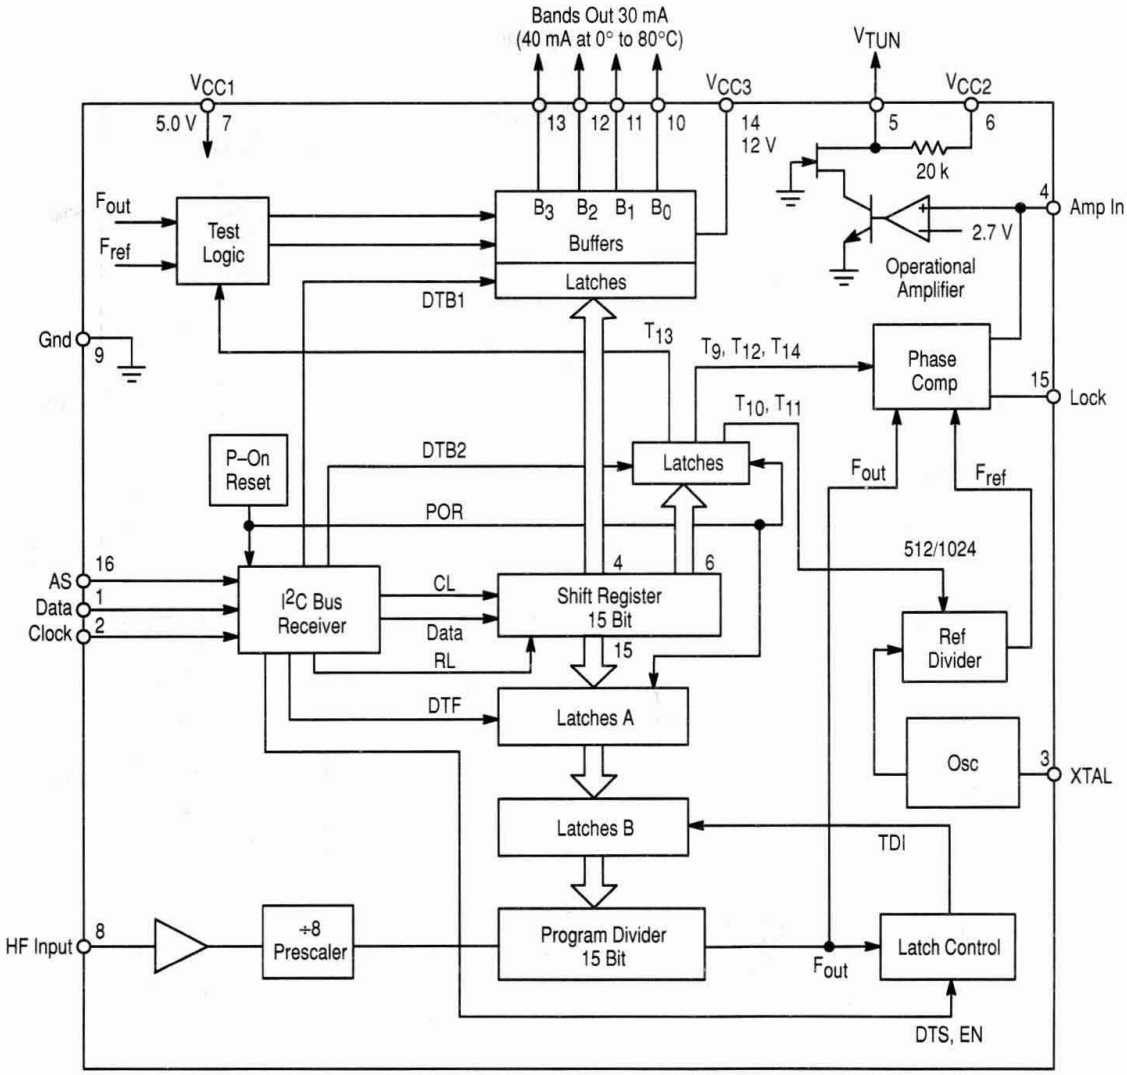

PLL Tuning Circuit with 3–Wire Bus

MC44827DTB, BDTB

Case 948F

The MC44827 is a tuning circuit for TV and VCR tuner applications. This device contains on one chip all the functions required for PLL control of a VCO. This integrated circuit also contains a high frequency prescaler and thus can handle frequencies up to 1.3 GHz.

The MC44827 is controlled by a 3–wire bus. It has the same function as the MC44828 which is I^2C bus controlled. The MC44827 and MC44828 can replace each other to allow conversion between 3–wire bus and I^2C bus control.

The MC44827 is manufactured on a single silicon chip using Motorola's high density bipolar process, MOSAIC™ (Motorola Oxide Self Aligned Implanted Circuits).

The MC44827 has the same features as MC44817 with the following differences:

- Lower Power Consumption, 200 mW Typical
- Improved Prescaler with Higher Margins for Sensitivity and Temperature Range. (A typical device is functional in a temperature range greater than –40 to 100°C.)
- Lock Detector with Push–Pull Output
- No Bypass of Divide–by–8 Prescaler
- TSSOP Package

PLL Tuning Circuit with I^2C Bus

MC44828DTB

Case 948F

The MC44828 is a tuning circuit for TV and VCR tuner applications. This device contains on one chip all the functions required for PLL control of a VCO. This integrated circuit also contains a high frequency prescaler and thus can handle frequencies up to 1.3 GHz.

The MC44828 is controlled by an I^2C bus. It has the same function as the MC44827 which is 3–wire bus controlled. The MC44827 and MC44828 can replace each other to allow conversion between 3–wire bus and I^2C bus control.

The MC44828 is manufactured on a single silicon chip using Motorola's high density bipolar process, MOSAIC™ (Motorola Oxide Self Aligned Implanted Circuits).

The MC44828 has the same features as MC44818 with the following differences:

- Lower Power Consumption, 200 mW Typical
- Improved Prescaler with Higher Margins for Sensitivity and Temperature Range. (A typical device is functional in a temperature range greater than –40 to 100°C.)
- Lock Detector with Push–Pull Output
- TSSOP Package

PLL Tuning Circuit with DC/DC Converter and I^2C Bus

MC44871DTB

Case 948F

The MC44871 is a tuning circuit for TV, VCR and Multimedia tuner applications. This device contains on one chip all the functions required for PLL control of a VCO. This integrated circuit also contains a high frequency prescaler and therefore can handle frequencies up to 1.3 GHz.

The MC44871 has an integrated dc/dc converter to generate the 30 V supply voltage for the tuning amplifier on the chip. A tuner using the MC44871 does not need an external 30 V supply.

The MC44871 is controlled by a I^2C bus, and has a chip address function. The MC44871 data format is the same as the MC44818/MC44828.

The MC44871 is manufactured on a single silicon chip using Motorola's high density bipolar process, MOSAIC™ (Motorola Oxide Self Aligned Implanted Circuits).

The differences compared with the MC44828 are described hereafter:

- The Pin Called V_{CC2} for the MC44828 is Now Called CP (Charge Pump). This Pin is the Output of the dc/dc Converter; it Only Needs an External Capacitor (1.0 nF) Instead of the 30 V Supply Line
- High Speed I^2C Bus (500 kHz)
- I^2C Bus Read Mode for Lock Detector and A to D Converters
- HF Input is Symmetric
- MC44871 has Three PNP High Current (30 mA) Band Buffers (B0, B1, B2) and One NPN Low Current (5.0 mA) Band Buffer (B4)
- The Tuning Voltage Pin Needs an External pull–up Resistor (560 kΩ)
- Phase Comparator Output Current Has Been Decreased

PLL Tuning Circuit with I²C Bus

MC44829D

Case 751A

The MC44829 is a tuning circuit for TV and VCR tuner applications. It contains, on one chip, all the functions required for PLL control of a VCO. This integrated circuit also contains a high frequency prescaler and thus can handle frequencies up to 1.3 GHz. The circuit has a band decoder that provides the band switching signal for the mixer/oscillator circuit. The decoder is controlled by the buffer bits.

The MC44829 has programmable 512/1024 reference dividers and is manufactured on a single silicon chip using Motorola's high density bipolar process, MOSAIC™ (Motorola Oxide Self Aligned Implanted Circuits).

- Complete Single Chip System for MPU Control (I²C Bus)
- Divide–by–8 Prescaler Accepts Frequencies up to 1.3 GHz
- 15 Bit Programmable Divider
- Reference Divider: Programmable for Division Ratios 512 and 1024
- 3–State Phase/Frequency Comparator
- Operational Amplifier for Direct Tuning Voltage Output (30 V)
- Four Programmable Chip Addresses
- Integrated Band Decoder for the Mixer/Oscillator Circuit
- Band Buffers with Low "On" Voltage (0.4 V Maximum at 5.0 mA)
- Fully ESD Protected to MIL–STD–883C, Method 3015.7 (2000 V, 1.5 kΩ, 150 pF)

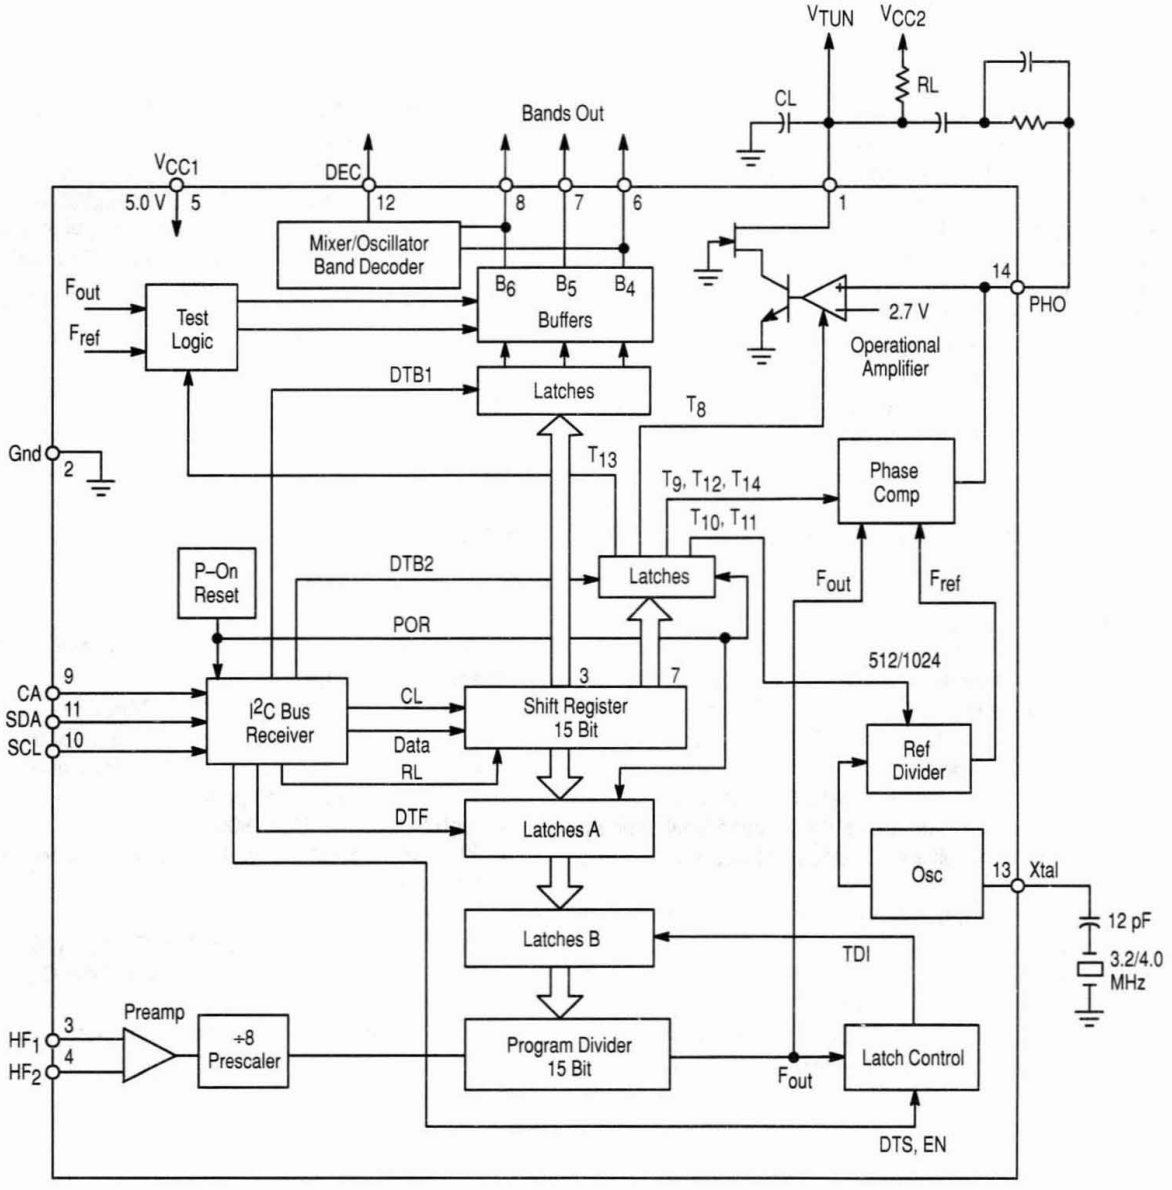

Advanced PAL/NTSC Encoder

MC13077P, DW

Case 738, 751D

The MC13077 is an economical, high quality, RGB encoder for PAL or NTSC applications. It accepts red, green, blue and composite sync inputs and delivers either composite PAL or NTSC video, and S–Video Chroma and Luma outputs. The MC13077 is manufactured using Motorola's high density, bipolar MOSAIC® process.

- Single 5.0 V Supply
- Composite Output
- S–Video Outputs
- PAL/NTSC Switchable
- PAL Squarewave Output
- PAL Sequence Resettable
- Internal/External Burst Flag
- Modulator Angles Accurate to 90°
- Burst Position/Duration Determined Digitally
- Subcarrier Reference from a Crystal or External Source

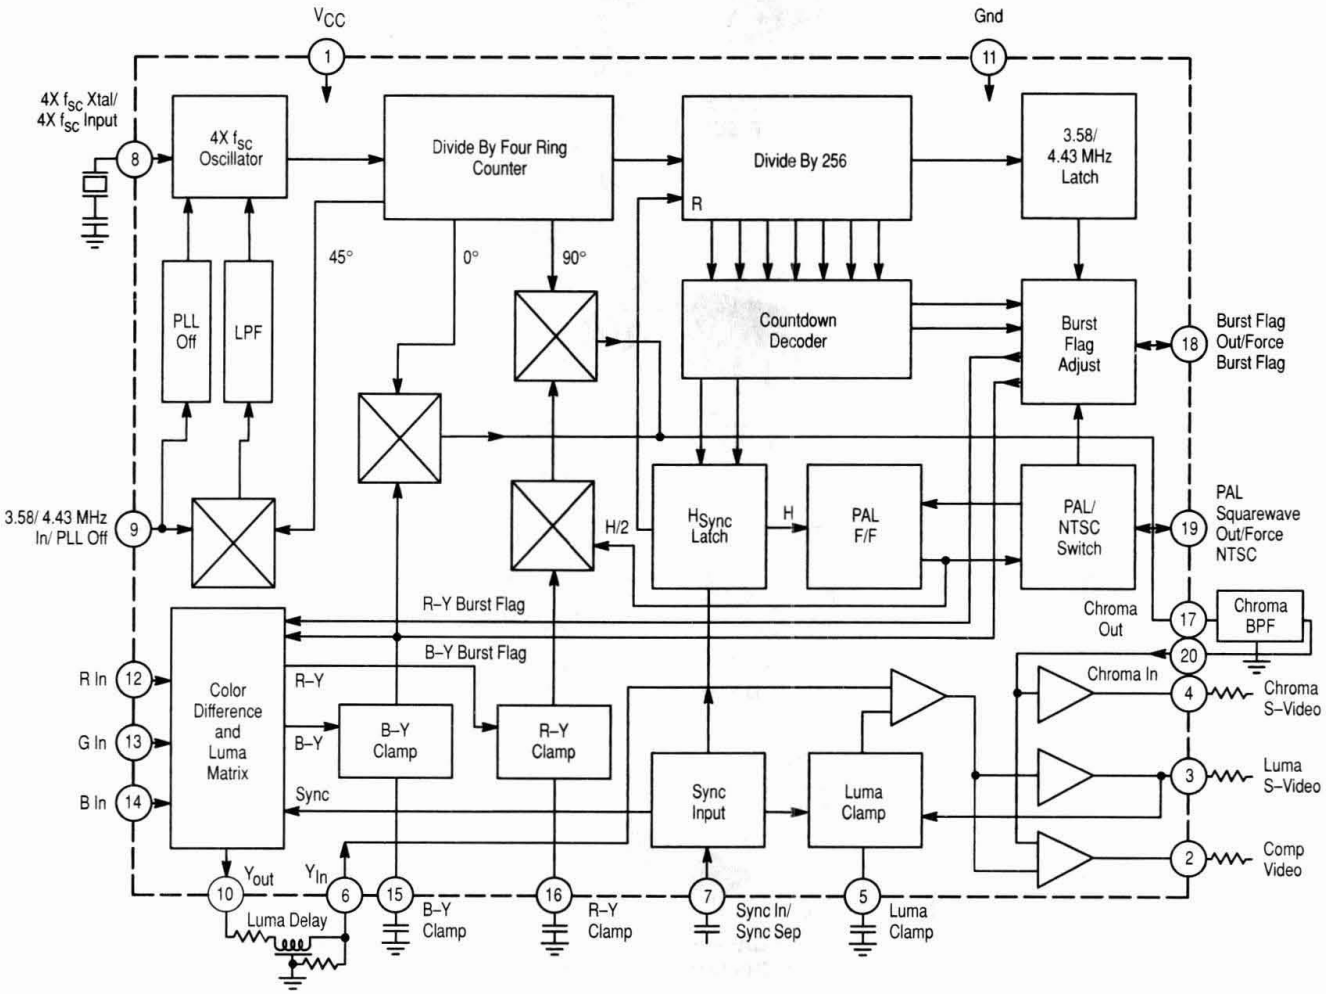

Consumer Electronic Circuits Package Overview

CASE 626
P SUFFIX

CASE 646
P SUFFIX

CASE 648
P SUFFIX



CASE 709
P SUFFIX

CASE 710
P SUFFIX

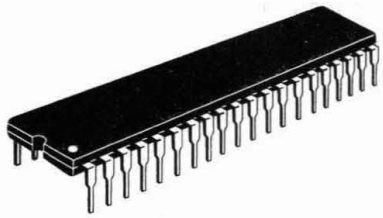

CASE 711
P SUFFIX



CASE 724
P SUFFIX



CASE 738
H, P SUFFIX

CASE 751
D SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW SUFFIX

CASE 751E
DW SUFFIX

CASE 751F
DW SUFFIX

CASE 751G
DW SUFFIX

Consumer Electronic Circuits Package Overview (continued)

CASE 777
FN SUFFIX

CASE 824, 824A
FB, FU SUFFIX

CASE 824D
FTB SUFFIX



CASE 824E
FB SUFFIX

CASE 859
B SUFFIX

CASE 873
FU SUFFIX

CASE 898
FB, FU, P SUFFIX

CASE 904
F SUFFIX

CASE 948E
DTB SUFFIX

CASE 948F
DTB SUFFIX

CASE 948J
DTB SUFFIX

CASE 967
M SUFFIX

Automotive Electronic Circuits

In Brief . . .

Motorola Analog has established itself as a global leader in custom integrated circuits for the automotive market. With multiple design centers located on four continents, global process and assembly sites, and strategically located supply centers, Motorola serves the global automotive market needs. These products are key elements in the rapidly growing engine control, body, navigation, entertainment, and communication electronics portions of modern automobiles. Though Motorola is most active in supplying automotive custom designs, many of yesterday's proprietary custom devices have become standard products of today, available to the broad base manufacturers who support this industry. Today, based on new technologies, Motorola offers a wide array of standard products ranging from rugged high current "smart" fuel injector drivers which control and protect the fuel management system through the rigors of the underhood environment, to the latest SMARTMOS™ switches and series transient protectors. Several devices are targeted to support microprocessor housekeeping and data line protection. A wide range of packaging is available including die, flip–chip, and SOICs for high density layouts, to low thermal resistance multi–pin, single–in–line types for high power control ICs.

	Page
Voltage Regulators	4.9–2
Electronic Ignition Circuits	4.9–2
Low– and High–Side Switches	4.9–3
Alternator Regulators	4.9–3
Communication Bus Circuits	4.9–3
Special Function Circuits	4.9–3
Package Overview	4.9–17

Automotive Electronic Circuits

Table 1. Voltage Regulators

Function	Features	Suffix/Package	Device
Multifunction Very Low Dropout Voltage Regulator	A monolithic integrated 5.0 V voltage regulator with a very low dropout and additional functions such as power–on reset and input voltage sense. It is designed for supplying the micro–computer controlled systems especially in automotive applications.	N/626, D/751	L4949
Low Dropout Voltage Regulator	Fixed and adjustable positive output voltage regulators which maintain regulation with very low input–to–output voltage differential.	Z/29, T/221A, T/314D, TH/314A, TV/314B, DT/369A, DT–1/369, D2T/936, D2T/936A, D/751	LM2931 Series
Low Dropout Voltage Regulator	Low voltage differential regulator featuring dual positive 5.0 V outputs; switched currents in excess of 750 mA and 10 mA standby current. Fixed quiescent current is less than 3.0 mA.	T/314D, TH/314A, TV/314B, D2T/936A	LM2935
Low Dropout Voltage Regulator	Positive 5.0 V, 500 mA regulator with on–chip power–up–reset circuit with externally programmable delay, current limit, and thermal shutdown.	T/314D, TV/314B	MC33267
Low Dropout Voltage Regulator	Positive 3.3 V, 5.0 V, 12 V, 800 mA regulator.	D/751, DT/369A, ST/318E, T/221A	MC33269

Table 2. Electronic Ignition Circuits

Function	Features	Suffix/Package	Device
Electronic Ignition Circuit	High energy variable dwell electronic ignition control circuit used in 12 V battery systems using a variable reluctance sensor; drives external Darlington used to control coil current, dwell and spark energy are externally programmed.	P/626, D/751,	MC3334,
Electronic Ignition Circuit	Differential input, high energy ignition control circuit used in 12 V battery systems; drives external Darlington used to control coil current, internal zener for flyback protection of external Darlington, three external capacitors used to program RPM adaptive coil current dwell and charge times, coil current limiting, and engine push starting capability.	DW/751G,	MC33093,
Electronic Ignition Circuit	Single–ended input, high energy ignition control circuit used in 12 V battery systems; drives external Darlington used to control coil current, internal zener for flyback protection of external Darlington, three external capacitors used to program RPM adaptive coil current dwell and charge times, coil current limiting, and engine push starting capability.	DW/751G,	MC33094,
Electronic Ignition Circuit	Reluctance or Hall Sensor input, high energy ignition control circuit used in 12 V battery systems; drives external Darlington used to control coil current, internal zener for flyback protection of external Darlington, spark advance, RPM detect, coil current dwell, and coil current limiting.	DW/751G,	MC79076,

Table 3. Low– and High–Side Switches

Function	Features	Suffix/Package	Device
Low–Side Protected Switch	Single low–side switch; 5.0 V CMOS compatible input, 1.0 A maximum current rating, with overcurrent, overvoltage, and thermal protection. Ideally suited for instrument panel use.	T/221A, T–1/314D, DW/751G	MC3392
Half–Amp High–Side Switch	Controls loads from positive supply side of load in 12 V battery systems; TTL compatible input control, output current limiting, thermal shutdown, reverse battery protection, ±100 V transient protection.	T/314D, DW/751G	MC3399
Quad Fuel Injector Driver	Four low–side switches with parallel CMOS compatible input control, ≤7.0 mA quiescent current, 0.25 Ω $R_{DS(on)}$ at 25°C, individual internal per output current limiting and 65 V inductive flyback protection, fault reporting of open and shorted loads, overvoltage duration shutdown with automatic recovery.	T/821D, TV/821C	MC33293A
Basic Octal Serial Switch	Eight low–side switches incorporating Serial Peripheral Interface (SPI) protocol using an 8–bit CMOS compatible input control word, serial fault reporting, overvoltage detection and shutdown, ≤2.0 mA total operational quiescent current, and ≤25 μA sleep state supply current; outputs have individual 1.0 Ω $R_{DS(on)}$ at 25°C, 1.0 A minimum current limiting, thermal shutdown, and 55 V inductive flyback protection.	DW/751E	MC33291
Octal Serial Switch	Eight low–side switches incorporating Serial Peripheral Interface (SPI) protocol using an 8–bit CMOS compatible input control word, serial fault reporting, overvoltage detection and shutdown, ≤4.0 mA total operational quiescent current, and ≤50 μA sleep state supply current; outputs have individual 0.45 Ω $R_{DS(on)}$ at 25°C, 3.0 A minimum current limiting, thermal shutdown, and 55 V inductive flyback protection.	P/738, DW/751E	MC33298
Dual High–Side Switch	Two high–side switches incorporating parallel CMOS compatible input control, overvoltage shutdown, ≤300 mA sleep state current with chip enable; each output switch has 0.25 Ω $R_{DS(on)}$ at 25°C with internal charge pump, 3.0 A minimum current limiting, output status reporting of output ON and OFF open load detection, short to ground shutdown protection with automatic retry, and short to supply detection. Fault interrupt output is available for system interrupt use.	DW/751E	MC33143

Table 4. Alternator Regulators

Function	Features	Suffix/Package	Device
Alternator Regulator	Provides load response control, duty cycle limiting, under/overvoltage and phase detection, high–side external MOSFET field current control, voltage regulation in 12 V alternator systems.	DW/751D	MC33092
Integral Alternator Regulator	Constant frequency with variable duty cycle circuit used with an external Darlington device to monitor and control the field current in 12 V alternator charging systems. Circuit reports overvoltage and stopped engine (broken belt) conditions, and adjusts charge rate to compensate for changes in ambient temperature.	D/751A	MC33095,

Table 5. Communication Bus Circuits

Function	Features	Suffix/Package	Device
ISO 9141 L & K–Line Serial Link Transceiver	Two–wire asynchronous serial communication interface (SCI) to a microcontroller for one–wire car diagnostic systems (DIA), for 12 V battery systems; receive and transmit data, and L–line output to microcontroller are 5.0 V CMOS compatible, both ISO 9141 K– and L–lines of bus are available. Enhanced K–line data rates up to 200 k Baud, short to ground protection of bus K–line input, thermal shutdown protection. Battery terminal will sustain 40 V dc.	D/751A	MC33199
ISO 9141 K–Line Serial Link Transceiver	Two–wire asynchronous serial communication interface (SCI) to a microcontroller for one–wire car diagnostic systems; for 12 V battery systems, I/O lines to microcontroller are 5.0 V CMOS compatible, ISO 9141 K–line of bus available, greater than 50 k Baud rates, 1.0 A short to ground current limit of bus K–line input, 35 mA ISO K–line data current sinking, thermal shutdown protection, 45 V battery load dump, and 40 V dc K–line capability.	D/751, P/626	MC33290

Table 6. Special Function Circuits

Function	Features	Suffix/Package	Device
High–Side TMOS Driver	Control circuit used to drive and protect generic external N–channel power MOSFETs in high–side switching applications; 5.0 V CMOS compatible input control, internal charge pump, externally programmed to protect power MOSFET, shorted load protection, and MOSFET overcurrent fault reporting.	P/626, D/751	MC33091A
MI–Bus Interface Stepper Motor Controller	High noise immunity serial communication MI–Bus protocol circuit used to control relay drivers and motors in harsh environments. Four phase signals drive two phase motors in either half of full–step modes; bus error, motor fault, and over temperature detection.	DW/751G	MC33192
Peripheral Clamping Array	Protects up to six MPU I/O lines against voltage transients; V_{CC} +1.0 V positive clamping, –0.3 V negative clamping.	*/626, D/751	TCF6000
Direction Indicator	Turn signal flasher circuit detects defective lamps and protects against overvoltage in automotive 12 V battery flasher applications; on–chip relay driver, 20 mΩ shunt requirement, minimum modification required to replace UAA1041B in applications not requiring short circuit detection.	D/751, P/626	MC33193
Wash Wiper Timer	Standard wiper timer control circuit for use in driving wiper motor relay in 12 V battery systems; can perform intermittent, after–wash, and continuous wiper timer functions.	D/751, P/626	MC33197A

* No Suffix

Quad Fuel Injector Driver

MC33293AT, MC33293ATV

T_J = –40° to +150°C, Case 821D, C

The MC33293AT is a monolithic quad low–side switching device having CMOS logic, bipolar/ CMOS analog circuitry, and DMOS power FETs. All inputs are CMOS compatible. Each independent output is internally clamped to 65 V, current limited to ≥ 3.0 A, and has an $r_{DS(on)}$ of ≤ 0.25 Ω with V_{PWR} ≥ 9.0 V and may be paralleled to lower $r_{DS(on)}$. $\overline{\text{Fault}}$ output reports existence of open loads (outputs "On" or "Off"), shorted loads, and over temperature condition of outputs. A shorted load condition will shut off only the specific output involved while allowing other outputs to operate normally. An overvoltage condition will shut off all outputs for the overvoltage duration. A single/dual mode select pin allows either independent input/output operation or paired output operation.

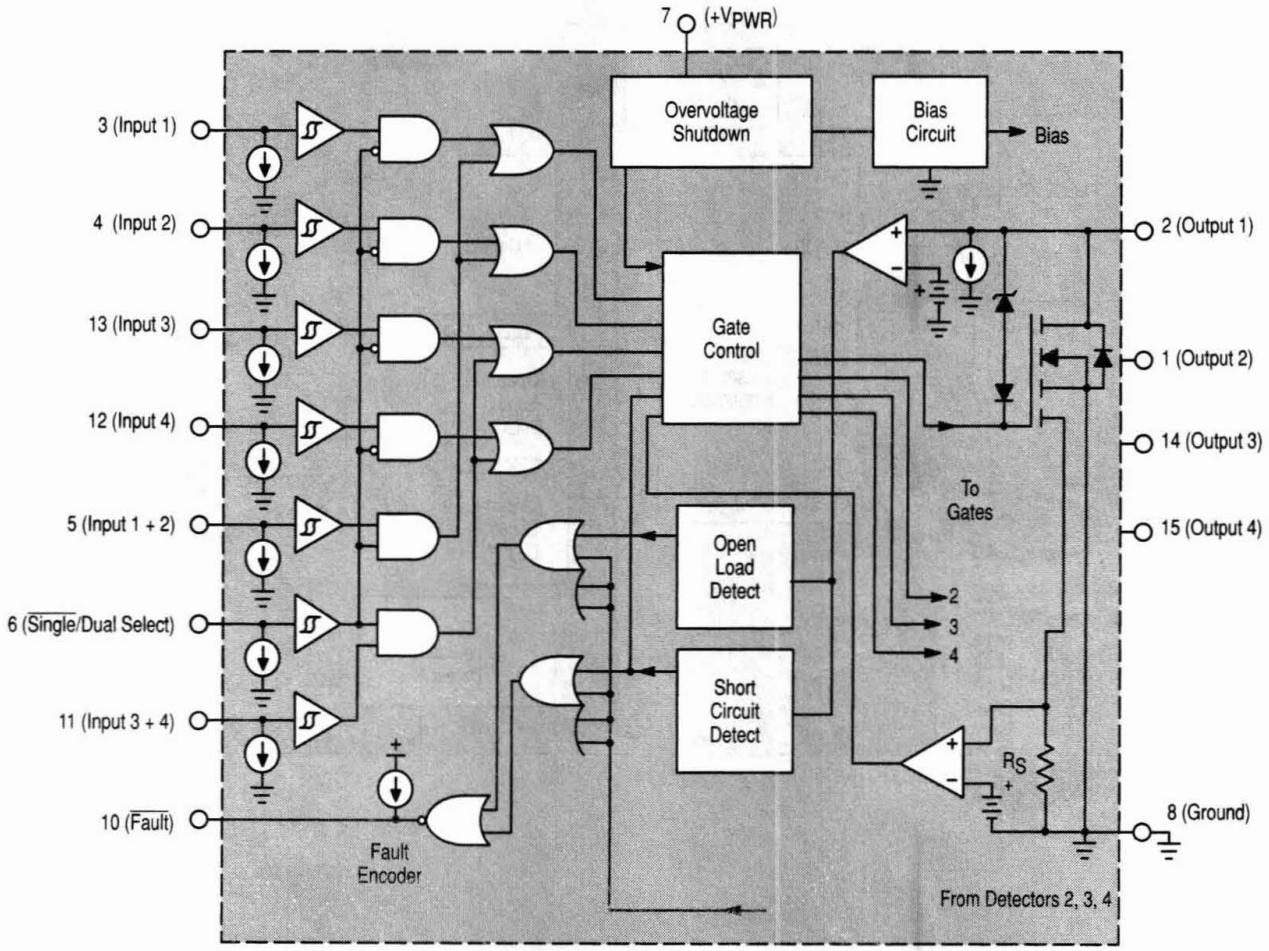

Octal Serial Switch

MC33298P, MC33298DW

T_J = –40° to +150°C, Case 738, 751E

The MC33298 is a monolithic eight output low–side switch with 8–bit serial input control. Incorporates CMOS logic, bipolar/CMOS analog circuitry, and DMOS power FETs. All inputs are CMOS compatible. It is designed to interface to a microcontroller and switch inductive or incandescent loads. Each independent output is internally clamped to 55 V, current limited to ≥ 3.0 A, and has an $r_{DS(on)}$ of ≤ 0.45 Ω with V_{PWR} ≥ 9.0 V. This device has low standby current, cascadable fault status reporting, output diagnostics, and shutdown for each output.

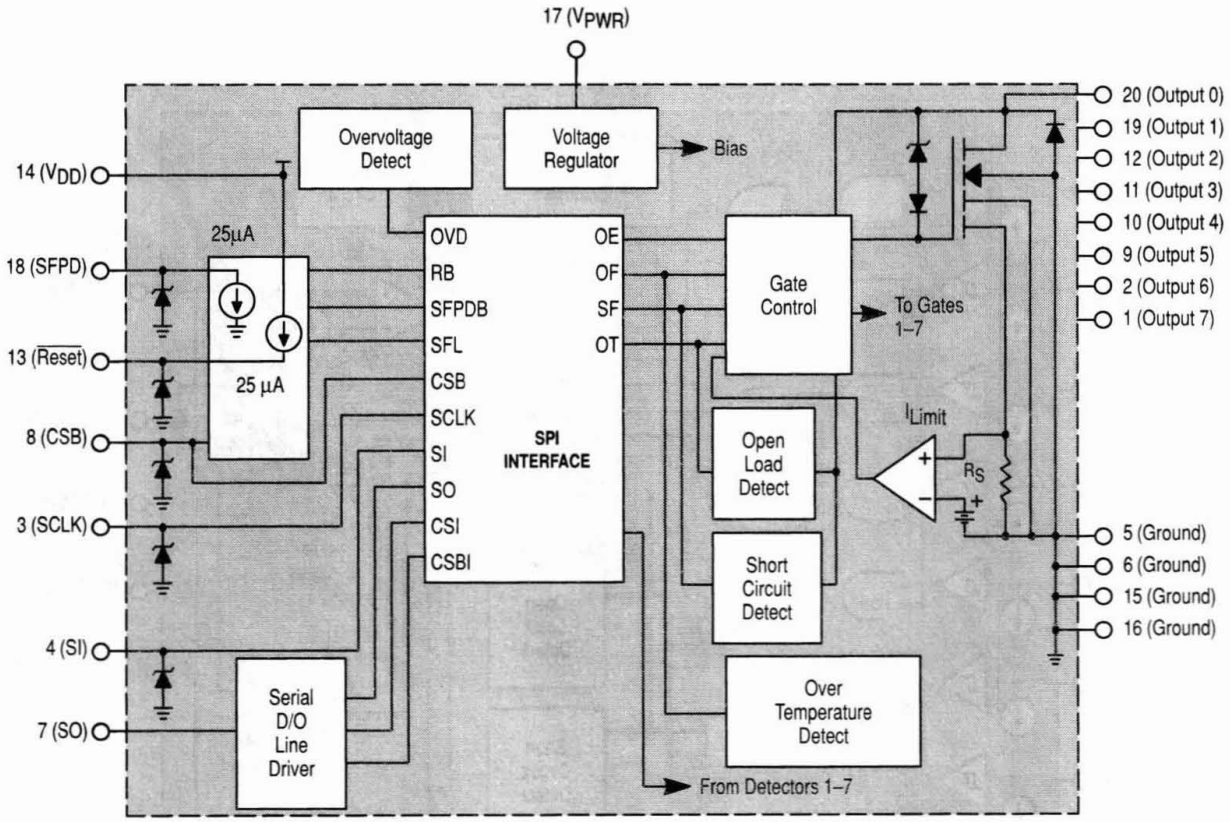

Dual High–Side Switch

MC33143DW

T_A = –40° to +125°C, Case 751E

The MC33143 is a dual high–side switch designed for solenoid control in harsh automotive applications, but is well suited for other environments. The device can also be used to control small motors and relays as well as solenoids. The MC33143 incorporates *SMARTMOS*™ technology, with CMOS logic, bipolar/MOS analog circuitry, and DMOS power outputs. An internal charge pump is incorporated for efficient gate enhancement of the internal high–side power output devices. The outputs are designed to provide current to low impedance solenoids. The MC33143 provides individual output fault status reporting along with internal Overcurrent and Over Temperature protection. The device also has Overvoltage protection, with automatic recovery, which "globally" disables both outputs for the duration of an Overvoltage condition. Each output has individual Overcurrent and Over Temperature shutdown with automatic retry recovery. Outputs are enabled with a CMOS logic high signal applied to an input to providing true logic control. The outputs, when turned on, provide full supply (battery) voltage across the solenoid coil.

The MC33143 is packaged in an economical 24 pin surface mount power package and specified over an operating voltage of 5.5 V ≤ V_{Pwr} < 26 V for –40°C ≤ T_A ≤ 125°C.

- Designed to Operate Over Wide Supply Voltages of 5.5 V to 26 V
- Dual High–Side Outputs Clamped to –10 V for Driving Inductive Loads
- Internal Charge Pump for Enhanced Gate Drive
- Interfaces Directly to a Microcontroller with Parallel Input Control
- Outputs Current Limited to 3.0 A to 6.0 A for Driving Incandescent Loads
- Chip Enable "Sleep Mode" for Power Conservation
- Individual Output Status Reporting
- $\overline{\text{Fault}}$ Interrupt Output for System Interrupt Use
- Output ON or OFF Open Load Detection
- Overvoltage Detection and Shutdown
- Output Over Temperature Detection and Shutdown with Automatic Retry
- Sustained Current Limit or Immediate Overcurrent Shutdown Output Modes
- Output Short to Ground Detection and Shutdown with Automatic Retry
- Output Short to V_{Pwr} Detection

Simplified Internal Block Diagram

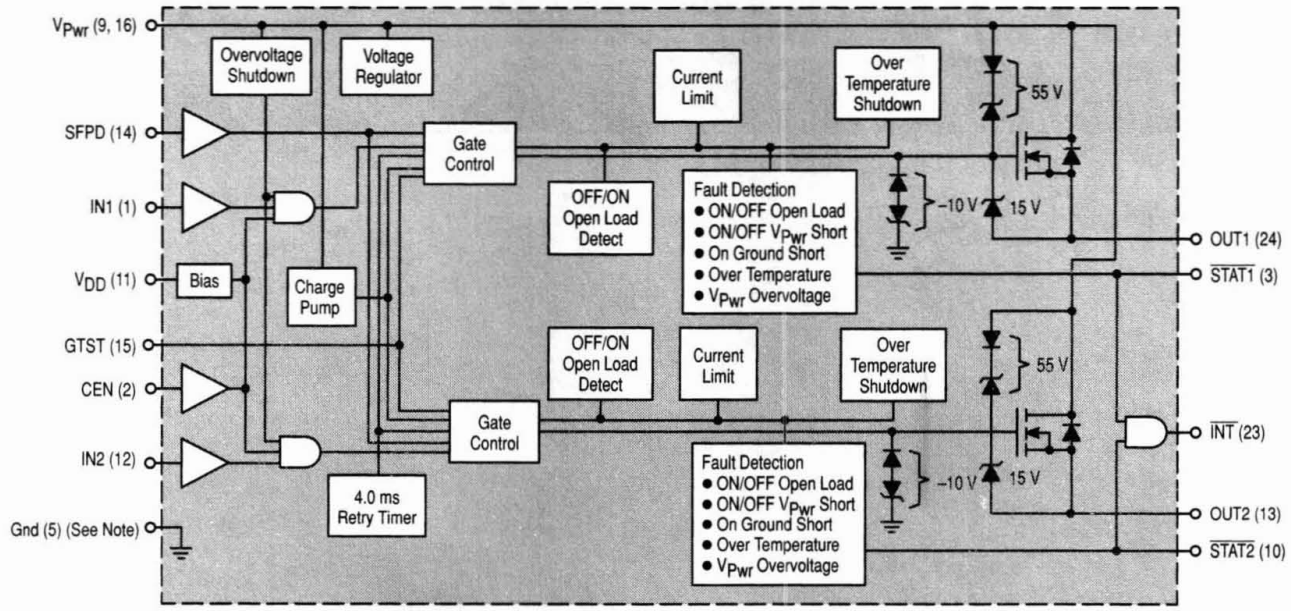

NOTE: Pins 5, 6, 7, 8, 17, 18, 19 and 20 should all be grounded so as to provide electrical as well as thermal heatsinking of the device.

Low Side Protected Switch

MC3392T, T–1, DW

T_J = –40° to +150°C,
Case 221A, 314D, 751G

Single low side protected switch with fault reporting capability. Input is CMOS compatible. Output is short circuit protected to 1.0 A minimum with a unique current fold–back feature. Device has internal output clamp for driving inductive loads with overcurrent, overvoltage, and thermal protection. When driving a moderate load, the MC3392 performs as an extremely high gain, low saturation Darlington transistor having a CMOS input characteristic with added protection features. In some applications, the three terminal version can replace industry standard TIP100/101 NPN power Darlington transistors.

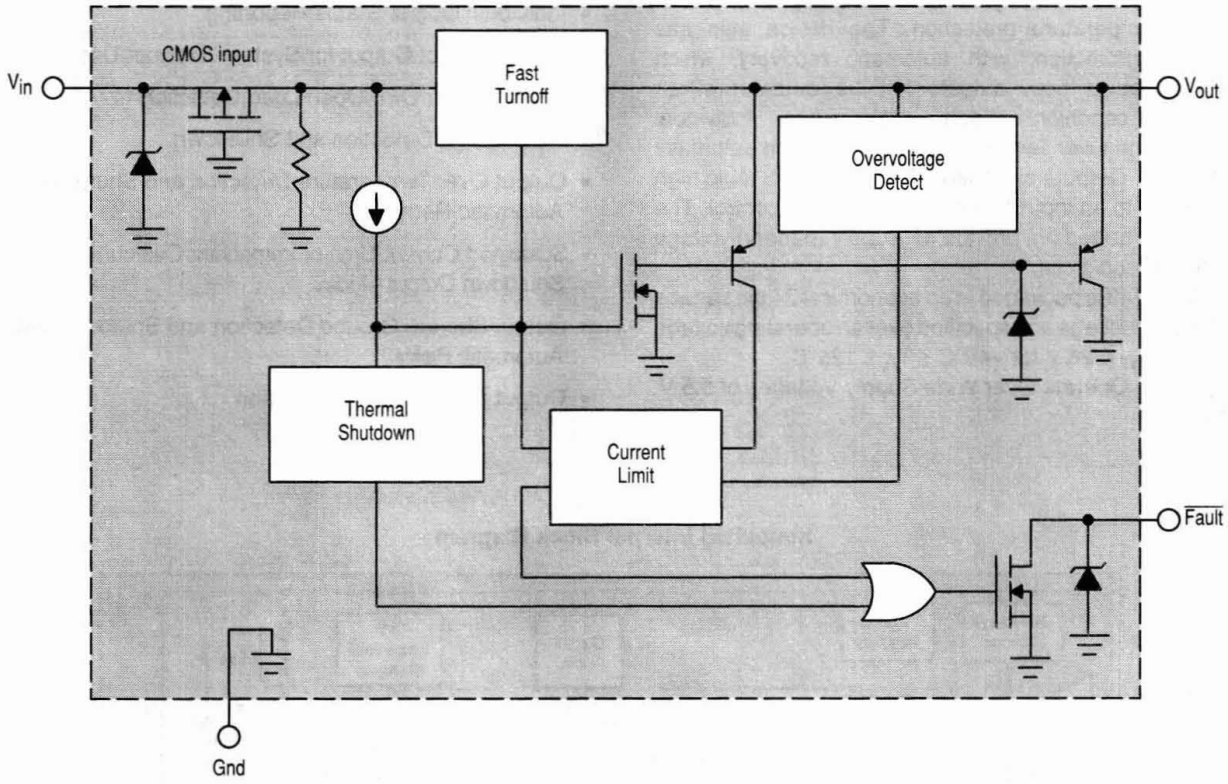

High Side TMOS Driver

MC33091AP, AD

T_J = –40° to +150°C, Case 626, 751

Offers an economical solution to drive and protect N–channel power TMOS devices used in high side switching configurations. Unique device monitors load resulting V_{DS}. TMOS voltage to produce a proportional current used to drive an externally programmed over current timer circuit to protect the TMOS device from shorted load conditions. Timer can be programmed to accommodate driving incandescent loads. Few external components required to drive a wide variety of N–channel TMOS devices. A $\overline{\text{Fault}}$ output is made available through the use of an open collector NPN transistor requiring a single pull–up resistor for operation. Input is CMOS compatible. Device uses ≤ 3.0 μA standby current and has an internal charge pump requiring no external components for operation.

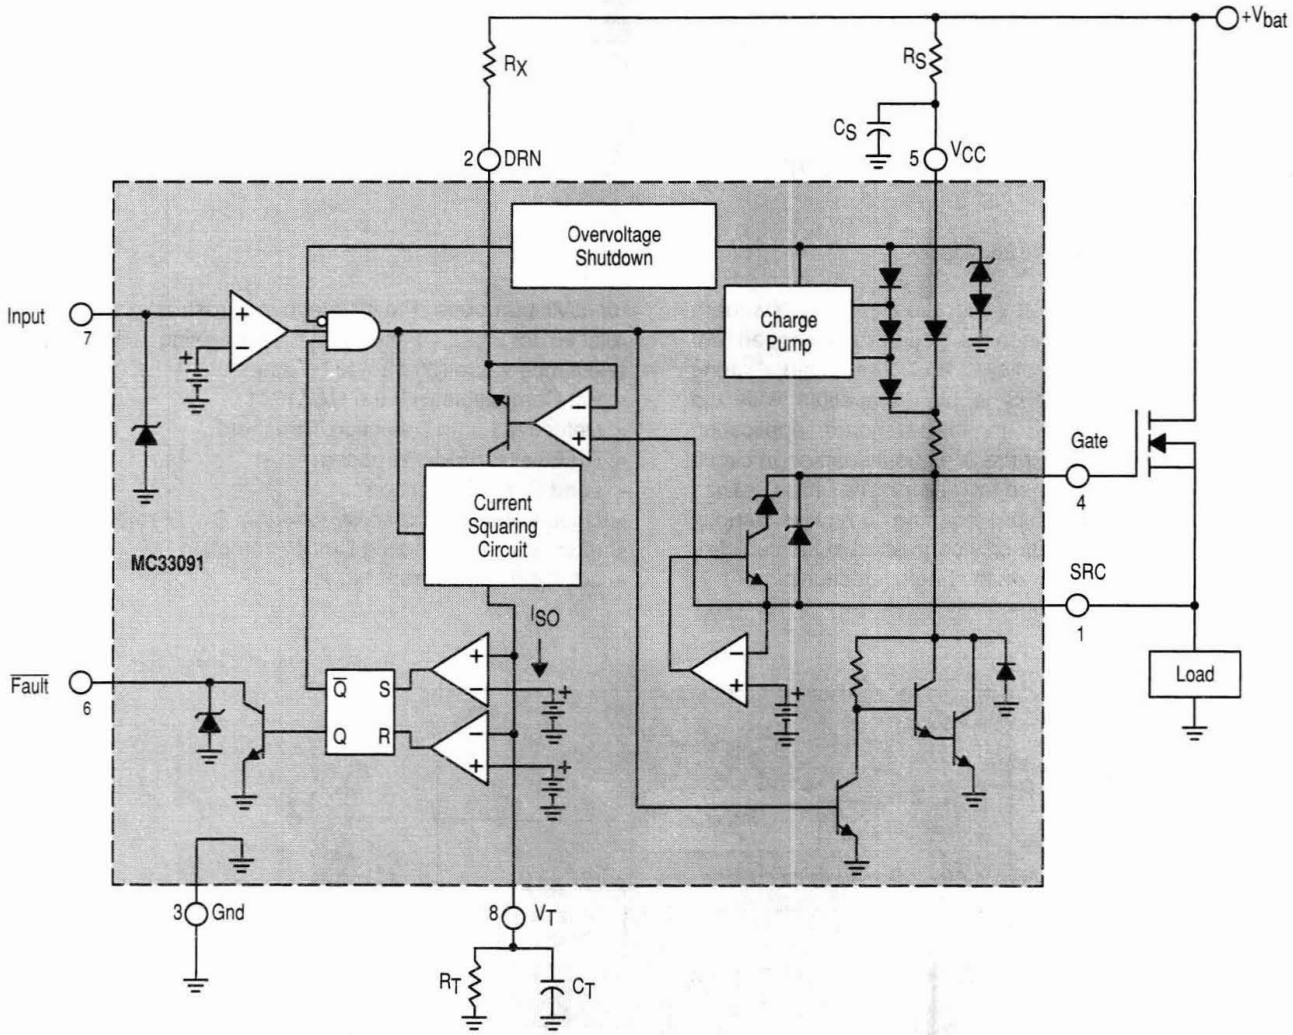

MI–Bus Interface Stepper Motor Controller

MC33192DW

T_J = –40° to +100°C, Case 751G

Intended to control loads in harsh automotive environments using a serial communication bus. Can provide satisfactory real time control of up to eight stepper motors using MI–Bus protocol. Use of MI–Bus offers a noise immune system solution for difficult applications involving relays and motors. The stepper motor controller provides four phase signals to drive two phase motors in either half of full–step modes. Designed to interface to a microprocessor with minimal amount of wiring, affording an economical and versatile system.

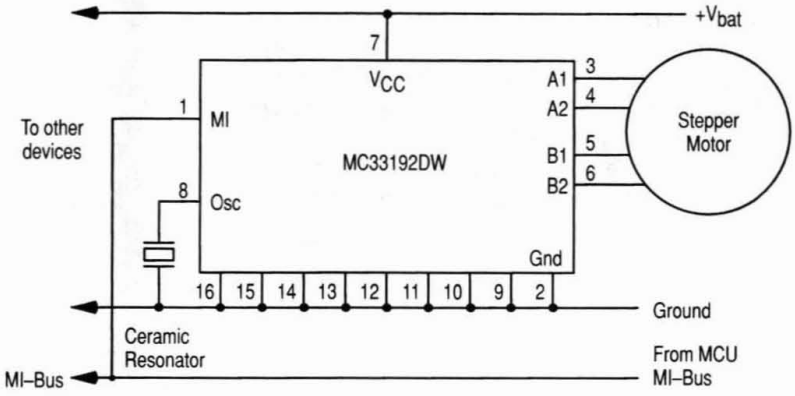

Automotive Direction Indicator

MC33193P, D

T_A = –40° to +125°C, Case 626, 751

The MC33193 is a new generation industry standard UAA1041 "Flasher". It has been developed for enhanced EMI sensitivity, system reliability, and improved wiring simplification. The MC33193 is pin compatible with the UAA1041 and UAA1041B in the standard application configuration as shown in Figure 9, without lamp short circuit detection and using a 20 mΩ shunt resistor. The MC33193 has a standby mode of operation requiring very low standby supply current and can be directly connected to the vehicle's battery. It includes a RF filter on the Fault detection pin (Pin 7) for EMI purposes. Fault detection thresholds are reduced relative to those of the UAA1041 allowing a lower shunt resistance value (20 mΩ) to be use.

- Pin Compatible with the UAA1041
- Defective Lamp Detection Threshold
- RF Filter for EMI Purposes
- Load Dump Protection
- Double Battery Capability for Jump Start Protection
- Internal Free Wheeling Diode Protection
- Low Standby Current Mode

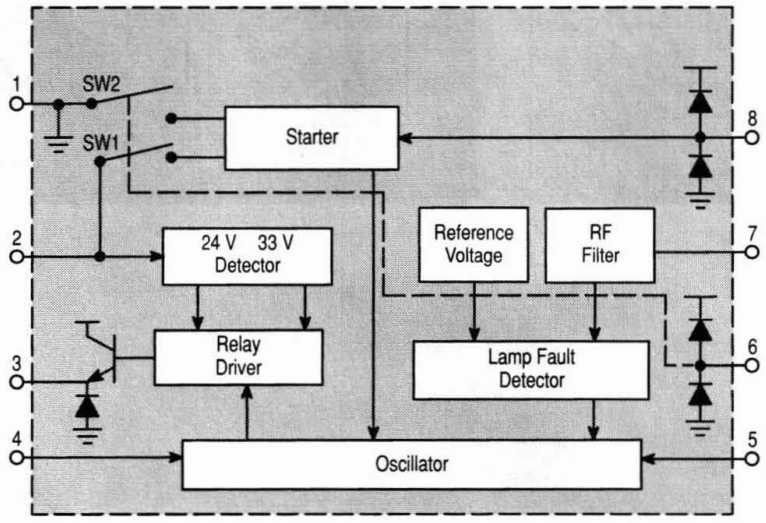

Automotive Wash Wiper Timer

MC33197AD

T_A = –40° to +105°C, Case 751

MC33197AP

T_A = –40° to +125°C, Case 626

The MC33197A is a standard wiper timer control device designed for harsh automotive applications. The device can perform the intermittent, after wash, and continuous wiper timer functions. It is designed to directly drive a wiper motor relay. The MC33197A requires very few external components for full system implementation. The intermittent control pin can be switched to ground or V_{bat} to meet a large variety of possible applications. The intermittent timing can be fixed or adjustable via an external resistor. The MC33197A is built using bipolar technology and parametrically specified over the automotive ambient temperature range and 8.0 to 16 V supply voltage. The MC33197A can operate in both front and rear wiper applications.

- Adjustable Time Interval of Less Than 500 ms to More Than 30 s
- Intermittent Control Pin Can Be Switched to Ground or V_{bat}
- Adjustable After Wipe Time
- Priority to Continuous Wipe
- Minimum Number of Timing Components
- Integrated Relay Driver With Free Wheeling Protection Diode
- Operating Voltage Range From 8.0 to 16 V
- For Front Wiper and Rear Wiper Window Applications

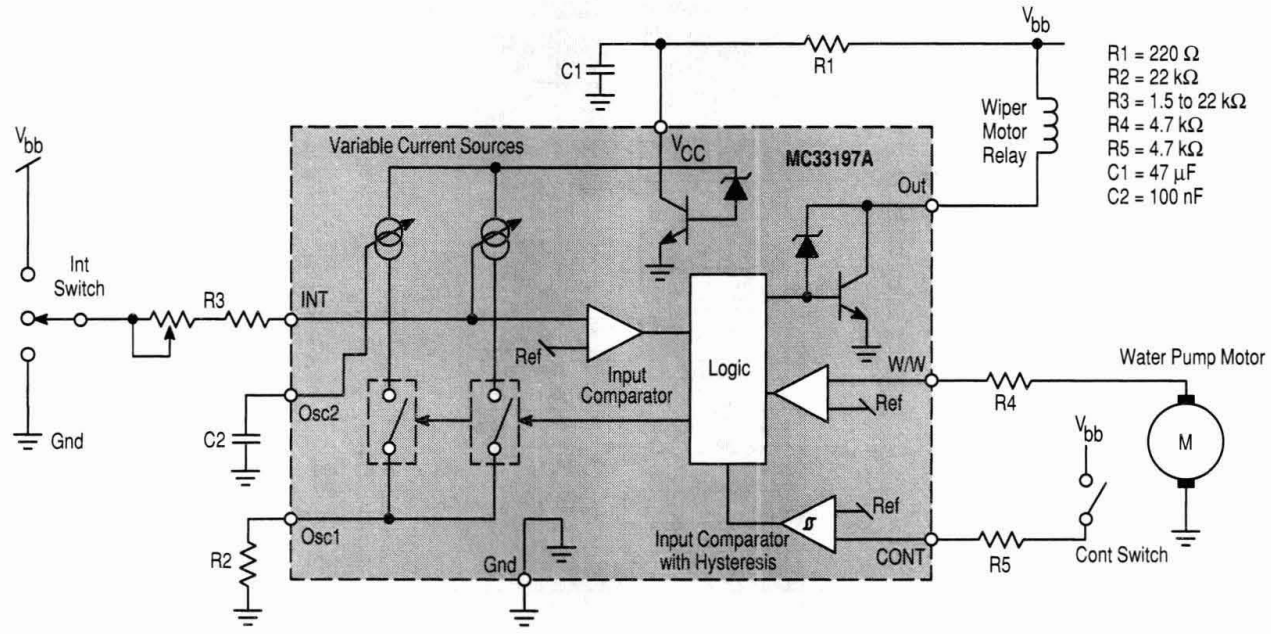

Automotive ISO 9141 Serial Link Driver

MC33199D

T_A = –40° to +125°C, Case 751A

The MC33199D is a serial interface circuit used in diagnostic applications. It is the interface between the microcontroller and the special K and L Lines of the ISO diagnostic port. The MC33199D has been designed to meet the "Diagnosis System ISO 9141" specification.

The device has a bi–directional bus K–Line driver, fully protected against short circuits and over temperature. It also includes the L Line receiver, used during the wake up sequence in the ISO transmission.

The MC33199 has a unique feature which allows transmission baud rate up to 200 k baud.

- Electrically Compatible with Specification "Diagnosis System ISO 9141"
- Transmission Speed Up to 200 k Baud
- Internal Voltage Reference Generator for Line Comparator Thresholds
- TXD, RXD and LO Pins are 5.0 V CMOS Compatible
- High Current Capability of DIA Pin (K–Line)
- Short Circuit Protection for the K–Line Input
- Over Temperature Shutdown with Hysteresis
- Large Operating Range of Driver Supply Voltage
- Full Operating Temperature Range
- ESD Protected Pins

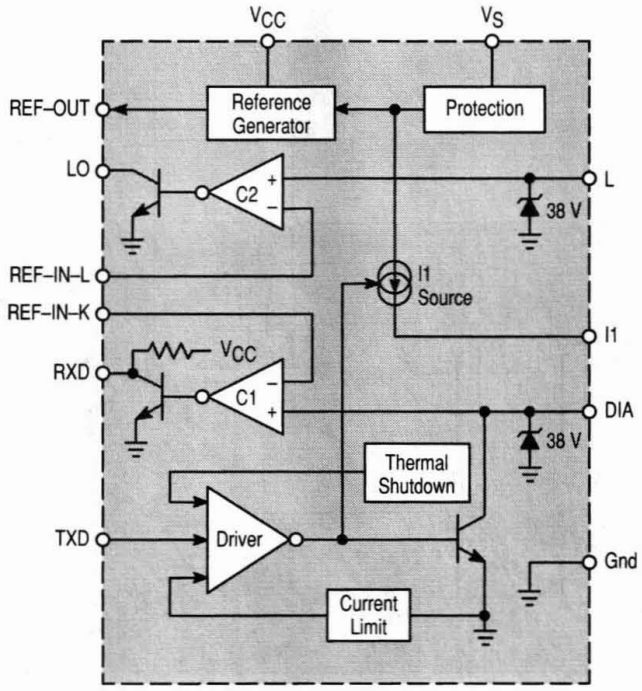

Multifunction Very Low Dropout Voltage Regulator

L4949N, D

T_J = –40° to +125°C, Case 626, 751

The L4949 is a monolithic integrated 5.0 V voltage regulator with a very low dropout and additional functions such as power–on reset and input voltage sense.

It is designed for supplying the micro–computer controlled systems especially in automotive applications.

- Operating DC Supply Voltage Range 5.0 V to 28 V
- Transient Supply Voltage Up to 40 V
- Extremely Low Quiescent Current in Standby Mode
- High Precision Standby Output Voltage 5.0 V ±1%
- Output Current Capability Up to 100 mA
- Very Low Dropout Voltage Less Than 0.4 V
- Reset Circuit Sensing The Output Voltage
- Programmable Reset Pulse Delay With External Capacitor
- Voltage Sense Comparator
- Thermal Shutdown and Short Circuit Protections

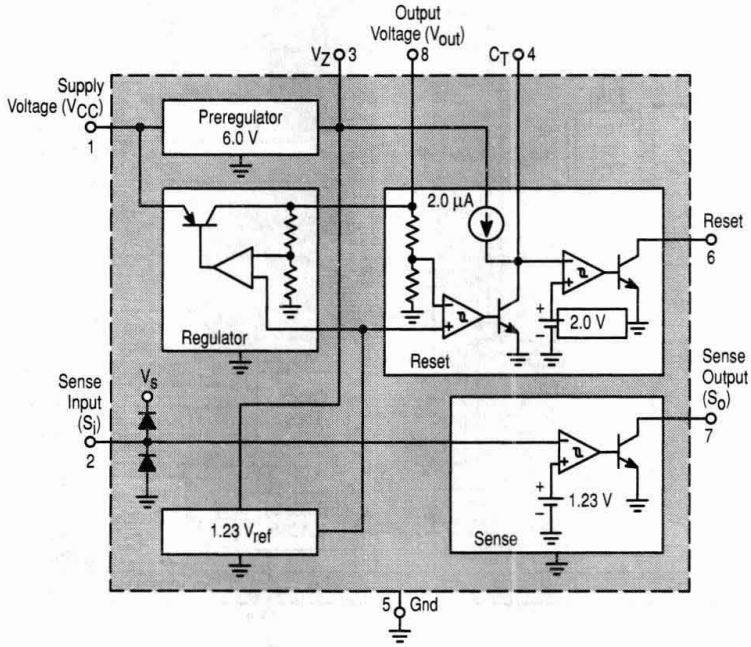

Alternator Voltage Regulator

MC33092DW

T_J = –40° to +125°C, Case 751D

Provides voltage regulation and load response control in diode rectified 12 V alternator charging systems. Provides externally programmed load response control of the alternator output current to eliminate engine speed hunting and vibration due to sudden electrical loads. Monitors and compares the system battery voltage to an externally programmed set point value and pulse width modulates an N–channel MOSFET transistor to control the average alternator field current. In addition, has duty cycle limiting, under/overvoltage and phase detection (broken belt) protective features.

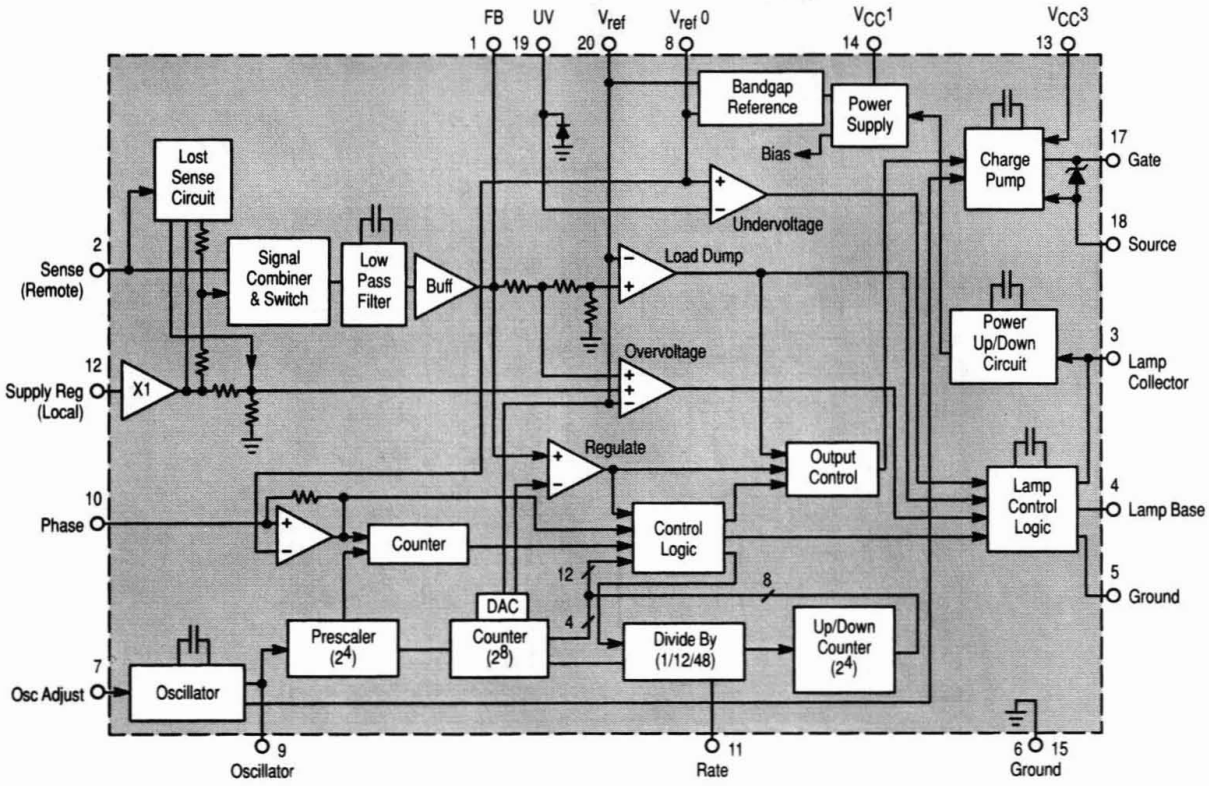

ISO Serial Link Interface

MC33290D, P

T_A = –40° to +125°C, Case 751, 626

The MC33290 is a serial link bus interface device designed to provide bi–directional half–duplex communication interfacing in automotive diagnostic applications. It is designed to interface between the vehicle's on–board microcontroller and systems off–board the vehicle via the special ISO K–line. The MC33290 is designed to meet the "Diagnostic Systems ISO9141" specification. The device's K–line bus driver's output is fully protected against bus shorts and over temperature conditions.

The MC33290 derives it's robustness to temperature and voltage extremes from being built on a *SMARTMOS*™ process, incorporating CMOS logic, bipolar/MOS analog circuitry, and DMOS power FETs. Though the MC33290 was principally designed for automotive applications, it is suited for other serial communication applications. It is parametrically specified over an ambient temperature range of –40°C ≤ T_A ≤ 125°C and 8.0 V ≤ V_{Bat} ≤ 18 V supply. The economical 8 pin DIP and SO–8 surface mount plastic packages make the MC33290 very cost effective.

- Designed to Operate Over Wide Supply Voltage of 8.0 to 18 V
- Ambient Operating Temperature of –40°C to 125°C
- Interfaces Directly to Standard CMOS Microprocessors
- ISO K–Line Pin Protected Against Shorts to Ground
- Thermal Shutdown with Hysteresis
- Maximum Transmission Speeds in Excess of 50 k Baud
- ISO K–Line Pin Capable of High Currents
- ISO K–Line can be Driven with up to 10 nF of Parasitic Capacitance
- 8.0 kV ESD Protection Attainable with Few Additional Components
- Standby Mode: No V_{Bat} Current Drain with V_{DD} at 5.0 V
- Low Current Drain during Operation with V_{DD} at 5.0 V

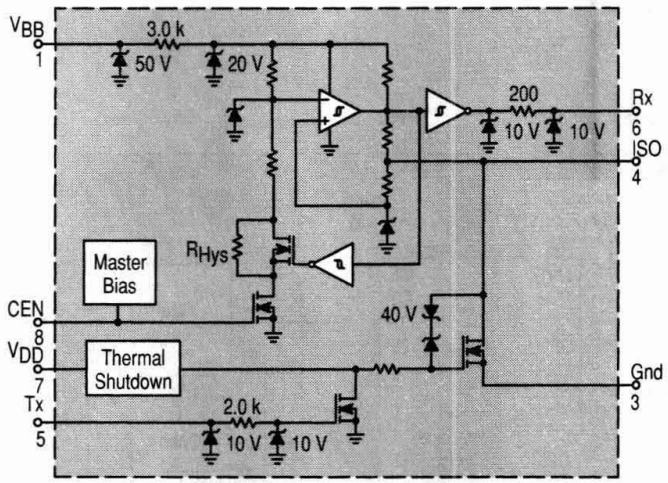

Basic Octal Serial Switch with Serial Peripheral Interface I/O

MC33291DW

T_A = –40° to +125°C, Case 751E

The MC33291 is an eight output low side power switch with 8 bit serial input control. The MC33291 is a versatile circuit designed for automotive applications but is well suited for other environments. The MC33291 incorporates *SMARTMOS*™ technology, with CMOS logic, bipolar/MOS analog circuitry, and DMOS power MOSFETs. The MC33291 interfaces directly with a microcontroller to control various inductive or incandescent loads. The circuits innovative monitoring and protection features are: very low standby current, SPI cascadable fault reporting, internal 55 V clamp on each output, output specific diagnostics, and independent shutdown of outputs. The device is parametrically specified over an ambient temperature range of –40°C ≤ TA ≤ 125°C and 9.0 V ≤ VPWR ≤ 16 V supply. The economical SO–24 wide body surface mount plastic packages makes the MC33291 very cost effective.

- Designed To Operate Over Wide Supply Voltage of 5.5 V to 26.5 V
- Interfaces Directly with Microprocessor using 8 Bit SPI I/O Protocol to 3.0 MHz
- 1.0 A Peak Current Outputs with Maximum $R_{DS(on)}$ of 1.4 Ω at T_J = 150°C
- Outputs Current Limited to 1.0 – 3.0 A for Switching Incandescent Loads
- Output Voltages Clamped to 55 V during Inductive Switching
- Maximum Sleep Current (I_{PWR}) of 25 μA with $\overline{\text{Reset}}$ Low
- Maximum of 4.0 mA I_{DD} during Operation
- Maximum of 2.0 mA I_{PWR} during Operation with All Outputs ON
- Open Load Detection (Outputs OFF)
- Overvoltage Detection and Shutdown
- Outputs have Independent Over Temperature Detection and Shutdown
- Output Mode Programmable for Sustained Current Limit or Shutdown
- Independent Output Short Circuit Detect and Latch–Off for Every Write Cycle
- Designed for –40°C to +125°C Ambient Temperature Operation

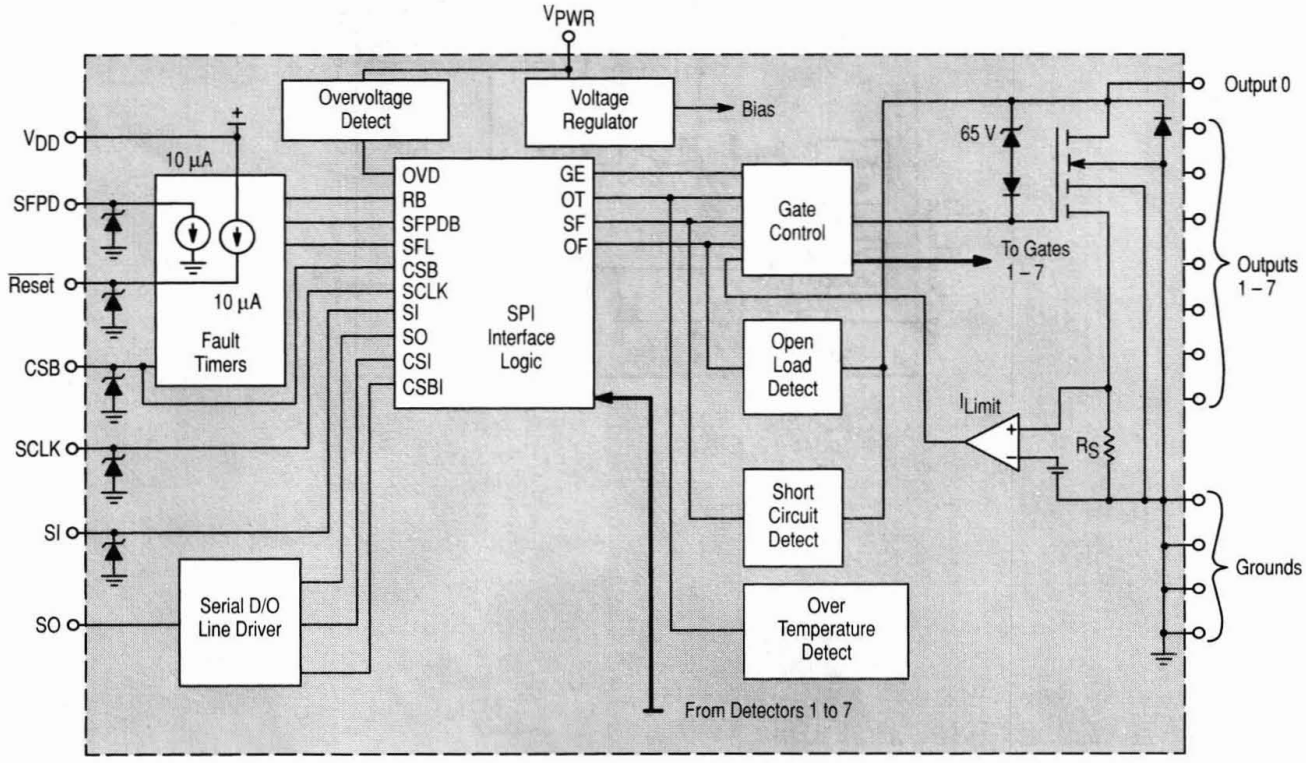

Automotive Electronic Circuits Package Overview

CASE 29
Z SUFFIX



CASE 221A
T SUFFIX



CASE 314A
TH SUFFIX

CASE 314B
TV SUFFIX

CASE 314D
T, T–1 SUFFIX

CASE 318E
ST SUFFIX

CASE 369
DT–1 SUFFIX

CASE 369A
DT SUFFIX

CASE 626
N, P, NO SUFFIX



CASE 738
P SUFFIX

CASE 751
D SUFFIX

CASE 751A
D SUFFIX

CASE 751D
DW SUFFIX

CASE 751E
DW SUFFIX

CASE 751G
DW SUFFIX



CASE 821C
TV SUFFIX



CASE 821D
T SUFFIX

CASE 936
D2T SUFFIX

CASE 936A
D2T SUFFIX

Other Analog Circuits

In Brief . . .

Other analog circuits are provided for special applications with both bipolar and CMOS technologies. These circuits range from the industry standard analog timing circuits and multipliers to specialized CMOS smoke detectors. These products provide key functions in a wide range of applications, including data transmission, commercial smoke detectors, and various industrial controls.

	Page
Timing Circuits	4.10–2
Singles	4.10–2
Duals	4.10–2
Multipliers	4.10–2
Linear Four-Quadrant Multipliers	4.10–2
Smoke Detectors (CMOS)	4.10–3
Package Overview	4.10–4

Timing Circuits

These highly stable timers are capable of producing accurate time delays or oscillation. In the time delay mode of operation, the time is precisely controlled by one external resistor and capacitor. For a stable operation as an oscillator, the free–running frequency and the duty cycle are both accurately controlled with two external resistors and one capacitor. The output structure can source or sink up to 200 mA or drive TTL circuits. Timing intervals from microseconds through hours can be obtained. Additional terminals are provided for triggering or resetting if desired.

Singles

MC1455P1, D

T_A = 0° to +70°C, Case 626, 751

MC1455BP1, D

T_A = −40° to +85°C, Case 626, 751

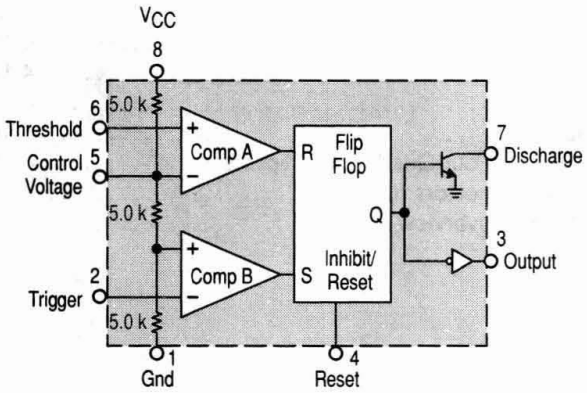

Duals

MC3456P

T_A = 0° to +70°C, Case 646

NE556N, D

T_A = 0° to +70°C, Case 646, 751A

Multipliers

Linear Four–Quadrant Multipliers

Multipliers are designed for use where the output voltage is a linear product of two input voltages. Typical applications include: multiply, divide, square, root–mean–square, phase detector, frequency doubler, balanced modulator/demodulator, electronic gain control.

Multiplier Transfer Characteristics

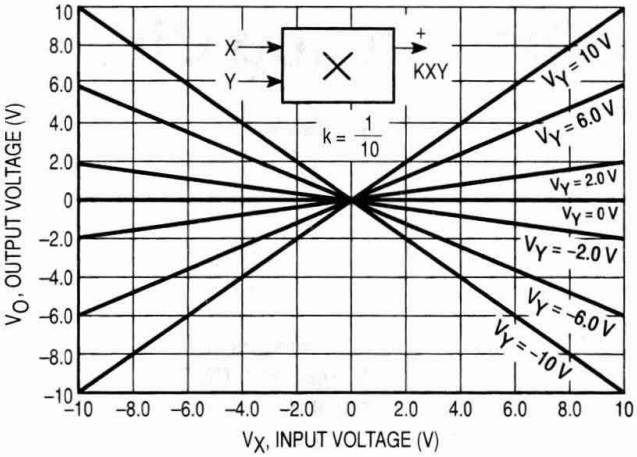

MC1494P

T_A = 0° to +70°C, Case 648

This device has all the necessary internal regulation and references. The single–ended output is referenced to ground.

MC1495D, P

T_A = 0° to +70°C, Case 751A, 646

Maximum versatility is assured by allowing the user to select the level shift method.

MC1495BP

T_A = −40° to +125°C, Case 646

Linearity and offset are actually tested over temperature. This is an improved specification over previous versions.

Smoke Detectors (CMOS)

These smoke detector ICs require a minimum number of external components. When smoke is sensed, or a low battery voltage is detected, an alarm is sounded via an external piezoelectric transducer. All devices are designed to comply with UL specifications.

Table 1. Smoke Detectors (CMOS)

Function	Recommended Power Source	Unique Feature	Low Battery Detector	Piezoelectric Horn Driver	Complies with UL217 and UL268	Device Number	Suffix/ Package
Ionization–Type Smoke Detector	Battery	High Input Impedance FET Comparator	✓	✓	✓	MC14467–1	P1/646
	Line		–	–	✓	MC14578	P/648
Ionization–Type Smoke Detector with Interconnect	Battery		✓	✓	✓	MC14468	
	Line		–	✓	✓	MC14470	
Photoelectric–Type Smoke Detector with Interconnect	Battery	Photo Amplifier	✓	✓	✓	MC145010	P/648, DW/751G
	Line		(1)	✓	✓	MC145011	
	Battery	Photo Amplifier, Temporal Pattern	✓	✓	✓	MC145012	P/646, DW/751G
	Line		(1)	✓	✓	MC145013	
Ionization–Type Smoke Detector	Battery	High Input Impedance FET Comparator, Temporal Pattern	✓	✓	✓	MC145017	P/648
Ionization–Type Smoke Detector with Interconnect	Battery		✓	✓	✓	MC145018	

(1) Low–supply detector.

Other Analog Circuits Package Overview

CASE 626
P1 SUFFIX



CASE 646
N, P, P1 SUFFIX



CASE 648
P SUFFIX

CASE 751
D SUFFIX

CASE 751A
D SUFFIX

CASE 751G
DW SUFFIX

Tape and Reel Options

In Brief . . .

Motorola offers the convenience of Tape and Reel packaging for our growing family of standard integrated circuit products. Reels are available to support the requirements of both first and second generation pick–and–place equipment. The packaging fully conforms to the latest EIA–481A specification. The antistatic embossed tape provides a secure cavity, sealed with a peel–back cover tape.

	Page
Tape and Reel Configurations	4.11–2
Tape and Reel Information Table	4.11–4
Analog MPQ Table	4.11–5

Tape and Reel Configurations

Mechanical Polarization

SOIC and Micro–8 DEVICES

Typical

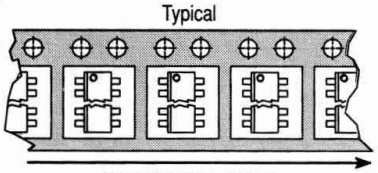

User Direction of Feed

PLCC DEVICES

Typical

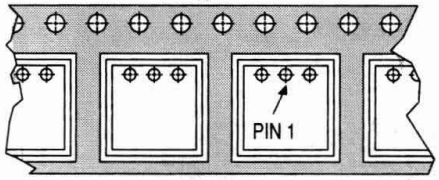

User Direction of Feed

DPAK and D²PAK DEVICES

Typical

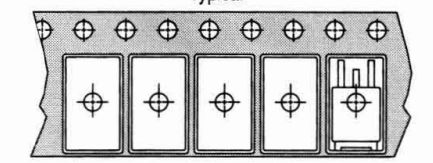

User Direction of Feed

SOT–23 (5 Pin) DEVICES

Typical



User Direction of Feed

SOT–89 (3 Pin) DEVICES

Typical



User Direction of Feed

SOT–89 (5 Pin) DEVICES

Typical



User Direction of Feed

TO–92 Reel Styles

STYLE A
(Preferred)

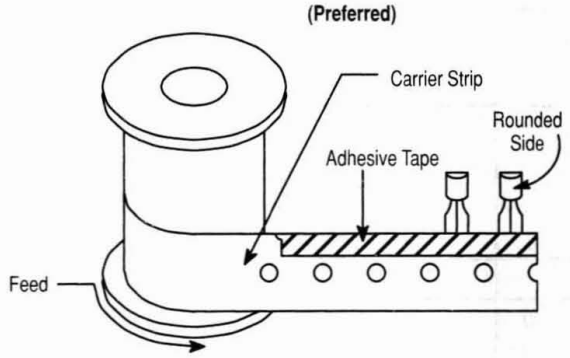

Rounded side of transistor and adhesive tape visible.

STYLE E

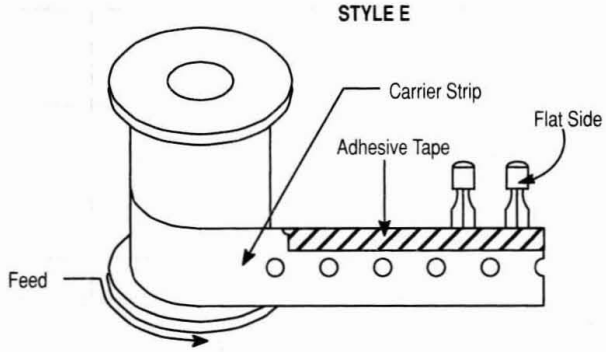

Flat side of transistor and adhesive tape visible.

TO–92 Ammo Pack Styles

STYLE P
(Preferred)

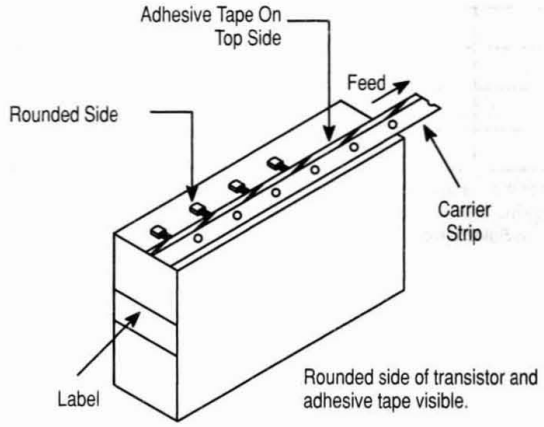

Style P ammo pack is equivalent to Styles A and B of reel pack dependent on feed orientation from box.

STYLE M

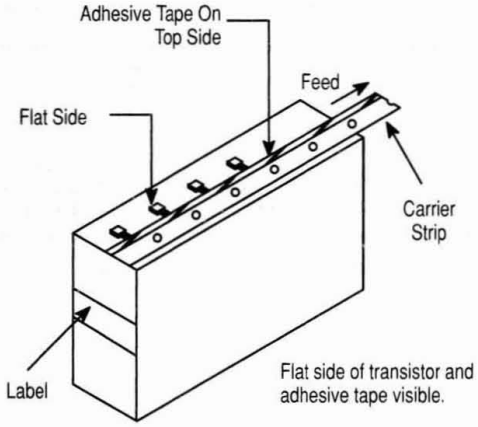

Style M ammo pack is equivalent to Style E of reel pack dependent on feed orientation from box.

TO–92 EIA Radial Tape in Fan Fold Box or On Reel

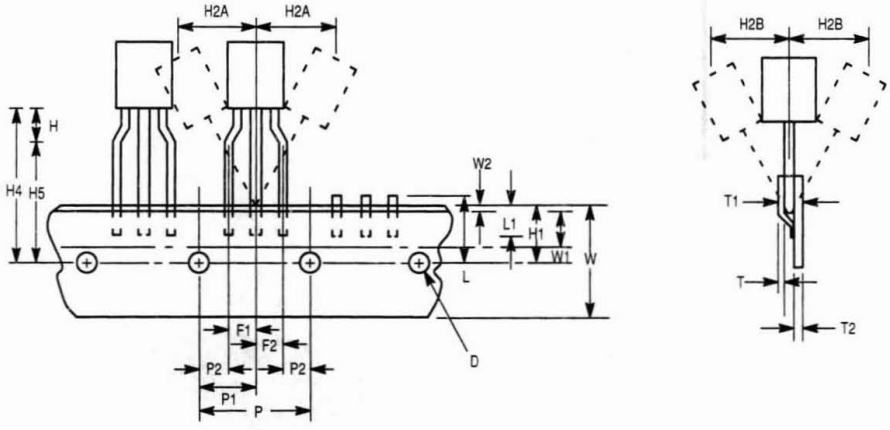

Tape and Reel Information Table

Package	Tape Width (mm)	Devices[1] per Reel	Reel Size (inch)	Device Suffix
SO–8, SOP–8	12	2,500	13	R2
SO–14	16	2,500	13	R2
SO–16	16	2,500	13	R2
SO–16L, SO–8+8L WIDE	16	1,000	13	R2
SO–20L WIDE	24	1,000	13	R2
SO–24L WIDE	24	1,000	13	R2
SO–28L WIDE	24	1,000	13	R2
SO–28L WIDE	32	1,000	13	R3
Micro–8	12	2,500	13	R2
PLCC–20	16	1,000	13	R2
PLCC–28	24	500	13	R2
PLCC–44	32	500	13	R2
PLCC–52	32	500	13	R2
PLCC–68	44	250	13	R2
PLCC–84	44	250	13	R2
TO–226AA (TO–92)[2]	18	2,000	13	RA, RE, RP, or RM (Ammo Pack) only
DPAK	16	2,500	13	RK
D^2PAK	24	800	13	R4
SOT–23 (5 Pin)	8	3,000	7	TR
SOT–89 (3/5 Pin)	12	1,000	7	T1

(1) Minimum order quantity is 1 reel. Distributors/OEM customers may break lots or reels at their option, however broken reels may not be returned.
(2) Integrated circuits in TO–226AA packages are available in Styes A and E only, with optional "Ammo Pack" (Suffix RP or RM). The RA and RP configurations are preferred. For ordering information please contact your local Motorola Semiconductor Sales Office.

Analog MPQ Table

Tape/Reel and Ammo Pack

Package Type	Package Code	MPQ
PLCC		
Case 775	0802	1000/reel
Case 776	0804	500/reel
Case 777	0801	500/reel
SOIC		
Case 751	0095	2500/reel
Case 751A	0096	2500/reel
Case 751B	0097	2500/reel
Case 751G	2003	1000/reel
Case 751D	2005	1000/reel
Case 751E	2008	1000/reel
Case 751F	2009	1000/reel
Micro–8		
Case 846A	–	2500/reel
TO–92		
Case 29	0031	2000/reel
Case 29	0031	2000/Ammo Pack
DPAK		
Case 369A	–	2500/reel
D^2PAK		
Case 936	–	800/reel
SOT–23 (5 Pin)		
Case 1212	–	3000/reel
SOT–89 (3 Pin)		
Case 1213	–	1000/reel
SOT–89 (5 Pin)		
Case 1214	–	1000/reel

Semiconductor Components Group

In Brief . . .

Many leading semiconductor manufacturers have either de–emphasized or eliminated discrete components from their product portfolio. At Motorola, exceptional long–term growth and outstanding customer acceptance of our portfolio are the most significant effects of Motorola's superiority in providing bipolar and MOS transistors, diodes, thyristors, zeners, RF, rectifier, and sensor devices.

Consistent, ongoing improvements in product development and packaging processing continue to ensure Motorola's position as the most broad–based discrete supplier in the world. The increased use of automatic placement equipment has driven the trend towards surface mount packaging.

Motorola continues to expand upon a broad offering of surface mount packages which continue to advance state–of–the–art designs that cannot be accomplished with insertion technology. Surface mount technology is cost effective, allowing users the opportunity to utilize smaller units and increased functions with less board space. In many electronic applications, complex integrated solutions with a multitude of functions can replace several active and passive components.

SMARTDISCRETES, RF hybrid amplifiers and modules and RF monolithic integrated circuits, pressure and temperature sensors, and hybrid power modules are a few of the exciting new products which provide more reliable, intelligent discrete devices. Key initiatives to raise products and services to a Six Sigma standard (99.9997% defect–free), reduce total cycle time in all activities, and provide leadership in the areas of product and manufacturing ensure that Motorola will continue to be the manufacturer of choice for all your discrete semiconductor requirements.

	Page
Small Signal Transistors, FETs and Diodes	5.1–1
TVS/Zeners	
Transient Voltage Suppressors	
Zener Regulator Diodes	5.2–1
Modular Power Systems	5.3–1
TMOS Power MOSFETs	5.4–1
Bipolar Power Transistors	5.5–1
Rectifiers	5.6–1
Thyristors and Triggers	5.7–1
Sensors	5.8–1
RF Products	5.9–1
Surface Mount Information	5.10–1
Tape and Reel Specifications and Packaging Specifications	5.11–1

Small Signal Transistors, FETs and Diodes

In Brief . . .

This section highlights semiconductors that are the most popular and have a history of high usage for most applications.

It covers a wide range of Small Signal plastic semiconductors.

A large selection of encapsulated plastic transistors, FETs and diodes are available for surface mount and insertion assembly technology. Plastic packages include TO–92 (TO–226AA), 1 Watt TO–92 (TO–226AE), SOT–23, SC–59, SC–70/SOT–323 and SOT–223.

	Page
Bipolar Transistors	5.1–2
Plastic–Encapsulated Transistors	5.1–2
Plastic–Encapsulated Surface Mount Transistors	5.1–6
Field–Effect Transistors	5.1–13
JFETs	5.1–13
MOSFETs	5.1–15
Surface Mount FETs	5.1–16
Tuning and Switching Diodes	5.1–18
Tuning Diodes — Abrupt Junction	5.1–18
Tuning Diodes — Hyper–Abrupt Junction	5.1–20
Schottky Diodes	5.1–22
Switching Diodes	5.1–24
Small Signal Multi–integrated Devices	5.1–27

Bipolar Transistors

Plastic–Encapsulated Transistors

Motorola's Small Signal TO–226 plastic transistors encompass hundreds of devices with a wide variety of characteristics for general–purpose, amplifier and switching applications. The popular high–volume package combines proven reliability, performance, economy and convenience to provide the perfect solution for industrial and consumer design problems. All devices are laser marked for ease of identification and shipped in antistatic containers, as part of Motorola's ongoing practice of maintaining the highest standards of quality and reliability.

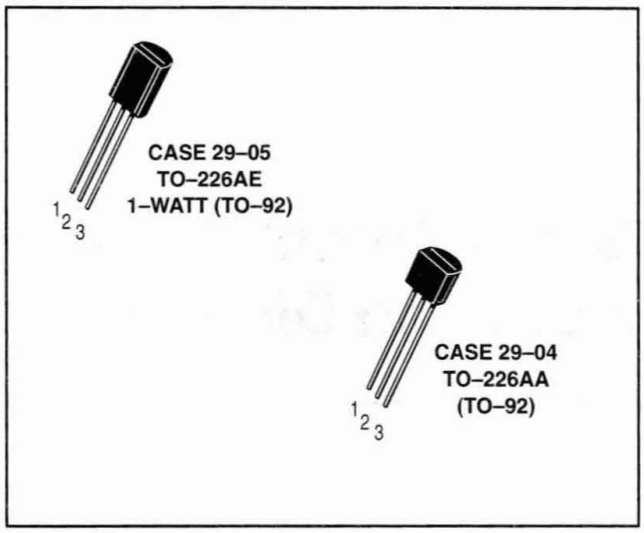

Table 1. Plastic–Encapsulated General–Purpose Transistors

These general–purpose transistors are designed for small–signal amplification from dc to low ratio frequencies. They are also useful as oscillators and general–purpose switches. Complementary devices shown where available (Tables 1–4).

NPN	PNP	$V_{(BR)CEO}$ Volts Min	f_T @ I_C MHz Min	f_T @ I_C mA	I_C mA Max	h_{FE} @ I_C Min	h_{FE} @ I_C Max	h_{FE} @ I_C mA	NF dB Max	Style
Case 29–04 — TO–226AA (TO–92)										
MPS8099	***MPS8599***	80	150	10	500	100	300	1.0	—	1
MPSA06	***MPSA56***	80	100	10	500	100	—	100	—	1
2N4410	—	80	60	10	250	60	400	10	—	1
BC546	BC556	65	150	10	100	120	450	2.0	10	17
BC546B	BC556B	65	150	10	100	180	450	2.0	10	17
MPSA05	MPSA55	60	100	10	500	100	—	100	—	1
—	***MPS2907A***	60	200	50	600	100	300	150	—	1
BC182	BC212	50	200(1)	10	100	120	500	2.0	10	14
BC237B	BC307B	45	150	10	100	200	460	2.0	10	17
BC337	BC327	45	210(1)	10	800	100	630	100	—	17
BC547	BC557	45	150	10	100	120	800	2.0	10	17
BC547A	BC557A	45	150	10	100	120	220	2.0	10	17
BC547B	BC557B	45	150	10	100	180	450	2.0	10	17
BC547C	BC557C	45	150	10	100	380	800	2.0	10	17
MPSA20	MPSA70	40	125	5.0	100	40	400	5.0	—	1
MPS2222A	—	40	300	20	600	100	300	150	—	1
2N4401	***2N4403***	40	200	20	600	100	300	150	—	1
2N4400	2N4402	40	150	20	600	50	150	150	—	1
MPS6602	***MPS6652***	40	100	50	1000	50	—	500	—	1
2N3904	***2N3906***	40	250	10	200	100	300	10	5.0	1
BC548A	—	30	300(1)	10	100	120	220	2.0	10	17
BC548B	BC558B	30	300(1)	10	100	200	450	2.0	10	17
BC548C	—	30	300	10	100	420	800	2.0	10	17
BC338	BC328	25	210(1)	10	800	100	630	100	—	17

(1) Typical

NPN	PNP	$V_{(BR)CEO}$ Volts Min	f_T @ I_C MHz Min	f_T @ I_C mA	I_C A Max	h_{FE} @ I_C Min	h_{FE} @ I_C Max	h_{FE} @ I_C mA	$V_{CE(sat)}$ @ I_C @ I_B Volts Max	$V_{CE(sat)}$ @ I_C @ I_B mA	$V_{CE(sat)}$ @ I_C @ I_B mA	Style
Case 29–05 — TO–226AE (1–WATT TO–92)												
MPSW06	***MPSW56***	80	50	200	0.5	80	—	50	0.4	250	10	1

Devices listed in bold, italic are Motorola preferred devices.

Table 2. Plastic–Encapsulated Low–Noise and Good h_{FE} Linearity

These devices are designed to use on applications where good h_{FE} linearity and low–noise characteristics are required: Instrumentation, hi–fi preamplifier.

NPN	PNP	$V_{(BR)CEO}$ Volts	h_{FE} @ I_C Min	h_{FE} @ I_C Max	h_{FE} @ I_C mA	V_T(4) mV Typ	NF(5) dB Max	f_T MHz Typ	Style
Case 29–04 — TO–226AA (TO–92)									
—	***2N5087***	50	250	800	0.1	—	2.0	40(2)	1
MPS6428	—	50	250	650	0.1	7.0(7)	3.5(8)	100(2)	1
BC550C	BC560C	45	380	800	2.0	—	2.5	250	17
MPSA18	—	45	500	—	1.0	6.5(1)	—	160	1
MPS3904	MPS3906	40	100	300	10	—	5.0	200(2)	1
2N5088	—	30	350	—	1.0	—	3.0	50	1
2N5089(6)	—	25	450	—	1.0	—	2.0	50	1
MPS6521	MPS6523	25	300	600	2.0	—	3.0	—	1

(1) Typical
(2) Min
(4) V_T: Total Input Noise Voltage (see BC413/BC414 and BC415/BC416 Data Sheets) at R_S = 2.0 kΩ, I_C = 200 μA, V_{CE} = 5.0 Volts.
(5) N_F: Noise Figure at R_S = 2.0 kΩ, I_C = 200 μA, V_{CE} = 5.0 Volts. f = 30 Hz to 15 kHz.
(7) R_S = 10 kΩ, BW = 1.0 Hz, f = 100 MHz
(8) R_S = 500 Ω, BW = 1.0 Hz, f = 10 MHz

Table 3. Plastic–Encapsulated Darlington Transistors

Darlington amplifiers are cascade transistors used in applications requiring very high–gain and input impedance. These devices have monolithic construction.

NPN	PNP	$V_{(BR)CEO}$ Volts	I_C Max	h_{FE} @ I_C Min	h_{FE} @ I_C Max	h_{FE} @ I_C mA	$V_{CE(sat)}$ @ I_C & I_B Volts Max	$V_{CE(sat)}$ @ I_C & I_B mA	$V_{CE(sat)}$ @ I_C & I_B mA	f_T @ I_C Min	f_T @ I_C mA	Style
Case 29–05 — TO–226AE (1–WATT TO–92)												
MPSW45A	—	50	1000	25K	150K	200	1.5	1000	2.0	100	200	1
—	***MPSW64***	30	1000	20K	—	100	1.5	100	0.1	125	10	1
Case 29–04 — TO–226AA (TO–92)												
MPSA29	—	100	500	10K	—	100	1.5	100	0.1	125	10	1
BC373	—	80	1000	10K	160K	100	1.1	250	0.25	100	100	1
MPSA27	MPSA77	60	500	10K	—	100	1.5	100	0.1	—	—	1
BC618	—	55	1000	10K	50K	200	1.1	200	0.2	150	500	17
—	MPSA75	40	500	10K	—	100	1.5	100	0.1	—	—	1
2N6427	—	40	500	20K	200K	100	1.5	500	0.5	—	—	1
2N6426	—	40	500	30K	300K	100	1.5	500	0.5	125	10	1
MPSA14	***MPSA64***	30	500	20K	—	100	1.5	100	0.1	125	10	1
MPSA13	MPSA63	30	500	10K	—	100	1.5	100	0.1	125	10	1
BC517	—	30	1000	30K	—	20	1.0	100	0.1	200(1)	10	17

(1) Typical

Devices listed in bold, italic are Motorola preferred devices.

Table 4. Plastic–Encapsulated High–Current Transistors

The following table is a listing of devices that are capable of handling a higher current range for small–signal transistors.

NPN	PNP	$V_{(BR)CEO}$ Volts Min	f_T @ I_C MHz Min	f_T @ I_C mA	I_C mA Max	h_{FE} @ I_C Min	h_{FE} @ I_C Max	h_{FE} @ I_C mA	$V_{CE(sat)}$ @ I_C & I_B Volts Max	$V_{CE(sat)}$ @ I_C & I_B mA	$V_{CE(sat)}$ @ I_C & I_B mA	Style
Case 29–05 — TO–226AE (1–WATT TO–92)												
MPSW01A	***MPSW51A***	40	50	50	1000	50	—	1000	0.5/0.7	1000	100	1
Case 29–04 — TO–226AA (TO–92)												
BC489	BC490	80	200/150(1)	50	1000	60	400	100	0.3/0.5	1000	100	17
BC639	BC640	80	60	10	500	40	160	150	0.5	500	50	14
MPS651	***MPS751***	60	75	50	2000	75	—	1000	0.5	2000	200	1
BC368	BC369	20	65	10	1000	60	—	1000	0.5	1000	100	1

(1) Typical

Table 5. Plastic–Encapsulated High–Voltage Amplifier Transistors

These high–voltage transistors are designed for driving neon bulbs and indicator tubes, for direct line operation, and for other applications requiring high–voltage capability at relatively low collector current. These devices are listed in order of decreasing breakdown voltage ($V_{(BR)CEO}$).

Device Type	$V_{(BR)CEO}$ Volts Min	I_C Amp Max	h_{FE} @ I_C Min	h_{FE} @ I_C mA	$V_{CE(sat)}$ @ I_C & I_B Volts Max	$V_{CE(sat)}$ @ I_C & I_B mA	$V_{CE(sat)}$ @ I_C & I_B mA	f_T @ I_C MHz Min	f_T @ I_C mA	Style
Case 29–05 — TO–226AE (1–WATT TO–92) — NPN										
MPSW42	300	0.5	40	30	0.5	20	2.0	50	10	1
Case 29–05 — TO–226AE (1–WATT TO–92) — PNP										
MPSW92	300	0.5	25	30	0.5	20	2.0	50	10	1
Case 29–04 — TO–226AA (TO–92) — NPN										
2N6517	350	0.5	30	30	0.3	10	1.0	40	10	1
BF393	300	0.5	40	10	0.2	20	2.0	50	10	1
MPSA42	300	0.5	40	10	0.5	20	2.0	50	10	1
2N5551	160	0.6	80	10	0.15	10	1.0	100	10	1
Case 29–04 — TO–226AA (TO–92) — PNP										
BF493S	350	0.5	40	10	20	20	2.0	50	10	1
2N6520	350	0.5	30	30	0.3	10	1.0	40	10	1
MPSA92	300	0.5	40	10	0.5	20	2.0	50	10	1
2N6519	300	0.5	45	30	0.3	10	1.0	40	10	1
2N5401	150	0.6	60	10	0.2	10	1.0	100	10	1

NPN	PNP	$V_{(BR)CEO}$ Volts Min	I_C Amp Cont	h_{FE} @ I_C Min	h_{FE} @ I_C mA	$V_{CE(sat)}$ @ I_C & I_B Volts Max	$V_{CE(sat)}$ @ I_C & I_B mA	$V_{CE(sat)}$ @ I_C & I_B mA	f_T @ I_C MHz Min	f_T @ I_C mA	Style
Case 29–04 — TO–226AA (TO–92)											
BF420	BF421	300	0.5	50	25	2.0	20	2.0	60	10	14
BF422	BF423	250	0.5	50	25	2.0	20	2.0	60	10	14

Devices listed in bold, italic are Motorola preferred devices.

Table 6. Plastic–Encapsulated RF Transistors

The RF transistors are designed for small–signal amplification from RF to VHF/UHF frequencies. They are also used as mixers and oscillators in the same frequency ranges.

Device Type	$V_{(BR)CEO}$ Volts Min	I_C mA Max	h_{FE} @ I_C Min	h_{FE} @ I_C mA	V_{CE} V	f_T MHz Typ	CRE/CRB pF Max	NF dB Typ	f MHz	Style
Case 29–04 — TO–226AA (TO–92) — NPN										
MPSH10	25	—	60	4.0	10	650(2)	0.65	—	—	2
BF959	20	100	40	20	10	600(2)	0.65	3.0	200	21
MPSH17	15	—	25	5.0	10	800(2)	0.9	6.0(3)	200	2
MPS918	15	50	20	8.0	10	600(2)	1.7	6.0(3)	60	1
MPS5179	12	50	25	3.0	1.0	2000(3)	—	5.0(3)	200	1
MPS3563	12	50	20	8.0	10	800	1.7	6.0(3)	60	1

(2) Min
(3) Max

Table 7. Plastic–Encapsulated Telecom Transistors

These devices are special product ranges intended for use in telecom applications.

Device Type	$V_{(BR)CEO}$ Volts	P_D mW 25°C Amb	I_C mA Cont	h_{FE} @ I_C @ V_{CE} Min	Max	mA	Volts	f_T MHz Min	Style
Case 29–04 — TO–226AA (TO–92) — NPN									
P2N2222A	40	625	600	75	—	10	10	300	17
Case 29–04 — TO–226AA (TO–92) — PNP									
P2N2907A	60	625	600	100	—	10	10	200	17

Devices listed in bold, italic are Motorola preferred devices.

Plastic–Encapsulated Surface Mount Transistors

This section of the selector guide lists the small–signal plastic devices that are available for surface mount applications. These devices are encapsulated with the latest state–of–the–art mold compounds that enhance reliability and exhibit excellent performance in high temperature and high humidity environments. This package offers higher power dissipation capability for small–signal applications.



CASE 318–08
TO–236AB
SOT–23



CASE 318D–04
SC–59



CASE 318E–04
SOT–223



CASE 419–02
SC–70/SOT–323



CASE 419B–01
SOT–363



CASE 463–01
SOT–416/SC–90

Table 8. Plastic–Encapsulated Surface Mount General–Purpose Transistors

The following tables are a listing of small–signal general–purpose transistors in the SOT–23, SC–59, SOT–223, SC–70, SC–90, and SOT–363 surface mount packages. These devices are intended for small–signal amplification for DC, audio, and lower RF frequencies. They also have applications as oscillators and general–purpose, low voltage switches.

Pinout: 1–Base, 2–Emitter, 3–Collector

Devices are listed in order of descending breakdown voltage.

Device	Marking	$V_{(BR)CEO}$	h_{FE} @ I_C			f_T
			Min	Max	mA	MHz Min
Case 318–08 — TO–236AB (SOT–23) — NPN						
BC846ALT1	1A	65	110	220	2.0	100
BC846BLT1	1B	65	200	450	2.0	100
BC817–16LT1	6A	45	100	250	100	200
BC817–25LT1	6B	45	160	400	100	200
BC817–40LT1	6C	45	250	600	100	200
BC847ALT1	1E	45	110	220	2.0	100
BC847BLT1	1F	45	200	450	2.0	100
BC847CLT1	1G	45	420	800	2.0	100
MMBT2222ALT1	1P	40	100	300	150	200
MMBT3904LT1	1AM	40	100	300	10	200
MMBT4401LT1	2X	40	100	300	150	250
BC848ALT1	1J	30	110	220	2.0	100
BC848BLT1	1K	30	200	450	2.0	100
BC848CLT1	1L	30	420	800	2.0	100
Case 318–08 — TO–236AB (SOT–23) — PNP						
BC856ALT1	3A	65	125	250	2.0	100
BC856BLT1	3B	65	220	475	2.0	100
MMBT2907ALT1	2F	60	100	300	150	200
BC807–16LT1	5A	45	100	250	100	200
BC807–25LT1	5B	45	160	400	100	200
BC807–40LT1	5C	45	250	600	100	200
BC857ALT1	3E	45	125	250	2.0	100
BC857BLT1	3F	45	220	475	2.0	100
MMBT3906LT1	2A	40	100	300	10	250
MMBT4403LT1	2T	40	100	300	150	200
BC858ALT1	3J	30	125	250	2.0	100
BC858BLT1	3K	30	220	475	2.0	100
BC858CLT1	3L	30	420	800	2.0	100

Devices listed in bold, italic are Motorola preferred devices.

Table 8. Plastic–Encapsulated Surface Mount General–Purpose Transistors (continued)

Pinout: 1–Base, 2–Emitter, 3–Collector

Devices are listed in order of descending breakdown voltage.

Device	Marking	$V_{(BR)CEO}$	h_{FE} @ I_C			f_T
			Min	Max	mA	MHz Min
Case 318D–04 — SC–59 — NPN						
MSD601–RT1	YR	25	210	340	2.0	150(1)
MSD601–ST1	YS	25	290	460	2.0	150(1)
MSD602–RT1	WR	25	120	240	150	200(1)
MSD1328–RT1	1DR	20	200	350	500	200(1)
Case 318D–04 — SC–59 — PNP						
MSB709–RT1	AR	25	210	340	2.0	100(1)
MSB710–RT1	CR	25	120	240	150	200(1)
Case 419–02 — SC–70/SOT–323 —NPN						
BC818WT1	6I	45	100	600	100	—
BC818–25WT1	6F	45	160	400	100	—
BC818–40WT1	6G	45	250	600	100	—
BC846AWT1	1A	65	110	220	2.0	100
BC846BWT1	1B	65	200	450	2.0	100
BC847AWT1	1E	45	110	220	2.0	100
BC847BWT1	1F	45	200	450	2.0	100
BC847CWT1	1G	45	420	800	2.0	100
BC848AWT1	1J	30	110	220	2.0	100
BC848BWT1	1K	30	200	450	2.0	100
BC848CWT1	1L	30	420	800	2.0	100
MMBT2222AWT1	1P	40	100	300	150	300
MMBT3904WT1	AM	40	100	300	10	300
MSC3930–BT1	VB	20	70	140	1.0	150
MSD1819A–RT1	ZR	50	210	340	2.0	—
Case 419–02 — SC–70/SOT–323 —PNP						
BC808–25WT1	5F	45	160	400	100	—
BC808–40WT1	6F	45	250	600	100	—
BC856AWT1	3A	65	125	250	2.0	100
BC856BWT1	3B	65	220	475	2.0	100
BC857AWT1	3E	45	125	250	2.0	100
BC857BWT1	3F	45	220	475	2.0	100
BC858AWT1	3J	30	110	220	2.0	100
BC858BWT1	3K	30	200	450	2.0	100
BC858CWT1	3L	30	420	800	2.0	100
MMBT2907AWT1	20	60	100	300	150	200
MMBT3906WT1	2A	40	100	300	10	250
MSB1218A–RT1	BR	45	210	340	2.0	—
Case 419B–01 — SOT–363 — Dual NPN						
MBT3904DW1T1	MA	40	100	300	10	300
MBT3904DW9T1	MB	40	100	300	10	300
Case 419B–01 — SOT–363 — Dual PNP						
MBT3906DW1T1	A2	–40	100	300	10	250
MBT3906DW9T1	A3	–40	100	300	10	250

(1) Typical

Devices listed in bold, italic are Motorola preferred devices.

Table 8. Plastic–Encapsulated Surface Mount General–Purpose Transistors (continued)

Pinout: 1–Base, 2–Emitter, 3–Collector

Devices are listed in order of descending breakdown voltage.

Device	Marking	$V_{(BR)CEO}$	h_{FE} @ I_C			f_T
			Min	Max	mA	MHz Min
Case 419B–01 — SOT–363 — Dual Combination NPN and PNP						
MBT3946DW1T1	46	40	100	300	10	250
Case 463–01 — SOT–416/SC–90 — NPN						
2SC4617	B9	50	120	560	1.0	180
Case 463–01 — SOT–416/SC–90 — PNP						
2SA1774	F9	50	120	560	1.0	140



Table 9. Plastic–Encapsulated Surface Mount Bias Resistor Transistors for General Purpose Applications

Pinout: 1–Base, 2–Emitter, 3–Collector

These devices include bias resistors on the semiconductor chip with the transistor. See the BRT diagram for orientation of resistors.

Device		Marking		$V_{(BR)CEO}$ Volts	h_{FE} @ I_C		I_C mA	R_1	R_2
NPN	PNP	NPN	PNP	(Min)	Min	mA	Max	Ohm	Ohm
Case 318D–04 — SC–59									
MUN2211T1	***MUN2111T1***	8A	6A	50	35	5.0	100	10K	10K
MUN2212T1	***MUN2112T1***	8B	6B	50	60	5.0	100	22K	22K
MUN2213T1	***MUN2113T1***	8C	6C	50	80	5.0	100	47K	47K
MUN2214T1	***MUN2114T1***	8D	6D	50	80	5.0	100	10K	47K
MUN2215T1	***MUN2115T1***	8E	6E	50	160	5.0	100	10K	∞
MUN2216T1	***MUN2116T1***	8F	6F	50	160	5.0	100	4.7K	∞
MUN2230T1	***MUN2130T1***	8G	6G	50	3.0	5.0	100	1.0K	1.0K
MUN2231T1	***MUN2131T1***	8H	6H	50	8.0	5.0	100	2.2K	2.2K
MUN2232T1	***MUN2132T1***	8J	6J	50	15	5.0	100	4.7K	4.7K
MUN2233T1	***MUN2133T1***	8K	6K	50	80	5.0	100	4.7K	47K
MUN2234T1	***MUN2134T1***	8L	6L	50	80	5.0	100	22K	47K
Case 318–08 — TO–236AB (SOT–23)									
MMUN2211LT1	***MMUN2111LT1***	A8A	A6A	50	35	5.0	100	10K	10K
MMUN2212LT1	***MMUN2112LT1***	A8B	A6B	50	60	5.0	100	22K	22K
MMUN2213LT1	***MMUN2113LT1***	A8C	A6C	50	80	5.0	100	47K	47K
MMUN2214LT1	***MMUN2114LT1***	A8D	A6D	50	80	5.0	100	10K	47K
MMUN2215LT1	***MMUN2115LT1***	A8E	A6E	50	160	5.0	100	10K	∞
MMUN2216LT1	***MMUN2116LT1***	A8F	A6F	50	160	5.0	100	4.7K	∞
MMUN2230LT1	***MMUN2130LT1***	A8G	A6G	50	3.0	5.0	100	1.0K	1.0K
MMUN2231LT1	***MMUN2131LT1***	A8H	A6H	50	8.0	5.0	100	2.2K	2.2K
MMUN2232LT1	***MMUN2132LT1***	A8J	A6J	50	15	5.0	100	4.7K	4.7K
MMUN2233LT1	***MMUN2133LT1***	A8K	A6K	50	80	5.0	100	4.7K	47K
MMUN2234LT1	***MMUN2134LT1***	A8L	A6L	50	80	5.0	100	22K	47K

Devices listed in bold, italic are Motorola preferred devices.

Table 9. Plastic–Encapsulated Surface Mount Bias Resistor Transistors for General Purpose Applications (continued)

Pinout: 1–Base, 2–Emitter, 3–Collector

Device		Marking		$V_{(BR)CEO}$ Volts	h_{FE} @ I_C		I_C mA	R_1	R_2
NPN	PNP	NPN	PNP	(Min)	Min	mA	Max	Ohm	Ohm
Case 419–02 — SC–70/SOT–323									
MUN5211T1	***MUN5111T1***	8A	6A	50	35	5.0	50	10K	10K
MUN5212T1	***MUN5112T1***	8B	6B	50	60	5.0	50	22K	22K
MUN5213T1	***MUN5113T1***	8C	6C	50	80	5.0	50	47K	47K
MUN5214T1	***MUN5114T1***	8D	6D	50	80	5.0	50	10K	47K
MUN5215T1	***MUN5115T1***	8E	6E	50	160	5.0	50	10K	∞
MUN5216T1	***MUN5116T1***	8F	6F	50	160	5.0	50	4.7K	∞
MUN5230T1	***MUN5130T1***	8G	6G	50	3.0	5.0	50	1.0K	1.0K
MUN5231T1	***MUN5131T1***	8H	6H	50	8.0	5.0	50	2.2K	2.2K
MUN5232T1	***MUN5132T1***	8J	6J	50	15	5.0	50	4.7K	4.7K
MUN5233T1	***MUN5133T1***	8K	6K	50	80	5.0	50	4.7K	47K
MUN5234T1	***MUN5134T1***	8L	6L	50	80	5.0	50	22K	47K
Case 419B–01 — SOT–363 Duals									
MUN5211DW1T1	***MUN5111DW1T1***	7A	8A	50	35	5.0	100	10K	10K
MUN5212DW1T1	***MUN5112DW1T1***	7B	8B	50	60	5.0	100	22K	22K
MUN5213DW1T1	***MUN5113DW1T1***	7C	8C	50	80	5.0	100	47K	47K
MUN5214DW1T1	***MUN5114DW1T1***	7D	8D	50	80	5.0	100	10K	47K
MUN5215DW1T1	***MUN5115DW1T1***	7E	8E	50	160	5.0	100	10K	∞
MUN5216DW1T1	***MUN5116DW1T1***	7F	8F	50	160	5.0	100	4.7K	∞
MUN5230DW1T1	***MUN5130DW1T1***	7G	8G	50	3.0	5.0	100	1.0K	1.0K
MUN5231DW1T1	***MUN5131DW1T1***	7H	8H	50	8.0	5.0	100	2.2K	2.2K
MUN5232DW1T1	***MUN5132DW1T1***	7J	8J	50	15	5.0	100	4.7K	4.7K
MUN5233DW1T1	***MUN5133DW1T1***	7K	8K	50	80	5.0	100	4.7K	47K
MUN5234DW1T1	***MUN5134DW1T1***	7L	8L	50	80	5.0	100	22K	47K
MUN5235DW1T1	***MUN5135DW1T1***	7M	8M	50	80	5.0	100	2.2K	47K

Device	Marking	$V_{(BR)CEO}$	h_{FE} @ I_C		I_C mA	R_1	R_2
			Min	mA	Max	Ohm	Ohm
Case 419B–01 — SOT–363 — Dual Combination NPN and PNP							
MUN5311DW1T1	11	50	35	5.0	100	10K	10K
MUN5312DW1T1	12	50	60	5.0	100	22K	22K
MUN5313DW1T1	13	50	80	5.0	100	47K	47K
MUN5314DW1T1	14	50	80	5.0	100	10K	47K
MUN5315DW1T1	15	50	160	5.0	100	10K	∞
MUN5316DW1T1	16	50	160	5.0	100	4.7K	∞
MUN5330DW1T1	3X	50	3.0	5.0	100	1.0K	1.0K
MUN5331DW1T1	31	50	8.0	5.0	100	2.2K	2.2K
MUN5332DW1T1	32	50	15	5.0	100	4.7K	4.7K
MUN5333DW1T1	33	50	80	5.0	100	4.7K	47K
MUN5334DW1T1	34	50	80	5.0	100	22K	47K
MUN5335DW1T1	35	50	80	5.0	100	2.2K	47K

Device		Marking		$V_{(BR)CEO}$ Volts	h_{FE} @ I_C		I_C mA	R_1	R_2
NPN	PNP	NPN	PNP	(Min)	Min	mA	Max	Ohm	Ohm
Case 463–01 — SOT–416/SC–90									
DTC114TE	—	94	—	50	100	1.0	100	10K	∞
DTC114YE	***DTA114YE***	69	59	50	80	5.0	100	10K	47K
—	***DTA143EE***	—	43	50	15	5.0	100	4.7K	4.7K

Devices listed in bold, italic are Motorola preferred devices.

Table 10. Plastic–Encapsulated Surface Mount VHF/UHF Amplifiers, Mixers, Oscillators

The following table is a listing of devices intended for small–signal RF amplifier applications to VHF/UHF frequencies. These devices may also be used as VHF/UHF oscillators and mixers.

Pinout: 1–Base, 2–Emitter, 3–Collector

Device	Marking	$V_{(BR)CEO}$	C_{cb}[13] pF Max	f_T @ I_C	
				GHz Min	mA
Case 318–08 — TO–236AB (SOT–23) — NPN					
MMBTH10LT1	3EM	25	0.7	0.65	4.0
MMBT918LT1	M3B	15	1.7[14]	0.6	4.0
Pinout: 1–Emitter, 2–Base, 3–Collector					
Case 318D–04 — SC–59 — NPN					
MSC2295–BT1	VB	20	1.5[13]	0.15	1.0
MSC2295–CT1	VC	20	1.5[13]	0.15	1.0
MSC3130T1	1S	10	—	1.4	5.0

[13] C_{re}
[14] C_{ob}

Table 11. Plastic–Encapsulated Surface Mount Darlingtons

The following table is a listing of small–signal devices that have very high h_{FE} and input impedance characteristics. These devices utilize monolithic, cascade transistor construction.

Pinout: 1–Base, 2–Emitter, 3–Collector

Devices are listed in order of descending h_{FE}.

Device	Marking	$V_{(BR)CES}$	$V_{CE(sat)}$ Volts Max	h_{FE} @ I_C		
				Min	Max	mA
Case 318–08 — TO–236AB (SOT–23) — NPN						
MMBTA14LT1	1N	30	1.5	20K	—	100
Case 318–08 — TO–236AB (SOT–23) — PNP						
MMBTA64LT1	2V	30	1.5	20K	—	100

Table 12. Plastic–Encapsulated Surface Mount Low–Noise Transistors

The following table is a listing of small–signal devices intended for low noise applications in the audio range. These devices exhibit good linearity and are candidates for hi–fi and instrumentation equipment.

Pinout: 1–Base, 2–Emitter, 3–Collector

Devices are listed in order of ascending NF.

Device	Marking	NF dB Typ	$V_{(BR)CEO}$	h_{FE} @ I_C			f_T MHz Min
				Min	Max	mA	
Case 318–08 — TO–236AB (SOT–23) — NPN							
MMBT5089LT1	1R	2.0[15]	25	400	—	10	50
MMBT2484LT1	1U	3.0[15]	60	—	800	10	—
MMBT6428LT1	1KM	3.0	50	250	—	10	100
MMBT6429LT1	1L	3.0	45	500	—	10	100
Case 318–08 — TO–236AB (SOT–23) — PNP							
MMBT5087LT1	2Q	2.0[15]	50	250	—	10	40

[15] Max

Devices listed in bold, italic are Motorola preferred devices.

Table 13. Plastic–Encapsulated Surface Mount High–Voltage Transistors

The following table is a listing of small–signal high–voltage devices designed for direct line operation requiring high voltage breakdown and relatively low current capability.

Pinout: 1–Base, 2–Emitter, 3–Collector

Devices are listed in order of descending breakdown voltage.

Device	Marking	$V_{(BR)CEO}$	h_{FE} @ I_C			f_T
			Min	Max	mA	MHz Min
Case 318–08 — TO–236AB (SOT–23) — NPN						
MMBT6517LT1	1Z	350	15	—	100	40
MMBTA42LT1	1D	300	40	—	30	50
MMBT5551LT1	G1	160	30	—	50	100
Case 318–08 — TO–236AB (SOT–23) — PNP						
MMBT6520LT1	2Z	350	15	—	100	40
MMBTA92LT1	2D	300	25	—	30	50
MMBT5401LT1	2L	150	50	—	50	100

Table 14. Plastic–Encapsulated Surface Mount Drivers

The following is a listing of small–signal devices intended for medium voltage driver applications at fairly high current levels.

Pinout: 1–Base, 2–Emitter, 3–Collector

Device	Marking	$V_{(BR)CEO}$	$V_{CE(sat)}$	$V_{BE(sat)}$	h_{FE} @ I_C		
					Min	Max	mA
Case 318–08 — TO–236AB (SOT–23) — NPN							
MMBTA06LT1	1GM	80	0.25	—	100	—	100
BSS64LT1	AM	80	0.15	—	20	—	10
Case 318–08 — TO–236AB (SOT–23) — PNP							
BSS63LT1	T1	100	−0.25	−0.90	30	—	25
MMBTA56LT1	2GM	80	−0.25	—	100	—	100

Table 15. Plastic–Encapsulated Surface Mount General Purpose Amplifiers

Pinout: 1–Base, 2–Collector, 3–Emitter, 4–Collector

Device	Marking	$V_{(BR)CEO}$	h_{FE} @ I_C		
			Min	Max	mA
Case 318E–04 — SOT–223 — NPN					
BCP56T1	BH	80	40	250	150
Case 318E–04 — SOT–223 — PNP					
Pinout: 1–Gate, 2–Drain, 3–Source, 4–Drain					
BCP53T1	AH	80	40	25	150

Table 16. Plastic–Encapsulated Surface Mount Switching Transistors

Pinout: 1–Base, 2–Collector, 3–Emitter, 4–Collector

Device	Marking	t_{on}	t_{off}	$V_{(BR)CEO}$	h_{FE}		f_T	
					Min	Max	@ I_C (mA)	Min (MHz)
Case 318E–04 — SOT–223 — NPN								
PZT2222AT1	P1F	35	285	40	100	300	20	300
Case 318E–04 — SOT–223 — PNP								
PZT2907AT1	P2F	45	100	60	100	300	50	200

Devices listed in bold, italic are Motorola preferred devices.

Table 17. Plastic–Encapsulated Surface Mount Darlingtons
Pinout: 1–Base, 2–Collector, 3–Emitter, 4–Collector

Device	Marking	$V_{(BR)CER}$	$V_{CE(sat)}$ Max (V)	h_{FE}		
				Min	Max	@ I_C (mA)
Case 318E–04 — SOT–223 — NPN						
BSP52T1	AS3	80	1.3	2000	—	500
PZTA14T1	P1N	30	1.5	20k	—	100
Case 318E–04 — SOT–223 — PNP						
BSP62T1	BS3	90	1.3	2000	—	500

Table 18. Plastic–Encapsulated Surface Mount High–Voltage Transistors
Pinout: 1–Base, 2–Collector, 3–Emitter, 4–Collector

Device	Marking	$V_{(BR)CEO}$	h_{FE}		f_T	
			Min	Max	@ I_C (mA)	Min (MHz)
Case 318E–04 — SOT–223 — NPN						
BSP19AT1	SP19A	350	40	—	20	70
PZTA42T1	P1D	300	40	—	10	50
BF720T1	BF720	250	50	—	10	60
Case 318E–04 — SOT–223 — PNP						
PZTA92T1	P2D	300	40	—	10	50
BSP16T1	BSP16	300	30	150	10	15
BF721T1	BF721	250	50	—	10	60

Table 19. Plastic–Encapsulated Surface Mount High Current Transistors
Pinout: 1–Base, 2–Collector, 3–Emitter, 4–Collector

Device	Marking	$V_{(BR)CEO}$	$V_{CE(sat)}$ Volts	h_{FE} @ I_C		
				Min	Max	mA
Case 318E–04 — SOT–223 — NPN						
PZT651T1	651	60	0.5	75	—	1000
BCP68T1	CA	20	0.5	60	—	1000
Case 318E–04 — SOT–223 — PNP						
PZT751T1	ZT751	60	0.5	75	—	1000
BCP69T1	CE	20	0.5	60	—	1000

Devices listed in bold, italic are Motorola preferred devices.

Field–Effect Transistors

JFETs

JFETs operate in the depletion mode. They are available in both P– and N–channel and are offered in both Through–hole and Surface Mount packages. Applications include general–purpose amplifiers, switches and choppers, and RF amplifiers and mixers. These devices are economical and very rugged. The drain and source are interchangeable on many typical FETs.



CASE 29–04
TO–226AA
(TO–92)

Table 20. JFET Low–Frequency/Low–Noise

The following table is a listing of small–signal JFETs intended for low–noise applications in the audio range. These devices exhibit good linearity and are candidates for hi–fi and instrumentation equipment.

Device	$R_e\|Y_{fs}\|$ @ f		$R_e\|Y_{os}\|$ @ f		C_{iss} pF Max	C_{rss} pF Max	$V_{(BR)GSS}$ $V_{(BR)GDO}$ Volts Min	$V_{GS(off)}$ Volts		I_{DSS} mA		Style
	mmho Min	kHz	μmho Max	kHz				Min	Max	Min	Max	
Case 29–04 — TO–226AA (TO–92) — N–Channel												
2N5457	1.0	1.0	50	1.0	7.0	3.0	25	0.5	6.0	1.0	5.0	5
2N5458	1.5	1.0	50	1.0	7.0	3.0	25	1.0	7.0	2.0	9.0	5
Case 29–04 — TO–226AA (TO–92) — P–Channel												
2N5460	1.0	1.0	75	1.0	7.0	2.0	40	0.75	6.0	1.0	5.0	7
2N5461	1.5	1.0	75	1.0	7.0	2.0	40	1.0	7.5	2.0	9.0	7
2N5462	2.0	1.0	75	1.0	7.0	2.0	40	1.8	9.0	4.0	16	7

Table 21. JFET High–Frequency Amplifiers

The following is a listing of small–signal JFETs that are intended for hi–frequency applications. These are candidates for VHF/UHF oscillators, mixers and front–end amplifiers.

Device	$R_e\|Y_{fs}\|$ @ f		$R_e\|Y_{os}\|$ @ f		C_{iss} pF Max	C_{rss} pF Max	NF @ R_G = 1K		$V_{(BR)GSS}$ $V_{(BR)GDO}$ Volts Min	$V_{GS(off)}$ Volts		I_{DSS} mA		Style
	mmho Min	MHz	μmho Max	MHz			dB Max	f MHz		Min	Max	Min	Max	
Case 29–04 — TO–226AA (TO–92) — N–Channel														
MPF102	1.6	100	200	100	7.0	3.0	—	—	25	—	8.0	2.0	20	5
2N5485	3.0	400	100	400	5.0	1.0	4.0	400	25	0.5	4.0	4.0	10	5
2N5486	3.5	400	100	400	5.0	1.0	4.0	400	25	2.0	6.0	8.0	20	5
J308	12(1)	100	250(1)	100	7.5	2.5	1.5(1)	100	25	1.0	6.5	12	60	5
J309	12(1)	100	250(1)	100	7.5	2.5	1.5(1)	100	25	1.0	4.0	12	30	5
J310	12(1)	100	250(1)	100	7.5	2.5	1.5(1)	100	25	2.0	6.5	24	60	5

(1) Typical

Devices listed in bold, italic are Motorola preferred devices.

Table 22. JFET Switches and Choppers

The following is a listing of JFETs intended for switching and chopper applications.

Device	$R_{DS(on)}$ @ I_D		$V_{GS(off)}$ Volts		I_{DSS} mA		$V_{(BR)GSS}$ $V_{(BR)GDO}$ Volts	C_{iss} pF	C_{rss} pF	t_{on} ns	t_{off} ns	Style
	Ω Max	mA	Min	Max	Min	Max	Min	Max	Max	Max	Max	
Case 29–04 — TO–226AA (TO–92) — N–Channel												
J112	50	—	1.0	5.0	5.0	—	35	28	5.0	—	—	5
MPF4392	60	—	—	—	25	75	30	10	3.5	15	35	5
2N5639	60	1.0	—	(8.0)(1)	25	—	30	10	4.0	—	—	5
MPF4393	100	—	—	(12)(1)	5.0	30	30	10	3.5	15	55	5
2N5555	150	—	—	1.0(16)	15	—	25	5.0	1.2	10	25	5
J110	18	—	0.5	4.0	10	—	25	—	—	—	—	5

(1) Typical
(16) $V_{GS(f)}$

Devices listed in bold, italic are Motorola preferred devices.

TMOS FETs

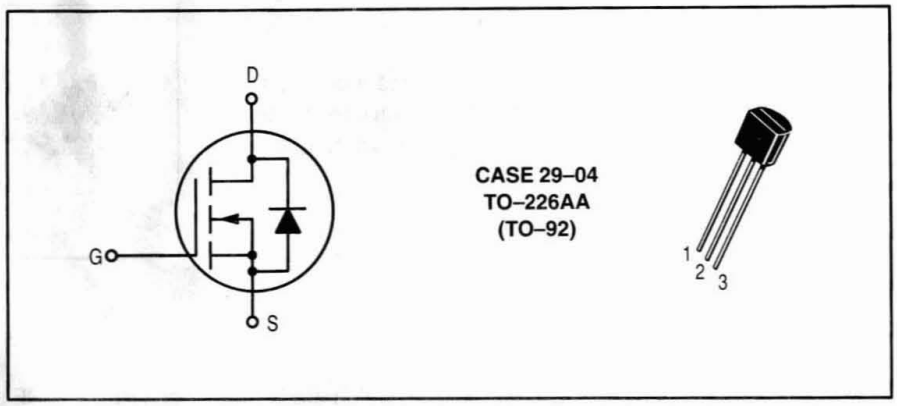

Table 23. TMOS Switches and Choppers

The following is a listing of small–signal TMOS devices that are intended for switching and chopper applications. These devices offer low $R_{DS(on)}$ characteristics.

Device	$R_{DS(on)}$ @ I_D		$V_{GS(th)}$ Volts		$V_{(BR)DSS}$ Volts	C_{iss} pF	C_{rss} pF	t_{on} ns	t_{off} ns	Style
	Ω Max	A	Min	Max	Min	Max	Max	Max	Max	
Case 29–04 — TO–226AA (TO–92) — N–Channel										
2N7000	5.0	0.5	0.8	3.0	60	60	5.0	10	10	22
BS170	5.0	0.2	0.8	3.0	60	25(1)	3.0(1)	10	10	30
VN0610LL	5.0	0.5	0.8	2.5	60	60	5.0	10	10	22
2N7008	7.5	0.5	1.0	2.5	60	50	5.0	20	20	22
VN2222LL	7.5	0.5	0.6	2.5	60	60	5.0	10	10	22

(1) Typical

Devices listed in bold, italic are Motorola preferred devices.

Surface Mount FETs

This section contains the FET plastic packages available for surface mount applications. Most of these devices are the most popular metal–can and insertion type parts carried over to the new surface mount packages.



CASE 318–08
TO–236AB
SOT–23



CASE 419–02
SC–70/SOT–323

Table 24. Surface Mount RF JFETs

The following is a list of surface mount FETs which are intended for VHF/UHF RF amplifier applications.
Pinout: 1–Drain, 2–Source, 3–Gate

Device	Marking	NF		Y_{fs} @ V_{DS}			$V_{(BR)GSS}$	Style
		dB Typ	f MHz	mmhos Min	mmhos Max	Volts		
Case 318–08 — TO–236AB (SOT–23) — N–Channel								
MMBFJ309LT1	6U	1.5	450	10	20	10	25	10
MMBFJ310LT1	6T	1.5	450	8.0	18	10	25	10
MMBFU310LT1	M6C	1.5	450	10	18	10	25	10
MMBF4416LT1	M6A	2(3)	100	4.5	7.5	15	30	10
MMBF5484LT1	M6B	2.0	100	3.0	6.0	15	25	10

(3) Max

Table 25. Surface Mount General–Purpose JFETs

The following table is a listing of surface mount small–signal general purpose FETs. These devices are intended for small–signal amplification for DC, audio, and lower RF frequencies. They also have applications as oscillators and general–purpose, low–voltage switches.
Pinout: 1–Drain, 2–Source, 3–Gate

Device	Marking	$V_{(BR)GSS}$	Y_{fs} @ V_{DS}			I_{DSS}		Style
			mmhos Min	mmhos Max	Volts	mA Min	mA Max	
Case 318–08 — TO–236AB (SOT–23) — N–Channel								
MMBF5457LT1	6D	25	1.0	5.0	15	1.0	5.0	10
Case 318–08 — TO–236AB (SOT–23) — P–Channel								
MMBF5460LT1	M6E	40	1.0	4.0	15	1.0	5.0	10

Devices listed in bold, italic are Motorola preferred devices.

Table 26. Surface Mount Choppers/Switches JFETs

The following is a listing of small–signal surface mount JFET devices intended for switching and chopper applications.

Pinout: 1–Drain, 2–Source, 3–Gate

Device	Marking	$R_{DS(on)}$ Ohms Max	t_{off} ns Max	$V_{(BR)GSS}$	$V_{GS(off)}$ Volts Min	$V_{GS(off)}$ Volts Max	I_{DSS} mA Min	I_{DSS} mA Max	Style
Case 318–08 — TO–236AB (SOT–23) — N–Channel									
MMBF4391LT1	6J	30	20	30	–4.0	–10	50	150	10
MMBF4392LT1	6K	60	35	30	–2.0	–5.0	25	75	10
MMBF4393LT1	6G	100	50	30	–0.5	–3.0	5.0	30	10
Case 318–08 — TO–236AB (SOT–23) — P–Channel									
MMBFJ175LT1	6W	125	—	30	3.0	6.0	7.0	60	10
MMBFJ177LT1	6Y	300	—	30	0.8	2.5	1.5	20	10

Table 27. TMOS FETs

The following is a listing of small–signal surface mount TMOS FETs which exhibit low $R_{DS(on)}$ characteristics.

Pinout: 1–Gate, 2–Source, 3–Drain

Device	Marking	$R_{DS(on)}$ @ I_D Ohm	$R_{DS(on)}$ @ I_D mA	V_{DSS}	$V_{GS(th)}$ Volts Min	$V_{GS(th)}$ Volts Max	Switching Time t_{on} ns	Switching Time t_{off} ns	Style
Case 318–08 — TO–236AB (SOT–23) — N–Channel									
MMBF170LT1	6Z	5.0	200	60	0.8	3.0	10	10	21
BSS123LT1	SA	6.0	100	100	0.8	2.8	20	40	21
2N7002LT1	702	7.5	500	60	1.0	2.5	20	20	21
MMBF0201NLT1	N1	1.0	300	20	1.0	2.4	2.5	15	21
MGSF1N02LT1	N2	0.085	1200	20	1.0	2.4	2.5	16	21
MGSF1N03LT1	N3	0.09	1200	30	1.0	2.4	2.5	16	21
Case 318–08 — TO–236 (SOT–23) — P–Channel									
BSS84LT1	PD	6.0	100	50	1.0	2.4	2.5	16	21
MMBF0202PLT1	P3	1.4	200	20	1.0	2.0	2.5	16	21
MGSF1P02LT1	PC	0.35	1500	20	1.0	2.4	2.5	16	21
MGSF1P02ELT1	PE	0.16	1500	20	0.7	1.2	2.5	15	21

Pinout: 1–Gate, 2–Drain, 3–Source, 4–Drain

Device	Marking	$R_{DS(on)}$ Ohm	$R_{DS(on)}$ mA	V_{DSS}	$V_{GS(th)}$ Volts Min	$V_{GS(th)}$ Volts Max	Switching Time t_{on} ns	Switching Time t_{off} ns	Style
Case 419–02 — SC–70/SOT–323 — N–Channel									
MMBF2201NT1	N1	1.0	300	20	1.0	2.4	2.5	15	8
Case 419–02 — SC–70/SOT–323 — P–Channel									
MMBF2202PT1	P3	2.2	200	20	1.0	2.4	2.5	16	8

Devices listed in bold, italic are Motorola preferred devices.

Tuning and Switching Diodes

Tuning Diodes — Abrupt Junction

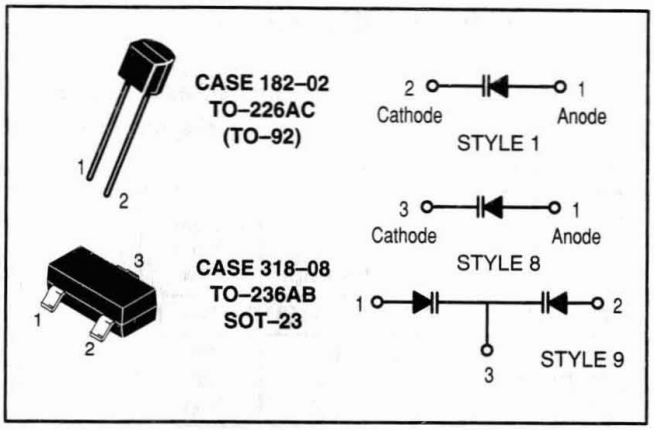

Motorola supplies voltage–variable capacitance diodes serving the entire range of frequencies from HF through UHF. Used in RF receivers and transmitters, they have a variety of applications, including:

- Phase–locked loop tuning systems
- Local oscillator tuning
- Tuned RF preselectors
- RF filters
- RF phase shifters
- RF amplifiers
- Automatic frequency control
- Video filters and delay lines
- Harmonic generators
- FM modulators

Two families of devices are available: Abrupt Junction and Hyper Abrupt Junction. The Abrupt Junction family includes devices suitable for virtually all tuned–circuit and narrow–range tuning applications throughout the spectrum.

Typical Characteristics

Diode Capacitance versus Reverse Voltage

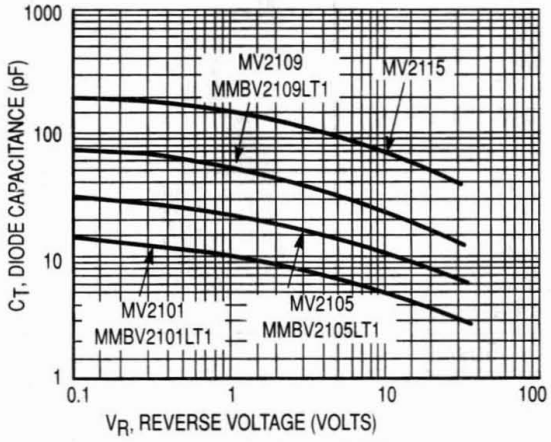

(See Tables 28 and 29)

Table 28. General–Purpose Plastic Abrupt Tuning Diodes
Capacitance Ratio @ 2.0 Volts/30 Volts

The following is a listing of plastic package, general–purpose, abrupt tuning diodes. These devices exhibit high Q characteristics.

Device	C_T @ V_R = 4.0 V, 1.0 MHz			$V_{R(BR)R}$ Volts	Cap Ratio C4/C30 Min	Q 4.0 V, 50 MHz Typ
	pF Min	pF Nominal	pF Max			
Case 182–02 — TO–226AC (TO–92) — 2–Lead						
MV2105	13.5	15	16.5	30	2.5	350
MV2109	29.7	33	36.3	30	2.5	200

Table 29. Surface Mount Abrupt Tuning Diodes
Capacitance Ratio @ 2.0 Volts/30 Volts

The following is a listing of surface mount abrupt junction tuning diodes intended for general–purpose variable capacitance circuit applications.

Device	C_T @ V_R = 4.0 V, 1.0 MHz pF Min	pF Nominal	pF Max	$V_{R(BR)R}$ Volts	Cap Ratio C2/C30 Min	Q 4.0 V, 50 MHz Typ
Case 318–08 — TO–236AB (SOT–23)						
MMBV2105LT1	13.5	15	16.5	30	2.5	350
MMBV2107LT1	19.8	22	24.2	30	2.5	300
MMBV2109LT1	29.7	33	36.3	30	2.5	200

Tuning Diodes — Hyper–Abrupt Junction

The Hyper–Abrupt family exhibits higher capacitance, and a much larger capacitance ratio. It is particularly well suited for wider–range applications such as AM/FM radio and TV tuning.

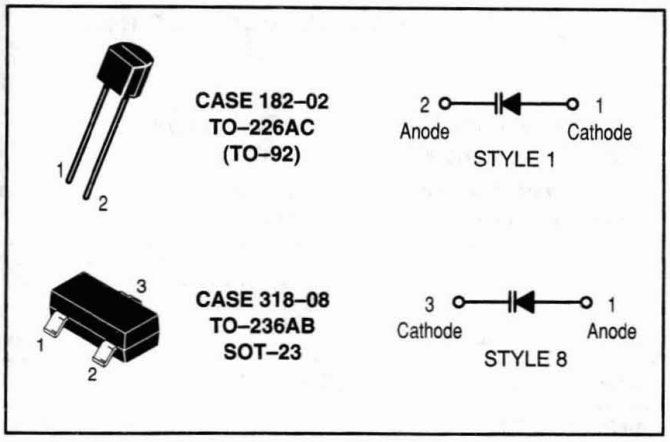

Typical Characteristics

Diode Capacitance versus Reverse Voltage

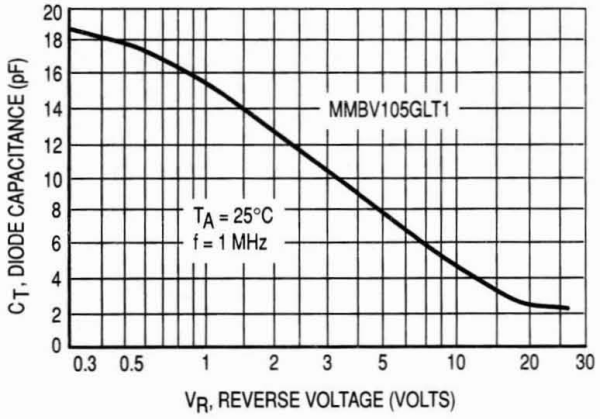

Figure 1. Diode Capacitance

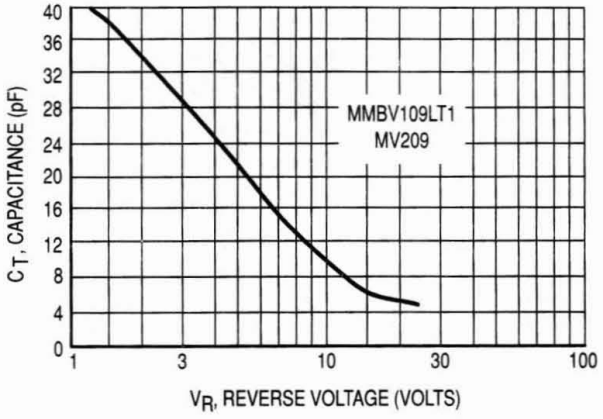

Figure 2. Diode Capacitance

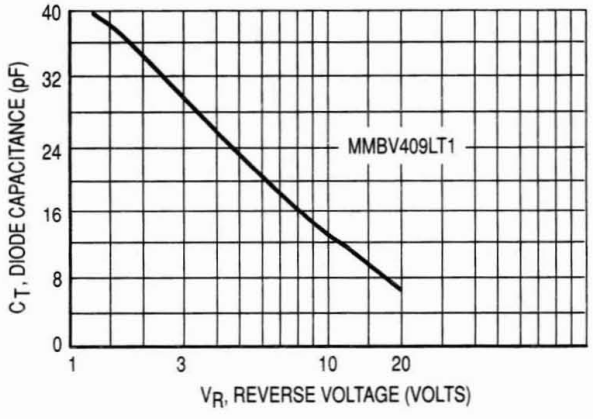

Figure 3. Diode Capacitance

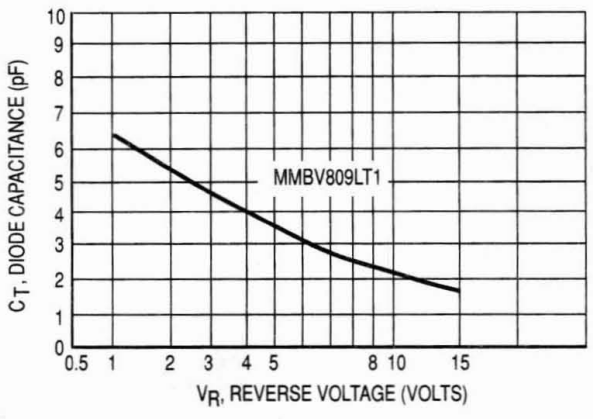

Figure 4. Diode Capacitance

Tuning Diodes — Hyper–Abrupt Junction (continued)

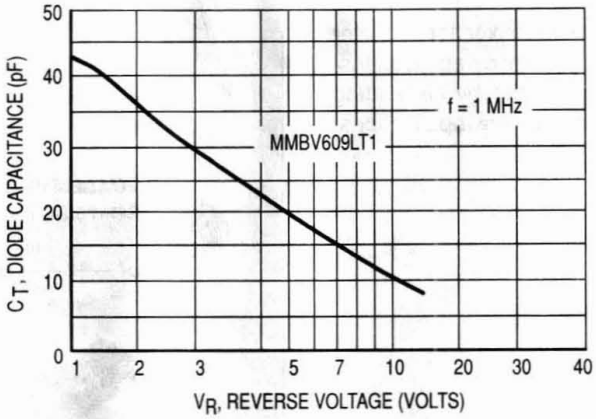

Figure 5. Diode Capacitance Each Die

Table 30. Hyper–Abrupt Tuning Diodes for Telecommunications — Single

The following is a listing of hyper–abrupt tuning diodes intended for high frequency, FM radio, and TV tuner applications.

Device	C_T @ V_R (f = 1.0 MHz)			Cap Ratio @ V_R			Q		$V_{(BR)R}$	Device	Case	CV
	pF Min	pF Max	Volts	Min	Max	Volts	3.0 V Min	50 MHz Max	Volts	Marking	Style	Curve Fig
Case 182–02 — TO–226AC (TO–92)												
MV209	26	32	3.0	5.0	6.5	3/25	200	—	30	—	1	2
Case 318–08 — TO–236AB (SOT–23)												
MMBV105GLT1	1.5	2.8	25	4.0	6.5	3/25	200	—	30	M4E	8	1
MMBV109LT1	26	32	3.0	5.0	6.5	3/25	200	—	30	M4A	8	2
MMBV409LT1	26	32	3.0	1.5	1.9	3/8	200	—	20	X5	8	3
MMBV809LT1	4.5	6.1	2.0	1.8	2.6	2/8	300	—	20	5K	8	4

Table 31. Hyper–Abrupt Tuning Diodes for Communications — Dual

Device	C_T @ V_R (f = 1.0 MHz)			Cap Ratio @ V_R			Q		$V_{(BR)R}$	Device	Case	CV
	pF Min	pF Max	Volts	Min	Max	Volts	3.0 V Min	50 MHz Max	Volts	Marking	Style	Curve Fig
Case 318–08 — TO–236AB (SOT–23)												
MMBV609LT1	26	32	3.0	1.8	2.4	3/8	250	—	20	5L	9	6

Schottky Diodes

Schottky diodes are ideal for VHF and UHF mixer and detector applications as well as many higher frequency applications. They provide stable electrical characteristics by eliminating the point–contact diode presently used in many applications.

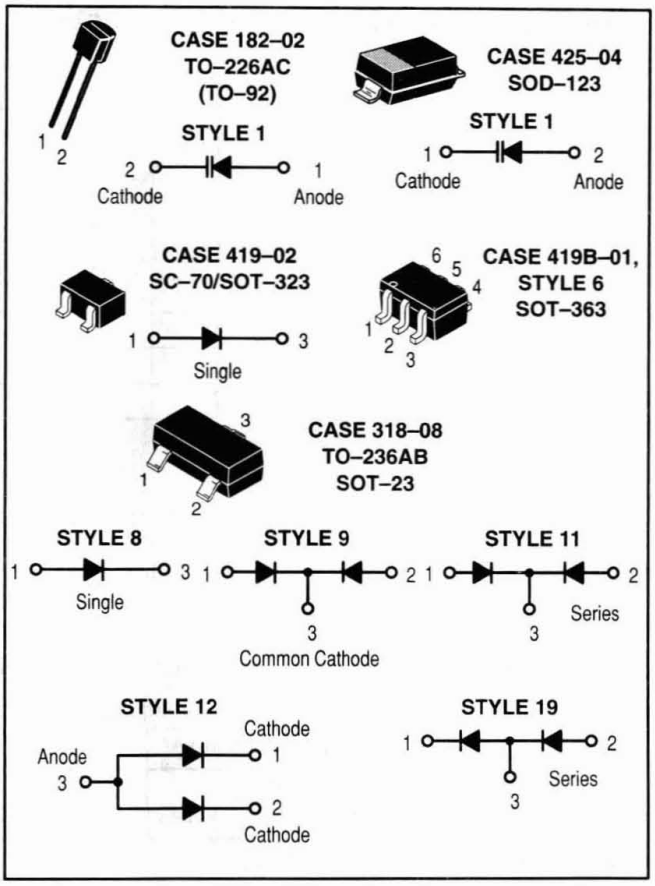

Typical Characteristics

Capacitance versus Reverse Voltage

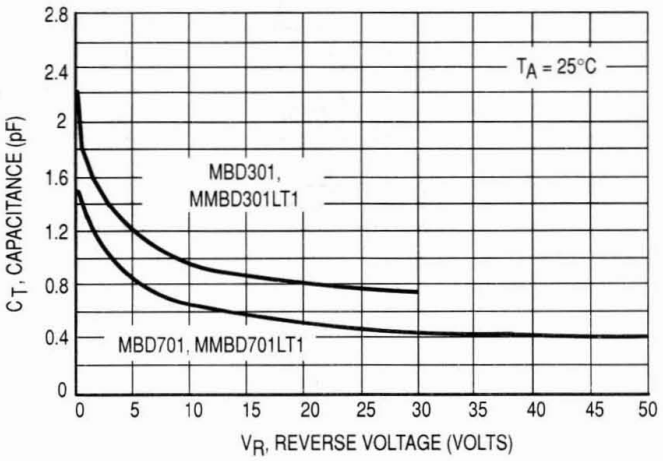

Schottky Diodes (continued)

Table 32. Schottky Diodes

The following is a listing of Schottky diodes that exhibit low forward voltage drop for improved circuit efficiency.

Device	$V_{(BR)R}$ Volts	C_T @ V_R pF Max	V_F @ 10 mA Volts Max	I_R @ V_R nA Max	Minority Lifetime pS (TYP)	Device Marking	Style
Case 182–02 — TO–226AC (TO–92)							
MBD701	70	1.0 @ 20 V	1.0	200 @ 35 V	15	—	1
MBD301	30	1.5 @ 15 V	0.6	200 @ 25 V	15	—	1
Case 318–08 — TO–236AB (SOT–23) – Single							
BAS40LT1	40	5.0 @ 1.0 V	0.5 @ 30 mA	1000 @ 25 V	—	B1	8
BAS40–04LT1	40	5.0 @ 1.0 V	0.5 @ 30 mA	1000 @ 25 V	—	—	12
BAS70LT1	70	2.0 @ 0 V	0.75	100 @ 50 V	—	BE	8
BAT54ALT1	30	10 @ 1.0 V	0.4	2000 @ 25 V	—	—	12
BAT54LT1	30	10 @ 1.0 V	0.4	2000 @ 25 V	—	LV3	8
BAT54SLT1	30	10 @ 1.0 V	0.4	2000 @ 25 V	—	LD3	11
MMBD701LT1	70	1.0 @ 20 V	1.0	200 @ 35 V	15	5H	8
MMBD301LT1	30	1.5 @ 15 V	0.6	200 @ 25 V	15	4T	8
Case 318–08 — TO–236AB (SOT–23) – Dual							
BAS40–06LT1	40	5.0 @ 1.0 V	0.5 @ 30 mA	1000 @ 25 V	—	—	11
BAS70–04LT1(23)	70	2.0 @ 0 V	0.75	100 @ 50 V	—	—	12
MMBD452LT1	30	1.5 @ 1.5 V	0.6	200 @ 25 V	15	5N	11
Case 425–04 — (SOD–123)							
BAT54T1	30	10 @ 1.0 V	0.4	2000 @ 25 V	—	—	1
MMSD701T1	70	1.0 @ 20 V	1.2	0.2 @ 35 V	15	XH	1
MMSD301T1	30	1.5 @ 15 V	0.6	0.2 @ 25 V	15	XT	1
Case 419–02 — (SC–70/SOT–323) – Single							
BAT54WT1	30	10 @ 1.0 V	0.4	2000 @ 25 V	—	—	2
MMBD330T1	30	1.5 @ 15 V	0.6	0.2 @ 25 V	—	—	2
MMBD770T1	70	1.0 @ 20 V	1.0	0.2 @ 35 V	—	—	2
Case 419–02 — (SC–70/SOT–323) – Dual							
BAT54SWT1	30	10 @ 1.0 V	0.4	2000 @ 25 V	—	—	9
MMBD717LT1(23)	20	2.5 @ 1.0 V	0.37 @ 1 mA	0.2 @ 10 V	—	B3	2

(23) Common Anode

Case 419B–01 — SOT–363 – Duals

Device	Marking	$V_{(BR)R}$		I_R		V_F			C_T(30)	t_{rr}	Case
		Min Volts	@ I_{BR} (μA)	Max (μA)	@ V_R Volts	Min Volts	Max Volts	@ I_F (mA)	Max (pF)	Max (ns)	Style
MBD54DWT1	BL	30	10	2.0	25	—	0.32	1.0	1.0	5.0	6
MBD330DWT1	T4	30	10	200	25	—	0.4	1.0	1.5	—	6
MBD770DWT1	H5	70	10	200	25	—	0.5	1.0	1.0	—	6

(30) V_R = 0 V, f = 1.0 MHz

Devices listed in bold, italic are Motorola preferred devices.

Switching Diodes

Small–signal switching diodes are intended for low current switching and steering applications. Hot–Carrier, PIN and general–purpose diodes allow a wide selection for specific application requirements.

Typical Characteristics

Capacitance versus Reverse Voltage

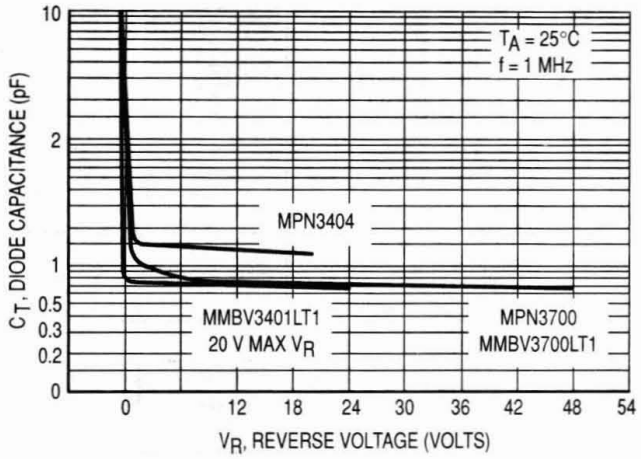

(See Table 33)

STYLE 1

1 Cathode — 2 Anode

CASE 425–04
SOD–123



CASE 463–01
SOT–416/SC–90

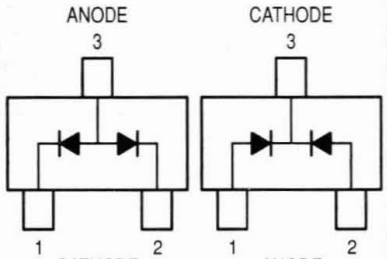



CASE 419–02
SC–70/SOT–323





CASE 182–02
TO–226AC
(TO–92)

STYLE 1

2 Cathode — 1 Anode



CASE 318–08
TO–236AB
SOT–23

STYLE 8

1 — 3

SINGLE

STYLE 12

1 — 2

3

COMMON ANODE

STYLE 9

1 — 2

3

COMMON CATHODE

STYLE 18

2 — 3

SINGLE

STYLE 11

1 — 2

3

SERIES

STYLE 19

1 — 2

3

SERIES



CASE 318D–04
SC–59

STYLE 2

2 — 3

SINGLE

STYLE 4

2 — 3

SINGLE

STYLE 3

1 — 2

3

COMMON CATHODE

STYLE 5

1 — 2

3

COMMON ANODE

Table 33. PIN Switching Diodes

The following PIN diodes are designed for VHF band switching and general–purpose low current switching applications.

Device	$V_{(BR)R}$ Volts Min	C_T @ V_R @ 1.0 MHz pF Max	C_T @ V_R @ 1.0 MHz Volts	I_R @ V_R μA Max	Series Resistance Ohm Max	Device Marking	Style
Case 182–02 — TO–226AC (TO–92)							
MPN3700	200	1.0	20	0.1 @ 150	1.0 @ 10 mA	—	1
MPN3404	20	2.0	15	0.1 @ 25 V	0.85 @ 10 mA	—	1
Case 318–08 — TO–236AB (SOT–23)							
MMBV3700LT1	200	1.0	20	0.1 @ 150	1.0 @ 10 mA	4R	8
MMBV3401LT1	35	1.0	20	0.1 @ 25 V	0.7 @ 10 mA	4D	8

Table 34. General–Purpose Signal and Switching Diodes — Single

The following is a listing of small–signal switching diodes in surface mount packages. These diodes are intended for low current switching and signal steering applications.

Device	Marking	$V_{(BR)R}$ Min Volts	$V_{(BR)R}$ @ I_{BR} (μA)	I_R Max (μA)	I_R @ V_R Volts	V_F Min Volts	V_F Max Volts	V_F @ I_F (mA)	C_T[30] Max (pF)	t_{rr} Max (ns)	Case Style
Case 318–08 — TO–236AB (SOT–23)											
BAS21LT1	JS	250	100	0.1	200	—	1.0	100	5.0	50	8
MMBD914LT1	5D	100	100	5.0	75	—	1.0	10	4.0	4.0	8
BAS16LT1	A6	75	100	1.0	75	—	1.0	50	2.0	6.0	8
MMBD6050LT1	5A	70	100	0.1	50	0.85	1.1	100	2.5	4.0	8
BAL99LT1	JF	70	100	2.5	70	—	1.0	50	1.5	6.0	18
Case 318D–04 — SC–59											
M1MA151AT1	MA	40	100	0.1	35	—	1.2	100	2.0	3.0	4
M1MA151KT1	MH	40	100	0.1	35	—	1.2	100	2.0	3.0	2
Case 419–02 — SC–70/SOT–323											
BAS16WT1	A6	75	1.0	0.02	20	—	1.25	150	2.0	6.0	2
M1MA141KT1	MH	40	100	0.1	35	—	1.2	100	2.0	3.0	2
M1MA142KT1	MI	80	100	0.1	75	—	1.2	100	2.0	3.0	2
M1MA174T1	J6	100	100	5.0	75	—	1.0	10	4.0	4.0	2
Case 425–04— SOD–123											
MMSD914T1	5D	100	100	5.0	75	—	1.0	10	4.0	4.0	1
MMSD71RKT1	6S	—	—	0.5	80	—	1.2	100	2.0	4.0	1

(30) V_R = 0 V, f = 1.0 MHz

Devices listed in bold, italic are Motorola preferred devices.

Switching Diodes (continued)

Table 35. General–Purpose Signal and Switching Diodes — Dual

The following is a listing of small–signal switching diodes in surface mount packages. These diodes are intended for low current switching and signal steering applications.

Device	Marking	$V_{(BR)R}$		I_R		V_F			C_T(30)	t_{rr}	Case Style
		Min Volts	@ I_{BR} (μA)	Max (μA)	@ V_R Volts	Min Volts	Max Volts	@ I_F (mA)	Max (pF)	Max (ns)	
Case 318–08 — TO–236AB (SOT–23)											
MMBD7000LT1	M5C	100	100	1.0	50	0.75	1.1	100	1.5	4.0	11
MMBD2836LT1	A2	75	100	0.1	50	—	1.0	10	4.0	4.0	12
MMBD2838LT1	A6	75	100	0.1	50	—	1.0	10	4.0	4.0	9
BAV70LT1	A4	70	100	5.0	70	—	1.0	50	1.5	6.0	9
BAV99LT1	A7	70	100	2.5	70	—	1.0	50	1.5	4.0	11
BAW56LT1	A1	70	100	2.5	70	—	1.0	50	2.0	6.0	12
MMBD6100LT1	5BM	70	100	0.1	50	0.85	1.1	100	2.5	4.0	9
BAV74LT1	JA	50	5.0	0.1	50	—	1.0	100	2.0	4.0	9
MMBD2835LT1	A3	35	100	0.1	30	—	1.0	10	4.0	4.0	12
MMBD2837LT1	A5	35	100	0.1	30	—	1.0	10	4.0	4.0	9
Case 318D–04 — SC–59											
M1MA151WAT1	MN	40	100	0.1	35	—	1.2	100	15	10	5
M1MA151WKT1	MT	40	100	0.1	35	—	1.2	100	2.0	3.0	3
Case 419–02 — SC–70/SOT–323											
M1MA142WKT1	MU	80	100	0.1	75	—	1.2	100	2.0	3.0	5
M1MA142WAT1	MO	80	100	0.1	75	—	1.2	100	15	10	4
BAW56WT1	A1	70	100	2.5	70	—	1.0	50	2.0	6.0	4
BAV70WT1	A4	70	100	5.0	70	—	1.0	50	1.5	6.0	5
BAV99WT1	A7	70	100	2.5	70	—	1.0	50	1.5	6.0	9
BAV99RWT1	F7	70	100	2.5	70	—	1.0	50	1.5	6.0	10
M1MA141WKT1	MT	40	100	0.1	35	—	1.2	100	2.0	3.0	5
M1MA141WAT1	MN	40	100	0.1	35	—	1.2	100	15	10	4
Case 463–01 — SOT–416/SC–90 (Common Anode)											
DAP222	P9	80	100	100	70	—	1.2	100	3.5	4.0	4
Case 463–01 — SOT–416/SC–90 (Common Cathode)											
DAN222	N9	80	100	100	70	—	1.2	100	3.5	4.0	5

(30) V_R = 0 V, f = 1.0 MHz

Devices listed in bold, italic are Motorola preferred devices.

Small Signal
Multi–integrated Devices



CASE 318–08
SOT–23

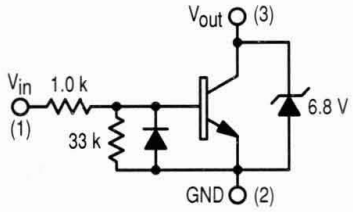

MDC3105LT1

INTERNAL CIRCUIT DIAGRAM

Table 36. Integrated Relay/Solenoid Driver

Monolithic circuit block to switch 3.0 V to 5.0 V relays. It is intended to replace an array of three to six discrete components.

Device Type	V_{CC} (Volts)		V_{in} (Volts)		V_{sat} (Volts)	I_{in} (mA)	$I_{C(on)}$ (mA)
	Min	Max	Min	Max			
Case 318–08 — SOT–23							
MDC3105LT1	2.0	5.5	2.0	5.5	0.4	2.5	250

Devices listed in bold, italic are Motorola preferred devices.

TVS/Zeners
Transient Voltage Suppressors
Zener Regulator Diodes

In Brief . . .

Motorola's standard TVS (Transient Voltage Suppressors) and Zener diodes comprise the largest inventoried line in the industry. Continuous development of improved manufacturing techniques have resulted in computerized diffusion and test, as well as critical process controls learned from surface–sensitive MOS fabrication. Resultant high yields lower factory costs. Check the following features for application to your specific requirements:

- Wide selection of package materials and styles:
  - — Plastic (Surmetic) for low cost, mechanical ruggedness
  - — Glass for high reliability, low cost
  - — Surface Mount packages for state of the art designs
- Power Ratings from 0.25 to 5.0 Watts
- Breakdown voltages from 1.8 to 400 Volts in approximately 10% steps
- TVS from 24 to 1500 Watts and from 6.2 to 250 Volts
- ESD protection devices
- Special selection of electrical characteristics available at low cost due to high–volume lines (check your Motorola sales representative for special quotations)
- UL Recognition on many TVS device types
- Tape and Reel options available on all axial leaded and surface mount types

	Page
TVS (Transient Voltage Suppressors)	5.2–2
General–Purpose	5.2–2
Axial Leaded for Through–hole Designs	5.2–2
Surface Mount Packages	5.2–3
Zener Diodes	5.2–7
Voltage Regulator Diodes	5.2–7
Notes — Axial Leaded Chart	5.2–7
Notes — Surface Mount Chart	5.2–8

Note: Any TVS/Zener device not listed in this Master Selection Guide may be available with a special order. Please contact your Motorola representative for details.

TVS (Transient Voltage Suppressors)

General-Purpose – Axial Leaded for Through-Hole Designs



Plastic
Surmetic 30
Case 59-03
(DO-41)

Plastic
Surmetic 40
Case 17-02

Case 59-04 (Mini Mosorb™)
Plastic
Cathode = Polarity Band

Case 41A-02 (Mosorb™)
Plastic-TVS-A
Cathode = Polarity Band

Table 1. Peak Power Dissipation[1] — *500 Watts* @ 1 ms Surge Case 59-04 — (Mini Mosorb)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) V_F = 3.5 V Max, I_F = 35 A Pulse (except bidirectional devices).

Working Peak Reverse Voltage V_{RWM} (Volts)	Device[2]	Breakdown Voltage V_{BR} (Volts) Min	Breakdown Voltage V_{BR} (Volts) Max	@ I_T Pulse (mA)	Maximum Reverse Leakage @ V_{RWM} I_R (μA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse Voltage @ I_{RSM} (Clamping Voltage) V_{RSM} (Volts)
5	SA5.0A	6.4	7	10	600	54.3	9.2
6	SA6.0A	6.67	7.37	10	600	48.5	10.3
12	SA12A	13.3	14.7	1	1	25.1	19.9
13	SA13A	14.4	15.9	1	1	23.2	21.5
15	SA15A	16.7	18.5	1	1	20.6	24.4

See notes at bottom of TVS Table 4.

Table 2. Peak Power Dissipation[4] — *600 Watts* @ 1 ms Surge Case 17-02 — (Surmetic 40)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) V_F = 3.5 V Max, I_F = 50 A Pulse (except bidirectional devices).

Breakdown Voltage[5] V_{BR} (Volts) Nom	Breakdown Voltage[5] @ I_T Pulse (mA)	Device[3,6]	Working Peak Reverse Voltage V_{RWM} (Volts)	Maximum Reverse Leakage @ V_{RWM} I_R (μA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse Voltage @ I_{RSM} (Clamping Voltage) V_{RSM} (Volts)
6.8	10	P6KE6.8A	5.8	1000	57	10.5
13	1	P6KE13A	11.1	5	33	18.2
15	1	P6KE15A	12.8	5	28	21.2
27	1	P6KE27A	23.1	5	16	37.5
33	1	P6KE33A	28.2	5	13.2	45.7
36	1	P6KE36A	30.8	5	12	49.9
62	1	P6KE62A	53	5	7.1	85

See notes at bottom of TVS Table 4.

Table 3. Peak Power Dissipation[4] — *1500 WATTS* @ 1 ms Surge Case 41A-02 — (Mosorb)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) V_F = 3.5 V Max, I_F = 100 A Pulse)
(C suffix denotes standard back to back bidirectional versions. Test both polarities)

Maximum Reverse Stand-Off Voltage V_{RWM} (Volts)	JEDEC[7] Device	Device[7]	Breakdown Voltage V_{BR} Volts Min	Breakdown Voltage @ I_T Pulse (mA)	Maximum Reverse Leakage @ V_{RWM} IR (μA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse @ IRSM (Clamping Voltage) V_{RSM} (Volts)	Clamping Voltage[8] Peak Pulse Current @ I_{pp1} = 1 A V_{C1} (Volts max)	Clamping Voltage[8] Peak Pulse Current @ I_{pp2} = 10 A V_{C2} (Volts max)
5	1N5908		6	1	300	120	8.5	7.6 @ 30 A	8 @ 60 A
5	1N6373	ICTE-5/MPTE-5	6	1	300	160	9.4	7.1	7.5

See notes at bottom of TVS Table 4.

TVS (Transient Voltage Suppressors) (continued)

General-Purpose – Axial Leaded for Through-Hole Designs



Case 41A-02 (Mosorb)
Plastic
Cathode = Polarity Band

Table 4. Peak Power Dissipation(4) — *1500 Watts* @ 1 ms Surge Case 41A-02

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) V_F = 3.5 V Max, I_F = 100 A Pulse							
Breakdown Voltage(5)							
V_{BR} Volts Nom	@ I_T Pulse (mA)	JEDEC Device	Device(9,10)	Working Peak Reverse Voltage V_{RWM} (Volts)	Maximum Reverse Leakage @ V_{RWM} I_R (μA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse Voltage @ I_{RSM} (Clamping Voltage) V_{RSM} (Volts)
6.8	10	1N6267A	1.5KE6.8A	5.8	1000	143	10.5
24	1	1N6280A	1.5KE24A	20.5	5	45	33.2
30	1	1N6282A	1.5KE30A	25.6	5	36	41.4
33	1	1N6283A	1.5KE33A	28.2	5	33	45.7
36	1	1N6284A	1.5KE36A	30.8	5	30	49.9
51	1	1N6288A	1.5KE51A	43.6	5	21.4	70.1
62	1	1N6290A	1.5KE62A	53	5	17.7	85

(1) Steady state power dissipation = 3 watt max rating.
(2) For bidirectional types use the CA suffix. ***SA12CA, SA13CA*** and ***SA15CA*** are Motorola preferred devices. Have cathode polarity band on each end. (Consult factory for availability)
(3) For bidirectional types use the CA suffix. Have cathode polarity band on each end. (Consult factory for availability)
(4) Steady state power dissipation = 5 watts max rating.
(5) Breakdown voltage tolerance is ±5% for A suffix.
(6) UL recognition for classification of protectors (QVGV2) under the UL standard for safety 497B for entire series including CA suffixes.
(7) 1N6382 thru 1N6389 and C suffix ICTE/MPTE device types are bidirectional. Have cathode polarity band on each end. All other device types are unidirectional 1N6267-6303A series do not have a CA option since the CA is not included in EIA Registration.
(8) Clamping voltage peak pulse currents for 1N5908 are 30 Amps and 60 Amps.
(9) For bidirectional types use the CA suffix on 1.5KE series only. Have cathode polarity band on each end. (Consult factory for availability)
(10) UL recognition for classification of protectors (QVGV2) under the UL standard for safety 497B for 1.5KE6.8A,CA thru 1.5KE250A,CA.

***Other voltages may be available upon request. Please contact your Motorola representative.**

Surface Mount Packages

Table 5. Peak Power Dissipation — *40 Watts* @ 1 ms Surge Case 318-08 — Common Cathode MMBZ15VDLT1(1) — SOT-23 Dual Monolithic Common Cathode Bipolar Zener for ESD protection*



SOT-23
Case 318-08
TO-236AB
Plastic

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) BIDIRECTIONAL (Circuit tied to pins 1 and 2)								
Breakdown Voltage				Working Peak Reverse Voltage V_{RWM} (Volts)	Maximum Reverse Leakage Current I_{RWM} I_R (nA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse Voltage @ I_{RSM} (Clamping Voltage) V_{RSM} (Volts)	Maximum Temperature Coefficient of V_{BR} (mV/°C)
V_{BR}(2) (Volts) Min	Nom	Max	@ I_T (mA)					
14.3	15	15.8	1.0	12.8	100	1.9	21.2	12
25.65	27	28.35	1.0	22	50	1.0	38	26

Table 6. Peak Power Dissipation — *24 Watts* @ 1 ms Surge Case 318-08 — Common Anode MMBZ5V6ALT1 — SOT-23 Dual Monolithic Common Anode Zener for ESD Protection*



SOT-23
Case 318-08
TO-236AB
Plastic

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) UNIDIRECTIONAL (Circuit tied to pins 1 and 3 or Pins 2 and 3) (V_F = 0.9 V Max @ I_F = 10 mA)											
Breakdown Voltage				Maximum Reverse Leakage Current		Maximum Zener Impedance(3)			Max Reverse Surge Current	Max Reverse Voltage @ I_{RSM} (Clamping Voltage)	Maximum Temperature Coefficient of
V_{BR}(2) (V) Min	Nom	Max	@ I_T (mA)	I_R @ V_R (uA)	(V)	Z_{ZT} @ I_{ZT} (Ω)	(mA)	Z_{ZK} @ I_{ZK} (Ω)	(mA)	I_{RSM} (A)	V_{RSM} (V)	V_{BR} (mV/°C)
5.32	5.6	5.88	20	5.0	3.0	11		1600	0.25	3.0	8.0	1.26
5.89	6.2	6.51	1.0	0.5	3.0	—		—	—	2.76	8.7	2.80

(1) T1 suffix designates tape and reel of 3000 units.
(2) V_{BR} measured at pulse test current I_T at an ambient temperature of 25°C.
(3) Z_{ZT} and Z_{ZK} are measured by dividing the AC voltage drop across the device by the AC current supplied. The specfied limits are $I_{Z(AC)}$ = 0.1 $I_{Z(DC)}$, with AC frequency = 1 kHz.

***Other voltages may be available upon request. Please contact your Motorola representative.**

Surface Mount Packages (continued)

Table 6. Peak Power Dissipation — *24 Watts* @ 1 ms Surge Case 318-08 — Common Anode MMBZ5V6ALT1 — SOT-23 Dual Monolithic Common Anode Zener for ESD Protection* (continued)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)
UNIDIRECTIONAL (Circuit tied to pins 1 and 3 or Pins 2 and 3) (V_F = 1.1 V Max @ I_F = 200 mA)

Breakdown Voltage V_{BR}(1) (V)				Reverse Voltage Working Peak V_{RWM} (V)	Max Reverse Leakage Current I_{RWM} I_R (nA)	Max Reverse Surge Current I_{RSM}(4) (A)	Max Reverse Voltage @ I_{RSM}(2) (Clamping Voltage) V_{RSM} (V)	Maximum Temperature Coefficient of V_{BR} (mV/°C)
Min	Nom	Max	@ I_T (mA)					
14.25	15	15.75	1.0	12.0	50	1.9	21	12.3
19.0	20	21.0	1.0	17.0	50	1.4	28	17.2



SOT-23
Case 318-08
TO-236AB
Plastic

(1) V_Z/V_{BR} measured at pulse test current I_T at an ambient temperature of 25°C.
(2) Z_{ZT} and Z_{ZK} are measured by dividing the AC voltage drop across the device by the AC current supplied. The specified limits are $I_{Z(AC)}$ = 0.1 $I_{Z(DC)}$, with AC frequency = 1 kHz.

***Other voltages may be available upon request. Please contact your Motorola representative.**



SC–59
Case 318F-02
Plastic



Table 7. Peak Power Dissipation — *24 Watts* — SC–59 Quad Transient Voltage Suppressor (ESD Protection) — Monolithic 4–Function Device

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)
UNIDIRECTIONAL (Circuit tied to pins 1, 2, and 5; Pins 2, 3, and 5; Pins 2, 4, and 5; or Pins 2, 5, and 6) (V_F = 0.9 V Max @ I_F = 10 mA)

	Breakdown Voltage				Max Reverse Leakage Current		Max Zener Impedance (3)	Max Reverse Surge Current	Max Reverse Voltage @ I_{RSM}(2) (Clamping Voltage)	Maximum Temperature Coefficient of V_Z
		V_{ZT} (1) (V)		@ I_{ZT}	I_R	V_R				
Device	Min	Nom	Max	(mA)	(nA)	(V)	Z_{ZT} @ I_{ZT} (Ω) (mA)	$I_{RSM(4)}$ (A)	V_{RSM} (V)	(mV/°C)
MMQA5V6T1,T3	5.32	5.6	5.88	1.0	2000	3.0	400	3.0	8.0	1.26
MMQA6V2T1,T3	5.89	6.2	6.51	1.0	700	4.0	300	2.66	9.0	10.6
MMQA6V8T1,T3	6.46	6.8	7.14	1.0	500	4.3	300	2.45	9.8	10.9
MMQA12VT1,T3	11.4	12	12.6	1.0	75	9.1	80	1.39	17.3	14
MMQA13VT1,T3	12.4	13	13.7	1.0	75	9.8	80	1.29	18.6	15
MMQA15VT1,T3	14.3	15	15.8	1.0	75	11	80	1.1	21.7	16
MMQA18VT1,T3	17.1	18	18.9	1.0	75	14	80	0.923	26	19
MMQA20VT1,T3	19	20	21	1.0	75	15	80	0.84	28.6	20.1
MMQA21VT1,T3	20	21	22.1	1.0	75	16	80	0.792	30.3	21
MMQA22VT1,T3	20.9	22	23.1	1.0	75	17	80	0.758	31.7	22
MMQA24VT1,T3	22.8	24	25.2	1.0	75	18	100	0.694	34.6	25
MMQA27VT1,T3	25.7	27	28.4	1.0	75	21	125	0.615	39	28
MMQA30VT1,T3	28.5	30	31.5	1.0	75	23	150	0.554	43.3	32
MMQA33VT1,T3	31.4	33	34.7	1.0	75	25	200	0.504	48.6	37

(1) V_Z measured at pulse test current I_T at an ambient temperature of 25°C.
(2) Surge current waveform per Figure 5 and derate per Figure 4.
(3) Z_{ZT} is measured by dividing the AC voltage drop across the device by the AC current supplied. The specified limits are $I_{Z(AC)}$ = 0.1 $I_{Z(DC)}$, with AC frequency = 1 kHz.
(4) Alumina = 0.4 × 0.3 × 0.024 inches. 99.5% alumina.

Table 8. 1.5 W — Peak Power Dissipation — *200 Watts* (10/1000 μs) — SMA (Case 403B–01)

ELECTRICAL CHARACTERISTICS (V_F = 1.5 V @ I_F = 200 mA for all types)

Device	Nominal Zener Voltage V_Z @ I_{ZT} Volts	Test Current I_{ZT} mA	Max Zener Impedance			Max Reverse Leakage Current			Device Marking
			Z_{ZT} @ I_{ZT} Ohms	Z_{ZK} Ohms	I_{ZK} mA	I_R μA	V_R Volts	Max DC Zener Current I_{ZM} mAdc	
1SMA5913BT3	3.3	113.6	10	500	1.0	50	1.0	455	813B
1SMA5914BT3	3.6	104.2	9.0	500	1.0	35.5	1.0	417	814B
1SMA5915BT3	3.9	96.1	7.5	500	1.0	12.5	1.0	385	815B
1SMA5916BT3	4.3	87.2	6.0	500	1.0	2.5	1.0	349	816B
1SMA5917BT3	4.7	79.8	5.0	500	1.0	2.5	1.5	319	817B
1SMA5918BT3	5.1	73.5	4.0	350	1.0	2.5	2.0	294	818B
1SMA5919BT3	5.6	66.9	2.0	250	1.0	2.5	3.0	268	819B
1SMA5920BT3	6.2	60.5	2.0	200	1.0	2.5	4.0	242	820B
1SMA5921BT3	6.8	55.1	2.5	200	1.0	2.5	5.2	221	821B
1SMA5922BT3	7.5	50	3.0	400	0.5	2.5	6.5	200	822B
1SMA5923BT3	8.2	45.7	3.5	400	0.5	2.5	6.8	183	823B
1SMA5924BT3	9.1	41.2	4.0	500	0.5	2.5	7.0	165	824B
1SMA5925BT3	10	37.5	4.5	500	0.25	0.5	8.0	150	825B
1SMA5926BT3	11	34.1	5.5	550	0.25	0.5	8.4	136	826B
1SMA5927BT3	12	31.2	6.5	550	0.25	0.5	9.1	125	827B
1SMA5928BT3	13	28.8	7.0	550	0.25	0.5	9.9	115	828B
1SMA5929BT3	15	25	9.0	600	0.25	0.5	11.4	100	829B
1SMA5930BT3	16	23.4	10	600	0.25	0.5	12.2	94	830B
1SMA5931BT3	18	20.8	12	650	0.25	0.5	13.7	83	831B
1SMA5932BT3	20	18.7	14	650	0.25	0.5	15.2	75	832B
1SMA5933BT3	22	17	17.5	650	0.25	0.5	16.7	68	833B
1SMA5934BT3	24	15.6	19	700	0.25	0.5	18.2	63	834B
1SMA5935BT3	27	13.9	23	700	0.25	0.5	20.6	56	835B
1SMA5936BT3	30	12.5	26	750	0.25	0.5	22.8	50	836B
1SMA5937BT3	33	11.4	33	800	0.25	0.5	25.1	45	837B
1SMA5938BT3	36	10.4	38	850	0.25	0.5	27.4	42	838B
1SMA5939BT3	39	9.6	45	900	0.25	0.5	29.7	38	839B
1SMA5940BT3	43	8.7	53	950	0.25	0.5	32.7	35	840B
1SMA5941BT3	47	8.0	67	1000	0.25	0.5	35.8	32	841B
1SMA5942BT3	51	7.3	70	1100	0.25	0.5	38.8	29	842B
1SMA5943BT3	56	6.7	86	1300	0.25	0.5	42.6	27	843B
1SMA5944BT3	62	6.0	100	1500	0.25	0.5	47.1	24	844B
1SMA5945BT3	68	5.5	120	1700	0.25	0.5	51.7	22	845B

NOTE: Tolerance and Voltage Designation Tolerance designation — The type number listed indicates a tolerance of ±5%.

SMA
Case 403B–01
Plastic

SMB
Case 403A-03
Plastic
Cathode = Notch

Table 9. Peak Power Dissipation — *600 WATTS* @ 1 ms Surge — SMB Case 403A-03

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) V_F = 3.5 V Max, I_F = 50 A Pulse.

Breakdown Voltage[6] V_{BR} @ I_T Pulse[1] Volts		Device[4]	Working Peak Reverse Voltage V_{RWM} Volts	Maximum Reverse Leakage @ V_{RWM} I_R (μA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse Voltage @ I_{RSM} (Clamping Voltage) V_{RSM} (Volts)	Device Marking
Nom	mA						
13	1	P6SMB13AT3	11.1	5	33	18.2	13A
15	1	P6SMB15AT3	12.8	5	28	21.2	15A
27	1	P6SMB27AT3	23.1	5	16	37.5	27A
30	1	P6SMB30AT3	25.6	5	14.4	41.4	30A
33	1	P6SMB33AT3	28.2	5	13.2	45.7	33A
36	1	P6SMB36AT3	30.8	5	12	49.9	36A
51	1	P6SMB51AT3	43.6	5	8.6	70.1	51A
62	1	P6SMB62AT3	53	5	7.1	85	62A

See notes at bottom of TVS Table 11.

Table 10. Peak Power Dissipation — *600 Watts* @ 1 ms Surge — SMB Case 403A-03

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)							
Reverse Stand-Off V_R Volts[3]	Device[4,5]	Breakdown Voltage V_{BR} @ I_T Volts Min	Breakdown Voltage V_{BR} @ I_T Pulse mA	Maximum Clamping Voltage V_C @ I_{pp} Volts	Peak Pulse Current I_{pp} Amps	Maximum Reverse Leakage @ V_R I_R µA	Device Marking
13	1SMB13AT3	14.4	1	21.5	27.9	5	LG
15	1SMB15AT3	16.7	1	24.4	24	5	LM
30	1SMB30AT3	33.3	1	48.4	12.4	5	MK
33	1SMB33AT3	36.7	1	53.3	11.3	5	MM
36	1SMB36AT3	40	1	58.1	10.3	5	MP

See notes at bottom of TVS Table 11.

SMC
Case 403-03
Plastic
Cathode = Notch

Table 11. Peak Power Dissipation — *1500 Watts* @ 1 ms Surge — SMC Case 403-03

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) V_F = 3.5 V Max, I_F = 100 A Pulse.							
Breakdown Voltage[6] V_{BR} @ I_T Pulse[1] Volts Nom	Breakdown Voltage[6] V_{BR} @ I_T Pulse[1] Volts mA	Device[4]	Working Peak Reverse Voltage V_{RWM} Volts	Maximum Reverse Leakage @ V_{RWM} I_R (µA)	Maximum Reverse Surge Current I_{RSM} (Amps)	Maximum Reverse Voltage @ I_{RSM} (Clamping Voltage) V_{RSM} (Volts)	Device Marking
36	1	1.5SMC36AT3	30.8	5	30	49.9	36A
56	1	1.5SMC56AT3	47.8	5	19.5	77	56A

(1) V_{BR} and V_Z are measured at pulse test current I_T at an ambient temperature of 25°C.
(2) Z_{ZT} and Z_{ZK} are measured by dividing the AC voltage drop across the device by the AC current supplied. The specfied limits are $I_{Z(AC)}$ = 0.1 $I_{Z(DC)}$, with AC frequency = 1 kHz.
(3) A transient suppressor is normally selected according to the reverse "Stand Off Voltage" (V_R) which should be equal to or greater than the DC or continuous peak operating voltage level.
(4) T3 suffix designates tape and reel of 2500 units.
(5) Bidirectional version available for 1SMB10AT3 thru 1SMB78AT3, electrical characteristics apply in both directions except for V_F. Use CAT3 suffix.
(6) Breakdown voltage tolerance is ±5% for A suffix.

***Other voltages may be available upon request. Please contact your Motorola representative.**

Zener Voltage Regulator Diodes

Table 12. Axial Leaded for Through-hole Designs

Nominal Zener Breakdown Voltage	500 mW Cathode = Polarity Band	Nominal Zener Breakdown Voltage	1 Watt Cathode = Polarity Band	1.5 Watt Cathode = Polarity Band	5 Watt Cathode = Polarity Band
(*Note 1)	(*Note 2)	(*Note 1)	(*Note 3)	(*Note 4)	(*Note 5)
Volts	**Case 299–02**	**Volts**	**Case 59–03**		**Case 17–02**
2.4	1N5221B	**3.3**	1N4728A		1N5333B
3.3	1N5226B	**4.3**	1N4731A		
4.3	1N5229B	**5.1**	1N4733A	1N5918B	1N5338B
5.1	1N5231B	**5.6**	1N4734A		1N5339B
5.6	1N5232B	**6.2**	1N4735A	1N5920B	
6.2	1N5234B	**12**	1N4742A		1N5349B
8.2	1N5237B	**13**	1N4743A		1N5350B
10	1N5240B	**15**	1N4744A	1N5929B	1N5352B
12	1N5242B	**18**	1N4746A		1N5355B
13	1N5243B	**20**	1N4747A		1N5357B
20	1N5250B	**24**	1N4749A	1N5934B	1N5359B
24	1N5252B	**27**	1N4750A		1N5361B
30	1N5256B	**30**	1N4751A	1N5936B	1N5363B
36	1N5258B	**36**			1N5365B

Glass
Case 299-02
DO-204AH
(DO-35)



Glass
Case 59-03
(DO-41)

Surmetic 40
Case 17-02
Plastic
Cathode = Polarity Band

NOTES — AXIAL LEADED CHART

1. *Zener Voltage* is the key parameter for each device type. It is specified at a particular test current applied at either thermal equilibrium (T.E.) or pulse test condition. The voltage tolerance for the device types listed is, in general, ±5%; however, for some series, the voltage tolerance varies from device type to device type over a range of ±(5 to 8.5)%. Consult the complete data sheet to determine the exact test conditions and minimum/maximum limits for the zener voltage. Consult Application Note AN924 regarding measurement of Zener Voltage (pulse versus thermal equilibrium).

   Power Ratings represent the capability of the case size listed as supplied by Motorola. These ratings may be higher than the JEDEC registration and/or the same device types supplied by other manufacturers.

V_Z TEST CONDITIONS AND TOLERANCES

2. *1N5221B-42B* I_{ZT} = 20 mA (T.E.).
   1N5243B-81B I_{ZT} @ approximately 125 mW point (T.E.).
   B suffix = ±5%.
   C suffix = ±2%.

3. *1N4728A-64A*
   I_{ZT} @ approximately 250 mW point (T.E.).
   A suffix = ±5%.
   C suffix = ±2%.

4. *1N5913B-56B*
   I_{ZT} @ approximately 375 mW point (T.E.).
   B suffix = ±5%.

5. *1N5333B-88B*
   I_{ZT} varies from 0.9 to 1.5 W point depending on type number (pulse)
   B suffix = ±5%.
   Also has delta V_Z parameter and limit.

All devices listed are Motorola's "Preferred" devices. A larger range of specifications are available. 1-(602) 244-4628 for details.

Zener Voltage Regulator Diodes (continued)



SOT-23
Case 318-08, Style 9
TO-236AB
Plastic

SOD-123
Plastic
Case 425-04, Style 1

SMA
Case 403B–01
Plastic

SMB
Case 403A-03
Plastic
Cathode = Notch

Table 13. Surface Mount Packages

Nominal Zener Breakdown Voltage	225 mW Surface Mount SOT-23		500 mW Surface Mount SOD-123	500 mW Low Level Surface Mount SOD-123	500 mW Surface Mount SOD-123	1.5 Watt Surface Mount SMA	3 Watt Surface Mount SMB
(*Note 1)	(*Note 2)	(*Note 3) Case 318-07	(*Note 4)	(*Note 5) Case 425-04	(*Note 6)	(*Note 6)	(*Note 7) Case 403A-03
3.3		MMBZ5226BLT1	MMSZ3V3T1	MMSZ4684T1	MMSZ5226BT1	1SMA5913BT3	
4.3		MMBZ5229BLT1	MMSZ4V3T1	MMSZ4687T1	MMSZ5229BT1	1SMA5916BT3	
4.7	BZX84C4V7LT1	MMBZ5230BLT1	MMSZ4V7T1	MMSZ4688T1	MMSZ5230BT1	1SMA5917BT3	
5.1	BZX84C5V1LT1	MMBZ5231BLT1	MMSZ5V1T1	MMSZ4689T1	MMSZ5231BT1	1SMA5918BT3	1SMB5918BT3
5.6	BZX84C5V6LT1	MMBZ5232BLT1	MMSZ5V6T1	MMSZ4690T1	MMSZ5232BT1	1SMA5919BT3	
6.0					MMSZ5233BT1		
6.2	BZX84C6V2LT1	MMBZ5234BLT1	MMSZ6V2T1	MMSZ4691T1	MMSZ5234BT1	1SMA5920BT3	1SMB5920BT3
6.8	BZX84C6V8LT1	MMBZ5235BLT1	MMSZ6V8T1	MMSZ4692T1	MMSZ5235BT1	1SMA5921BT3	
7.5		MMBZ5236BLT1	MMSZ7V5T1	MMSZ4693T1	MMSZ5236BT1	1SMA5922BT3	
8.2	BZX84C8V2LT1	MMBZ5237BLT1	MMSZ8V2T1	MMSZ4694T1	MMSZ5237BT1	1SMA5923BT3	
9.1	BZX84C9V1LT1	MMBZ5239BLT1	MMSZ9V1T1	MMSZ4696T1	MMSZ5239BT1	1SMA5924BT3	
10	BZX84C10LT1	MMBZ5240BLT1	MMSZ10T1	MMSZ4697T1	MMSZ5240BT1	1SMA5925BT3	1SMB5925BT3
12	BZX84C12LT1	MMBZ5242BLT1	MMSZ12T1	MMSZ4699T1	MMSZ5242BT1	1SMA5927BT3	1SMB5927BT3
14				MMSZ4701T1	MMSZ5244BT1		
15	BZX84C15LT1	MMBZ5245BLT1	MMSZ15T1	MMSZ4702T1	MMSZ5245BT1	1SMA5929BT3	1SMB5929BT3
18			MMSZ18T1	MMSZ4705T1	MMSZ5248BT1	1SMA5931BT3	1SMB5931BT3
24			MMSZ24T1	MMSZ4709T1	MMSZ5252BT1	1SMA5934BT3	1SMB5934BT3
27		MMBZ5254BLT1	MMSZ27T1	MMSZ4711T1	MMSZ5254BT1	1SMA5935BT3	
28		MMBZ5255BLT1		MMSZ4712T1	MMSZ5255BT1		
30	BZX84C30LT1		MMSZ30T1	MMSZ4713T1	MMSZ5256BT1	1SMA5936BT3	1SMB5936BT3
60					MMSZ5264BT1		
75			MMSZ75T1		MMSZ5267BT1		
91					MMSZ5270BT1		

NOTES — SURFACE MOUNT CHART

1. Zener Voltage is the key parameter for each device type. It is specified at a particular test current applied at either thermal equilibrium (T.E.) or pulse test condition. The voltage tolerance for the device types listed is, in general ±5%; however, for some series, the voltage tolerance varies from device type to device type over a range of ±(5 to 8.5)%. Consult the complete data sheet to determine the exact test conditions and minimum/maximum limits for the zener voltage.

   Power Ratings represent the capability of the case size listed as supplied by Motorola. These ratings may be higher than the same device types supplied by other manufacturers.

V_Z TEST CONDITIONS AND TOLERANCES

2. BZX84C2V4L-C24LT1 I_{ZT} = 5 mA (pulse).
   BZX84C27L-C75LT1 I_{ZT} = 2 mA (pulse).
   Tolerance is ±(5 to 8.5)% depending on type number. Each device type also has other V_Z min/max limits at two other I_{ZT} pulse current values.
3. MMBZ5221BL-42BLT1 I_{ZT} = 20 mA (pulse).
   MMBZ5243BL-70BLT1 I_{ZT} @ approximately 125 mW point (pulse).
   BL suffix = ±5%.
4. MMSZ2V4T1-24T1 I_{ZT} = 5 mA (pulse).
   MMSZ27T1-C75T1 I_{ZT} = 2 mA (pulse).
   Tolerance is ±(5 to 8.5)% depending on type number. Each device type also has other V_Z min/max limits at two other I_{ZT} pulse current values.
5. MMSZ4678T1 Series I_{ZT} = 50 µA (T.E.).
   No suffix = ±5%.
6. MMSZ5221B-42BT1 I_{ZT} = 20 mA (T.E.).
   MMSZ5243B-70BT1 I_{ZT} @ approximately 125 mW point (T.E.).
   B suffix = ±5%.
   I_{ZT} @ approximately 375 mW point (T.E.).
7. 1SMB5913BT3 Series
   BT3 suffix = ±5%.
   T3 suffix designates tape and reel of 2500 units.

Modular Power Systems

In Brief . . .

Motorola has combined its expertise in silicon and packaging technology to produce a leading edge portfolio of highly integrated hybrid power modules. Product families include the flexible and convenient VersaPower, E–Power, and Cheval package platforms.

- VersaPower modules are a low cost versatile package option designed for motor drive applications from 1 to 5 Hp. Typical circuits may include single or three phase diode inputs. In addition, IGBT inverters with brake circuit and temperature sense elements, are available as an integrated power stage (IPS). The two available sizes of the VersaPower package offer designers the opportunity to develop circuitry that ranges from the very simple to circuitry with increased features, functionality and pinouts.
- Utilizing similar package technology to VersaPower, the E–Power family is a robust choice for motor drive applications up to 5 Hp requiring 1200 V 6–pack circuitry. This compact package features top connector pins that are designed for easy interfacing to the user's control board. The footprint and pinouts of this package are common to Seimens' Econo–Pac II product which has already received worldwide acceptance.
- The Cheval platform consists of integrated power stages for 1, 2, 3, and 5 Hp motor drives. Standard modules have integrated a 3–phase input rectifier bridge, 3–phase output inverter, brake transistor/diode and temperature sensing in a single package. These are also offered without the temperature sense and current sense elements.

Future products planned are being designed to make system integration simple and reduce overall motor drive system costs.

	Page
Modular Power Systems	5.3–1
Module Part Numbering System	5.3–2
16 Pin VersaPower	5.3–3
16 Pin 3&3 VersaPower	5.3–4
24 Pin VersaPower	5.3–5
E–Power	5.3–6
Cheval	5.3–7

Module Part Numbering System

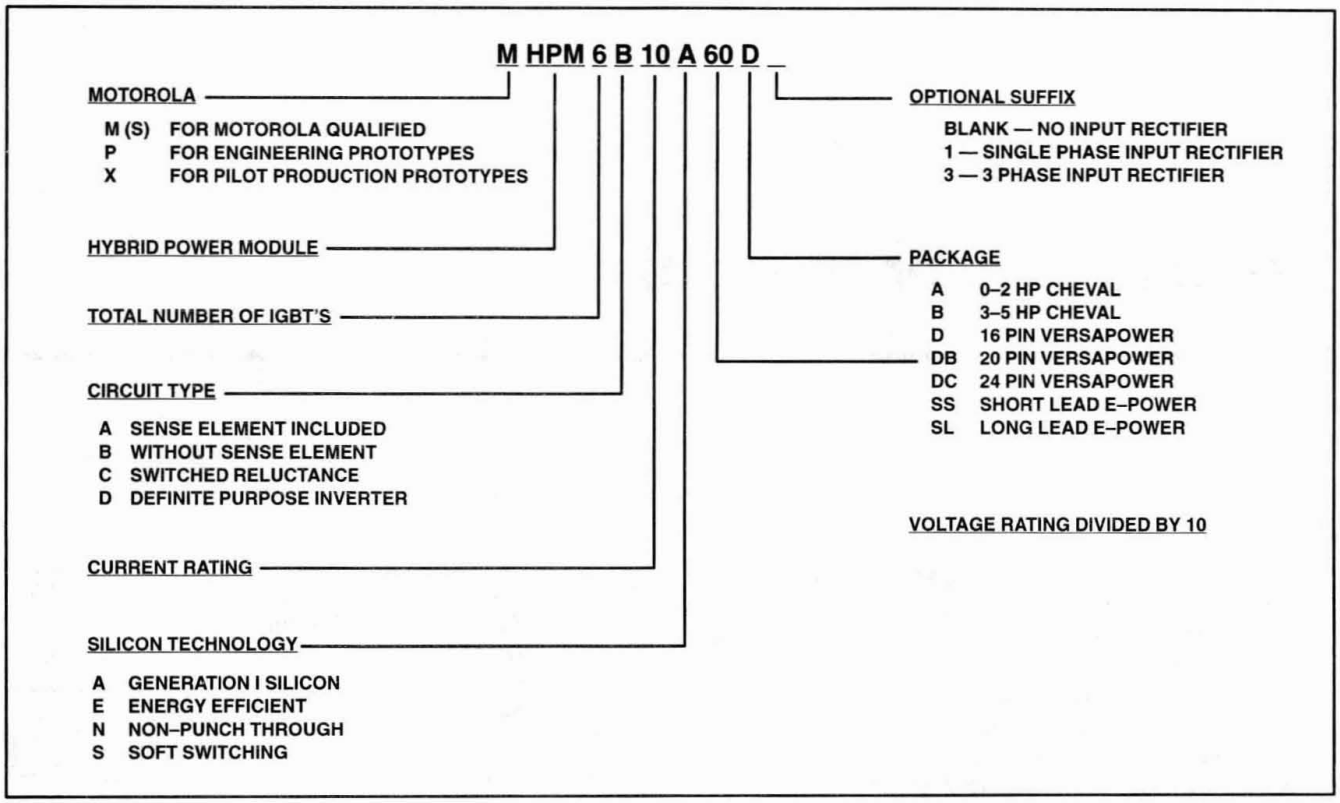

VersaPower

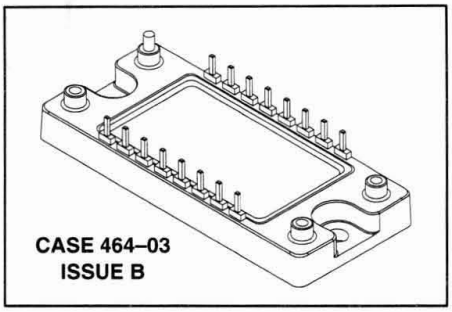

Table 1. 16 Pin VersaPower

Voltage (Volts)	Current (Amps)	Power (hp)	Part Number
600	10 20	1.0 2.0	***MHPM6B10A60D*** ***MHPM6B20A60D***
1200	5 10 15	1.0 2.0 3.0	***MHPM6B5A120D*** ***MHPM6B10A120D*** ***MHPM6B15A120D***

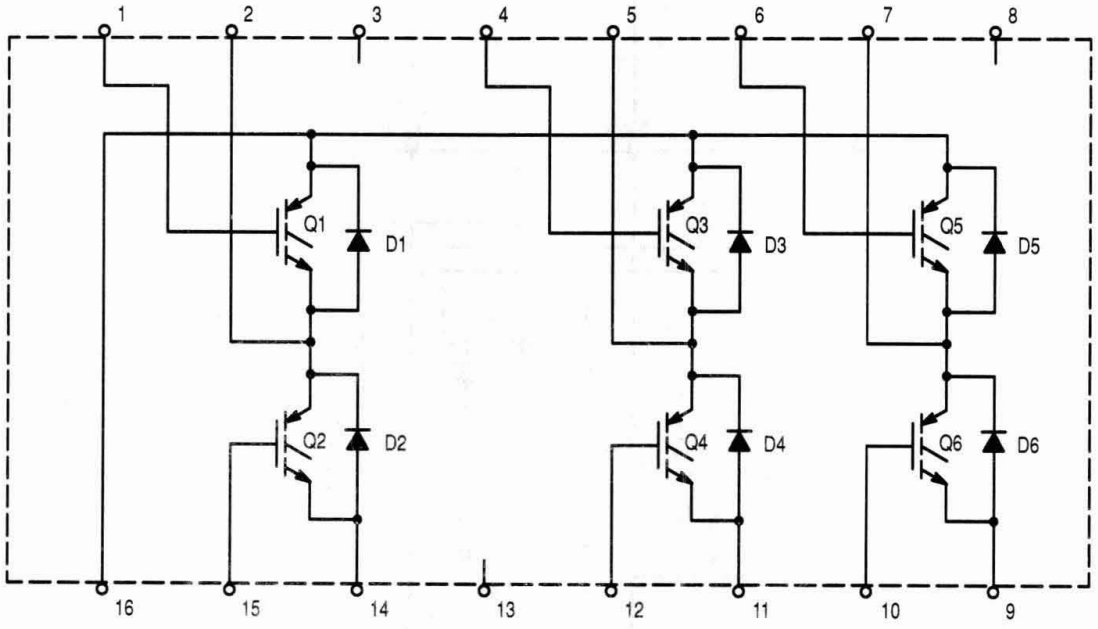

Devices listed in bold, italic are Motorola preferred devices.

VersaPower

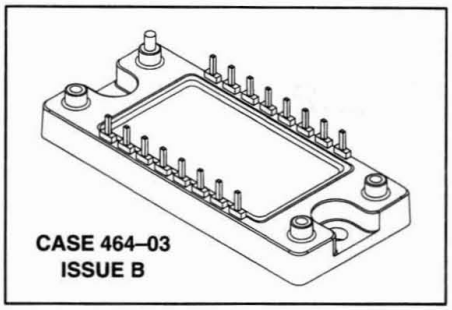

Table 2. 16 Pin 3&3 VersaPower

Voltage (Volts)	Current (Amps)	Power (hp)	Part Number
600	7	0.5	***MHPM6B7E60D3***
	10	1.0	***MHPM6B10E60D3***
	15	1.5	***MHPM6B15E60D3***
	20	2.0	***MHPM6B20E60D3***

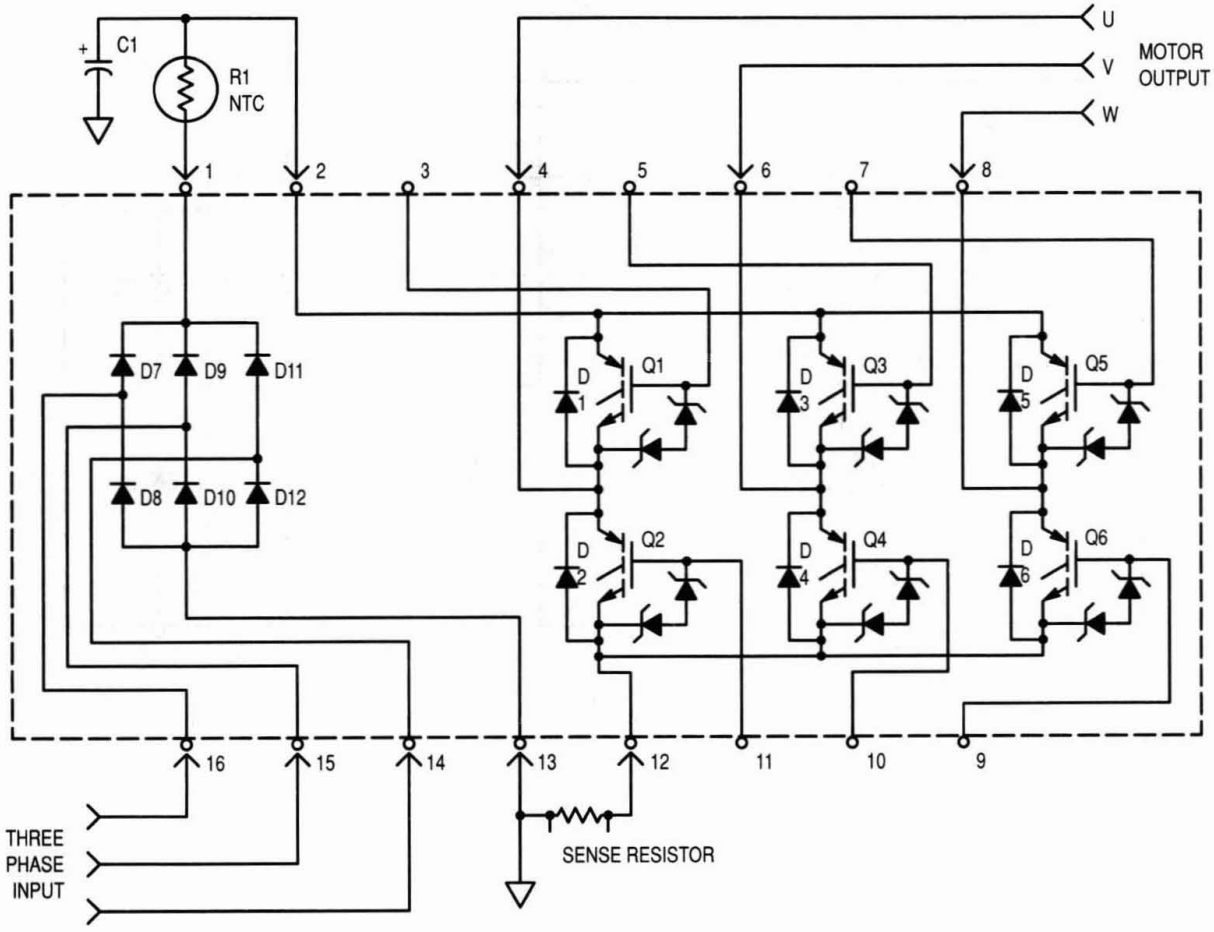

Devices listed in bold, italic are Motorola preferred devices.

VersaPower

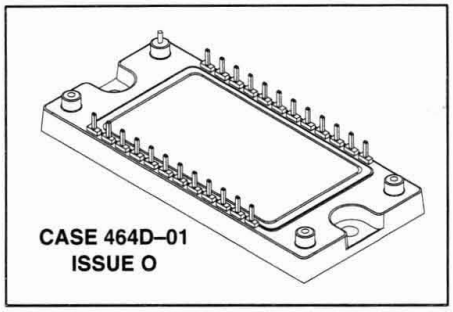

CASE 464D–01
ISSUE O

Table 3. 24 Pin VersaPower

Voltage (Volts)	Current (Amps)	Power (hp)	Part Number
600	10	1.0	***MHPM7A10E60DC3***
	20	1.0	***MHPM7A20E60DC3***
	30	3.0	***MHPM7A30E60DC3***
1200	5	1.0	***MHPM7A5S120DC3***
	10	2.0	***MHPM7A10S120DC3***
	15	3.0	***MHPM7A15S120DC3***
	25	5.0	***MHPM7A25S120DC3***

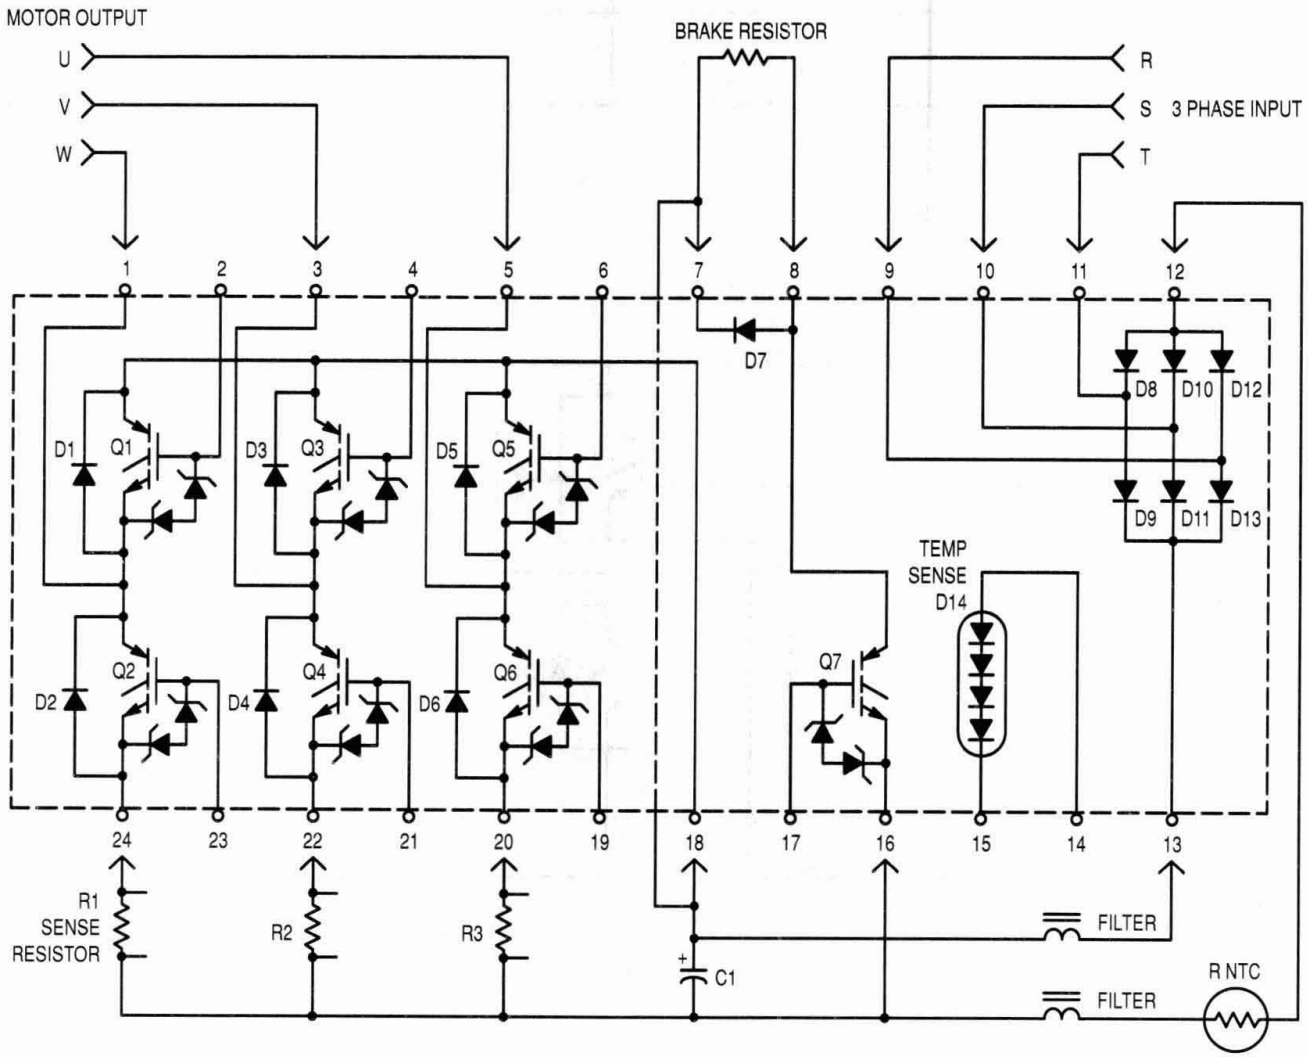

Devices listed in bold, italic are Motorola preferred devices.

E–Power

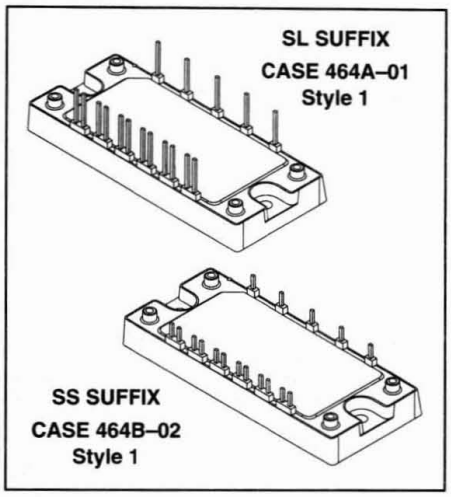

Table 4. E–Power

Package	Voltage (Volts)	Current (Amps)	Power (hp)	Part Number
Long leads	1200	10	2.0	***MHPM6B10N120SL***
		15	3.0	***MHPM6B15N120SL***
		25	5.0	***MHPM6B25N120SL***
Short leads	1200	10	2.0	***MHPM6B10N120SS***
		15	3.0	***MHPM6B15N120SS***
		25	5.0	***MHPM6B25N120SS***

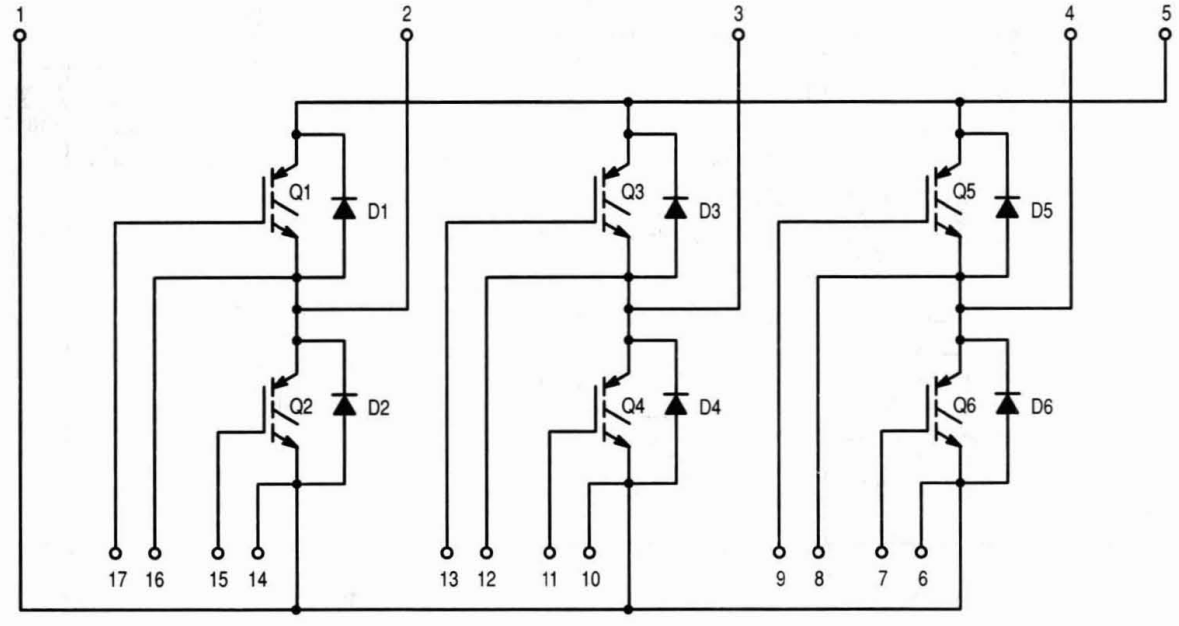

Devices listed in bold, italic are Motorola preferred devices.

Cheval



PLASTIC PACKAGE
CASE 440-02, Style 1

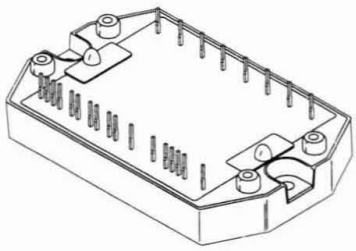

PLASTIC PACKAGE
CASE 440A–02, Style 1

Table 5. Cheval

Circuit	Voltage (Volts)	Current (Amps)	Power (hp)	Part Number
Standard	600	15	1.0	MHPM7A15A60A
		20	2.0	MHPM7A20A60A
		30	3.0	MHPM7A30A60B
	1200	8	1.0	MHPM7A8A120A
		12	2.0	MHPM7A12A120A
		16	3.0	MHPM7A16A120B
		25	5.0	MHPM7A25A120B
Without Temperature Sensing and Current Sensing Elements	600	15	1.0	MHPM7B15A60A
		20	2.0	MHPM7B20A60A
		30	3.0	MHPM7B30A60B
	1200	8	1.0	MHPM7B8A120A
		12	2.0	MHPM7B12A120A
		16	3.0	MHPM7B16A120B
		25	5.0	MHPM7B25A120B

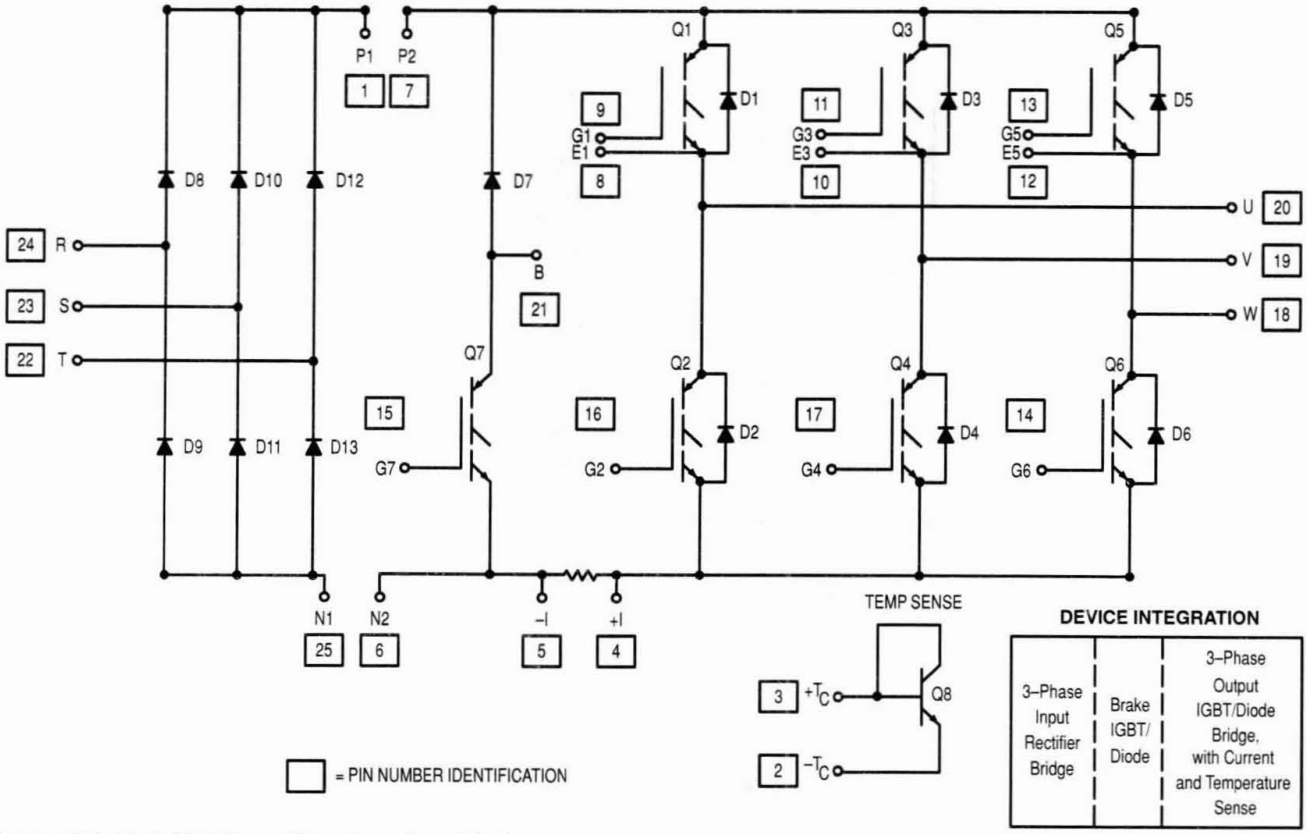

Devices listed in bold, italic are Motorola preferred devices.

TMOS Power MOSFETs

In Brief . . .

Motorola has been one of the premier suppliers of Power MOSFETs since the early 1980s and continues to develop new MOSFET products with the lowest possible on–resistance per silicon area. Continuing R&D has created MOSFET products that are manufactured with the same precision and versatility as the most advanced integrated circuits. The following new advances have been made in the area of silicon technology.

- New WaveFET™ high cell density MOSFETs utilizing Motorola's latest MOSFET technology provide ultra–low $R_{DS(on)}$ in both P– and N–channels in the SO–8 and DPAK surface mount packages and industry standard TO–220 package.
- New ESD FETs include monolithic back–to–back Zener diodes protecting the gate from ESD as well as providing extremely low $R_{DS(on)}$ in surface mount and through–hole packages.

Advances in packaging technology provide the end users with the broadest portfolio of surface mount MOSFETs in the industry. Advances in surface mount packaging from largest to smallest include:

- New Micro8 eight leaded low profile package for both single and dual MOSFETS.
- New TSOP–6 six leaded low profile package housing dual and single MOSFETs.
- New SC–70 three leaded package (smaller than a SOT–23) for single MOSFET chips.

	Page
TMOS Power MOSFETs	5.4–1
TMOS Power MOSFETs Numbering System	5.4–2
SO–8 MiniMOS	5.4–3
EZFET Power MOSFETs	5.4–4
Micro8™ HDTMOS™ Products	5.4–4
SOT–223	5.4–4
TSOP–6	5.4–5
SOT–23	5.4–5
SC–70/SOT–323	5.4–5
DPAK	5.4–6
D^2PAK	5.4–6
D^3PAK	5.4–7
TO–220AB	5.4–7
TO–247	5.4–7
TO–264	5.4–8
SMARTDISCRETES™	5.4–8
Insulated Gate Bipolar Transistors (IGBTs)	5.4–8

TMOS
Power MOSFETs

TMOS Power MOSFETs Numbering System

Wherever possible, Motorola has used the following numbering systems for TMOS power MOSFET products.

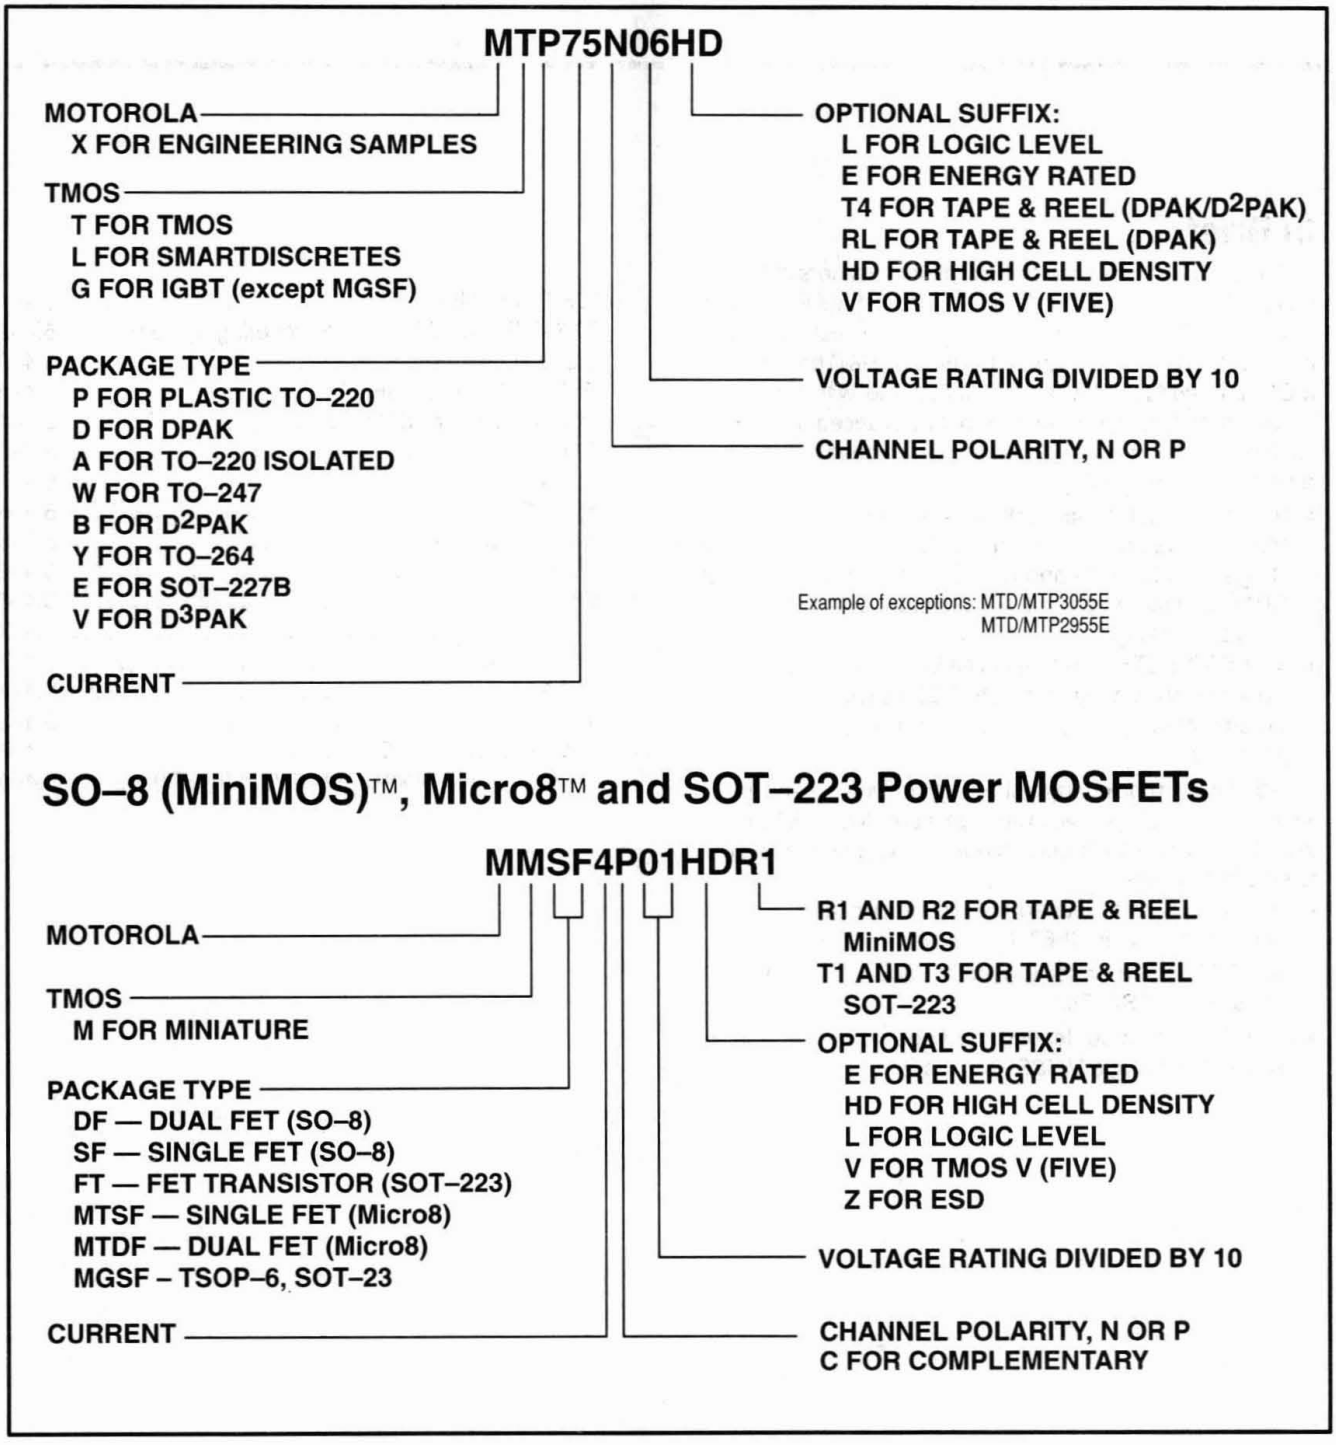

SO–8 (MiniMOS)™, Micro8™ and SOT–223 Power MOSFETs

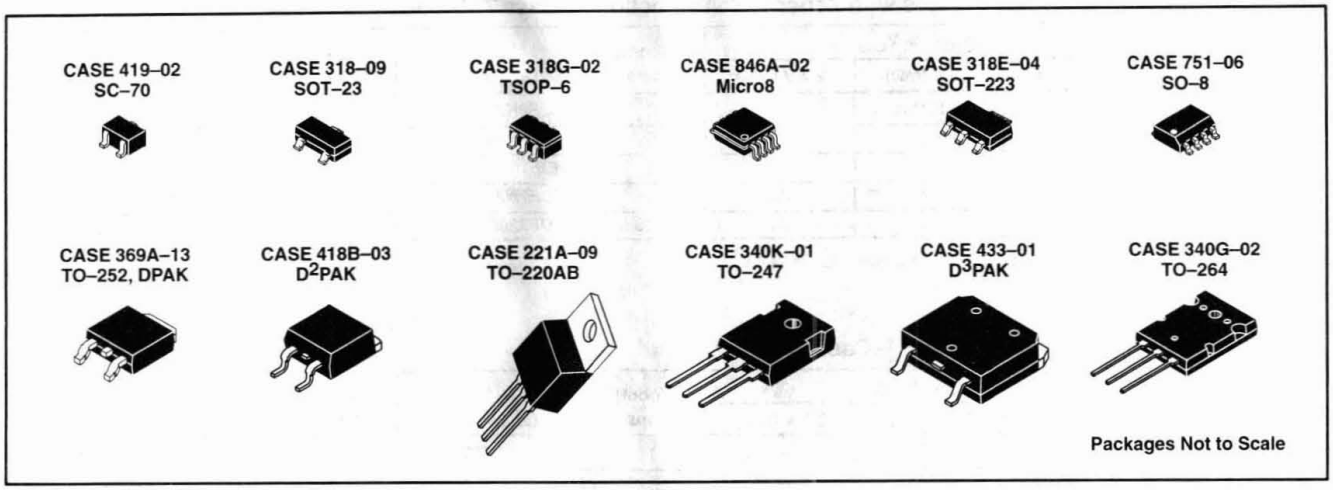

TMOS®

HD TMOS™

TMOS V™

Table 1. SO-8 (MiniMOS™) — Case 751–06

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ @ V_{GS} 10 V (mΩ)	4.5 V (mΩ)	2.7 V (mΩ)	I_D (cont) Amps	Device[3]	P_D[1,2] (Watts) Max	Configuration
60	100	200	—	3.3	***MMDF3N06HD***	2	Dual N–Channel
50	300	500	—	1.5	***MMDF1N05E***	2	Dual N–Channel
40	80	100	—	3.4	***MMDF3N04HD***		
30	10	—	—	12	***MMSF3300***	2.5	Single N–Channel
	28	40	—	8	***MMSF7N03HD***		
	40	50	—	5	***MMSF5N03HD***		
	70	75	—	2.8	***MMDF3N03HD***	2	Dual N–Channel
	70/200[4]	75/300	—	2	***MMDF2C03HD***		Complementary
	37	55	—	6	***MMDF6N03HD***		Dual N–Channel
	100	110	—	3	***MMSF3P03HD***	1.5	Single P–Channel
	200	300	—	2	***MMDF2P03HD***		Dual P–Channel
25	0.10/0.22[4]	0.16/0.33[4]	—	2	***MMDF1300***	2	Complementary
20	47	—	—	6	***MMDF6N02HD***	2.5	Dual P–Channel
	—	30	45	8.2	***MMSF5N02HD***		Single N–Channel
	90	100	—	3	***MMDF3N02HD***	2	Dual N–Channel
	100	200	—	2	***MMDF2N02E***		
	90/160[4]	100/180[4]	—		***MMDF2C02HD***		Complementary
	100/250[4]	200/400[4]	—		***MMDF2C02E***		
	—	30	45	6.4	***MMSF5P02HD***	2.5	Single P–Channel
	75	95	—	3	***MMSF3P02HD***	1.5	
	160	180	—	2	***MMDF2P02HD***		Dual P–Channel
	250	400	—		***MMDF2P02E***		
			—		***MMSF2P02E***		Single P–Channel
	—	25	35	11	***MMSF3205***	2.5	Single P–Channel
12	—	45	55	4	***MMDF4N01HD***	2	Dual N–Channel
	—	45/180	55/220[4]	2	***MMDF2C01HD***		Complementary
	—	80	90	4	***MMSF4P01HD***	1.5	Single P–Channel
	—	180	220	2	***MMDF2P01HD***		Dual P–Channel

(1) T_C = 25°C
(2) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.
(3) Available in tape and reel only — R1 suffix = 500/reel, R2 suffix = 2500/reel.
(4) N-Channel/P-Channel $R_{DS(on)}$ with the minimum recommended footprint.

Devices listed in ***bold, italic*** are Motorola preferred devices.

Table 2. EZFET™ — Power MOSFETs with Zener Gate Protection — Case 751–06

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ @ V_{GS}			I_D (cont) Amps	Device(1)	V_{GS} (Volts) Max	Configuration
	10 V (mΩ)	4.5 V (mΩ)	2.7 V (mΩ)				
50	300	500	—	2	***MMDF2N05Z***	±15	Dual N–Channel
30	30	40	—	5	***MMSF7N03Z***		Single N–Channel
20	—	22	27	6	***MMSF10N02Z***	±10	
	—	27	35	5	***MMDF7N02Z***	±12	Dual N–Channel
	—	20	30	11.5	***MMDF3200Z***	±12	Dual N–Channel

(1) Available in tape and reel only — R1 suffix = 500/reel, R2 suffix = 2500/reel.

Table 3. Micro8™ HDTMOS Products — Case 751–06

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ @ V_{GS}			I_D (cont) Amps	Device(3)	P_D(1,2) (Watts) Max	Configuration
	10 V (mΩ)	4.5 V (mΩ)	2.7 V (mΩ)				
30	135	222	—	1	***MTDF1N03HD***	1.25	Dual N–Channel
	90	150	—	2.4	***MTSF2P03HD***	1.8	Single P–Channel
	40	60	—	3	***MTSF3N03HD***		Single N–Channel
20	—	120	160	1.7	***MTDF1N02HD***	1.25	Dual N–Channel
	—	175	280	1.6	***MTDF1P02HD***		Dual P–Channel
	—	160	190	1.5	***MTSF1P02HD***	1.8	Single P–Channel
	—	90	120	2.4	***MTSF2P02HD***	1.8	
	—	40	50	3.8	***MTSF3N02HD***	1.8	Single N–Channel
	—	120/175	160/280	1.7	***MTDF1C02HD***	1.25	Complementary

(1) T_C = 25°C
(2) Power rating when mounted on 1" square copper pad on FR–4/G–10 Board (V_{GS} = 4.5 V, @ steady state).
(3) Available in tape and reel only — R1 suffix = 500/reel, R2 suffix = 2500/reel.

Table 4. SOT-223 — Case 318E–04

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$(5) (Ohms) Max	@ I_D (Amps)	Device(4)	I_D (cont) Amps	P_D(1) (Watts) Max
100	0.30	0.5	***MMFT1N10E***	1	0.8(3)
60	0.14	0.75	***MMFT3055VL***(2)	1.5	
	0.13	0.85	***MMFT3055V***	1.7	
20	0.15	1	***MMFT2N02EL***(2)	2	
60	0.30	0.6	***MMFT2955E***	1.2	0.8(3)
30	0.1	5.2	***MMFT5P03HD***	5.2	3.1

(1) T_C = 25°C
(2) Indicates logic level V_{GS} = 4.5 V
(3) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.
(4) Available in tape and reel only — T1 suffix = 1000/reel, T3 suffix = 4000/reel.
(5) V_{GS} = 10 V unless otherwise noted.

Table 5. TSOP–6 — Case 318G–02

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ @ V_{GS}			I_D (cont) Amps	Device	P_D(1,2) (Watts) Max	V_{GS} (Volts) Min	Polarity
	10 V (Ω)	4.5 V (Ω)	2.7 V (Ω)					
30	0.065	0.095	—	4.2	***MGSF3454X***	0.15	1.0	N–Channel
					MGSF3454V	2.0		N–Channel
	0.1	0.135		3.5	***MGSF3455X***	0.5		P–Channel
					MGSF3455V	2.0		P–Channel
20	—	0.07	0.095	4.0	***MGSF3442X***	0.5	0.6	N–Channel
					MGSF3442V	2.0		N–Channel
		0.10	0.19	3.3	***MGSF3441X***	0.5	0.45	P–Channel
					MGSF3441V	2.0		P–Channel

(1) T_C = 25°C
(2) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.

Table 6. SOT–23 — Case 318–08

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ @ V_{GS}			I_D (cont) Amps	Device	P_D(1,2) (Watts) Max	V_{GS} (Volts) Min	Polarity
	10 V (Ω)	4.5 V (Ω)	2.7 V (Ω)					
60	5.0	—	—	0.2	***MMBF170LT1***	0.225	0.8	N–Channel
	7.5			0.5	***2N7002LT1***		1.0	N–Channel
50	0.9	6.0		0.1	***BSS84***			P–Channel
30	0.09	0.135		1.0	***MGSF1N03LT1***			N–Channel
20	0.075	0.085			***MGSF1N02LT1***			N–Channel
	0.75	1.0		0.1	***MMBF0201NLT1***			N–Channel
	0.16	0.21		0.75	***MGSF1P02ELT1***		0.7	P–Channel
	0.235	0.375			***MGSF1P02LT1***		1.0	P–Channel
	0.9	2.0		0.25	***MMBF0202PLT1***			P–Channel

(1) T_C = 25°C
(2) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.

Table 7. SC–70 / SOT–323 — Case 419–02

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ @ V_{GS}			I_D (cont) Amps	Device	P_D(1,2) (Watts) Max	V_{GS} (Volts) Min	Polarity
	10 V (Ω)	4.5 V (Ω)	2.7 V (Ω)					
20	0.75	1.0	—	0.3	***MMBF2201NT1***	0.15	1.0	N–Channel
	1.5	2.0	—		***MMBF2202PT1***			P–Channel

(1) T_C = 25°C
(2) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.

Table 8. DPAK — Case 369A–13 (TO–252)

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max[6]	@ I_D (Amps)	Device[4]	I_D (cont) Amps	P_D[1] (Watts) Max
DPAK — N-Channel					
800	12	0.5	***MTD1N80E***	1	1.75[3]
600	8	0.5	***MTD1N60E***	1	
500	5	0.5	***MTD1N50E***	1	
	3.60	1	***MTD2N50E***	2	
400	3.50	1	***MTD2N40E***	2	
250	1.40	1.5	***MTD3N25E***	3	
	1	2.5	***MTD5N25E***	5	
200	1.5	1.5	***MTD3N20E***	3	
	1.20	2	***MTD4N20E***	4	
	0.70	3	***MTD6N20E***	6	
150	0.30	3	MTD6N15	6	
100	0.40	3	***MTD6N10E***	6	
	0.25	4.5	***MTD9N10E***	9	
	0.22	5	***MTD10N10EL***	10	
	0.11	7	***MTD14N10E***	14	
60	0.18	6	***MTD3055VL***[2]	12	
	0.12	7.5	***MTD15N06V***	15	
	0.085	7.5	***MTD15N06VL***	15	
	0.18	6	***MTD12N06EZL***[2,5]	12	
	0.15	4	***MTD3055V***	8	
	0.045	10	***MTD20N06HD***	20	
	0.045	10	***MTD20N06HDL***[2]	20	
	0.080	10	***MTD20N06V***	20	
40	0.030	15	***MTD3410***	30	
30	0.035	10	***MTD20N03HDL***[2]	20	
	0.022	10	***MTD1302***	20	
DPAK — P-Channel					
500	15.0	0.5	***MTD1P50E***	1	1.75[3]
100	0.66	3	***MTD6P10E***	6	
60	0.45	2.5	***MTD5P06V***	5	
	0.20	6	***MTD2955V***	12	
	0.15	10	***MTD20P06HDL***[2]	20	
30	0.099	10	***MTD20P03HDL***[2]	19	

(1) T_C = 25°C
(2) Indicates logic level V_{GS} = 4.5 V
(3) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.
(4) Available in tape and reel — add T4 suffix to part number.
(5) ESD protected to 4 kV.
(6) V_{GS} = 10 V unless otherwise noted.

Table 9. D²PAK — Case 418B–03

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max[5]	@ I_D (Amps)	Device[4]	I_D (cont) Amps	P_D[1] (Watts) Max
D²PAK — N-Channel					
1200	5.0	1.5	***MTB3N120E***	3	2.5[3]
1000	9	0.5	***MTB1N100E***	1	
	4	1.5	***MTB3N100E***	3	
800	3	2	***MTB4N80E***	4	
600	1.20	3	***MTB6N60E***	6	
	4.16	1	***MTB2N60E***	2	
500	0.80	4	***MTB8N50E***	8	
400	3.5	1	***MTB2N40E***	2	
	0.55	5	***MTB10N40E***	10	
250	0.50	4.5	***MTB9N25E***	9	
	0.25	8	***MTB16N25E***	16	
200	0.16	10	***MTB20N20E***	20	
150	0.07	14.5	***MTB29N15E***	29	
100	0.060	16.5	***MTB33N10E***	33	
100	0.04	20	***MTB40N10E***	40	
60	0.12	7.5	***MTB15N06V***	15	
	0.05	15	***MTB30N06VL***[2]	30	
	0.026	17.5	***MTB35N06ZL***	35	
	0.04	18	***MTB36N06V***	32	
	0.032	21	***MTB50N06VL***[2]	42	
	0.028	21	***MTB50N06V***	42	
	0.025	26	***MTB52N06VL***	52	
	0.022	26	***MTB52N06V***	52	
	0.018	27.5	***MTB55N06Z***	55	
	0.014	30	***MTB60N06HD***	60	
	0.01	37.5	***MTB75N06HD***	75	
50	0.0095	37.5	***MTB75N05HD***	75	
30	0.008	38	***MTB1306***	75	
25	0.009	37.5	***MTB75N03HDL***[2]	75	
D²PAK — P-Channel					
500	6	1	***MTB2P50E***	2	2.5[3]
60	0.12	11.5	***MTB23P06V***	23	
30	0.025	25	***MTB50P03HDL***[2]	50	

(1) T_C = 25°C
(2) Indicates logic level V_{GS} = 4.5 V
(3) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.
(4) Available in tape and reel — add T4 suffix to part number.
(5) V_{GS} = 10 V unless otherwise noted.

Table 10. D³PAK — Case 433–01

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max(3)	@ I_D (Amps)	Device(2)	I_D (cont) Amps	P_D(1) (Watts) Max
D³PAK — N-Channel					
1000	1.50	3	*MTV6N100E*	6	178
	1.30	5	*MTV10N100E*	10	250
500	0.320	8	*MTV16N50E*	16	250
	0.240	10	*MTV20N50E*	20	250
	0.200	12.5	*MTV25N50E*	25	250
250	0.080	16	*MTV32N25E*	32	250
200	1.50	16	*MTV32N20E*	32	180

(1) T_C = 25°C
(2) Available in tape and reel — add T4 suffix to part number.
(3) V_{GS} = 10 V unless otherwise noted.

Table 11. TO-220AB — Case 221A–06

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max(3)	@ I_D (Amps)	Device	I_D (cont) Amps	P_D(1) (Watts) Max
TO-220AB — N-Channel					
1200	5.0	1.5	*MTP3N120E*	3	125
1000	9	0.5	*MTP1N100E*	1	75
	4.0	1.5	*MTP3N100E*	3	125
800	3	2	*MTP4N80E*	4	
600	8	0.5	*MTP1N60E*	1	50
	3.80	1	*MTP2N60E*	2	
	2.20	1.5	*MTP3N60E*	3	75
	1.20	3	*MTP6N60E*	6	125
500	5	0.5	*MTP1N50E*	1	50
	3.60	1	*MTP2N50E*	2	75
	3	1.5	*MTP3N50E*	3	50
	1.50	2	*MTP4N50E*	4	75
	0.80	4	*MTP8N50E*	8	125
400	3.50	1	*MTP2N40E*	2	50
	1.80	2	*MTP4N40E*	4	50
	1	2.5	*MTP5N40E*	5	75
	0.55	5	*MTP10N40E*	10	125
250	1.4	1	*MTP3N25E*	3	40
	0.5	4.5	*MTP9N25E*	9	75
	0.25	8	*MTP16N25E*	16	125
200	0.70	3.5	*MTP7N20E*	7	75
	0.16	10	*MTP20N20E*	20	125
150	0.07	14.5	*MTP29N15E*	29	125
100	0.25	5	*MTP10N10E*	10	75
	0.22	5	*MTP10N10EL*	10	40
	0.11	8	*IRF530*	14	78
	0.16	6	*MTP12N10E*	12	75
	0.06	15	*IRF540*	27	145
	0.070	13.5	*MTP27N10E*	27	125
	0.060	16.5	*MTP33N10E*	33	150
	0.04	20	*MTP40N10E*	40	169

(1) T_C = 25°C
(2) Indicates logic level V_{GS} = 4.5 V
(3) V_{GS} = 10 V unless otherwise noted.

Table 11. TO-220AB — Case 221A–06 (continued)

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max(3)	@ I_D (Amps)	Device	I_D (cont) Amps	P_D(1) (Watts) Max
TO-220AB — N-Channel (continued)					
60	0.18	6	*MTP3055VL*(2)	12	48
	0.15	6	*MTP3055V*	12	
	0.12	7.5	*MTP15N06V*	15	60
	0.085	7.5	*MTP15N06VL*	15	
	0.08	10	*MTP20N06V*	20	
	0.008	37.5	*MTP3600*	75	150
	0.05	15	*MTP30N06VL*(2)	30	90
	0.04	18	*MTP36N06V*	32	
	0.032	25	*MTP50N06VL*(2)	42	150
	0.028	25	*MTP50N06V*	42	
	0.014	30	*MTP60N06HD*	60	
	0.01	37.5	*MTP75N06HD*	75	
50	0.10	7.5	*MTP15N05EL*(2)	15	75
	0.0095	37.5	*MTP75N05HD*	75	150
40	0.006	37.5	*MTP3402*	75	150
30	0.008	38	*MTP1306*	75	150
	0.015	25	*MTP1304*	52	120
	0.022	20	*MTP1302*	42	75
25	0.009	37.5	*MTP75N03HDL*(2)	75	150
TO-220AB — P-Channel					
500	6	1	*MTP2P50E*	2	75
200	1	3	*MTP6P20E*	6	
100	0.30	6	*MTP12P10*	12	88
60	0.45	2.5	*MTP5P06V*	5	40
	0.20	6	*MTP2955V*	12	60
	0.12	11.5	*MTP23P06V*	23	125
	0.08	15	*MTD30P06V*	30	125
30	0.025	25	*MTP50P03HDL*(2)	50	150

(1) T_C = 25°C
(2) Indicates logic level V_{GS} = 4.5 V
(3) V_{GS} = 10 V unless otherwise noted.

Table 12. TO-247 (Isolated Mounting Hole) — Case 340K–01

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max(2)	@ I_D (Amps)	Device	I_D (cont) Amps	P_D(1) (Watts) Max
TO-247 — N-Channel					
1000	1.50	3	*MTW6N100E*	6	180
	1.30	5	*MTW10N100E*	10	250
800	1	3.5	*MTW7N80E*	7	180
600	0.50	4	*MTW8N60E*	8	180
500	0.40	7	*MTW14N50E*	14	180
	0.24	10	*MTW20N50E*	20	250
400	0.24	8	*MTW16N40E*	16	180
	0.16	12	*MTW24N40E*	24	250
250	0.10	16	*MTW32N25E*	32	250
200	0.075	16	*MTW32N20E*	32	180
150	0.065	17.5	*MTW35N15E*	35	180
100	0.035	22.5	*MTW45N10E*	45	180

(1) T_C = 25°C
(2) V_{GS} = 10 V unless otherwise noted.

Table 13. TO-264 — Case 340G–02

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max(2)	@ I_D (Amps)	Device	I_D (cont) Amps	P_D(1) (Watts) Max
TO-264 — N-Channel					
1000	0.80	7	***MTY14N100E***	14	300
800	0.50	8	***MTY16N80E***	16	
600	0.21	12.5	***MTY25N60E***	25	
500	0.24	10	***MTY20N50E***	20	
	0.14	15	***MTY30N50E***	30	
200	0.028	27.5	***MTY55N20E***	55	
100	0.01	50	***MTY100N10E***	100	

(1) T_C = 25°C

(2) V_{GS} = 10 V unless otherwise noted.

Table 14. SMARTDISCRETES™

BV_{CES} (Volts) Clamped	$V_{CE(on)}$ @ 10 A	Device	P_D(1) (Watts) Max	Package
Ignition IGBTs				
140 V	1.8	***MGP20N14CL***	150	TO–220AB
350 V		***MGP20N35CL***	150	TO–220AB
		MGB20N35CL	2.5(2,3)	D^2PAK
400 V		***MGP20N40CL***	150	TO–220AB
		MGB20N40CL	2.5(2,3)	D^2PAK
TO-220AB				

$V_{(BR)DSS}$ (Volts) Min	$R_{DS(on)}$ (Ohms) Max	I_D (Amps)	Device	I_D (cont) Amps	P_D(1) (Watts) Max
60 Clamped Voltage	0.75	1	***MLP1N06CL***	Current Limited	40
62 Clamped Voltage	0.4	2	MLP2N06CL	Current Limited	40

(1) T_C = 25°C

(2) Power rating when mounted on an FR-4 glass epoxy printed circuit board with the minimum recommended footprint.

(3) Available in tape and reel — add T4 suffix to part number.

Table 15. IGBT — Insulated Gate Bipolar Transistor

Device	BV_{CES} (V)	I_{C90}(1) (A)	I_C @ 25°C (A)	$V_{CE(on)}$ @ I_{C90} (V) typ	E_{off} @ I_{C90} (mJ) typ @ 125°C	Package
IGBT — N-Channel						
MGP4N60E	600	4	6	2.0	0.165	TO–220
MGP4N60ED						
MGP7N60E		7	10		0.35	
MGP7N60ED						
MGP11N60E		11	15		0.48	
MGP11N60ED						
MGP14N60E		14	18		0.63	
MGP15N60U		15	26	1.70	0.510	
MGP20N60U		20	31		0.625	
MGP21N60E		21		2.10	1.3	
MGW14N60ED		14	18	2.0	0.63	TO–247
MGW21N60ED		21	31	2.2	1.3	
MGW12N120	1200	12	20	3.72	1.49	
MGW12N120D						
MGW20N120		20	28	2.90	3.19	
MGY20N120D						TO–264
MGY25N120		25	38	2.98	5.40	
MGY25N120D						

(1) I_{C90} = Collector current rating at 90°C case temperature

Bipolar Power Transistors

In Brief . . .

Motorola's broad line of Bipolar Power Transistors includes discrete and Darlington transistors in a variety of packages from the popular surface mount DPAK at 1.75 watts to the 250 watt TO-3 and TO–264. New products include the MJE/MJF 18000 series for lamp ballast and power supplies, MJW16212 — a new 1500 V deflection transistor for video monitor applications, and high performance audio output devices in the TO–264 package. We have the broadest line of Bipolar Power Transistors in the industry and the Motorola commitment to quality and total customer satisfaction to go with them.

	Page
Bipolar Power Transistors	5.5–2
Selection by Package	5.5–2
Plastic TO–220AB	5.5–3
Plastic TO–225AA Type (Formerly TO–126 Type)	5.5–4
SO–8 – Surface Mount Packages	5.5–4
DPAK – Surface Mount Power Packages	5.5–5
SOT–223 – Surface Mount Packages	5.5–5
Large Plastic TO–264	5.5–5
Plastic Isolated TO–220 Type	5.5–6
Metal TO–204AA (Formerly TO–3), TO–204AE	5.5–7
Audio	5.5–8
Electronic Lamp Ballasts	5.5–9

BIPOLAR POWER TRANSISTORS SELECTOR GUIDE

SELECTION BY PACKAGE

Package		I_C Range (Amps)	V_{CE} Range (Volts)	P_D (Watts)
	TO-204AA (TO-3) CASE 1-07	4-30	40-1500	90-250
	TO-204AE CASE 197A-05	50–80	60-1000	150-300
	DPAK CASE 369-07	0.5-10	40-400	12.5-20
	DPAK CASE 369A-13	0.5-10	40-400	12.5-20
	**TO-218 TYPE CASE 340D-02**	5.0-25	60-1500	80-150
	**TO-220AB CASE 221A-09**	0.5-15	30-1800	30-125
	**ISOLATED TO-220 TYPE CASE 221D-02**	1-12	80-450	20-45
	TO-225AA (TO-126 TYPE) CASE 77-09	0.3-5.0	25-400	12.5-40
	**CASE 340K-01 (TO-247 TYPE)**	10-30	400-1500	125-180
	SOT–223 CASE 318E–04	3.0	30	2.0 (1)
	SO–8 CASE 751-06	3.0	30	2.0 (2)
	TO-264 CASE 340G-02	15-16	200-250	250

(1) Tested on 1″ sq. FR4 Board
(2) Tested on 1″ sq., 2 oz. copper

Table 1. PLASTIC TO–220AB — CASE 221A–09, Style 1

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s µs Max	t_f µs Max	@ I_C Amp		
0.5	350	***MJE2361T***		40 min	0.1				10 typ	30
1	100	TIP29C	TIP30C	15/75	1	0.6 typ	0.3 typ	1	3	30
	250	TIP47		30/150	0.3	2 typ	0.18 typ	0.3	10	40
	400	***TIP50***	***MJE5731A***	30/150	0.3	2 typ	0.18 typ	0.3	10	40
2	60	TIP110(2)	TIP115(2)	500 min	2	1.7 typ	1.3 typ	2	25(1)	50
	100	***TIP112***(2)	***TIP117***(2)	500 min	2	1.7 typ	1.3 typ	2	25(1)	50
	450/1000	***BUX85***		30	0.1	3.5	1.4	1	4	50
	450/1000	***MJE18002***		14/34	0.2	3	0.17	1	12 typ	40
3	80	***TIP31B***	***TIP32B***	25 min	1	0.6 typ	0.3 typ	1	3	40
	100	***TIP31C***	***TIP32C***	25 min	1	0.6 typ	0.3 typ	1	3	40
4	80	***D44C12***	***D45C12***	40/120	0.2			1	40 typ	30
	400/700	***MJE13005***		6/30	3	3	0.7	3	4	60
5	60	TIP120(2)	TIP125(2)	1k min	3	1.5 typ	1.5 typ	3	4(1)	65
	100	***TIP122***(2)	***TIP127***(2)	1k min	3	1.5 typ	1.5 typ	4	4(1)	75
	400/700	***BUL45***		14/34	0.3	1.7	0.15	1	12 typ	75
	450/1000	MJE16002		5 min	5	3	0.3	3		80
	550/1200	***MJE18204***		18/35	0.5	2.75	0.2	2	12	75
6	80	TIP41B	TIP42B	15/75	3	0.4 typ	0.15 typ	3	3	65
	100	***TIP41C***	***TIP42C***	15/75	3	0.4 typ	0.15 typ	3	3	65
	400/700	***BUL146***		14/34	0.5	1.75	0.15	3	14 typ	100
7	70	***2N6292***	***2N6107***	30/150	2	0.4 typ	0.15 typ	3	4	40
	150	BU407		30 min	1.5		0.75	5	10	60
8	60	TIP100(2)	TIP105(2)	1k/20k	3	1.5 typ	1.5 typ	3	4(1)	80
	100	***BDX53C***(2)	***BDX54C***(2)	750 min	3					
		TIP102(2)	***TIP107***(2)	1k/20k	3	1.5 typ	1.5 typ	3	4(1)	80
	150	***MJE15030***	***MJE15031***	20 min	4				30	50
	250	***MJE15032***	***MJE15033***	50 min	1				30	50
	350	***MJE13007***		5/30	5	3	0.7	5		80
			MJE5852	15 min	2	2	0.5	4		80
	400/700	***BUL147***		14/34	1	2.5	0.18	2	14 typ	125
10	60	***MJE3055T***	***MJE2955T***	20/70	4					75
	80	***2N6388***(2)	***2N6668***(2)	1k/20k	5				20(1)	65
		D44H11	***D45H11***	40 min	4	0.5 typ	0.14 typ	5	50 typ	50
	100	***BDX33C***(2)	***BDX34C***(2)	750 min	3				3	70
12	400/700	***MJE13009***		6/30	8	3	0.7	8	4	100
15	80	***D44VH10***	***D45VH10***	20 min	4	0.5	0.09	8	50 typ	83
	100	***BDW42***(2)	***BDW47***(2)	1k min	5	1 typ	1.5 typ	5	4	85

(1) $|h_{FE}|$ @ 1 MHz
(2) Darlington

Devices listed in bold, italic are Motorola preferred devices.

Table 2. PLASTIC TO–225AA Type
(Formerly TO–126 Type) — CASE 77–09, Styles 1 & 3

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s µs Max	t_f µs Max	@ I_C Amp		
0.3	350	***MJE3439***		40/160	0.02				15	15
0.5	200	***MJE344***		30/300	0.05				15	20.8
	250	2N5655		30/250	0.1	3.5 typ	0.24 typ	0.1	10	20
	300	***MJE340***	***MJE350***	30/240	0.05					20.8
	350	***2N5657***		30/250	0.1	3.5 typ	0.24 typ	0.1	10	20
1	40	2N4921	2N4918	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
	80	***2N4923***	***2N4920***	20/100	0.5	0.6 typ	0.3 typ	0.5	3	30
1.5	45	BD135	BD136	40/250	0.15					12.5
	80	***BD139***	***BD140***	40/250	0.15					12.5
	400	***MJE13003***(1)		5/25	1	4	0.7	1	5	40
2	80	***BD237***	***BD238***	25 min	1				3	25
	100	***MJE270***(1)(2)	***MJE271***(1)(2)	1.5k min	0.12				6	15
3	60	MJE181	MJE171	50/250	0.1	0.6 typ	0.12 typ	0.1	50	12.5
	80	***MJE182***	***MJE172***	50/250	0.1	0.6 typ	0.12 typ	0.1	50	12.5
4	40	***MJE521***	***MJE371***	40 min	1					40
	45	***BD437***	***BD438***	40 min	2				3	36
	60		***BD440***	25 min	2				3	36
		BD677(2)	***BD678***(2)	750 min	1.5					40
		BD787	***BD788***	20 min	2				50	15
		2N5191	***2N5194***	25/100	1.5	0.4 typ	0.4 typ	1.5	2	40
		MJE800(2)	***MJE700***(2)	750 min	1.5				1(3)	40
	80	***2N5192***	***2N5195***	25/100	1.5	0.4 typ	0.4 typ	1.5	2	40
		BD679(2)	***BD680***(2)	750 min	1.5					40
		BD679A(2)	***BD680A***(2)	750 min	2					40
		BD789	***BD790***	10 min	2				40	15
		MJE802(2)	MJE702(2)	750 min	1.5				1(3)	40
		MJE803(2)	***MJE703***(2)	750 min	2				1(3)	40
		2N6039(2)	***2N6036***(2)	750/18k	2	1.7 typ	1.2 typ	2	25	40
	100	***BD681***(2)	***BD682***(2)	750 min	1.5					40
		MJE243	***MJE253***	40/120	0.2	0.15 typ	0.07 typ	2	40	15
5	25	***MJE200***	***MJE210***	45/180	2	0.13 typ	0.035 typ	2	65	15

(1) Case 77, Style 3
(2) Darlington
(3) | @ 1 MHz

Table 3. SO-8 — CASE 751–06, Style 16

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s µs Max	t_f µs Max	@ I_C Amp		
3	30	***MMDJ3N03BJT***	***MMDJ3P03BJT***	50	1				3	2

Table 4. SURFACE MOUNT POWER PACKAGES
DPAK — CASE 369A-13 and 369-07

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
0.5	300	***MJD340***	***MJD350***	30/240	0.05					15
1	250	***MJD47***		30/150	0.3	2	0.2	0.3	10	15
	350		***MJD5731***	30/175	0.3	1.5	0.2	0.3	10	15
	400	***MJD50***		30/150	0.3	2	0.2	0.3	10	15
1.5	400	***MJD13003***		5/25	1	4	0.7	1	4	15
2	100	***MJD112***(2)	***MJD117***(2)	1000 min	2	1.7	1.3	2	25(1)	20
3	40	***MJD31***	***MJD32***	10 min	1	0.6	0.3	1	3	15
	100	***MJD31C***	***MJD32C***	10 min	1	0.6	0.3	1	3	15
4	45	***MJD148***		30 min	4				3	20
	80	***MJD6039***(2)	***MJD6036***(2)	1k/12k	2	1.7	1.2	2	25	20
	100	***MJD243***	***MJD253***	40/180	0.2	0.16	0.04	1	40	12.5
5	25	***MJD200***	***MJD210***	45/180	2	0.15	0.04	2	65	12.5
6	100	***MJD41C***	***MJD42C***	15/75	3	0.4	0.15	3	3	20
8	80	***MJD44H11***	***MJD45H11***	40 min	4	0.5	0.14	5	50 typ	20
	100	***MJD122***(2)	***MJD127***(2)	1k/12k	4	1.5	2	4	4(1)	20
10	60	***MJD3055***	***MJD2955***	20/100	4	1.5	1.5	3	2	20
	80	***MJD44E3***(2)		1k min	5	2	0.5	10		20

(1) $|h_{FE}|$ @ 1 MHz
(2) Darlington

Table 5. SOT-223 — CASE 318E–04, Style 1

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
3	30	***MMJT9410***	***MMJT9435***	50	1					0.8

Table 6. LARGE PLASTIC TO-264 — CASE 340G-02

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s μs Max	t_f μs Max	@ I_C Amp		
15	200	***MJL3281A***	***MJL1302A***	60/175	0.1				30 typ	200
	650/1500	***MJL16218***		4/11	12				2.5 typ	170
16	250	***MJL21194***	***MJL21193***	25/75	8				4	200
16	250	***MJL21196***	***MJL21195***	25/75	8				4	200

Case 221D-02 is UL RECOGNIZED for its isolation feature. Case 221D-02 has been evaluated to 3500 volts RMS. Actual isolation rating depends on specific mounting position and maintaining required strike and creepage distances.

Table 7. PLASTIC (ISOLATED TO-220 TYPE) — CASE 221D–02, UL RECOGNIZED: File #E69369

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	V_{CES} Volts Min	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
			NPN	PNP			t_s µs Max	t_f µs Max	@ I_C Amp		
1	250		***MJF47***		30/150	0.3	2 typ	0.17 typ	0.3	10	28
2	400	700	***BUL44F***		14/34	0.2	2.75(3)	0.2(3)	1	13 typ	25
		1000	***MJF18002***		14/34	0.2	2.75(3)	0.175(3)	1	13 typ	25
3	100		***MJF31C***	***MJF32C***	10 min	1	0.6	0.3	1	3	28
5	100		***MJF122***(2)	***MJF127***(2)	2000 min	3	1.5 typ	1.5 typ	3	4(1)	28
	400	700	***BUL45F***		14/34	0.3	1.7(3)	0.15(3)	1	12 typ	35
	450	1000	***BUT11AF***		10 min	.005	4	0.8	2.5		40
		1000	***MJF16002***		5 min	5	3	0.3	3		40
		1000	***MJF18004***		14/34	0.3	1.7(3)	0.15(3)	1	13 typ	35
6	250	550	***MJF16204***		5 min	6	1.5(3)	0.15(3)	1	10	45
	400	700	***BUL146F***		14/34	0.5	2.5(3)	0.15(3)	3	14 typ	40
	450	1000	***MJF18006***		14/34	0.5	3.2(3)	0.15(3)	3	14 typ	40
8	80			***MJF6107***	30/90	2	0.5 typ	0.13 typ	2	4	35
	150		***MJF15030***	***MJF15031***	40 min	3	1 typ	0.15 typ	3	30	35
	400	700	***MJF13007***		5/30	5	3	0.7	5	4	40
			BUL147F		14/34	1	2.5(3)	0.18(3)	2	14 typ	45
	450	1000	***MJF18008***		16/34	1	2.75(3)	0.18(3)	2	13 typ	45
10	60		***MJF3055***	***MJF2955***	20/100	4	—	—	—	2	40
	80		***MJF44H11***	***MJF45H11***	40/100	4	0.5 typ	0.14 typ	5	40	35
	100		***MJF6388***(2)	***MJF6668***(2)	3k/20k	3	1.5 typ	1.5 typ		20(1)	40
12	400	700	***MJF13009***		6/30	8	3	0.7	8	8	40

(1) $|h_{FE}|$ @ 1 MHz
(2) Darlington
(3) Switching tests performed w/special application simulator circuit. See data sheet for details.

Table 8. METAL TO–204AA (Formerly TO–3) — CASE 1–07
TO–204AE — CASE 197A–05, Style 1

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min(8)	Device Type		h_{FE} Min/Max	@ I_C Amp	Resistive Switching			f_T MHz Min	P_D (Case) Watts @ 25°C
		NPN	PNP			t_s µs Max	t_f µs Max	@ I_C Amp		
4	250	***MJ15020***	***MJ15021***	30 min	1				20	150
8	80	***MJ1001***(2)		1k min	3					90
10	80	2N3716	2N3792	30 min	3	0.3 typ	0.4 typ	5	4	150
		MJ3001(2)	***MJ2501***(2)	1k min	5					150
	250	***MJ15011***	***MJ15012***	20/100	2					200
	325	***MJ413***		20/80	0.5				2.5	125
	400	***MJ10012***(2)		100/2k	6	15	15	6		175
12	100	***2N6059***(2)	***2N6052***(2)	750/18k	6	1.6 typ	1.5 typ	6	4(1)	150
15	60	***2N3055***	***MJ2955***	20/70	4	0.7 typ	0.3 typ	4	2.5	115
	120	***MJ15015***	***MJ15016***	20/70	4	0.7 typ	0.3 typ	4	1	180
	140	MJ15001	MJ15002	25/150	4				2	200
	200	***MJ3281A***	***MJ1302A***	60/175	0.1				30 typ	250
	400/650	***MJ16110***		6/20	15	0.8 typ	0.1 typ	10		175
16	140	***2N3773***	2N6609	15/60	8	1.1 typ	1.5 typ	8	4	150
	200	MJ15022	MJ15023	15/60	8				5	250
	250	***MJ21194***	***MJ21193***	25/75	8				4	250
	250	***MJ21196***	***MJ21195***	25/75	8				5	250
20	80	***2N6283***(2)	2N6286(2)	750/18k	10	2.5 typ	2.5 typ	10	4(1)	160
	100	***2N6284***(2)	***2N6287***(2)	750/18k	10	2.5 typ	2.5 typ	10	4(1)	160
	140	***MJ15003***	***MJ15004***	25/150	5				2	250
	400	***MJ13333***		10/60	5	4	0.7	10		175
	500	***MJ10009***(2)		30/300	10	2	0.6	10	8(1)	175
25	60	2N5885	2N5883	20/100	10	1	0.8	10	4	200
	150	***2N6341***		30/120	10	1	0.25	10	40	200
30	60	2N5302	2N4399	15/60	15	2	1	10	2	200
	100	***MJ802***	***MJ4502***	25/100	7.5				2	200
	120	***MJ11016***(2)	***MJ11015***(2)	1k min	20				4(1)	200
	400/1000	***BUX98***		8 min	20	3	0.8	20		250
	450/850	MJ16020		5 min	30	1.8	0.2	20		250
40	400	***MJ10023***(2)		50/600	10	2.5	0.9	20		250
50	80	***2N5686***	***2N5684***	15/60	25	0.5 typ	0.3 typ	25	2	300
	120	***MJ11032***(2)	***MJ11033***(2)	400 min	50					300
	125	***BUV20***		10 min	50	1.2	0.25	50	8	250
	400	***MJ10015***(2)		10 min	40	2.5	1	20		250
60	80	***MJ14002***	***MJ14003***	15/100	50					300

(1) $|h_{FE}|$ @ 1 MHz
(2) Darlington

Audio

GENERAL DESIGN CURVES FOR POWER AUDIO OUTPUT STAGES

$V_{(BR)CEO}$ Required on Output and Driver Transistor versus Output Power for 4, 8 and 18 Ohm Loads

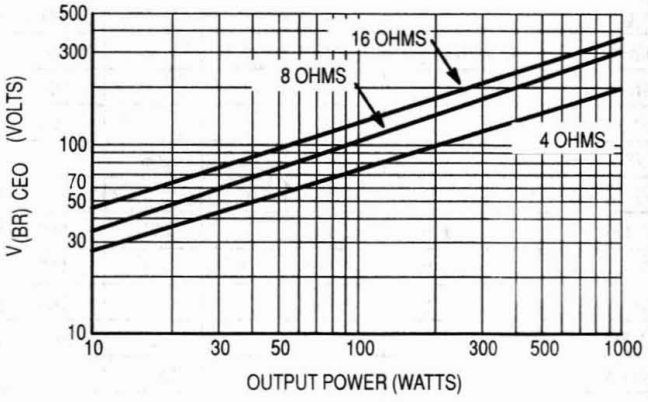

Output Transistor Peak Collector Current versus Output Power for 4, 8 and 16 Ohm Loads

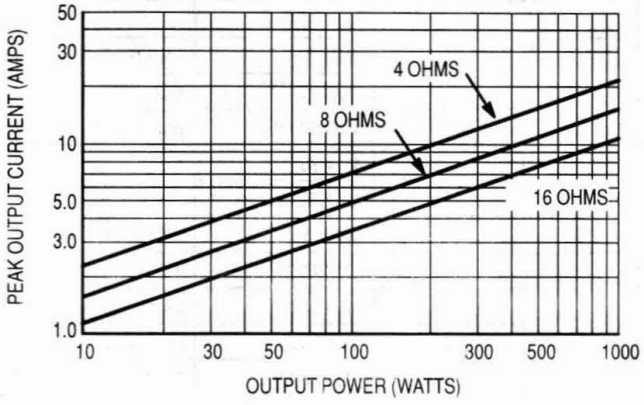

Another important parameter that must be considered before selecting the output transistors is the safe–operating area these devices must withstand. For a complete discussion see Application Note AN485.

Table 9. Recommended Power Transistors for Audio/Servo Loads

RMS Power Output	NPN	PNP	Case	P_D Watts @ 25°C	V_{CEO}	h_{FE} @ Min/Max	I_C Amps	f_T MHz Typ	ISB Volts/Amps
To 25W	MJE15030	MJE15031	TO–220	50	150	20 min	4	30	14/3.6
	MJE15032	MJE15033	TO–220	50	250	50 min	1	40	50/1
25 to 50W	2N3055A	MJ2955A	TO–204	120	120	20/70	4	3	60/2
	MJ15001	MJ15002	TO–204	200	140	25/150	4	3	40/5
50 to 100W	MJ15015	MJ15016	TO–204	180	120	20/70	4	3	60/3
	MJ15003	MJ15004	TO–204	250	140	25/150	5	3	100/1
	MJ15020	MJ15021	TO–204	150	250	30 min	1	20	50/3
Over 100W	MJ15024	MJ15025	TO–204	250	250	15/60	8	8	80/2.2
	MJ3281A	MJ1302A	TO–204	250	200	60/175	7	30	50/4
	MJL3281A	MJL1302A	340G–01	150	200	60/175	7	30	40/4
	MJ21194	MJ21193	TO–204	250	250	25/75	8	7	100/2
	MJL21194	MJL21193	340G–01	200	200	25/75	8	7	100/2

The Power Transistors shown are provided for reference only and show device capability. The final choice of the Power Transistors used is left to the circuit designer and depends upon the particular safe–operating area required and the mounting and heat sinking configuration used.

Electronic Lamp Ballasts

As in many other areas of its semiconductor activity, Motorola is an industry leader in the fast growing market of Electronic Ballast Semiconductors. We introduced the first dedicated devices for this market in 1988. Today, devices based on advanced technologies such as H2BIP (High Gain, High Frequency Bipolar) and ZPCMOS (Zero Power Control MOS) are leading the way in providing benefits for ballast manufacturers, consumers and the environment.

Two factors make the Electronic Lamp Ballast market grow at an ever increasing rate — Economics and the Environment.

Lamps based on Electronic Ballasts have long lifetimes and very low power consumption, so contributing to the efficient use of energy and to preservation of the environment. Motorola designs silicon solutions specifically for these applications.

For this growing ballast market Motorola offers optimized devices such as Power MOSFETs, Bipolar Transistors, Linear drive ICs, custom Start–Stop ICs, Diodes and Silicon Bilateral Switches.

Even more important are our efforts to develop the technology for tomorrow in close cooperation with the world's leading manufacturers of Electronic Transformers and Lamp Ballasts, as well as assisting them today in their choice of technology.

This capability is driven from our centre of competence based in Toulouse, France. An important team of Applications, Design, Product, Manufacturing and Marketing Engineers drives our worldwide dedication to this market.

The intention of this section is to provide you with a 'snapshot' of our bipolar transistor products and capabilities. It is a document showing Motorola's professionalism in this area, and illustrating some of the expertise available to *you* — the Electronic Lamp Ballast manufacturer.

World Lamp Ballast Market

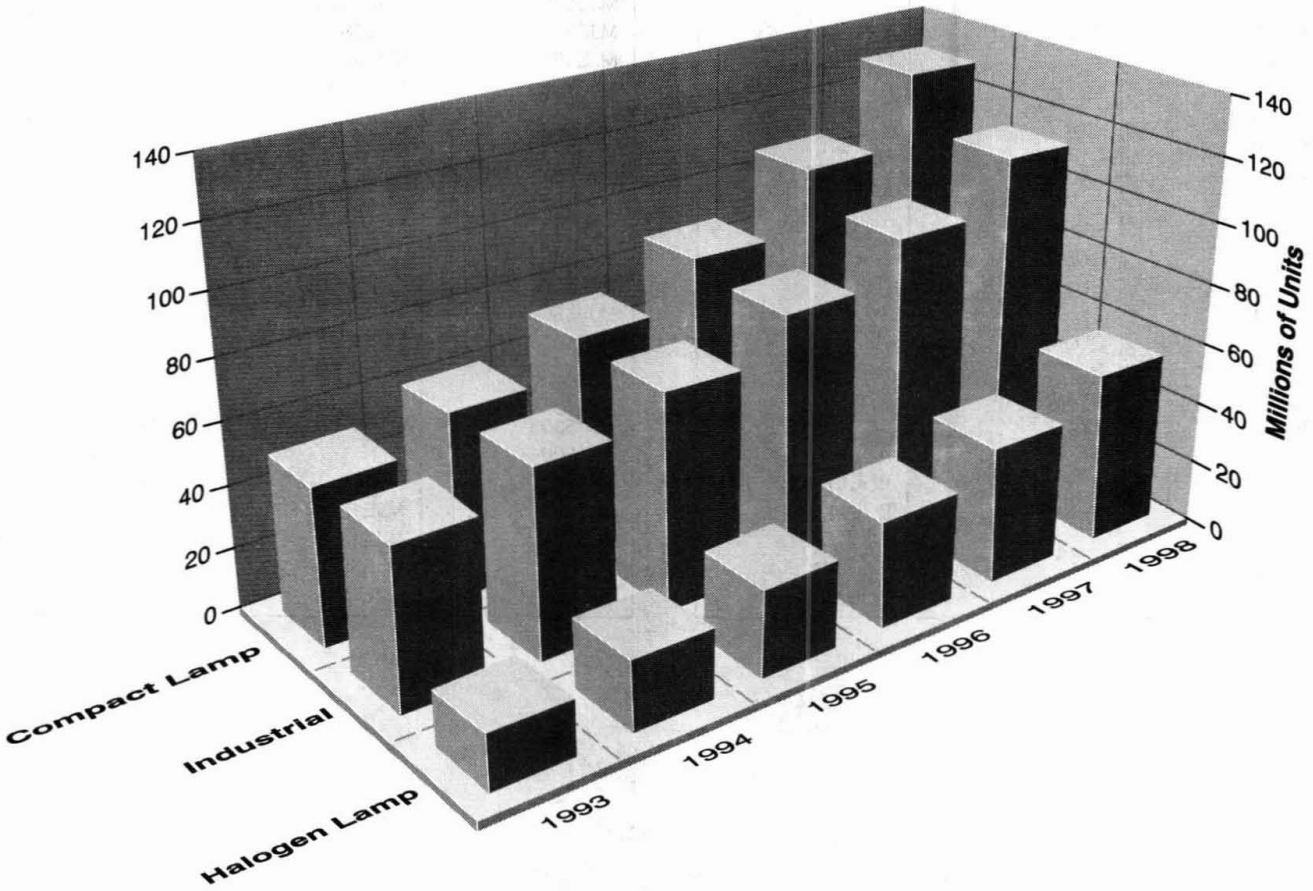

Cross Reference Transistors for Electronic Lamp Ballasts

Industry Part Number	Motorola Direct Replacement	Motorola Nearest Replacement
2SC4053		MJE18004
2SC4546		BUL146F
2SC4630		MJF18004
2SC4820		MJF18002
BU1706A		MJE18604D2
BU1708A		MJE18604D2
BUD43B–1	BUD43B–1	
BUF610		MJE18004D2
BUF654		BUL146
BUH100	BUH100	
BUH150	BUH150	
BUH50	BUH50	
BUH51	BUH51	
BUL146	BUL146	
BUL146F	BUL146F	
BUL147	BUL147	
BUL147F	BUL147F	
BUL213		MJE18204
BUL216		MJE18206
BUL381		BUL45
BUL38D		BUL45D2
BUL410		MJE18006
BUL416		MJE18604D2
BUL43B	BUL43B	
BUL44	BUL44	
BUL44D2	BUL44D2	
BUL44F	BUL44F	
BUL45	BUL45	
BUL45D2	BUL45D2	
BUL45F	BUL45F	
BUL48		MJE18004D2
BUL510		MJE18004D2
BUL57		BUL147
BUL67		BUL147
BUL810		BUV48A
BUL87		BUL147
BULD215		BUL45D2

Industry Part Number	Motorola Direct Replacement	Motorola Nearest Replacement
BULD50		BUL44D2
BULD85		BUL45D2
BUT11AF		MJF18004
BUT18		BUH100
BUT93		BUL45
BUT93D		BUL44D2
BUV46		MJE18006
KSC5021F		MJE18004
KSC5027F		MJE18604D2
MJD13003–1	MJE13003–1	
MJE13003	MJE13003	
MJE13005	MJE13005	
MJE13007	MJE13007	
MJE13009	MJE13009	
MJE18002	MJE18002	
MJE18004	MJE18004	
MJE18004D2	MJE18004D2	
MJE18006	MJE18006	
MJE18008	MJE18008	
MJE18009	MJE18009	
MJE18204	MJE18204	
MJE18206	MJE18206	
MJE18604D2	MJE18604D2	
MJF18002	MJF18002	
MJF18004	MJF18004	
MJF18006	MJF18006	
MJF18008	MJF18008	
MJF18009	MJF18009	
MJF18204	MJF18204	
MJF18206	MJF18206	
TD13003		MJD13003–1
TD13004		BUF43B–1
TEO13005D		BUL44D2–1
TEO13007	MJE13007	
TEO13003	MJE13003	
TEO13005	MJE13005	
TEO13009	MJE13009	

Cross Reference Transistors for Electronic Lamp Ballasts

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR



CASE 221A–06
(TO–220AB)

Table 10. TO–220AB Bipolar Transistors

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	V_{CES} Volts Min	Device Type	I_C Operating Amps	h_{FE} min @ I_C Operating V_{CE} = 1 V	Inductive Switching @ I_C Operating T_{si} Min/Max (μs)	P_D (Case) Watts @ 25°C
2	350	650	BUL43B	0.8	9	1.8 / 3.3	40
	400	700	BUL44	0.8	10	2.6 / 3.8	50
	400	700	BUL44D2*	0.8	20	2.05 / 2.35	50
	450	1000	MJE18002	1	6	/ 2.75	50
4	500	800	BUH50	2	8 typ	/ 2.5	50
5	400	700	BUL45	2	7	2.6 / 3.8	75
	400	700	BUL45D2*	2	10	1.95 / 2.25	75
	450	1000	MJE18004	2	6	/ 2.5	75
	450	1000	MJE18004D2*	2	6	2.1 / 2.4	75
	550	1200	MJE18204	2	5	/ 2.75	75
	600	1600	MJE18604D2*	0.5	15	/ 1.0	75
6	400	700	BUL146	3	8	2.6 / 3.8	100
	450	1000	MJE18006	3	6	/ 3.2	100
8	400	700	BUL147	4.5	8	2.6 / 3.8	125
	450	1000	MJE18008	4.5	6	/ 3.2	125
	550	1200	MJE18206	3	5	/ 2.75	100
10	400	700	BUH100	5	10 typ	/ 3.0	100
	450	1000	MJE18009	7	8	/ 2.75	150
15	400	700	BUH150	10	8 typ	/ 2.75	150

BUHXXX Series are specified for Halogen applications.
* D2 suffix indicates transistor with built in C–E freewheeling diode and antisaturation network.

Cross Reference Transistors for Electronic Lamp Ballasts

CASE 221D–02
Isolated TO–220 Type
UL Recognized
File #E69369



STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER

Table 11. Isolated TO–220 Bipolar Transistors

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	V_{CES} Volts Min	Device Type	I_C Operating Amps	h_{FE} min @ I_C Operating V_{CE} = 1 V	Inductive Switching @ I_C Operating T_{si} Min/Max (μs)	P_D (Case) Watts @ 25°C
2	400	700	BUL44F	0.8	10	2.6 / 3.8	25
	450	1000	MJF18002	1	6	/ 2.75	25
5	400	700	BUL45F	2	7	2.6 / 3.8	35
	450	1000	MJF18004	2	6	/ 2.5	35
	550	1200	MJF18204	2	5	/ 2.75	40
6	400	700	BUL146F	3	8	2.6 / 3.8	40
	450	1000	MJF18006	3	6	/ 3.2	40
8	400	700	BUL147F	4.5	8	2.6 / 3.8	45
	450	1000	MJF18008	4.5	6	/ 3.2	45
	550	1200	MJF18206	5	6	/ 2.75	45
10	450	1000	MJF18009	7	8	/ 2.75	50

STYLE 1:
PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR



CASE 369–07

Table 12. DPAK Bipolar Transistors

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	V_{CES} Volts Min	Device Type	I_C Operating Amps	h_{FE} min @ I_C Operating V_{CE} = 1 V	Inductive Switching @ I_C Operating T_{si} Min/Max (μs)	P_D (Case) Watts @ 25°C
2	350	650	BUD43B–1	0.8	9 typ	1.8 / 3.3	25
	400	700	BUD44D2–1*	0.8	20 typ	2.05 / 2.35	25

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. BASE

STYLE 3:
PIN 1. BASE
2. COLLECTOR
3. EMITTER



CASE 77–08
(TO–225AA)

Table 13. Case 77 (TO–225) Bipolar Transistors

I_C Cont Amps Max	$V_{CEO(sus)}$ Volts Min	V_{CES} Volts Min	Device Type	I_C Operating Amps	h_{FE} min @ I_C Operating V_{CE} = 1 V	Inductive Switching @ I_C Operating T_{si} Min/Max (μs)	P_D (Case) Watts @ 25°C
1.5	400	700	MJE13003	1	6 typ	/ 3.0	40
4	400	700	BUH51	1	8	/ 3.75	50

BUHXXX Series are specified for Halogen applications.
* D2 suffix indicates transistor with built in C–E freewheeling diode and antisaturation network.

Rectifiers

In Brief . . .

Continuing investment in research and development for discrete products has created a rectifier manufacturing facility that matches the precision and versatility of the most advanced integrated circuits. As a result, Motorola's silicon rectifiers span all high tech applications with quality levels capable of passing the most stringent environmental tests . . . including those for automotive under–hood applications.

Product Highlights:

- Surface Mount Devices — A major thrust has been the development and introduction of a broad range of power rectifiers, Schottky and Ultrafast, 1/2 amp to 25 amp, 15 to 600 volts.
- Application Specific Rectifiers —
  - — MEGAHERTZ™ series for high frequency power supplies and power factor correction.
  - — Schottky rectifiers having lower forward voltage drop (0.3 to 0.6 volts) for use in low voltage SMPS outputs and as "OR"ing diodes.
  - — Automotive transient suppressors.
- Ultrafast rectifiers having reverse recovery times as low as 25 ns to complement the Schottky devices for higher voltage requirements in high frequency applications.
- A wide variety of package options to match virtually any potential requirement.

The rectifier selector section that follows has generally been arranged by package and technology. The individual tables have been sorted by voltage and current with the package types for the devices listed shown above each table. The Application Specific Rectifiers are also included in their respective tables.

Motorola's commitment to Six–Sigma is showing its worth. Refined processes no longer produce fallout as such and therefore only **Motorola Preferred Devices** are listed in the tables. The non–preferred devices will continue to be offered, but customers are encouraged to begin designing using the preferred types.

	Page
Rectifier Numbering System	5.6–2
Application Specific Rectifiers	5.6–3
Low V_F Schottky	5.6–3
MEGAHERTZ	5.6–3
NEW UltraSoft	5.6–3
SCHOTTKY Rectifiers	5.6–4
Surface Mount Schottky	5.6–4
Axial Lead Schottky	5.6–5
TO–220 Type Schottky	5.6–5
TO–218 Types and TO–247 Schottky	5.6–6
POWERTAP II Schottky	5.6–7
POWERTAP III Schottky	5.6–7
NEW UltraSoft Rectifiers	5.6–7
Ultrafast Rectifiers	5.6–8
Surface Mount Ultrafast	5.6–8
Axial Lead Ultrafast	5.6–8
TO–220 Type Ultrafast	5.6–9
TO–218 Types and TO–247 Ultrafast	5.6–9
POWERTAP II Ultrafast	5.6–9
Fast Recovery Rectifiers/General Purpose Rectifiers	5.6–10

RECTIFIER NUMBERING SYSTEM

PART NUMBER KEY XXX X XX XX XX X

- XXX: PREFIX (TYPE DESIGNATOR)
  - F = FULLY ISOLATED
  - S = SURFACE MT (SMB/SMC)
  - D = DPAK
  - B = D^2PAK
  - H = MEGAHERTZ
- X: F = FULLY ISOLATED
- XX: I_O
- XX: V_R (X10 EXCEPT SCHOTTKY)
- XX: SUFFIX (DUAL DESIGNATOR)
- X:
  - R = REVERSE
  - L = LOW V_F
  - E = ENERGY

PREFIX KEY

MUR	=	MOTOROLA ULTRA FAST RECTIFIER
MBR	=	MOTOROLA (SCHOTTKY) BARRIER RECTIFIER
MR	=	MOTOROLA STANDARD & FAST RECOVERY
MSR	=	MOTOROLA ULTRASOFT

SUFFIX KEY

CT	=	CENTER TAP (DUAL) TO–220, POWERTAP, DPAK, D^2PAK
PT	=	CENTER TAP (DUAL) TO–218 PACKAGE
WT	=	CENTER TAP (DUAL) TO–247
–1	=	STRAIGHT LEAD D^2PAK

EXAMPLE:	MUR	30	20	WT
	MOTOROLA ULTRAFAST	30 AMP	200 V	CENTER TAP (DUAL) TO–247
EXAMPLE:	MBR	30	45	WT
	MOTOROLA SCHOTTKY	30 AMP	45 V	CENTER TAP (DUAL) TO–247

Application Specific Rectifiers

Table 1. Low V_F Schottky Rectifiers

Device	I_O Amps	V_{RRM} (Volts)	V_F @ Rated I_O and T_C = 25°C Volts (Max)	I_R @ Rated V_{RRM} mAmps (Max)	Package
MBR0520LT1, T3	0.5	20	0.33	0.25	SOD-123
MBRS130LT3	1	30	0.395	1	SMB
MBRD835L	8	35	0.41	1.4	DPAK
MBRD1035CTL	10	35	0.41	6	DPAK
MBR2030CTL	20	30	0.48	5	TO-220
MBRB2535CTL	25	35	0.41	10	D^2PAK
MBR2535CTL	25	35	0.41	5	TO-220
MBRB2515L	25	15	0.42	15	D^2PAK
MBR2515L	25	15	0.42	15	TO-220
MBRB3030CTL	30	30	0.51	5	D^2PAK
MBR4015LWT	40	15	0.42	5	TO-247
MBR5025L	50	25	0.58	0.5	TO-218
MBRP20030CTL	200	30	0.52	5	POWERTAP II
MBRP20035L	200	35	0.57	10	POWERTAP III
MBRP20045L	200	45	0.57	10	POWERTAP III
MBRP200100L	200	100	0.83	6	POWERTAP III
MBRP30035L	300	35	0.57	10	POWERTAP III
MBRP40045CTL	400	45	0.57	10	POWERTAP II
MBRP400100CTL	400	100	0.83	6	POWERTAP II
MBRP60035CTL	600	35	0.57	10	POWERTAP II

Table 2. MEGAHERTZ™ Rectifiers

Device	I_O Amps	V_{RRM} (Volts)	Maximum		t_{rr} (Nanosecond)
			V_F @ Rated I_O and Temp. (Volts)	I_R @ Rated V_{RRM} (mAmps)	
MURH840CT/MURHB840CT	8	400	1.7	0.01	28
MURH860CT	8	600	2.0	0.01	35
MURHB860CT	8	600	2.0	0.01	35
MURHF860CT	8	600	2.0	0.01	35
MURH8100E	8	1000	2.6	0.01	50

Table 3. UltraSoft Rectifiers (For High Speed Rectification)

Device	I_O Amps	V_{RRM} (Volts)	Max V_F @ I_F (Volts)	Max t_{rr} (ηSec)	T_JMax (°C)
MSRP10040	100	400	1.75 @ 100 A	75	150
MSRD620CT	6	200	1.2 @ 6.0 A	55	150

SCHOTTKY Rectifiers

Table 4. Surface Mount Schottky Rectifiers

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R[2] T_J = 25°C (mA)	Max I_R[3] (mA)	Package
20	0.5	T_L = 105°C	*MBR0520LT1*[5] ★ *MBR0520LT3*	0.310 @ 0.1 A 0.385 @ 0.5 A	5	125	.075 @ 10 V .250 @ 20 V	5 @ 10 V 8 @ 20 V	**CASE 425-04** (SOD-123) Cathode = Band
30	0.5	T_L = 105°C	*MBR0530T1*[5] ★ *MBR0530T3*	0.375 @ 0.1 A 0.430 @ 0.5 A	5	125	.020 @ 15 V .130 @ 30 V	—	
40	0.5	T_L = 110°C	*MBR0540T1*[5] ★ *MBR0540T3*	0.53 @ 0.5 A	20	150	.010 @ 20 V .020 @ 40 V	—	
20	1	T_{tab} ≤ 100°C	*MBRM120T3*	0.36 @ 0.1 A 0.45 @ 1 A	50	150	0.4 @ 20 V	N/A	**CASE 457–03** (POWERMITE®)
40	1	T_{tab} ≤ 100°C	*MBRM140T3*	0.39 @ 0.1 A 0.55 @ 1 A	50	150	0.4 @ 40 V	N/A	
30	1	T_C ≤ 105°C	*MBRA130LT3*	0.41 @ 1 A 0.47 @ 2 A	25	125	1.0 @ 30 V 0.4 @ 15 V	25 @ 30 V	**CASE 403B–01** (SMA)
40	1	T_C ≤ 100°C	*MBRA140T3*	0.60 @ 1 A 0.73 @ 2 A	25	125	1.0 @ 40 V 0.2 @ 20 V	25 @ 40 V	
30	1	T_L = 120°C	*MBRS130LT3*[6]	0.395 @ 1.0 A	40	125	1	10	**CASE 403-03** (SMB) Cathode = Notch
40	1	T_L = 115°C	*MBRS140T3*[6]	0.6 @ 1.0 A	40	125	1	10	
100	1	T_L = 120°C	*MBRS1100T3*[6]	0.75 @ 1.0 A	40	150	0.5	5	
40	3	T_L = 100°C	*MBRS340T3*[6]	0.525 @ 3.0 A	80	125	2	20	**CASE 403A-03** (SMC) Cathode = Notch
40	2	T_C ≤ 95°C	*MBRS240LT3*	0.43 @ 2 A 0.53 @ 4 A	25	125	2.0 @ 40 V 0.5 @ 20 V	60 @ 40 V 40 @ 20 V	
60	3	T_L = 100°C	*MBRS360T3*[6] ★	0.74 @ 3.0 A	80	125	0.5	20	
60	3	T_C = 125°C	*MBRD360*	0.60 @ 3.0 A	75	150	0.2	20 @ 125°C	**CASE 369A-13** (DPAK)
40	6	T_C = 130°C	*MBRD640CT*	0.70 @ 3.0 A	75	150	0.1	15 @ 125°C	
60	6	T_C = 130°C	*MBRD660CT*	0.70 @ 3.0 A	75	150	0.1	15 @ 125°C	
35	8	T_C = 100°C	*MBRD835L* ★	0.40 @ 3.0 A 0.51 @ 8.0 A	100	125	1.4	35	
35	10	T_C = 90°C	*MBRD1035CTL* ★	0.49 @ 10 A	100	125	2	130 @ 125°C	
100	3	T_C = 125°C	*MBRD3100* ★	0.65 @ 3.0 A	150	150	0.6	20 @ 125°C	
45	15	T_C = 105°C	*MBRB1545CT*	0.84 @ 15 A	150	150	0.1	15 @ 125°C	"CT" Suffix
60	20	T_C = 110°C	*MBRB2060CT*	0.95 @ 20 A	150	150	0.15	150 @ 125°C	
100	20	T_C = 110°C	*MBRB20100CT*	0.85 @ 10 A 0.95 @ 20 A	150	150	0.1	6 @ 125°C	
200	20	T_C = 125°C	*MBRB20200CT* ★	1.0 @ 20 A	150	150	1	50 @ 125°C	**CASE 418B-03** (D^2PAK) Non-"CT" Suffix
15	25	T_C = 90°C	*MBRB2515L* ★	0.45 @ 25 A	150	100	15	200 @ 70°C	
35	25	T_C = 110°C	*MBRB2535CTL*	0.47 @ 12.5 A 0.55 @ 25 A	150	125	10	500 @ 125°C	
45	25	T_C = 130°C	*MBRB2545CT*	0.82 @ 30 A	150	150	0.2	40 @ 125°C	
30	30	T_C = 115°C	*MBRB3030CT* ★	0.54 @ 15 A 0.67 @ 30 A	300	150	1.2	145 @ 150°C 46 @ 10 V, 150°C	
30	30	T_C = 95°C	*MBRB3030CTL* ★	0.45 @ 15 A 0.51 @ 30 A	150	125	2	195 @ 125°C 75 @ 10 V, 125°C	
30	40	T_C = 110°C	*MBRB4030* ★	0.46 @ 20 A 0.55 @ 40 A	300	150	1	150 @ 125°C	
30	70	T_C ≤ 135°C	*MBRV7030CTL*	0.50 @ 35 A 0.62 @ 70 A	500	150	2.0 @ 30 V	40 @ 30 V	**CASE 433–01** (D^3PAK)

(1) I_O is total device current capability.
(2) V_{RRM} unless noted
(3) V_{RRM}, T_J = 100°C unless noted
(5) T1 suffix = 3000/reel, T3 suffix = 10000/reel.
(6) T3 suffix = 2500/reel.

★ New Product

All devices listed are Motorola preferred devices

Table 5. Axial Lead Schottky Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_L = 25°C (mA)	Max I_R(3) T_L (mA)	Package
20	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	*1N5817*	0.45 @ 1.0 A	25	125	1	10	CASE 59–04 Plastic Cathode = Polarity Band
30	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	*1N5818*	0.55 @ 1.0 A	25	125	1	10	
40	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	*1N5819*	0.60 @ 1.0 A	25	125	1	10	
60	1	T_A = 55°C $R_{\theta JA}$ = 80°C/W	*MBR160*	0.75 @ 1.0 A	25	150	0.5	5	
100	1	T_A = 120°C $R_{\theta JA}$ = 50°C/W	*MBR1100*	0.79 @ 1.0 A	50	150	0.5	5	
20	3	T_A = 76°C $R_{\theta JA}$ = 28°C/W	*1N5820*	0.457 @ 3.0 A	80	125	2	20	CASE 267-03 Plastic Cathode = Polarity Band
30	3	T_A = 71°C $R_{\theta JA}$ = 28°C/W	*1N5821*	0.500 @ 3.0 A	80	125	2	20	
40	3	T_A = 61°C $R_{\theta JA}$ = 28°C/W	*1N5822*	0.525 @ 3.0 A	80	125	2	20	
40	3	T_A = 65°C $R_{\theta JA}$ = 28°C/W	*MBR340*	0.600 @ 3.0 A	80	150	0.6	20	
60	3	T_A = 65°C $R_{\theta JA}$ = 28°C/W	*MBR360*	0.740 @ 3.0 A	80	150	0.6	20	
100	3	T_A = 100°C $R_{\theta JA}$ = 28°C/W	*MBR3100*	0.79 @ 3.0 A	150	150	0.6	20	

(2)V_{RRM} unless noted
(3)V_{RRM}, T_J = 100°C unless noted

Table 6. TO-220 and D²PAK Straight Lead Type Schottky Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_C = 25°C (mA)	Max I_R(3) (mA)	Package
45	15	T_C = 105°C	*MBR1545CT*	0.84 @ 15 A	150	150	0.1	15 @ 125°C	CASE 221A-09 (TO-220AB) 
30	20	T_C = 137°C	*MBR2030CTL*★	0.52 @ 10 A 0.58 @ 20 A	150	150	5	40	
45	20	T_C = 135°C	*MBR2045CT*	0.84 @ 20 A	150	150	0.1	15 @ 125°C	
60	20	T_C = 133°C	*MBR2060CT*	0.85 @ 10 A 0.95 @ 20 A	150	150	0.1	6 @ 125°C	
100	20	T_C = 133°C	*MBR20100CT*	0.85 @ 10 A 0.95 @ 20 A	150	150	0.1	6 @ 125°C	
200	20	T_C = 125°C	*MBR20200CT*	1.0 @ 20 A	150	150	1	50 @ 125°C	
15	25	T_C = 90°C	*MBR2515L* ★	0.45 @ 25 A	150	100	15	200 @ 70°C	
35	25	T_C = 95°C	*MBR2535CTL* ★	0.55 @ 25 A	150	125	5	500 @ 125°C	
45	25	T_C = 130°C	*MBR2545CT*	0.82 @ 30 A	150	150	0.2	40 @ 125°C	
45	30	T_C = 130°C	*MBR3045ST* ★	0.76 @ 30 A	150	150	0.2	40 @ 125°C	
45	7.5	T_C = 105°C	*MBR745*	0.84 @ 15 A	150	150	0.1	15 @ 125°C	CASE 221B-04 (TO-220AC) 
45	10	T_C = 135°C	*MBR1045*	0.84 @ 20 A	150	150	0.1	15 @ 125°C	
60	10	T_C = 133°C	*MBR1060*	0.80 @ 10 A	150	150	0.1	6 @ 125°C	
100	10	T_C = 133°C	*MBR10100*	0.80 @ 10 A	150	150	0.1	6 @ 125°C	
45	16	T_C = 125°C	*MBR1645*	0.63 @ 16 A	150	150	0.2	40 @ 125°C	
45	15	T_C = 105°C	Ⓤ *MBRF1545CT* ★	0.84 @ 15 A	150	150	0.1	15 @ 125°C	CASE 221D-02 
45	20	T_C = 135°C	Ⓤ *MBRF2045CT* ★	0.84 @ 20 A	150	150	0.1	15 @ 125°C	
60	20	T_C = 133°C	Ⓤ *MBRF2060CT* ★	0.95 @ 20 A	150	150	0.15	15 @ 125°C	
100	20	T_C = 133°C	Ⓤ *MBRF20100CT* ★	0.95 @ 20 A	150	150	0.15	15 @ 125°C	
200	20	T_C = 125°C	Ⓤ *MBRF20200CT* ★	1.0 @ 20 A	150	150	1	50 @ 125°C	
45	25	T_C = 125°C	Ⓤ *MBRF2545CT* ★	0.82 @ 25 A	150	150	0.2	40 @ 125°C	

(2)V_{RRM} unless noted
(3)V_{RRM}, T_J = 100°C unless noted
Ⓤ Indicates UL Recognized — File #E69369

Table 6. TO-220 and D²PAK Straight Lead Type Schottky Rectifiers (continued)

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_C = 25°C (mA)	Max I_R(3) (mA)	Package
45	7.5	T_C = 105°C	*MBRF745* ★	0.84 @ 15 A	150	150	0.1	15 @ 125°C	CASE 221E-01
45	10	T_C = 135°C	*MBRF1045* ★	0.84 @ 20 A	150	150	0.1	15 @ 125°C	
30	30	T_C = 115°C	*MBRB3030CT1* ★	0.54 @ 15 A	300	150	1.2	145 @ 150°C	CASE 418C-01 (D²PAK–SL)
35	25	T_C = 110°C	*MBRB2535CTL1* ★	0.47 @ 12.5 A	150	125	10	500 @ 125°C	
100	20	T_C = 110°C	*MBRB20100CT1* ★	0.85 @ 10 A	150	150	0.1	6 @ 125°C	
100	30	T_C = 110°C	*MBRB30100CT–001* ★	0.88 @ 15 A	150	150	0.1	6 @ 125°C	

(2)V_{RRM} unless noted
(3)V_{RRM}, T_J = 100°C unless noted
Indicates UL Recognized — File #E69369

Table 7. TO-218 and TO-247 Type Schottky Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_C = 25°C (mA)	Max I_R(3) (mA)	Package
45	30	T_C = 105°C	*MBR3045PT*	0.76 @ 30 A	200	150	1	100 @ 125°C	CASE 340D-02 (TO-218AC)
45	40	T_C = 125°C	*MBR4045PT*	0.70 @ 20 A 0.80 @ 40 A	400	150	1	50	
45	60	T_C = 125°C	*MBR6045PT*	0.62 @ 30 A 0.75 @ 60 A	500	150	1	50	
25	50	T_C = 125°C	*MBR5025L*	0.54 @ 30 A 0.62 @ 50 A	300	150	0.5	60	CASE 340E-02 (TO-218)
45	30	T_C = 105°C	*MBR3045WT*	0.76 @ 30 A	200	150	1	100 @ 125°C	CASE 340K–01 (TO-247)
15	40	T_C = 125°C	*MBR4015LWT*	0.42 @ 20 A 0.50 @ 40 A	400	150	5	150 @ 75°C	
45	40	T_C = 125°C	*MBR4045WT*	0.70 @ 20 A 0.80 @ 40 A	400	150	1	50	
45	60	T_C = 125°C	*MBR6045WT*	0.62 @ 30 A 0.75 @ 60 A	500	150	1	50	
30	70	T_C = 135°C	*MBR7030WT*	0.55 @ 35 A 0.70	400	150	5	250	

(2)V_{RRM} unless noted
(3)V_{RRM}, T_J = 100°C unless noted

Table 8. POWERTAP II Schottky Rectifiers

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R[2] T_C = 25°C (mA)	Max I_R[3] (mA)	Package
30	200	T_C = 125°C	***MBRP20030CTL***	0.52 @ 100 A 0.60 @ 200 A	1500	150	5	—	**CASE 357C-03** POWERTAP™
35	600	T_C = 100°C	***MBRP60035CTL***	0.57 @ 300 A	4000	150	10	250	
45	200	T_C = 125°C	***MBRP20045CT***	0.78 @ 100 A	1500	175	0.5	50 @ 125°C	
45	300	T_C = 120°C	***MBRP30045CT***	0.70 @ 150 A 0.82 @ 300 A	2500	175	0.8	75 @ 125°C	
45	400	T_C = 100°C	***MBRP40045CTL*** ★	0.57 @ 200 A	2500	150	10	—	
60	200	T_C = 125°C	***MBRP20060CT***	0.800 @ 100 A	1500	175	0.5	50 @ 125°C	
60	300	T_C = 120°C	***MBRP30060CT***	0.79 @ 150 A 0.89 @ 300 A	2500	175	0.8	75 @ 125°C	
100	400	T_C = 100°C	***MBRP400100CTL*** ★	0.83 @ 200 A	2500	150	6	—	



Cathode = Mounting Plate
Anode = Terminal

[1] I_O is total device current capability.
[2] V_{RRM} unless noted
[3] V_{RRM}, T_J = 100°C unless noted

★ New Product

All SOT-227B devices have 2500 volts isolation between the heatsink and active elements.

Table 9. POWERTAP III Schottky Rectifiers

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R[2] T_C = 25°C (μA)	Max I_R[3] (μA) T_J = 100°C	Package
35	200	T_C = 100°C	***MBRP20035L*** ★	0.57 @ 200 A	2000	150	10	250	**CASE 357D-01** POWERTAP™
	300	T_C = 100°C	***MBRP30035L*** ★	0.57 @ 300 A	3000	150	10	250	
45	200	T_C = 100°C	***MBRP20045L*** ★	0.57 @ 200 A	2000	150	10	—	
100	200	T_C = 100°C	***MBRP200100L*** ★	0.83 @ 200 A	2000	150	6	—	



[1] I_O is total device current capability.
[2] V_{RRM} unless noted
[3] V_{RRM}, T_J = 100°C unless noted

★ New Product

All SOT-227B devices have 2500 volts isolation between the heatsink and active elements.

NEW UltraSoft Rectifiers

Table 10. UltraSoft Rectifiers (For High Speed Rectification)

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_C = 29°C (Volts)	t_{rr} (ηSec)	T_J Max (°C)	Max I_R[2] T_C = 25°C (mA)	Max I_R[3] (mA) T_J = 100°C	Package
400	100	T_C = 100°C	***MSRP10040*** ★	1.75 @ 100 A	75	150	50	500	**CASE 357D-01** POWERTAP™
200	6	T_C = 145°C	***MSRD620CT*** ★	1.2 @ 6.0 A	55	150	0.001	500	**CASE 369A–13** (DPAK)

[1] I_O is total device current capability.
[2] V_{RRM} unless noted
[3] V_{RRM}, T_J = 100°C unless noted

Ultrafast Rectifiers

Table 11. Surface Mount Ultrafast Rectifiers

V_{RRM} (Volts)	I_O[1] (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R[2] T_J = 25°C (μA)	Max I_R[4] (μA) Package	Package
200	1	T_L = 155°C	***MURS120T3***[6]	35	0.875 @ 1.0 A	40	175	2	50	**SMB** Cathode = Notch
600	1	T_L = 150°C	***MURS160T3***[6]	75	1.25 @ 1.0 A	35	175	5	150	
200	3	T_L = 140°C	***MURS320T3***[6]	35	0.875 @ 3.0 A	75	175	5	15	**SMC** Cathode = Notch
600	3	T_L = 130°C	***MURS360T3***[6]	75	1.25 @ 3.0 A	75	175	10	250	
200	3	T_L = 158°C	***MURD320***	35	0.95 @ 3.0 A	75	175	5	500 @ 125°C	**DPAK**   "CT" Suffix
200	6	T_L = 145°C	***MURD620CT***	35	1.0 @ 3.0 A	63	175	5	250 @ 125°C	
400	8	T_L = 120°C	***MURHB840CT***	28	2.2 @ 4.0 A	100	175	10	500	**D^2PAK**   Non-"CT" Suffix
600	8	T_L = 120°C	***MURHB860CT*** ★	35	2.8 @ 4.0 A	100	175	10	500	
200	16	T_L = 150°C	***MURB1620CT***	35	0.975 @ 8.0 A	100	175	5	250	
600	16	T_L = 150°C	***MURB1660CT***	60	1.5 @ 8.0 A	100	175	10	500	

(1)I_O is total device current capability.
(2)V_{RRM} unless noted
(4)V_{RRM}, T_J = 150°C unless noted
(6)T3 suffix = 2500/reel.
★ New Product

Table 12. Axial Lead Ultrafast Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R[2] T_J = 25°C (μA)	Max I_R[4] (μA)	Package
200	1	T_A = 130°C $R_{\theta JA}$ = 50°C/W	***MUR120***	25	0.875 @ 1.0 A	35	175	2	50	**CASE 59-04** Plastic Cathode = Polarity Band
400	1	T_A = 120°C $R_{\theta JA}$ = 50°C/W	***MUR140***	50	1.25 @ 1.0 A	35	175	5	150	
600	1	T_A = 120°C $R_{\theta JA}$ = 50°C/W	***MUR160***	50	1.25 @ 1.0 A	35	175	5	150	
1000	1	T_A = 95°C $R_{\theta JA}$ = 50°C/W	***MUR1100E***	75	1.75 @ 1.0 A	35	175	10	600 @ 100°C	
200	4	T_A = 80°C $R_{\theta JA}$ = 28°C/W	***MUR420***	25	0.875 @ 3.0 A	125	175	5	150	**CASE 267-03** Plastic Cathode = Polarity Band
400	4	T_A = 40°C $R_{\theta JA}$ = 28°C/W	***MUR440***	50	1.25 @ 3.0 A	70	175	10	250	
600	4	T_A = 40°C $R_{\theta JA}$ = 28°C/W	***MUR460***	50	1.25 @ 3.0 A	70	175	10	250	
1000	4	T_A = 35°C $R_{\theta JA}$ = 28°C/W	***MUR4100E***	75	1.75 @ 3.0 A	70	175	25	900 @ 100°C	

(2)V_{RRM} unless noted
(4)V_{RRM}, T_J = 150°C unless noted

Table 13. TO-220 Type Ultrafast and MEGAHERTZ™ Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_C = 25°C (μA)	Max I_R(4) (μA)	Package
200	6	T_C = 130°C	*MUR620CT*	35	0.975 @ 3.0 A	75	175	5	250	CASE 221A-09 (TO-220AB)  MUR1620CTR Only
400	8	T_C = 120°C	*MURH840CT*	28	2.0 @ 4.0 A	100	175	10	500	
600	8	T_C = 120°C	*MURH860CT*	35	2.8 @ 4.0 A	100	175	10	500	
200	16	T_C = 150°C	*MUR1620CT*	35	0.975 @ 8.0 A	100	175	5	250	
200	16	T_C = 160°C	*MUR1620CTR*	85	1.2 @ 8.0 A	100	175	5	500	
400	16	T_C = 150°C	*MUR1640CT*	60	1.30 @ 8.0 A	100	175	10	250	
600	16	T_C = 150°C	*MUR1660CT*	60	1.5 @ 8.0 A	100	175	10	500	
200	8	T_C = 150°C	*MUR820*	35	0.975 @ 8.0 A	100	175	5	250	CASE 221B-04 (TO-220AC) 
400	8	T_C = 150°C	*MUR840*	50	1.30 @ 8.0 A	100	175	10	500	
600	8	T_C = 150°C	*MUR860*	50	1.50 @ 8.0 A	100	175	10	500	
800	8	T_C = 175°C	*MUR880E*	75	1.80 @ 8.0 A	100	175	25	500 @ 100°C	
1000	8	T_C = 150°C	*MUR8100E*	75	1.80 @ 8.0 A	100	175	25	500 @ 100°C	
1000	8	T_C = 150°C	*MURH8100E*	50	2.60 @ 8.0 A	100	175	10	100	
1200	10	T_C = 125°C	*MUR10120E*	175	2.2 @ 6.5 A	100	125	100	1000 @ 125°C	
1500	10	T_C = 125°C	*MUR10150E*	175	2.4 @ 6.5 A	100	125	100	1000 @ 125°C	
200	15	T_C = 150°C	*MUR1520*	35	1.05 @ 15 A	200	175	10	500	
400	15	T_C = 150°C	*MUR1540*	60	1.25 @ 15 A	150	175	10	500	
600	15	T_C = 145°C	*MUR1560*	60	1.50 @ 15 A	150	175	10	1000	
200	8	T_C = 150°C	*MURF82*	25	0.975 @ 8.0 A	100	150	5	250	CASE 221E-01 
200	16	T_C = 150°C	*MURF1620CT*	25	0.975 @ 8.0 A	100	150	5	250	
600	8	$T_C \leq$ 120°C	*MURHF860CT*★	35	2.8 @ 4.0 A	100	175	10	500	
600	16	T_C = 150°C	*MURF1660CT*	50	1.50 @ 8.0 A	100	150	10	500	

(2)V_{RRM} unless noted
(4)V_{RRM}, T_J = 150°C unless noted
★ New Product
Indicates UL Recognized — File #E69369

Table 14. TO-218 and TO-247 Type Ultrafast Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_J = 25°C (μA)	Max I_R(4) (mA)	Package
200	30	T_C = 145°C	*MUR3020WT*	35	1.05 @ 15 A	150	175	10	0.5	CASE 340K–01 (TO-247) 
600	30	T_C = 145°C	*MUR3060WT*	60	1.70 @ 15 A	150	175	10	1	
200	30	T_C = 150°C	*MUR3020PT*	35	1.12 @ 15 A	200	175	10	0.5	CASE 340D-02 (TO-218AC) 
400	30	T_C = 150°C	*MUR3040PT*	60	1.12 @ 15 A	150	175	10	0.5	
600	30	T_C = 145°C	*MUR3060PT*	60	1.20 @ 15 A	150	175	10	1	
400	30	T_C = 70°C	*MUR3040*	100	1.5 @ 30 A	300	175	35	6 @ 100°C	CASE 340E-02 (TO-218) 
800	30	T_C = 70°C	*MUR3080*	110	1.90 @ 30 A	300	175	100	5 @ 100°C	
400	60	T_C = 70°C	*MUR6040*	100	1.50 @ 60 A	600	175	60	10 @ 100°C	

(2)V_{RRM} unless noted
(4)V_{RRM}, T_J = 150°C unless noted

Table 15. POWERTAP II Ultrafast Rectifiers

V_{RRM} (Volts)	I_O(1) (Amperes)	I_O Rating Condition	Device	Max t_{rr} (ns)	Max V_F @ i_F T_C = 25°C (Volts)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_J = 25°C (μA)	Max I_R(4) (mA)	Package
200	200	T_C = 130°C	*MURP20020CT*	50	1.00 @ 100 A	800	175	150	1 @ 125°C	CASE 357C-03 POWERTAP™  Cathode = Mounting Plate Anode = Terminal
400	200	T_C = 100°C	*MURP20040CT*	50	1.30 @ 100 A	800	175	50	0.5 @ 125°C	

(1)I_O is total device current capability.
(2)V_{RRM} unless noted
(4)V_{RRM}, T_J = 150°C unless noted
★ New Product

Fast Recovery Rectifiers/General-Purpose Rectifiers

Table 16. Fast Recovery Rectifiers/General Purpose Rectifiers

V_{RRM} (Volts)	I_O (Amperes)	I_O Rating Condition	Device	Max V_F @ i_F T_J = 25°C (Volts)	Max t_{rr} (ns)	I_{FSM} (Amperes)	T_J Max (°C)	Max I_R(2) T_J = 25°C (μA)	Max I_R(3) (μA)	Package
200	1	T_C = 100°C	***MRA4003T3*** ★	1.1 @ 1.0 A	—	30	150	10	50	**CASE 403B-01** **SMA** Cathode = Notch
400	1	T_C = 100°C	***MRA4004T3*** ★	1.1 @ 1.0 A	—	30	150	10	50	
600	1	T_C = 100°C	***MRA4005T3*** ★	1.1 @ 1.0 A	—	30	150	10	50	
800	1	T_C = 100°C	***MRA4006T3*** ★	1.1 @ 1.0 A	—	30	150	10	50	
1000	1	T_C = 100°C	***MRA4007T3*** ★	1.1 @ 1.0 A	—	30	150	10	50	
400	1	T_A = 75°C	***1N4004***	1.1 @ 1.0 A	—	30	150	10	50	**CASE 59-03**(7) Plastic  Cathode = Polarity Band
1000	1	T_A = 75°C	***1N4007***	1.1 @ 1.0 A	—	30	150	10	50	
200	1	T_A = 75°C	***1N4935***	1.2 @ 3.14 A T_J = 125°C	200	30	150	5	100	
600	1	T_A = 75°C	***1N4937***	1.2 @ 3.14 A T_J = 125°C	200	30	150	5	100	
400	3	T_L = 105°C	***1N5404***	1.2 @ 9.4 A	—	200	150	—	500 @ 80°C	**CASE 267-03** Plastic Cathode = Polarity Band
600	3	T_L = 105°C	***1N5406***	1.2 @ 9.4 A	—	200	150	—	500 @ 80°C	
200	3	T_A = 80°C(8)	***MR852***	1.25 @ 3.0 A	200	100	150	10	200 @ 80°C	
600	3	T_A = 80°C(8)	***MR856***	1.25 @ 3.0 A	200	100	150	10	300 @ 80°C	
400	6	T_A = 60°C $R_{\theta JA}$ = 25°C/W	***MR754***	1.25 @ 100 A	—	400	175	25	1000	**CASE 194-04** Plastic Cathode indicated by diode symbol
1000	6	T_A = 60°C $R_{\theta JA}$ = 25°C/W	***MR760***	1.25 @ 100 A	—	400	175	25	1000	
400	25	T_C = 150°C	***MR2504***	1.18 @ 78.5 A	—	400	175	100	500	**CASE 193-04** Plastic Cathode = Polarity Band
1000	25	T_C = 150°C	***MR2510***	1.18 @ 78.5 A	—	400	175	100	500	
20	35	T_C = 150°C	***MR2535L***(9)	1.1 @ 100 A	—	400	175	0.2 @ 20 V	—	**CASE 194-04** Plastic Cathode indicated by diode symbol

(2)V_{RRM} unless noted
(3)V_{RRM}, T_J = 100°C unless noted
(7)Package Size: 0.120" max diameter by 0.260" length.
(8)Must be derated for reverse power dissipation. See data sheet.
(9)Overvoltage Transient Suppressor: 24–32 volts avalanche voltage.
★ New Product

Thyristors and Triggers

In Brief . . .

Motorola's broad line of Thyristors includes. . . .

- A full line of TRIACs and SCRs covering a forward current range from 0.5 to 55 amperes and blocking voltages from 15 to 800 volts.
- Plastic package for lowest cost which includes the fully insulated plastic Case 221C (TO–220 Isolated).

Then there are the special applications devices for Ignition circuits and Crowbar applications. Also included are isolated packaged devices for appliances and surface mount packages for surface mounting in space–saving requirements.

New in the Motorola Thyristor line–up are the high–performance TO–220 TRIACs, such as the MAC8 and MAC12 series designed specifically for white goods and motor control applications.

	Page
Silicon Controlled Rectifiers	5.7–2
TRIACs	5.7–7
General Purpose	5.7–7
Thyristor Triggers	5.7–14
Programmable Unijunction Transistors — PUT	5.7–14
Silicon Bidirectional Switch (SBS)	5.7–14
High Voltage Bidirectional TVS Devices	5.7–14

SCRs

Silicon Controlled Rectifiers

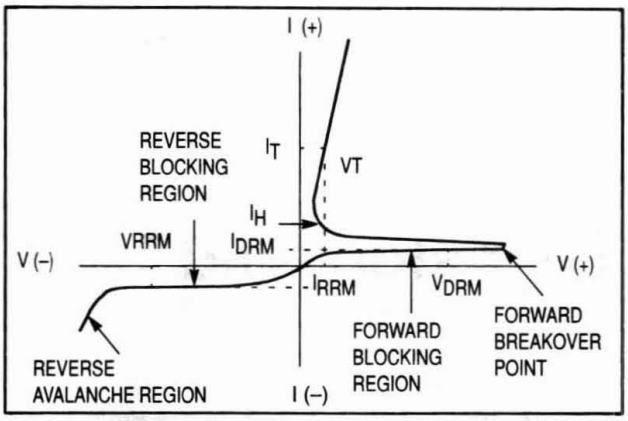

Table 1. SCRs — General Purpose Plastic Packages
0.8 to 55 Amperes RMS, 25 to 800 Volts

V_{DRM} V_{RRM} (Volts)	On–State (RMS) Current		
	0.8 AMP		1.5 AMPS
	T_C = 58°C	T_C = 80°C	T_C = 50°C
	Sensitive Gate		
	Case 29–04 TO–226AA (TO–92) Style 10	Case 318E SOT–223 STYLE 10	Case 29–04 TO–226AA (TO–92) Style 10
25	—	—	—
50	—	—	—
100	—	—	—
200	—	***MCR08BT1***	—
400	***MCR100–6***	***MCR08DT1***	***MCR22–6***
500	—	—	—
600	***MCR100–8***	***MCR08MT1***	***MCR22–8***
Maximum Electrical Characteristics			
I_{TSM} (Amps) 60 Hz	10	10	15 150(3)
I_{GT} (mA)	0.2		
V_{GT} (V)	0.8		
T_J Operating Range (°C)	–65 to +110	–40 to +110	–40 to +125

(3) Exponential decay 2 μs wide at 5 time constants, f = 12 Hz.

Devices listed in bold, italic are Motorola preferred devices.

Table 1. SCRs — General Purpose Plastic Packages (continued)

V_{DRM} V_{RRM} (Volts)	On–State (RMS) Current		
	4 AMPS		
	T_C = 93°C	T_C = 30°C	
			
	Sensitive Gate		
	Case 77 TO–225AA (TO–126) Style 2		Case 369 Style 4
50	—	***C106F***	—
100	—	***C106A***	—
200	—	***C106B***	—
400	***MCR106–6*** ***2N6240***	***C106D***	MCR716–1
600	***MCR106–8*** ***2N6241***	***C106M***	MCR718–1
800	—	—	—
Maximum Electrical Characteristics			
I_{TSM} (Amps) 60 Hz	25	20	25
I_{GT} (mA)	0.2		0.075
V_{GT} (V)	1	0.8	1
T_J Operating Range (°C)	−40 to +110		

Indicates UL Recognized — File #E69369

Devices listed in bold, italic are Motorola preferred devices.

Table 1. SCRs — General Purpose Plastic Packages (continued)

V_{DRM} V_{RRM} (Volts)	On–State (RMS) Current			
	8 AMPS			10 AMPS
	T_C = 70°C	T_C = 83°C	T_C = 80°C	T_C = 75°C
				
			High Performance	
	Isolated UL	Sensitive Gate	Sensitive Gate	
	Case 221C–02 Style 2	Case 221A–04 TO–220AB Style 3	Case 221A–06 TO–220AB Style 3	Case 221A–04 TO–220AB Style 3
50	—	—	—	—
100	—	—	—	—
200	—	—	—	—
400	MCR218–6FP	MCR72–6	***MCR8D***	***MCR8SD***
600	—	MCR72–8	***MCR8M***	***MCR8SM***
800	—	—	***MCR8N***	***MCR8SN***
Maximum Electrical Characteristics				
I_{TSM} (Amps) 60 Hz	80	100	80	100
I_{GT} (mA)	25	0.2	15	0.2
V_{GT} (V)	1.5		1	1.5
DV/DT V/μsec			Min. 50	Min. 2
T_J Operating Range (°C)	−40 to +125	−40 to +110	−40 to +125	−40 to +110

UL Indicates UL Recognized — File #E69369

Devices listed in bold, italic are Motorola preferred devices.

Table 1. SCRs — General Purpose Plastic Packages (continued)

V_{DRM} V_{RRM} (Volts)	On–State (RMS) Current				
	10 AMPS	12 AMPS	16 AMPS	25 AMPS	
	T_C = 75°C	T_C = 80°C			T_C = 85°C
					
	Sensitive Gate	High Performance			
	Case 221A–04 TO–220AB Style 3	Case 221A–06 TO–220AB Style 3			Case 221A–04 TO–220AB Style 3
50	—	—	—	—	—
100	—	—	—	—	—
200	—	—	—	—	—
400	MCR12LD	***MCR12D***	***MCR16D***	***MCR25D***	2N6507
600	MCR12LM	***MCR12M***	***MCR16M***	***MCR25M***	2N6508
800	MCR12LN	***MCR12N***	***MCR16N***	***MCR25N***	2N6509
Maximum Electrical Characteristics					
I_{TSM} (Amps) 60 Hz	100		150	300	
I_{GT} (mA)	8	20		30	40
V_{GT} (V)	1.5	2.2	1.7	1	1.5
	Min.	Min.	Min.	Min.	
DV/DT V/μsec	50	50	50	50	
T_J Operating Range (°C)	−40 to +100	−40 to +125			

Devices listed in bold, italic are Motorola preferred devices.

Table 1. SCRs — General Purpose Plastic Packages (continued)

V_{DRM} V_{RRM} (Volts)	On–State (RMS) Current		
	25 AMPS	40 AMPS	55 AMPS
	T_C = 85°C	T_C = 80°C	T_C = 70°C
	Isolated UL		
	Case 221C–02 Style 2	Case 221A–04 TO–220AB Style 3	
50	—	—	—
100	—	—	—
200	—	***MCR264–4***	***MCR265–4***
400	—	***MCR264–6***	***MCR265–6***
600	MCR225–8FP	***MCR264–8***	***MCR265–8***
800	MCR225–10FP	—	***MCR265–10***
Maximum Electrical Characteristics			
I_{TSM} (Amps) 60 Hz	300	400	550
I_{GT} (mA)	40	50	
V_{GT} (V)	1.5		
T_J Operating Range (°C)	–40 to +125		

UL Indicates UL Recognized — File #E69369

Devices listed in bold, italic are Motorola preferred devices.

TRIACs

Table 2. TRIACs — General Purpose Plastic Packages
0.6 to 40 Amperes, 200 to 800 Volts

	On–State (RMS) Current			
	0.6 AMP		0.8 AMPS	2.5 AMPS
	T_C = 50°C		T_C = 80°C	T_C = 70°C
				
	Sensitive Gate			
V_{DRM} (Volts)	Case 29–04 TO–226AA (TO–92) Style 12		Case 318E Style 11 SOT–223	Case 77 TO–225AA (TO–126) Style 5
200	—	—	***MAC08BT1***	***T2322B***
400	—	***MAC97A6***	—	***T2322D***
600	***MAC97–8***	***MAC97A8***	***MAC08MT1***	***T2322M***
Maximum Electrical Characteristics				
I_{TSM} (Amps)	8		10	25
I_{GT} @ 25°C (mA)				
MT2(+)G(+)	10	5	10	10
MT2(+)G(–)	10	5	10	10
MT2(–)G(–)	10	5	10	10
MT2(–)G(+)	10	7	10	10
V_{GT} @ 25°C (V)			0.8	
MT2(+)G(+)	2		2	2.2
MT2(+)G(–)	2		2	2.2
MT2(–)G(–)	2		2	2.2
MT2(–)G(+)	2.5		2	2.2
T_J Operating Range (°C)	−40 to +110			

Devices listed in bold, italic are Motorola preferred devices.

Table 2. TRIACs (continued)

V_{DRM} (Volts)	On–State (RMS) Current			
	4 AMPS			6 AMPS
	T_C = 85°C			T_C = 80°C
		Sensitive Gate		
	Case 77 TO–225AA (TO–126) Style 5			Case 221A–04 TO–220AB Style 4
200	—	***2N6071A***	***2N6071B***	—
400	—	***2N6073A***	***2N6073B***	T2500D
600	***2N6075***	***2N6075A***	***2N6075B***	T2500M
800	—	—	—	T2500N
Maximum Electrical Characteristics				
I_{TSM} (Amps)	30			60
I_{GT} @ 25°C (mA)				
MT2(+)G(+)	30	5	3	25
MT2(+)G(–)	—	5	3	60
MT2(–)G(–)	30	5	3	25
MT2(–)G(+)	—	10	5	60
V_{GT} @ 25°C (V)	@ –40°C	@ –40°C		
MT2(+)G(+)	2.5	2.5		2.5
MT2(+)G(–)	—	2.5		2.5
MT2(–)G(–)	2.5	2.5		2.5
MT2(–)G(+)	—	2.5		2.5
T_J Operating Range (°C)	–40 to +110	–40 to +100		

Devices listed in bold, italic are Motorola preferred devices.

Table 2. TRIACs (continued)

	On–State (RMS) Current					
	6 AMPS	8 AMPS				
	T_C = 80°C	T_C = 80°C	T_C = 70°C	T_C = 80°C		
						
			Sensitive Gate			
	Isolated UL		High Performance			Isolated UL
V_{DRM} (Volts)	Case 221C–02 Style 3	Case 221A–04 TO–220AB Style 4	Case 221A–06 TO–220AB Style 4			Case 221C–02 Style 3
200	—	—	—	—	—	—
400	T2500DFP	—	***MAC8SD***	***MAC8D***	***MAC9D***	MAC218A6FP
600	—	MAC218A8	***MAC8SM***	***MAC8M***	***MAC9M***	—
800	—	—	***MAC8SN***	***MAC8N***	***MAC9N***	MAC218A10FP
Maximum Electrical Characteristics						
I_{TSM} (Amps)	100		70	80		100
I_{GT} @ 25°C (mA)			Min. / Max.			
MT2(+)G(+)	25	50	0.8 / 5.0	35	50	50
MT2(+)G(–)	60	50	0.8 / 5.0	35	50	50
MT2(–)G(–)	25	50	0.8 / 5.0	35	50	50
MT2(–)G(+)	60	75	— / —	—	—	75
V_{GT} @ 25°C (V)						
MT2(+)G(+)	2.5	2	0.45 / 1.5	1.5		2
MT2(+)G(–)	2.5	2	0.45 / 1.5	1.5		2
MT2(–)G(–)	2.5	2	0.45 / 1.5	1.5		2
MT2(–)G(+)	2.5	2.5	— / —	—		2.5
			Min.	Min.	Min.	
DV/DT V/μsec			25	250	500	
T_J Operating Range (°C)	–40 to +100	–40 to +125	–40 to +110	–40 to +125		

UL Indicates UL Recognized — File #E69369

Devices listed in bold, italic are Motorola preferred devices.

Table 2. TRIACs (continued)

V_{DRM} (Volts)	On–State (RMS) Current		
	8 AMPS		
	T_C = 80°C		
			
			Sensitive Gate
	Case 221A–04 TO–220AB Style 4		
200	—	—	MAC228A4
400	—	T2800D	MAC228A6
600	2N6344	—	MAC228A8
800	2N6349	—	—
Maximum Electrical Characteristics			
I_{TSM} (Amps)	100		80
I_{GT} @ 25°C (mA)			
MT2(+)G(+)	50	25	5
MT2(+)G(–)	75(6)	60	5
MT2(–)G(–)	50	25	5
MT2(–)G(+)	75(6)	60	10(1)
V_{GT} @ 25°C (V)			
MT2(+)G(+)	2	2.5	2
MT2(+)G(–)	2.5(6)	2.5	2
MT2(–)G(–)	2.5	2.5	2
MT2(–)G(+)	2.5(6)	2.5	2.5
T_J Operating Range (°C)	–40 to +125	–40 to +100	–40 to +110

(6) Denotes 2N6346–49 Series only.

Ⓤ Indicates UL Recognized — File #E69369

Table 2. TRIACs (continued)

	On–State (RMS) Current			
	10 AMPS		12 AMPS	
	T_C = 70°C		T_C = 85°C	
				
		Isolated ℛ	Isolated ℛ	
V_{DRM} (Volts)	Case 221A–04 TO–220AB Style 4	Case 221C–02 Style 3	Case 221C–02 Style 3	Case 221A–04 TO–220AB Style 4
200	—	—	—	—
400	—	—	MAC212A6FP	—
600	MAC210A8	MAC210A8FP	MAC212A8FP	MAC212A8
800	—	MAC210A10FP	MAC212A10FP	—
Maximum Electrical Characteristics				
I_{TSM} (Amps)	100			
I_{GT} @ 25°C (mA) MT2(+)G(+) MT2(+)G(–) MT2(–)G(–) MT2(–)G(+)	 50 50 50 75			
V_{GT} @ 25°C (V) MT2(+)G(+) MT2(+)G(–) MT2(–)G(–) MT2(–)G(+)	 2 2 2 2.5			
T_J Operating Range (°C)	–40 to +125			

ℛ Indicates UL Recognized — File #E69369

Table 2. TRIACs (continued)

	On–State (RMS) Current						
	12 AMPS		15 AMPS				
	T_C = 80°C			T_C = 70°C	T_C = 90°C	T_C = 80°C	T_C = 90°C
				Sensitive Gate			
		High Performance				High Performance	Isolated UL
V_{DRM} (Volts)	Case 221A–04 TO–220AB Style 4	Case 221A–06 TO–220AB Style 4			Case 221A–04 TO–220AB Style 4	Case 221A–06 TO–220AB Style 4	Case 221C–02 Style 3
200	—	—	—	—	—	—	—
400	—	***MAC12D***	—	***MAC15SD***	MAC15A6	***MAC16D***	MAC15A6FP
600	2N6348A	***MAC12M***	***MAC15M***	***MAC15SM***	MAC15A8	***MAC16M***	MAC15A8FP
800	—	***MAC12N***	***MAC15N***	***MAC15SN***	MAC15A10	***MAC16N***	MAC15A10FP
Maximum Electrical Characteristics							
I_{TSM} (Amps)	120		150	120	150		
I_{GT} @ 25°C (mA)				Min. / Max.			
MT2(+)G(+)	50		35	0.8 / 5.0	50	50	50
MT2(+)G(–)	75		35	0.8 / 5.0	50	50	50
MT2(–)G(–)	50		35	0.8 / 5.0	50	50	50
MT2(–)G(+)	75		—	— / —	75	—	75
V_{GT} @ 25°C (V)							
MT2(+)G(+)	2	1.5		0.45 / 1.5	2	1.5	2
MT2(+)G(–)	2.5	1.5		0.45 / 1.5	2	1.5	2
MT2(–)G(–)	2	1.5		0.45 / 1.5	2	1.5	2
MT2(–)G(+)	2.5	—		— / —	2.5	—	2.5
		Min.	Min.	Min.		Min.	
DV/DT V/μsec		250	250	25		500	
T_J Operating Range (°C)		–40 to +125		–40 to +110		–40 to +125	

UL Indicates UL Recognized — File #E69369

Devices listed in bold, italic are Motorola preferred devices.

Table 2. TRIACs (continued)

V_{DRM} (Volts)	On–State (RMS) Current			
	20 AMPS	25 AMPS		40 AMPS
	T_C = 75°C	T_C = 80°C		T_C = 75°C
				
	Isolated UL	Isolated UL		
	Case 221C–02 Style 3	Case 221C–02 Style 3	Case 221A–04 TO–220AB Style 4	
200	—	—	—	—
400	—	MAC223A6FP	***MAC223A6***	***MAC224A6***
600	MAC320A8FP	MAC223A8FP	***MAC223A8***	***MAC224A8***
800	—	MAC223A10FP	***MAC223A10***	***MAC224A10***
Maximum Electrical Characteristics				
I_{TSM} (Amps)	150	250		350
I_{GT} @ 25°C (mA)				
MT2(+)G(+)	50			
MT2(+)G(–)	50			
MT2(–)G(–)	50			
MT2(–)G(+)	75			
V_{GT} @ 25°C (V)				
MT2(+)G(+)	2			
MT2(+)G(–)	2			
MT2(–)G(–)	2			
MT2(–)G(+)	2.5			
T_J Operating Range (°C)	–40 to +125			

UL Indicates UL Recognized — File #E69369

Devices listed in bold, italic are Motorola preferred devices.

Thyristor Triggers



Table 3. Programmable Unijunction Transistor — PUT

Similar to UJTs, except that I_V, I_P and intrinsic standoff voltage are programmable (adjustable) by means of external voltage divider. This stabilizes circuit performance for variations in device parameters. General operating frequency range is from 0.01 Hz to 10 kHz, making them suitable for long–duration timer circuits.

Device Type	I_P		I_{GAO} @ 40 V nA Max	I_V	
	R_G = 10 kΩ	R_G = 1 MΩ		R_G = 10 kΩ	R_G = 1 MΩ
	μA Max			μA Min	μA Max
Plastic TO–92 (Case 29–04/16)					
2N6027	5	2	10	70	50
2N6028	1	0.15	10	25	25

Table 4. Silicon Bidirectional Switch (SBS)

This versatile trigger device exhibits highly symmetrical bi-directional switching characteristics which can be modified by means of a gate lead. Requires a gate trigger current of only 250 μAdc for triggering.

Device Type	V_S Volts		I_S μA Max	I_H mA Max
	Min	Max		
Plastic TO–92/TO–226AA (Case 29–04/12)				
MBS4991	6	10	500	1.5
MBS4992	7.5	9	120	0.5
MBS4993	7.5	9	250	0.75

Table 5. High Voltage Bidirectional TVS Devices Primary Protection

Transient Voltage Suppression (TVS) devices are break-over–triggered crowbar protectors. Turn–off occurs when the surge current falls below the holding current value.

Device Type	I_{TSM} Amps	V_{BR} Volts (Min)	V_{BO} Volts (Max)
Case 416A–01			
MMT10V275	100	200	275
MMT10V400	100	265	400

Devices listed in bold, italic are Motorola preferred devices.

Sensors

In Brief . . .

Motorola's sensor products feature three product families of smoke ICs, acceleration, and pressure sensors. These sensors combine silicon micromachining with high volume semiconductor manufacturing technology and processes for highly accurate, reliable, repeatable, cost–effective sensors.

Acceleration Sensors

The acceleration sensor portfolio includes the PMMA1000 and PMMA2000 series sensors. This family of sensors integrates the silicon micromachined sensing element with a control chip packaged in a rugged, plastic package for maximum versatility and functionality.

Target applications: Automotive systems and industrial products

Pressure Sensors

Combining integrated circuit and micromachining technology, this diverse family of pressure sensing products offers performance, reliability and design adaptability in a single monolithic device. The versatile, cost–effective MPX series of pressure transducers are available in a number of versions:

- Fully signal conditioned for high–level output;
- High impedance, temperature compensated and calibrated, for low current designs;
- Temperature compensated and calibrated, for simplified circuits
- Uncompensated for unlimited adaptability and;
- Packaging and porting options

	Page
Introduction	5.8–2
Linearity	5.8–2
Operation	5.8–3
Typical Electrical Characteristic Curves	5.8–4
Unibody Cross–sectional Drawings	5.8–5
Pressure Side Identification	5.8–6
Selector Guide	5.8–7
Reference Table	5.8–13
Packaging Options	5.8–14

Pressure Sensors

Introduction

Motorola pressure sensors combine advanced piezoresistive sensor architecture with integrated circuit technology to offer a wide range of pressure sensing devices for automotive, biomedical, consumer and industrial applications. Selection versatility includes choice of:

Pressure Ranges in PSI

0 to 1.45, 0 to 6, 0 to 7.3, 0 to 14.5, 0 to 29, 0 to 75, 0 to 100, 0 to 150

Sensing Options

Uncompensated, Temperature Compensated/Calibrated, High Impedance, and Signal Conditioned (with on–chip amplifiers)

Application Measurements

Absolute, Differential, Gauge

Package Options

- Basic Element, Ported Elements for specific measurements
- Surface Mount, Low Profile and Top Piston fit packages

Linearity

Linearity refers to how well a transducer's output follows the equation: $V_{out} = V_{off}$ + sensitivity x P over the operating pressure range. There are two basic methods for calculating nonlinearity: (1) end point straight line fit (see Figure 1) or (2) a least squares best line fit. While a least squares fit gives the "best case" linearity error (lower numerical value), the calculations required are burdensome.

Conversely, an end point fit will give the "worst case" error (often more desirable in error budget calculations) and the calculations are more straightforward for the user. Motorola's specified pressure sensor linearities are based on the end point straight line method measured at the midrange pressure.

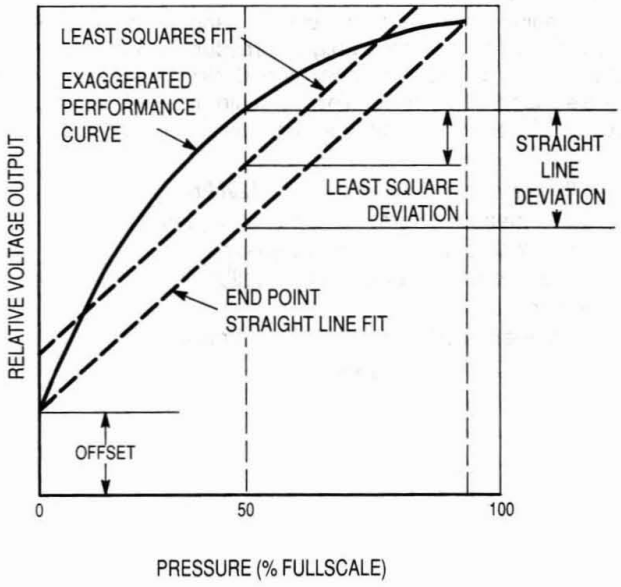

Figure 1. Linearity Specification Comparison

Operation

Motorola pressure sensors support three types of pressure measurements: Absolute Pressure, Differential Pressure and Gauge Pressure.

Absolute Pressure Sensors measure an external pressure relative to a zero–pressure reference (vacuum) sealed inside the reference chamber of the die during manufacture. This corresponds to a deflection of the diaphragm equal to approximately 14.5 psi (one atmosphere), generating a quiescent full–scale output for the MPX100A (14.5 psi) sensor, and a half–scale output for the MPX200A (29 psi) device. Measurement of external pressure is accomplished by applying a relative negative pressure to the "Pressure" side of the sensor.

Differential Pressure Sensors measure the difference between pressures applied simultaneously to opposite sides of the diaphragm. A positive pressure applied to the "Pressure" side generates the same (positive) output as an equal negative pressure applied to the "Vacuum" side.

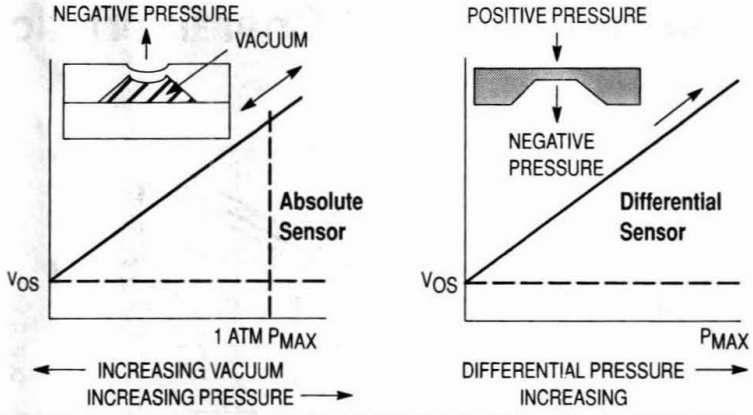

Motorola sensing elements can withstand pressure inputs as high as four times their rated capacity, although accuracy at pressures exceeding the rated pressure will be reduced. When excessive pressure is reduced, the previous linearity is immediately restored.

Figure 2. Pressure Measurements

Gauge Pressure readings are a special case of differential measurements in which the pressure applied to the "Pressure" side is measured against the ambient atmospheric pressure applied to the "Vacuum" side through the vent hole in the chip of the differential pressure sensor elements.

Typical Electrical Characteristic Curves

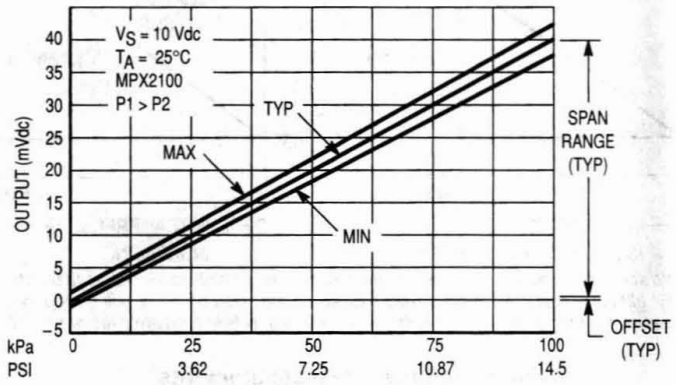

Figure 3. Output versus Pressure Differential

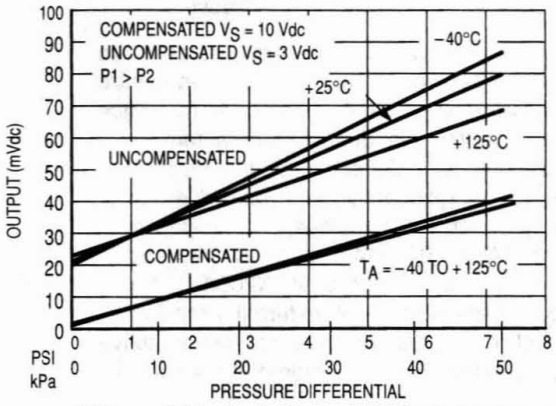

Figure 4. Typical–Output Voltage versus Pressure and Temperature for Compensated and Uncompensated Devices

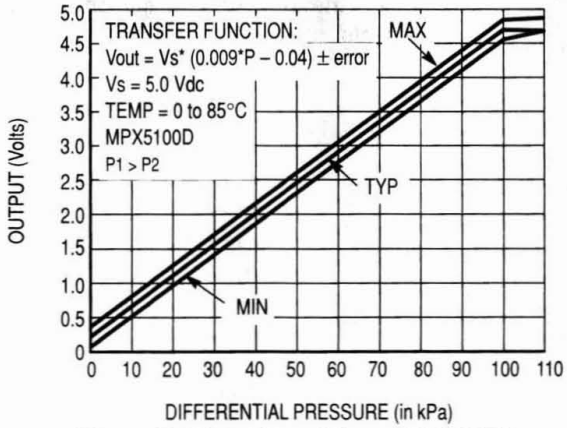

Figure 5. Signal Conditioned MPX5100

Unibody Cross–sectional Drawings

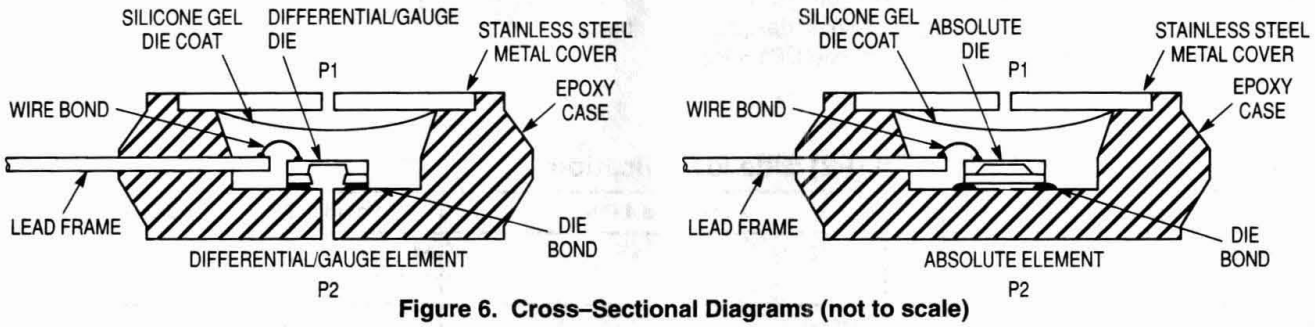

Figure 6. Cross–Sectional Diagrams (not to scale)

Figure 6 illustrates the absolute sensing configuration (right) and the differential or gauge configuration in the basic chip carrier (Case 344). A silicone gel isolates the die surface and wire bonds from harsh environments, while allowing the pressure signal to be transmitted to the silicon diaphragm.

The MPX series pressure sensor operating characteristics and internal reliability and qualification tests are based on use of dry air as the pressure media. Media other than dry air may have adverse effects on sensor performance and long term stability. Contact the factory for information regarding media compatibility in your application.

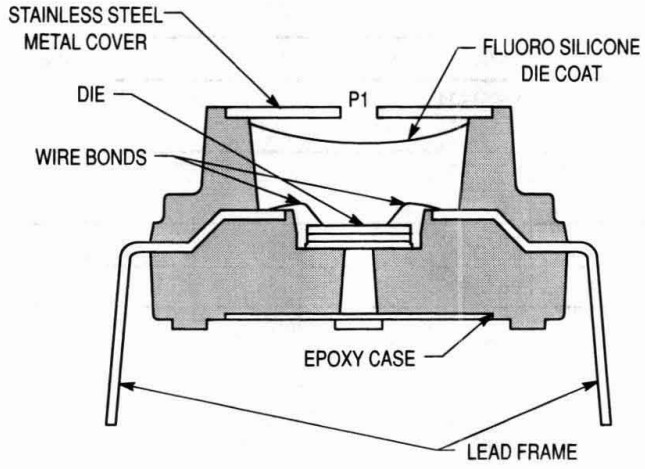

Figure 7. Cross–Sectional Diagram (not to scale)

Figure 7 illustrates the differential/gauge die in the basic chip carrier (Case 473). A silicone gel isolates the die surface and wirebonds from the environment, while allowing the pressure signal to be transmitted to the silicon diaphragm.

Pressure Side Identification

Motorola designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing the silicon gel which protects the die. The differential or gauge sensor is designed to operate with positive differential pressure applied, P1 > P2. The absolute sensor is designed for vacuum applied to P1 side.

The Pressure (P1) side may be identified by using the table below.

Table 1. Pressure (P1) / Vacuum (P2) Side Identification

Part Number	Case Type 4 PIN	Positive Pressure Side Identifier
MPXxxxxA MPXxxxxD	344–15	Stainless Steel Cap
MPXxxxxDP	344C–01	Side with Part Marking
MPXxxxxAP MPXxxxxGP	344B–01	Side with Port Attached
MPXxxxxGVP	344D–01	Stainless Steel Cap
MPXxxxxAS MPXxxxxGS	344E–01	Side with Port Attached
MPXxxxxGVS	344A–01	Stainless Steel Cap
MPXxxxxASX	344F–01	Side with Port Attached
Part Number	**Case Type 6 PIN**	**Positive Pressure Side Identifier**
MPXxxxxA MPXxxxxD	867–08	Stainless Steel Cap
MPXxxxxDP	867C–05	Side with Part Marking
MPXxxxxAP MPXxxxxGP	867B–04	Side with Port Attached
MPXxxxxAS MPXxxxxGS	867E–03	Side with Port Attached
MPXxxxxGVS	867A–04	Stainless Steel Cap
MPXxxxxASX	867F–03	Side with Port Attached

Table 2. Uncompensated

Device Series	Max Pressure Rating psi	Max Pressure Rating kPa	Over Pressure (kPa)	Offset mV (Typ)	Full Scale Span mV (Typ)	Sensitivity (mV/kPa)	Linearity % of FSS(1) (Min)	Linearity % of FSS(1) (Max)
MPX10D	1.45	10	75	20	35	3.5	–1.0	1.0
MPXL10	1.45	10	75	20	35	3.5	–1.0	1.0
MPX50D	7.3	50	200	20	60	1.2	–0.25	0.25
MPX100D,A	14.5	100	200	20	60	0.6	–0.25	0.25
MPX200D	29	200	400	20	60	0.3	–0.25	0.25
MPX700A*	100	700	2800	20	60	0.086	– 1.0	1.0
MPX700D*	100	700	2800	20	60	0.086	–0.50	0.50

*Lifetime buy. Call factory for specific information.

Table 3. Compensated and Calibrated (On–Chip)

MPX2010D	1.45	10	75	±1.0	25	2.5	–1.0	1.0
MPXT2010D	1.45	10	75	±1.0	25	2.5	–1.0	1.0
MPX2050D	7.3	50	200	±1.0	40	0.8	–0.25	0.25
MPX2100A	14.5	100	400	±2.0	40	0.4	–1.0	1.0
MPX2100D	14.5	100	400	±1.0	40	–0.4	–0.25	0.25
MPX2200A	29	200	400	±1.0	40	0.2	–1.0	1.0
MPX2200D	29	200	400	±1.0	40	0.2	–0.25	0.25
MPX2700A	100	700	2800	±2.0	40	0.057	–1.0	1.0
MPX2700D	100	700	2800	±1.0	40	0.057	–0.5	0.5

Table 4. High Impedance (On–Chip)

MPX7050D	7.3	50	200	±1.0	40	0.8	–0.25	0.25
MPX7100A	14.5	100	400	±2.0	40	0.4	–1.0	1.0
MPX7100D	14.5	100	400	±1.0	40	0.4	–0.25	0.25
MPX7200A	29	200	400	±2.0	40	0.2	–1.0	1.0
MPX7200D	29	200	400	±1.0	40	0.2	–0.25	0.25

Table 5. Compensated and Calibrated (On–Chip) Medical Grade

Device Series	Max Pressure Rating psi	Max Pressure Rating kPa	Supply Voltage (Vdc)	Offset mV (Max)	Sensitivity (μV/V/mmHg)	Output Impedance Ohms (Max)	Linearity % of FSS(1) (Min)	Linearity % of FSS(1) (Max)
MPX2300DT1	5.8	40	6.0	0.75	5.0	330	–2.0	2.0

(1)Based on end point straight line fit method. Best fit straight line linearity error is approximately 1/2 of listed value.

Table 6. Signal Conditioned (On–Chip)

Device Series	Max Pressure Rating psi	Max Pressure Rating kPa	Over Pressure (kPa)	Full Scale Span V (Typ)	Sensitivity (mV/kPa)	Accuracy (0–85°C) % of V_{FSS}
MPX4100A	15.2	105	400	4.59	54	±1.8
MPXS4100A	15.2	105	400	4.59	54	±1.8
MPXT4100	15.2	105	400	4.59	54	±1.8
MPX4101A	14.8	102	400	4.59	54	±1.8
MPXT4101	14.8	102	400	4.59	54	±1.8
MPX4115A	16.7	115	400	4.59	45.9	±1.5
MPXS4115A	16.7	115	400	4.59	45.9	±1.5
MPX4250A*	36.2	250	400	4.69	20	±1.5
MPXT5006D	0.87	6	1000	4.6	7.5	±3.0
MPX5010D	1.45	10	75	4.5	450	±5.0
MPXL5010D	1.45	10	75	4.5	450	±5.0
MPX5050D	7.3	50	200	4.5	90	±2.5
MPX5100D	14.5	100	400	4.5	45	±2.5
MPX5500D*	72.5	500	2000	4.5	9.0	±2.5
MPX5700D	100	700	2800	4.5	6.4	±2.5
MPX5999D	150	1000	4000	4.5	4.5	±2.5

*Lifetime buy. Call factory for specific information.

Table 7. Pressure Sensors by Pressure Range

Device Series	Maximum Pressure Rating		Device Type
	PSI	kPa	
MPX10D	1.45	10	Uncompensated
MPX2010D	1.45	10	Compensated and Calibrated (On–chip)
MPXT2010D	1.45	10	Top Piston Fit Package, Compensated and Calibrated (On–Chip)
MPX5010D	1.45	10	Signal Conditioned (On–chip)
MPXL5010D	1.45	10	Low profile package, Signal Conditioned (On–chip)
MPX2300D	5.80	40	Compensated and Calibrated Medical Grade
MPX50D	7.30	50	Uncompensated
MPX2050D	7.30	50	Compensated and Calibrated (On–chip)
MPX2052D*	7.30	50	Compensated and Calibrated (On–chip)
MPX5050D	7.30	50	Signal Conditioned (On–chip)
MPX7050D*	7.30	50	High Impedance (On–chip)
MPX100D,A	14.50	100	Uncompensated
MPX2100A,D	14.50	100	Compensated and Calibrated (On–chip)
MPX4100A	15.20	105	Signal Conditioned (On–chip)
MPXS4100A	15.20	105	Surface mount package, Signal Conditioned (On–chip)
MPX4101A	14.80	102	Signal Conditioned (On–chip)
MPX4115A	16.70	115	Signal Conditioned (On–chip)
MPXS4115A	16.70	115	Surface mount package, Signal Conditioned (On–chip)
MPX5100A,D	16.70	115	Signal Conditioned (On–chip)
MPX7100A,D	14.50	100	High Impedance (On–chip)
MPX200	29.00	200	Uncompensated
MPX2200A,D	29.00	200	Compensated and Calibrated (On–chip)
MPX7200A,D*	29.00	200	High Impedance (On–chip)
MPX4250A	36.20	250	Signal Conditioned (On–chip)
MPX5500D*	75.00	500	Signal Conditioned (On–chip)
MPX700A,D*	100.00	700	Uncompensated
MPX2700D	100.00	700	Compensated and Calibrated (On–chip)
MPX5700D	100.00	700	Signal Conditioned (On–chip)
MPX5999D	150.00	1000	Signal Conditioned (On–chip)

*Lifetime buy. Call factory for specific information.

Table 8. MPX10/50/100/200/700 Series (Uncompensated)

Device Type	Measurement/Porting Options	Package Options	Pressure Range				
			0 to 1.45 PSI (0 to 10 kPa)	0 to 7.3 PSI (0 to 50 kPa)	0 to 14.5 PSI (0 to 100 kPa)	0 to 29 PSI (0 to 200 kPa)	0 to 100 PSI (0 to 700 kPa)
4–Pin Basic Elements	Absolute	Case 344–15	—	—	MPX100A	—	—
	Differential	Case 344–15	MPX10D	MPX50D	MPX100D	MPX200D	—
Ported Elements	Absolute Port	Case 344B–01	—	—	MPX100AP	—	—
	Absolute Stovepipe	Case 344E–01	—	—	MPX100AS	—	—
	Absolute Axial	Case 344F–01	—	—	MPX100ASX	—	—
	Differential Port	Case 344C–01	MPX10DP	MPX50DP	MPX100DP	MPX200DP	—
	Gauge	Case 344B–01	MPX10GP	MPX50GP	MPX100GP	MPX200GP	—
	Gauge Stovepipe	Case 344E–01	MPX10GS	—	—	—	—

Table 9. MPX2000 Series (Temperature Compensated and Calibrated On–Chip)

Device Type	Measurement Options	Package Options	Pressure Range				
			0 to 1.45 PSI (0 to 10 kPa)	0 to 7.3 PSI (0 to 50 kPa)	0 to 14.5 PSI (0 to 100 kPa)	0 to 29 PSI (0 to 200 kPa)	0 to 100 PSI (0 to 700 kPa)
4–Pin Basic Elements	Absolute	Case 344–15	—	—	MPX2100A	MPX2200A	MPX2700A
	Differential	Case 344–15	MPX2010D	MPX2050D	MPX2100D	MPX2200D	MPX2700D
Ported Elements	Absolute Port	Case 344B–01	—	—	MPX2100AP	MPX2200AP	—
	Absolute Axial	Case 344F–01	—	—	MPX2100ASX	—	—
	Differential Port	Case 344C–01	MPX2010DP	MPX2050DP	MPX2100DP	MPX2200DP	MPX2700DP
	Gauge	Case 344B–01	MPX2010GP	MPX2050GP	MPX2100GP	MPX2200GP	—
	Gauge Vacuum	Case 344D–01	—	—	MPX2100GVP*	—	—
	Gauge Stovepipe	Case 344E–01	MPX2010GS	—	—	—	—
	Gauge Vacuum Stovepipe	Case 344A–01	—	—	—	—	—
	Gauge Axial	Case 344F–01	MPX2010GSX	MPX2050GSX	MPX2100GSX	—	—

*Lifetime buy. Call factory for specific information.

Table 10. MPX4000 Series (Signal Conditioned On–Chip)

Device Type	Measurement Options	Package Options	Pressure Range			
			3 to 15 PSI (20 to 105 kPa)	2.3 to 14.7 PSI (15 to 102 kPa)	2.3 to 16.6 PSI (15 to 115 kPa)	3 to 36.2 PSI (20 to 250 kPa)
6–Pin Basic Element	Absolute	Case 867–08	MPX4100A	MPX4101A	MPX4115A	MPX4250A
Ported Element	Absolute Port	Case 867B–04	MPX4100AP	—	MPX4115AP	MPX4250AP
	Absolute Stovepipe	Case 867E–03	MPX4100AS	—	MPX4115AS	—
	Absolute Axial	Case 867F–03	—	—	—	—
8–Pin Basic Element	Absolute	Case 471–01	MPXS4100A	—	—	—
Ported Element	Absolute Axial	Case 471B–01	—	—	MPXS4115A	—
	Absolute Side Port	Case 471A–01		—	—	—

Table 11. MPX5000 Series (Signal Conditioned On–Chip)

Device Type	Measure–ment Options	Package Options	Pressure Range						
			0 to 1.45 PSI (0 to 10 kPa)	0 to 7.3 PSI (0 to 50 kPa)	0 to 14.5 PSI (0 to 100 kPa)	2.3 to 16.6 PSI (15 to 115 kPa)	0 to 75 PSI (0 to 500 kPa)	0 to 100 PSI (0 to 700 kPa)	0 to 150 PSI (0 to 1000 kPa)
6–Pin	Absolute	Case 867–08	—	—	—	MPX5100A	—	—	—
Basic Element	Differential	Case 867–08	MPX5010D	MPX5050D	MPX5100D	—	MPX5500D*	MPX5700D	MPX5999D
Ported Element	Absolute Port	Case 867B–04	—	—	—	MPX5100AP	—	—	—
	Differential Port	Case 867C–05	MPX5010DP	MPX5050DP	MPX5100DP	—	MPX5500DP*	MPX5700DP	—
	Gauge	Case 867B–04	MPX5010GP	MPX5050GP	MPX5100GP	—	MPX5500GP*	MPX5700GP	—
	Gauge Stovepipe	Case 867E–03	MPX5010GS	—	—	—	—	—	—
	Gauge Axial	Case 867F–03	MPX5010GSX	—	—	—	—	—	—

*Lifetime buy. Call factory for specific information.

Table 12. MPX7000 Series (Temperature Compensated and Calibrated High Impedance On–Chip)

Device Type	Measurement Options	Package Options	Pressure Range		
			0 to 7.3 PSI (0 to 50 kPa)	0 to 14.5 PSI (0 to 100 kPa)	0 to 29 PSI (0 to 200 kPa)
4–Pin Basic Elements	Absolute	Case 344–15	—	MPX7100A	MPX7200A
	Differential	Case 344–15	MPX7050D	MPX7100D	MPX7200D
Ported Elements	Absolute Port	Case 344B–01	—	MPX7100AP	—
	Differential Port	Case 344C–01	MPX7050DP	MPX7100DP	—
	Gauge	Case 344B–01	MPX7050GP	MPX7100GP	MPX7200GP
	Gauge Stovepipe	Case 344E–01	MPX7050GS	MPX7100GS	—
	Gauge Axial	Case 344F–01	MPX7050GSX	—	—

Device Numbering System for Pressure Sensors

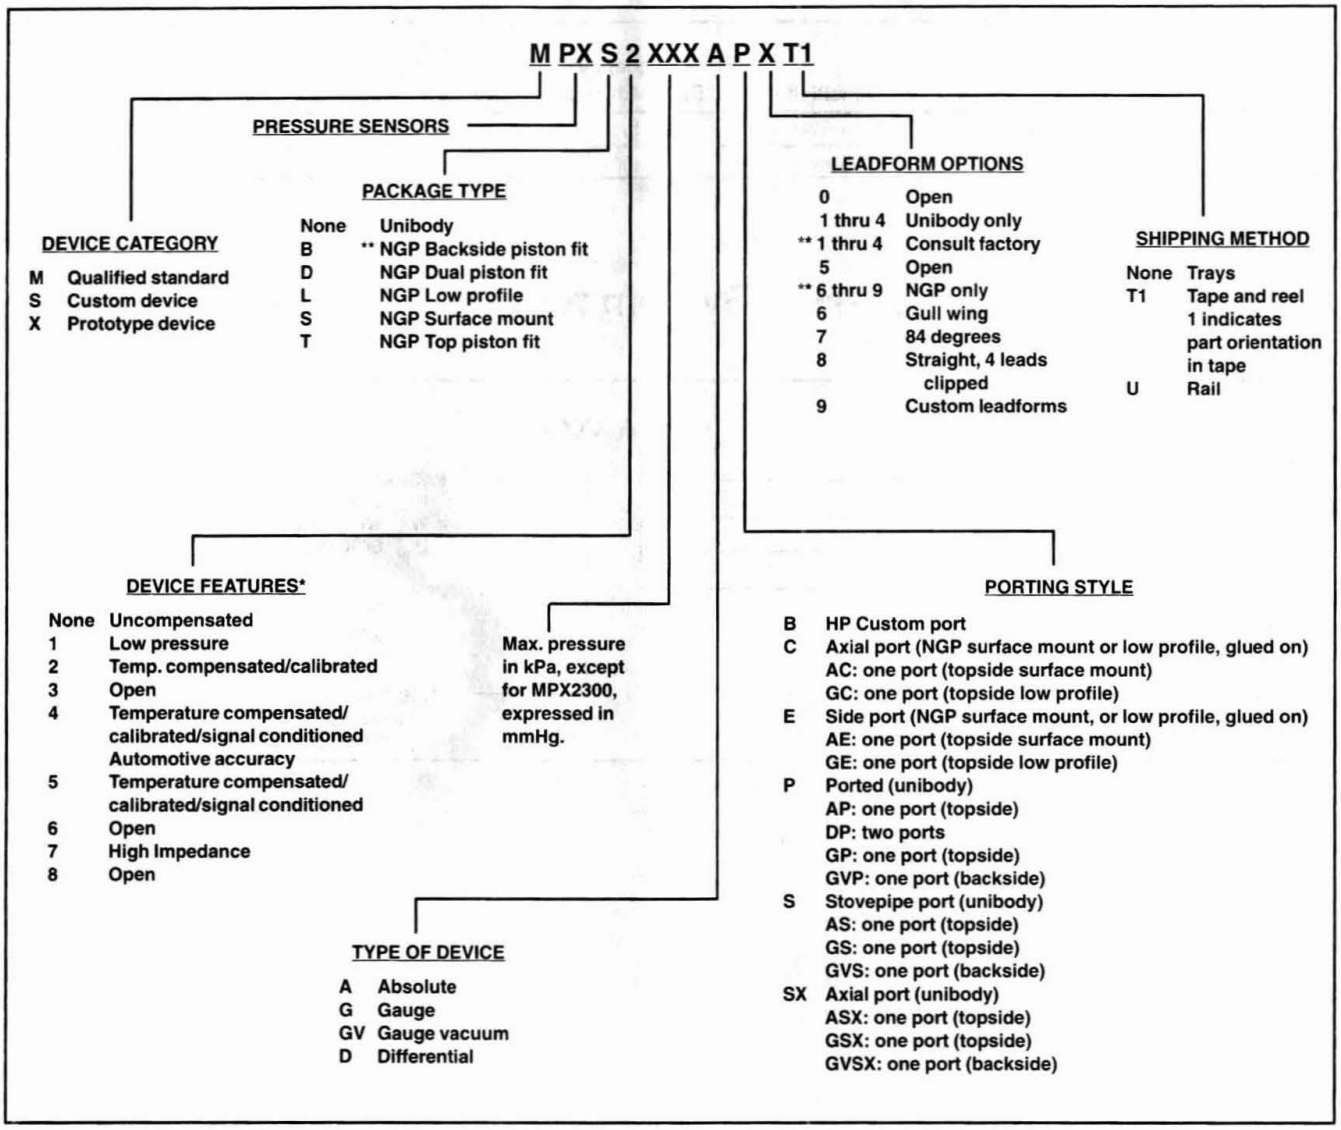

Note: Actual device marking may be abbreviated due to space constraints but packaging label will reflect full part number.

*Only applies to qualified and prototype devices. This does not apply to custom devices.

Examples: MPX100AP 100 kPa uncompensated, absolute device in unibody package with one port (topside), no leadform, shipped in trays.

MPXS4100A6U 100 kPa automotive temp. compensated and calibrated device with signal conditioning, NGP surface mount with gull wing leadform, shipped in rails

**NGP – Next Generation Package

Table 13. Accelerometer Sensor

Device	Range	Sensitivity	Frequency/ Bandwidth (Hz)	Sensing Direction	Supply Current (mA) Nominal	Zero Acceleration Output
PMMA1000	±40g	40 mV/g	400	Z axis	5	2.5
PMMA2000	±40g	40 mV/g	400	X axis	5	2.5

Device Numbering System for Accelerometers

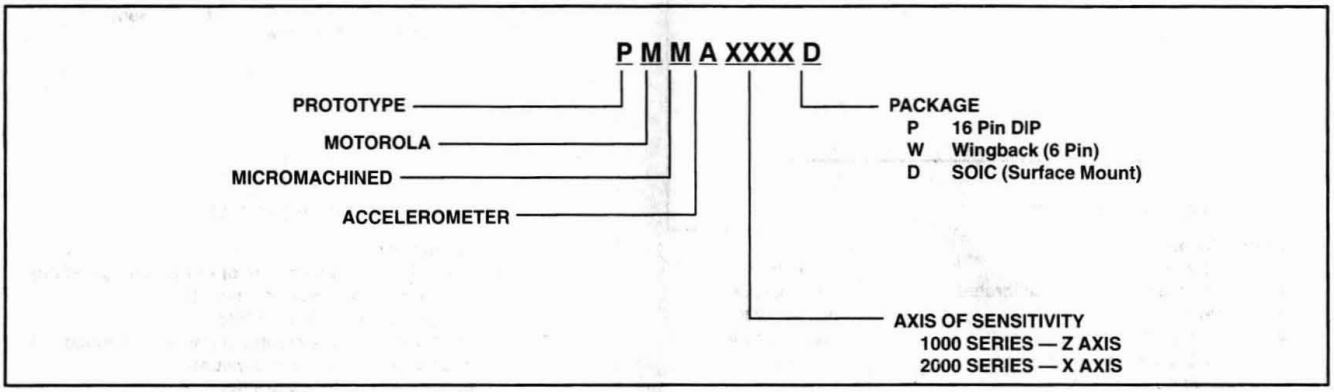

EVALUATION TOOLS

Table 14. Literature

Marketing Literature	Description
DL200/D	Sensor Device Data Book, Rev 3
HB218/D	Pressure Sensor Distributor Handbook
SG162/D	SPD Selector Guide, Rev 24
Application Notes	**Description**
AN1516/D	Liquid Level Control Using a Motorola Pressure Sensor
AN1551/D	Low Pressure Sensing with the MPX2010 Pressure Sensor
AN1552/D	MPX7100AP: The Sensor at the Heart of Solid–State Altimeter Applications
AN1556/D	Designing Sensor Performance Specifications for MCS–Based Systems
AN1557/D	A Cookbook Approach to Designing a Differential–Signal Amplifier for Sensor Applications
AN1559/D	Application Considerations for a Switched Capacitor Accelerometer
AN1571/D	Digital Blood Pressure Meter
AN1573/D	Understanding Pressure and Pressure Measurement
AN1583/D	Motorola's Next Generation Piston Fit Pressure Sensor Packages
AN1584/D	"Very Low–Pressure" Smart Sensing Solution with Serial Communications Interface
AN1585/D	High–Performance, Dynamically–Compensated Smart Sensor System
AN1586/D	Designing a Homemade Digital Output for Analog Voltage Output Sensors
AN1611/D	Impact and Tilt Measurement
AN1612/D	Shock and Mute Pager Applications Using Accelerometer
AN4004/D	+2g Acceleration Sensing Module Based on a +40g Integrated Accelerometer
AN1620/D	Monolithic Integrated Solution for MAP Sensors
AN1621/D	Integrated Silicon Bulk Micromachined Barometric Pressure Sensor for Control Unit and External Mount
AN1622/D	EMC Considerations for Automotive Sensors
AN1625/D	Low Cost Digitized CO Application Board
AN1640/D	Reducing Accelerometer Susceptibility to BCI
AN1638/D	Offset Calibration of Gauge Pressure Sensors Using Parallel I/O Ports
AN1632/D	MMA1000P Product Overview and Interface Considerations
AN1646/D	Noise Considerations for Integrated Pressure Sensors

REFERENCE TABLE

Table 15. Pressure Unit Conversion Constants (Most Commonly Used — Per International Conventions)

	PSI(1)	in. H_2O(2)	in. Hg(3)	K Pascal	millibar	cm H_2O(4)	mm Hg(5)
PSI(1)	1.000	27.681	2.036	6.8948	68.948	70.309	51.715
in. H_2O(2)	3.6126×10^{-2}	1.000	7.3554×10^{-2}	0.2491	2.491	2.5400	1.8683
in. Hg(3)	0.4912	13.595	1.000	3.3864	33.864	34.532	25.400
K Pascal	0.14504	4.0147	0.2953	1.000	10.000	10.1973	7.5006
millibar	0.01450	0.40147	0.02953	0.100	1.000	1.01973	0.75006
cm H_2O(4)	1.4223×10^{-2}	0.3937	2.8958×10^{-2}	0.09806	0.9806	1.000	0.7355
mm Hg(5)	1.9337×10^{-2}	0.53525	3.9370×10^{-2}	0.13332	1.3332	1.3595	1.000

PRESSURE PACKAGING OPTIONS

4–PIN

BASIC ELEMENT
CASE 344–15
SUFFIX A/D

GAUGE PORT
CASE 344B–01
SUFFIX AP/GP

GAUGE VACUUM PORT
CASE 344D–01
SUFFIX GVP

DUAL PORT
CASE 344C–01
SUFFIX DP

AXIAL PORT
CASE 344F–01
SUFFIX ASX/GSX

MEDICAL CHIP PACK
CASE 423–04

STOVEPIPE PORT
CASE 344A–01
SUFFIX GVS

STOVEPIPE VACUUM PORT
CASE 344E–01
SUFFIX AS/GS

6–PIN

BASIC ELEMENT
CASE 867–08
SUFFIX A/D

GAUGE PORT
CASE 867B–04
SUFFIX AP/GP

GAUGE VACUUM PORT
CASE 867D–04
SUFFIX GVP

DUAL PORT
CASE 867C–05
SUFFIX DP

AXIAL PORT
CASE 867F–03
SUFFIX ASX/GSX

STOVEPIPE PORT
CASE 867E–03
SUFFIX AS/GS

STOVEPIPE VACUUM PORT
CASE 867A–04
SUFFIX GVS

8–PIN



BACKSIDE PISTON FIT
CASE 474A–01

SURFACE MOUNT
CASE 471–01

SURFACE MOUNT
AXIAL PORT
CASE 471B–01



TOP PISTON FIT
CASE 473A–01

ACCELEROMETER PACKAGING



DIP PACKAGE
CASE 648C–03



WINGBACK PACKAGE (WB)
CASE 456–03

RF and RF/IF Products

In Brief . . .

While Motorola is a worldwide leader in semiconductor products, there is not a category in which the selection is more diverse, or more complete, than in products designed for RF system applications. From MOS, bipolar power and signal transistors to integrated circuits, Motorola's RF components cover the entire spectrum from HF to microwave to personal communications. Yet, product expansion continues — not only to keep pace with the progressive needs of the industry, but to better serve the needs of designers for a reliable and comprehensive source of supply.

How to Use This Selector Guide

The products in this guide are separated FIRST into major categories by power level (RF Monolithic Integrated Circuits, RF/IF Integrated Circuits, Small Signal, Medium Power Transistors, Power FETs, Power Bipolar, Power Amplifier Modules and CATV Distribution Amplifiers). SECOND, within each category parts are listed by frequency band, except for medium power transistors, small signal transistors and monolithic integrated circuits, which are divided by application. Small signal transistor applications are low noise, linear amplifiers, switches, and oscillators. Monolithic integrated circuit application groupings are switching, receiver functions and transmitter functions. THIRD, within a frequency band, transistors are further grouped by operating voltage and, finally, output power.

To Replace Devices in an Existing Design

Call your local Motorola Sales Office or Distributor to determine Motorola's closest replacement device.

Applications Assistance

Applications assistance is only a phone call away — call the nearest Semiconductor Sales office or 1-800-521-6274.

Access Data On–Line!

Use the Motorola SPS World Marketing Internet Server to access Motorola Semiconductor Product data at http://motorola.com/sps/ or http://motorola.com/sps/rf/. The SPS World Marketing Server provides you with instant access to data sheets, selector guide information, package outlines, on–line technical support and much more.

Table of Contents

	Page
RF Monolithic Integrated Circuits	5.9–3
Switching	5.9–4
Antenna Switches	5.9–4
Receiver Functions	5.9–4
General Purpose Integrated Circuits	5.9–4
900 MHz Front End	5.9–4
1.5–2.2 GHz Front End	5.9–5
2.4 GHz Front End	5.9–5
Transmitter Function	5.9–5
General Purpose Integrated Circuits	5.9–5
900 MHz Transmit Chain	5.9–6
1.5–2.2 GHz Transmit Chain	5.9–7
2.4 GHz Transmit Chain	5.9–8
RF/IF Integrated Circuits	5.9–11
RF/IF Monolithic Integrated Circuits	5.9–12
RF Front End ICs	5.9–12
Wideband IFs	5.9–12
Wideband Single Conversion Receivers	5.9–12
Narrowband Single Conversion Receivers	5.9–13
Narrowband Dual Conversion Receivers	5.9–13
Universal Cordless Phone Subsystem ICs	5.9–13
Transmitters	5.9–14
Balanced Modulator/Demodulator	5.9–14
Infrared Transceiver	5.9–14
Phase–Locked Loop Components	5.9–26
PLL Frequency Synthesizers	5.9–26
Phase–Locked Loop Functions	5.9–27
RF Discrete Transistors	5.9–31
RF Small Signal Transistors	5.9–32
Selection by Package	5.9–32
Plastic	5.9–32
Ceramic SOE Case	5.9–34
Selection by Application	5.9–35
Low Noise	5.9–35
CATV, MATV and Class A Linear	5.9–36
RF Medium Power Transistors	5.9–37
Discrete Wireless Transmitter Devices	5.9–37

RF and RF/IF Products

Table of Contents – continued

	Page
RF High Power Transistors	5.9–38
RF Power MOSFETs	5.9–38
RF Power Bipolar Transistors	5.9–41
HF Transistors	5.9–41
VHF Transistors	5.9–41
UHF Transistors	5.9–42
900 MHz Transistors	5.9–43
1.5 GHz Transistors	5.9–44
Microwave Transistors	5.9–44
Linear Transistors	5.9–45
RF Amplifier Modules	5.9–51
Land Mobile/Portable	5.9–52
Base Stations	5.9–53
Wideband Linear Amplifiers	5.9–54
RF CATV Distribution Amplifiers	5.9–57
Forward Amplifiers	5.9–58
Reverse Amplifiers	5.9–61

Motorola RF Monolithic Integrated Circuits

Motorola's RF monolithic integrated circuit devices provide an integrated solution for the personal communications market. These devices are available in plastic SOIC–8, SOIC–16, SOT–143, TSSOP–16, Micro–8, TSSOP–20, TSSOP–20HS, TQFP–48 or PFP–16 packages.

Evaluation Boards

Evaluation boards are available for RF Monolithic Integrated Circuits. For a complete list of currently available boards and ones in development for newly introduced product, please contact your local Motorola Distributor or Sales Office.

Table of Contents

	Page
RF Monolithic Integrated Circuits	5.9–3
Switching	5.9–4
Antenna Switches	5.9–4
Receiver Functions	5.9–4
General Purpose Integrated Circuits	5.9–4
900 MHz Front End	5.9–4
1.5–2.2 GHz Front End	5.9–5
2.4 GHz Front End	5.9–5
Transmitter Functions	5.9–5
General Purpose Integrated Circuits	5.9–5
900 MHz Transmit Chain	5.9–6
1.5–2.2 GHz Transmit Chain	5.9–7
2.4 GHz Transmit Chain	5.9–8

Motorola RF Monolithic Integrated Circuits

Switching

Antenna Switches/Local Oscillator Switches

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current μA (Typ)	P_{in}, 1 dB Compression dBm (Typ)	TX Insertion Loss dB (Typ)	Isolation dB (Typ)	Package	System Applicability
MRFIC1801(18b)	1500–2500	2.7–5.5	300	29	0.6	20	SO–8	DECT, PHS, PCS, ISM
MRFIC0903(18b)	100–2000	2.7–5.0	60	35.5	0.65	21	SO–8	AMPS, Class 4 & 5 GSM, DCS1800, PHS, PCS

Receiver Functions

General Purpose Integrated Circuits

General Purpose Cascode Amplifier

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Small Signal Gain @ 900 MHz dB (Typ)	Noise Figure dB (Typ)	Reverse Isolation dB (Typ)	Package	System Applicability
MRFIC0915(18c,46a)	100–2000	2.7–5.0	2.2	16.5	1.9	38	SOT–143	AMPS, CT1, CT2, GSM, IS–54, ISM, DECT, PHS, PCS
MRFIC0916(18c)	100–2000	2.7–5.0	4.7	18.5	1.9	44	SOT–143	AMPS, CT1, CT2, GSM, IS–54, ISM, DECT, PHS, PCS

Device	RF Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Conv. Gain dB (Typ)	Input Third Order Intercept	Package	System Applicability
MRF9820T1(18c)★	100–1500	2–5	1.0	16	–3	SOT–143	AMPS, CT1, CT2, GSM, IS–54, ISM, DECT, PHS, PCS

900 MHz Front End

LNA + Mixer

Device	RF Freq. Range MHz	IF Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Conv. Gain dB (Typ)	Output Level, 1 dB Comp. dBm (Typ)	Package	System Applicability
MRFIC2001(18b)	500–1000	0–250	2.7–5.0	4.7	23	–10	SO–8	CT2, ISM

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(46)To be introduced: a) 1Q98; b) 2Q98

★New Product

Receiver Functions (continued)

1.5 – 2.2 GHz Front End

Integrated LNA

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Small Signal Gain dB (Typ)	Noise Figure dB (Typ)	Reverse Isolation dB (Typ)	Package	System Applicability
MRFIC1501(18b) ★	1000–2000	3–5	5.7	18	1.1	26	SO–8	GPS
MRFIC1808(18b) ★	1700–2100	2.7–4.5	5.0	17	1.6	37	SO–8	DECT, PHS, PCS
MRFIC1808DM(18g,46a)	1700–2100	2.7–4.5	5.0	17	1.6	32	Micro–8	DECT, PHS, PCS

GPS Receiver

MRFIC1502★	1570–1580	4.5–5.5	50	65	9.5	—	TQFP–48	GPS

Integrated LNA/Downconverter

Device	RF Freq. Range GHz	IF Freq. Range GHz	Supply Volt. Range Vdc	Supply Current RX Mode mA (Typ)	Mixer Conv. Gain dB (Typ)	LNA Gain dB (Typ)	LNA Noise Figure dB (Typ)	Package	System Applicability
MRFIC1804(18b)	1.8–2.0	70–325	2.7–3.3	10	4	14	2.3	SO–16	DECT,PHS,PCS
MRFIC1814(18b) ★	1.8–2.0	70–325	2.7–4.5	13	8	17	2.5	TSSOP–16	DECT,PHS,PCS

2.4 GHz Front End

Integrated LNA/Downconverter

Device	RF Freq. Range MHz	IF Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Conv. Gain dB (Typ)	LNA Noise Figure dB (Typ)	Isolation Lo to RF, Lo to IF dB (Typ)	Package	System Applicability
MRFIC2401(18b)	2400–2500	100–350	4.75–5.25	9.5	21	1.9	20	SO–16	WLAN, MMDS, ISM

Transmitter Functions

General Purpose Integrated Circuits

Quadrature Modulator

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Gain Control dB (Typ)	Lo Leakage dBm (Typ)	SSB P_{out}, 1 dB Compression dBm (Typ)	Package	System Applicability
MRFIC0001(18b)	50–260	2.7–5.5	10	30	–55	–10	TSSOP–20	DCS1800, GSM, NADC PDC, PHS, PCS1900

General Purpose Cascode Amplifier

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Small Signal Gain @ 900 MHz dB (Typ)	Noise Figure dB (Typ)	Reverse Isolation dB (Typ)	Package	System Applicability
MRFIC0915(18c,46a)	100–2000	2.7–5.0	2.2	16.5	1.9	38	SOT–143	AMPS,CT1,CT2,GSM,IS–54, ISM,DECT,PHS,PCS
MRFIC0916(18c)	100–2000	2.7–5.0	4.7	18.5	1.9	44	SOT–143	AMPS,CT1,CT2,GSM,IS–54, ISM,DECT,PHS,PCS

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(46)To be introduced: a) 1Q98; b) 2Q98

★New Product

900 MHz Transmit Chain

Transmit Mixer

Device	RF Freq. Range MHz	IF Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Standby Current µA (Typ)	Conv. Gain dB (Typ)	Output Level, 1 dB Comp. dBm (Typ)	Package	System Applicability
MRFIC2002(18b)	500–1000	0–250	2.7–5.0	5.5	0.1	10	–18	SO–8	AMPS,CT1,CT2, GSM, IS–54, ISM
MRFIC2101(18b)	800–1000	0–250	3–4.75	45	2	26.5	4.5	SO–16	AMPS,CT1,CT2, GSM, IS–54, ISM, USPCS, CDMA
MRFIC0931(18b)★	500–2000	0–250	2.7–4.8	38	—	25	1.0	SO–8	AMPS,CT1,CT2, GSM, IS–54, ISM, USPCS, CDMA

Driver Amplifier

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Standby Current mA (Typ)	Small Signal Gain dB (Typ)	Gain Control dB (Typ)	P_{out}, 1 dB Compression dBm (Typ)	Package	System Applicability
MRFIC2004(18b)	800–1000	2.7–4.0	11	0.7	21.5	34	–1	SO–16	AMPS,CT1,CT2, GSM,ISM
MRFIC2006(18b)	500–1000	1.8–4.0	46	—	23	—	15.5	SO–8	AMPS,CT1,CT2, GSM,ISM
MRFIC0904(18b)	800–1000	2.7–5.0(47)	280	0.05	27	24.5	25.5	SO–16	AMPS,GSM,ISM

Integrated Power Amplifiers

Low Power 900 MHz Power Amplifiers

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Small Signal Gain dB (Typ)	Return Loss Input/Output dB (Typ)	P_{out}, 1 dB Compression dBm (Typ)	Package	Semiconductor Technology
MRFIC2006(18b)	500–1000	1.8–4.0	46	23	15	15.5	SO–8	Silicon

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Standby Current mA (Typ)	Small Signal Gain dB (Typ)	P_{out}, 1 dB Compression dBm (Typ)	Package	Semiconductor Technology
MRFIC2101(18b)	800–1000	3 – 4.75	38	2	16	18	SO–16	Silicon

Analog Cellular

Device	Freq. Range MHz	Supply Volt. Vdc	Power Added Efficiency % (Min)	Power Gain dB (Min)	Harmonic Output 2fo dBc	P_{out}/P_{in} dBm (Min)	Package	Semiconductor Technology
MRFIC0910(18e,46a)	824–905	4.8	50	17.8	–40	30.8/13	PFP–16	LDMOS
MRFIC0912(18e)★	824–905	4.6(47)	55	23.8	–25	30.8/7	PFP–16	GaAs

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(46)To be introduced: a) 1Q98; b) 2Q98

(47) Negative supply required

★New Product

Transmitter Functions: 900 MHz Transmit Chain: Integrated Power Amplifiers (continued)

GSM Cellular

Device	Freq. Range MHz	Supply Volt. Vdc	Power Added Efficiency % (Min)	Power Gain dB (Min)	Harmonic Output 2fo dBc	P_{out}/P_{in} dBm (Min)	Package	Semiconductor Technology
MRFIC0913(18e)★	880–915	4.8(47)	48	24.5	–30	34.5/10	PFP–16	GaAs
MRFIC0917(18e)★	880–915	3.6(47)	43	22	–30	34/12	PFP–16	GaAs

DCS1800, PCS1900

Device	Freq. Range GHz	Supply Volt. Vdc	Power Added Efficiency % (Min)	Power Gain dB (Min)	Harmonic Output 2fo dBc	P_{out}/P_{in} dBm (Min)	Package	Semiconductor Technology
MRFIC1818(18e)★	1.7–1.9	4.8(47)	35	30	–30	33/3	PFP–16	GaAs
MRFIC1817(18e)★	1.7–1.9	3.6(47)	35	27	–30	32/5	PFP–16	GaAs

Two–way Paging, ISM

Device	Freq. Range MHz	Supply Volt. Vdc	Power Added Efficiency % (Min)	Power Gain dB (Min)	Harmonic Output 2fo dBc	P_{out}/P_{in} dBm (Typ)	Package	Semiconductor Technology
MRFIC0920(18b,46b)	890–950	3.4	35	28	–45	30.5/2.5	TSSOP–20HS	LDMOS

1.5 – 2.2 GHz Transmit Chain

Upconverter

Device	RF Output Freq. Range GHz	Supply Volt. Range Vdc	Supply Current TX Mode mA (Typ)	Standby Current μA (Typ)	Conv. Gain dB (Typ)	Recommended IF Input MHz (Typ)	P_{out}, 1 dB Comp. dBm (Typ)	Package	System Applicability
MRFIC1803(18b)	1.7–2.5	2.7–5.0	28	100	10	70–350	–2	SO–16	DECT,PHS, PCS
MRFIC1813(18b)★	1.7–2.5	2.7–4.5	25	100	15	70–350	3	TSSOP–16	CDMA,PCS
MRFIC0931(18b)★	0.5–2.0	2.7–4.8	38	—	20	0–250	–2	SO–8	CDMA,PCS

Power Amplifier

Device	RF Output Freq. Range GHz	Supply Volt. Range Vdc(47)	Supply Current mA (Typ)	Standby Current mA (Typ)	Small Signal Gain dB (Typ)	P_{out}/P_{in} dBm (Typ)	1 dB Comp. dBm (Typ)	Pkg	System Applicability
MRFIC1805(18b)★	1.7–2.5	2.7–5.0	170	—	21	21.5/2	24	TSSOP–16	DECT,PHS, PCS
MRFIC1806(18b)	1.5–2.5	3.0–5.0	115	0.25	23	19.5/–3	21	SO–16	DECT,PHS, PCS
MRFIC1807(18b)	1.5–2.2	3.0–5.0	325	0.06	8	26.8/20	25	SO–16	DECT,PHS, PCS

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(46)To be introduced: a) 1Q98; b) 2Q98

(47)Negative supply required

★New Product

Transmitter Functions: 1.5 – 2.2 GHz Transmit Chain (continued)

Power Amplifier

Device	RF Output Freq. Range GHz	Supply Volt. Range Vdc	PA Supply Current TX Mode mA (Typ)	Standby Current mA (Typ)	Small Signal Gain dB (Typ)	Insertion Loss RX Mode dB (Typ)	P_{out}, 1 dB Compression dBm (Typ)	Package	System Applicability
MRFIC1807[18b] (Including TX/RX Switch)	1.5–2.2	3.0–5.0	325	0.06	8	1	25	SO–16	DECT, PHS, PCS

2.4 GHz Transmit Chain

Exciter Amplifier

Device	Freq. Range GHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Small Signal Gain dB (Typ)	Noise Figure dB (Typ)	P_{out}, 1 dB Compression dBm (Typ)	Package	System Applicability
MRFIC2404[18b]	2.0–3.0	4.75–5.25	9	17	4.3	5	SO–8	WLAN, MMDS, ISM

Power Amplifier

Device	Freq. Range MHz	Supply Volt. Range Vdc	Supply Current mA (Typ)	Small Signal Gain dB (Typ)	Power Control Range dB (Typ)	P_{out}, 1 dB Compression dBm (Typ)	Package	System Applicability
MRFIC2403[18b]	2200–2700	4.75–5.25	95	23	20	19	SO–16	WLAN, MMDS, ISM

Upconverter

Device	RF Output Freq. Range GHz	Supply Volt. Range Vdc	Supply Current TX Mode mA (Typ)	Standby Current μA (Typ)	Conv. Gain dB (Typ)	Recommended IF Input MHz (Typ)	P_{out}, 1 dB Comp. dBm (Typ)	Package	System Applicability
MRFIC1803[18b]	1.7–2.5	2.7–5.0	28	100	10	70–350	–2	SO–16	WLAN, ISM
MRFIC1813[18b]★	1.7–2.5	2.7–4.5	25	100	15	70–350	3	TSSOP–16	WLAN, ISM
MRFIC2406[18b]	2.4 – 2.5	3.0–5.0	15	0.6	6	100–370	–10	SO–16	WLAN, MMDS,ISM

[18]Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

★New Product

RF Monolithic Integrated Circuit Packages

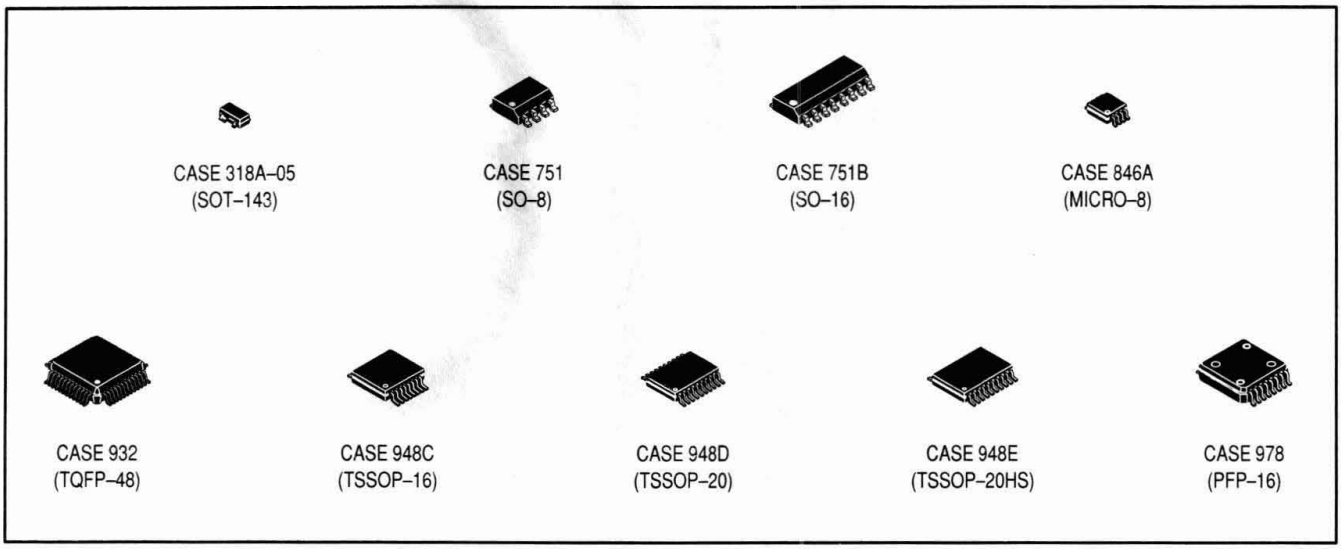

Motorola RF/IF Integrated Circuits

Radio communication has greatly expanded its scope in the past several years. Once dominated by public safety radio, the 30 to 1000 MHz spectrum is now packed with personal and low cost business radio systems. The vast majority of this equipment uses FM or FSK modulation and is targeted at short range applications. From mobile phones and VHF marine radios to garage door openers and radio controlled toys, these new systems have become a part of our lifestyle. Motorola has focused on this technology, adding a wide array of new products including complete receivers processed in our exclusive 3.0 GHz MOSAIC® 1.5 process. New surface mount packages for high density assembly are available for all of these products, as well as a growing family of supporting application notes.

Table of Contents

	Page
RF/IF Integrated Circuits	5.9–11
RF/IF Monolithic Integrated Circuits	5.9–12
RF Front End ICs	5.9–12
Wideband IFs	5.9–12
Wideband Single Conversion Receivers	5.9–12
Narrowband Single Conversion Receivers	5.9–13
Narrowband Dual Conversion Receivers	5.9–13
Universal Cordless Phone Subsystem ICs	5.9–13
Transmitters	5.9–14
Balanced Modulator/Demodulator	5.9–14
Infrared Transceiver	5.9–14
Phase–Locked Loop Components	5.9–26
PLL Frequency Synthesizers	5.9–26
Phase–Locked Loop Functions	5.9–27

Motorola RF/IF Monolithic Integrated Circuits

Table 1. RF Front End ICs

Receiver												
	Low Noise Amplifier				Mixer							
Device	Gain (dB)	Noise Figure (dB)	IIP3 (dBm)	Input P1dB (dBm)	Gain (dB)	Noise Figure (dB)	IIP3 (dBm)	P1dB (dBm)	Voltage Cont Osc	V_{CC} (V)	I_{CC} (mA)	Suffix/ Package
MC13142	17	1.8	–5.0	–15	±3.0	12	–3 to +21	3.0	Yes	2.7 to 6.5	13	D/751B
MC13143	–	–	–	–	±3.0	12	–3 to +21	3.0	–	1.8 to 6.5	1.0	D/751
MC13144	13 to 19	1.4	–1.0	–7.0	–	–	–	–	–	1.8 to 6.5	2 to 9	D/751
MC13145	14	1.8	–5.0	–8.0	0	13	9.0	–1.0	Yes	2.7 to 6.5	30	FTA/932
Transmitter												
	Low Power Amplifier				Mixer							
Device	PA Gain (dB)	Noise Figure (dB)	IIP3 (dBm)	Output P1dB (dBm)	P_{IFOut} (dB)	Noise Figure (dB)	IIP3 (dBm)	P1dB (dBm)	Voltage Cont Osc	V_{CC} (V)	I_{CC} (mA)	Suffix/ Package
MC13146	15	–	–	8.0	15	–	10	–	Yes	2.7 to 6.5	25	FTA/977

NOTES: All devices operate over a wide range of RF input and IF frequencies, from dc to 2.0 GHz.
Typical performance shown at 900 MHz.

Table 2. Wideband (FM/FSK) IFs

Device	V_{CC}	I_{CC}	Sensitivity (Typ)	IF	Mute	RSSI	Max Data Rate	Notes	Suffix/ Package
MC13055	3–12 V	25 mA	20 µV	40 MHz	✓	✓	2.0 Mb	Wideband Data IF, includes data shaper	P/648, D/751B
MC13155	3–6 V	7.0 mA	100 µV	250 MHz	–		10 Mb	Video Speed FM IF	D/751B

Table 3. Wideband Single Conversion Receivers – VHF

Device	V_{CC}	I_{CC}	Sensitivity (Typ)	RF Input	IF	Mute	RSSI	Max Data Rate	Notes	Suffix/ Package
MC3356	3–9 V	25 mA	30 µV	200 MHz	10.7 MHz	✓	✓	500 kb	Includes front end mixer/L.O.	P/738, DW/751D
MC13156	2–6 V	5.0 mA	2.0 µV	500 MHz	21.4 MHz	–			CT–2 FM/Demodulator	DW/751E, FB/873
MC13158	2–6 V	6.0 mA						>1.2 Mb	FM IF/Demodulator with split IF for DECT	FTB/873
MC13159	2.7–5 V	5.5 mA		600 MHz				500 kb	FM IF for PHS	DTB/948F

Table 4. Narrowband Single Conversion Receivers – VHF

Device	V_{CC}	I_{CC}	12 dB SINAD Sensitivity (Typ)	RF Input	IF	Mute	RSSI	Max Data Rate	Notes	Suffix/ Package
MC3357	4–8 V	5.0 mA	5.0 µV	45 MHz	455 kHz	✓	–	>4.8 kb	Ceramic Quad Detector/Resonator	P/648, D/751B
MC3359	4–9 V	7.0 mA	2.0 µV						Scan output option	P/707, DW/751D
MC3371	2–8 V	6.0 mA		60 MHz			✓	>4.8 kb	RSSI	P/648, D/751B, DTB/948F
MC3372									RSSI, Ceramic Quad Detector/Resonator	
MC13150	3–6 V	1.8 mA	1.0 µV	500 MHz			✓ 110 dB	>9.6 kb	Coilless Detector with Adjustable Bandwidth	FTB/873, FTA/977

Table 5. Narrowband Dual Conversion Receivers – FM/FSK – VHF

Device	V_{CC}	I_{CC}	12 dB SINAD Sensitivity (Typ)	RF Input	IF1	IF2 (Limiter In)	Mute	RSSI	Data Rate	Notes	Suffix/ Package
MC3362	2–7 V	3.0 mA	0.7 µV	180 MHz	10.7 MHz	455 kHz	–	✓	> 4.8 kb	Includes buffered VCO output	P/724, DW/751E
MC3363		4.0 mA	0.4 µV				✓			Includes RF amp/mute	DW/751F
MC13135			1.0 µV				–			Voltage buffered RSSI, LC Quad Detector	DW/751E, P/724
MC13136										Voltage Buffered RSSI, Ceramic Quad Detector	DW/751E

Table 6. Universal Cordless Phone Subsystem ICs

Device	V_{CC}	I_{CC}	Dual Conversion Receiver	Universal Dual PLL	Compander and Audio Interface	Voice Scrambler	Low Battery Detect	Programmable R_X, T_X Trim Gain and LBD Voltage Reference	Suffix/ Package
MC13109	2.0–5.5 V	Active Mode 6.7 mA Inactive Mode 40 µA	✓	✓	✓	–	1	–	FB/848B, FTA/932
MC13110	2.7–5.5 V	Active Mode 8.2 mA Inactive Mode 60 µA	✓	✓	✓	✓	2	✓	FB/848B
MC13111	2.7–5.5 V	Active Mode 8.2 mA Inactive Mode 60 µA	✓	✓	✓	–	2	✓	FB/848B

Table 7. Transmitters – AM/FM/FSK

Device	V_{CC}	I_{CC}	P_{out}	Max RF Freq Out	Max Mod Freq	Notes	Suffix/ Package
MC2833	3–8 V	10 mA	–30 dBm to +10 dBm	150 MHz	50 kHz	FM transmitter. Includes two frequency multiplier/amplifier transistors	P/648, D/751B
MC13175	2–5 V	40 mA	8.0 dBm	500 MHz	5.0 MHz	AM/FM transmitter. Single frequency PLL $f_{out} = 8 \times f_{ref}$, includes power down function	D/751B
MC13176				1.0 GHz		$f_{out} = 32 \times f_{ref}$, includes power down function	

Table 8. Balanced Modulator/Demodulator

Device	V_{CC}	I_{CC}	Function	Suffix/ Package
MC1496	3–5 V	10 mA	General purpose balanced modulator/demodulator for AM, SSB, FM detection with Carrier Balance >50 dB	P/646, D/751A

Table 9. Infrared Transceiver

Device	V_{CC}	I_{CC}	12 dB SINAD Sensitivity (Typ)	Max IF Freq	Carr Det	RSSI	Data Rate	Notes	Suffix/ Package
MC13173	3–5 V	6.5 mA	5.0 µV	10.7 MHz	✓	✓	200 kb	Includes Single Frequency PLL for T_X Carrier and R_X L_O	FTB/873

Universal Cordless Telephone Subsystem IC

MC13109FB, FTA

T_A = −20° to +85°C, Case 848B, 932

The MC13109 integrates several of the functions required for a cordless telephone into a single integrated circuit. This significantly reduces component count, board space requirements, and external adjustments. It is designed for use in both the handset and the base.

- Dual Conversion FM Receiver
  - Complete Dual Conversion Receiver – Antenna Input to Audio Output 80 MHz Maximum Carrier Frequency
  - RSSI Output
  - Carrier Detect Output with Programmable Threshold
  - Comparator for Data Recovery
  - Operates with Either a Quad Coil or Ceramic Discriminator
- Compander
  - Expander Includes Mute, Digital Volume Control and Speaker Driver
  - Compressor Includes Mute, ALC and Limiter
- Dual Universal Programmable PLL
  - Supports New 25 Channel U.S. Standard with No External Switches
  - Universal Design for Domestic and Foreign CT–1 Standards
  - Digitally Controlled Via a Serial Interface Port
  - Receive Side Includes 1st LO VCO, Phase Detector, and 14–Bit Programmable Counter and 2nd LO with 12–Bit Counter
  - Transmit Section Contains Phase Detector and 14–Bit Counter
  - MPU Clock Output Eliminates Need for MPU Crystal
- Supply Voltage Monitor
  - Externally Adjustable Trip Point
- 2.0 to 5.5 V Operation with One–Third the Power Consumption of Competing Devices

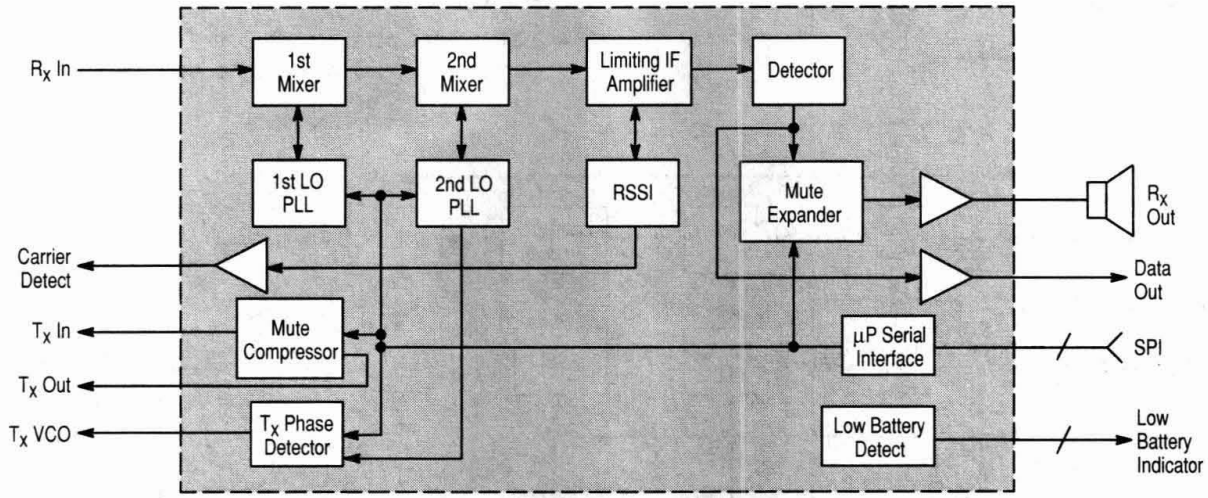

Universal Cordless Telephone Subsystem IC with Scrambler

MC13110FB

T_A = –40° to +85°C, Case 848B

The MC13110 integrates several of the functions required for a cordless telephone into a single integrated circuit. This significantly reduces component count, board space requirements, and external adjustments. It is designed for use in both the handset and the base.

- Dual Conversion FM Receiver
  - Complete Dual Conversion Receiver – Antenna In to Audio Out 80 MHz Maximum Carrier Frequency
  - RSSI Output
  - Carrier Detect Output with Programmable Threshold
  - Comparator for Data Recovery
  - Operates with Either a Quad Coil or Ceramic Discriminator
- Compander
  - Expander Includes Mute, Digital Volume Control, Speaker Driver, 3.5 kHz Low Pass Filter, and Programmable Gain Block
  - Compressor Includes Mute, 3.5 kHz Low Pass Filter, Limiter, and Programmable Gain Block
- Dual Universal Programmable PLL
  - Supports New 25 Channel U.S. Standard with New External Switches
  - Universal Design for Domestic and Foreign CT–1 Standards
  - Digitally Controlled Via a Serial Interface Port
  - Receive Side Includes 1st LO VCO, Phase Detector, and 14–Bit Programmable Counter and 2nd LO with 12–Bit Counter
  - Transmit Section Contains Phase Detector and 14–Bit Counter
  - MPU Clock Outputs Eliminates Need for MPU Crystal
- Supply Voltage Monitor
  - Provides Two Levels of Monitoring with Separate Outputs
  - Separate, Adjustable Trip Points
- Frequency Inversion Scrambler/Descrambler
  - Can Be Enabled/Disabled Via MPU Interface
  - Programmable Carrier Modulation Frequency
- 2.7 to 5.5 V Operation with One–Third the Power Consumption of Competing Devices

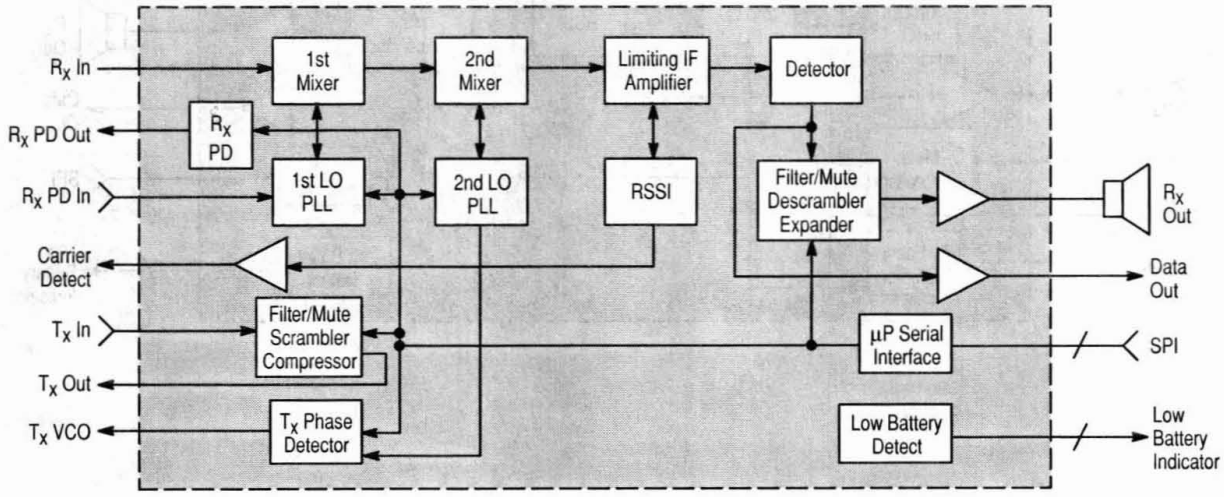

MC13111FB

T_A = –40° to +85°C, Case 848B, 932

The MC13111 integrates several of the functions required for a cordless telephone into a single integrated circuit. This significantly reduces component count, board space requirements, external adjustments, and lowers overall costs. It is designed for use in both the handset and the base.

- Dual Conversion FM Receiver
  - Complete Dual Conversion Receiver – Antenna In to Audio Out 80 MHz Maximum Carrier Frequency
  - RSSI Output
  - Carrier Detect Output with Programmable Threshold
  - Comparator for Data Recovery
  - Operates with Either a Quad Coil or Ceramic Discriminator
- Compander
  - Expander Includes Mute, Digital Volume Control, Speaker Driver, 3.5 kHz Low Pass Filter, and Programmable Gain Block
  - Compressor Includes Mute, 3.5 kHz Low Pass Filter, Limiter, and Programmable Gain Block
- Dual Universal Programmable PLL
  - Supports New 25 Channel U.S. Standard with No External Switches
  - Universal Design for Domestic and Foreign CT–1 Standards
  - Digitally Controlled Via a Serial Interface Port
  - Receive Side Includes 1st LO VCO, Phase Detector, and 14–Bit Programmable Counter and 2nd LO with 12–Bit Counter
  - Transmit Section Contains Phase Detector and 14–Bit Counter
  - MPU Clock Outputs Eliminates Need for MPU Crystal
- Supply Voltage Monitor
  - Provides Two Levels of Monitoring with Separate Outputs
  - Separate, Adjustable Trip Points
- Programmable Corner Frequency Selection
- MC13111 is Pin–for–Pin Compatible with MC13110
- 2.7 to 5.5 V Operation with One–Third the Power Consumption of Competing Devices
- AN1575: Refer to this Application Note for a List of the "Worldwide Cordless Telephone Frequencies" (List can also be found in Chapter 8 Addendum of DL128 Data Book)

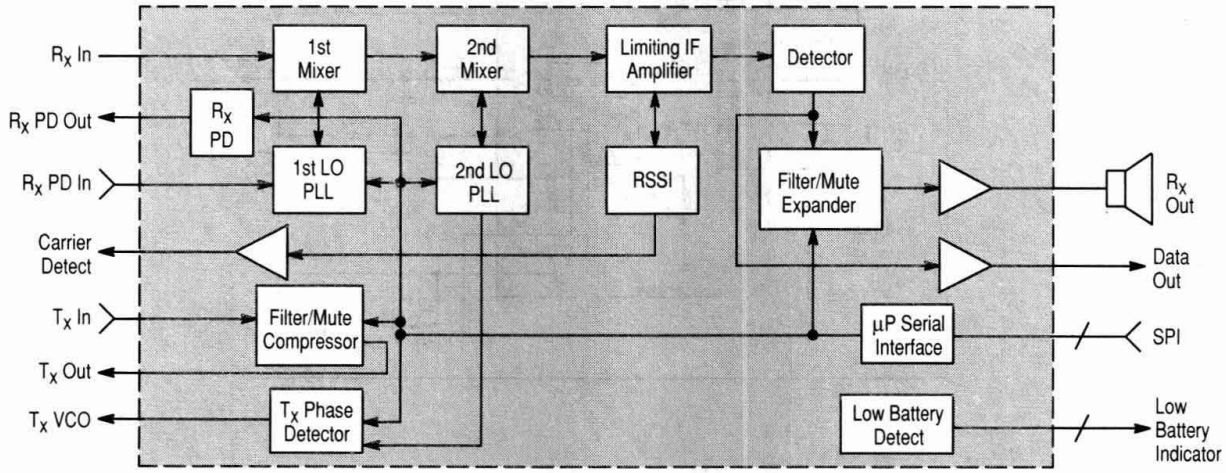

Narrowband FM Receiver

MC13135P,DW, MC13136DW

T_A = –40° to +85°C, Case 724, 751E

The MC13135 is a full dual conversion receiver with oscillators, mixers, Limiting IF Amplifier, Quadrature Discriminator, and RSSI circuitry. It is designed for use in security systems, cordless phones, and VHF mobile and portable radios. Its wide operating supply voltage range and low current make it ideal for battery applications. The Received Signal Strength Indicator (RSSI) has 65 dB of dynamic range with a voltage output, and an operational amplifier is included for a dc buffered output. Also, an improved mixer third order intercept enables the MC13135 to accommodate larger input signal levels.

- Complete Dual Conversion Circuitry
- Low Voltage: 2.0 to 6.0 Vdc
- RSSI with Op Amp: 65 dB Range
- Low Drain Current: 3.5 mA Typical
- Improved First and Second Mixer 3rd Order Intercept
- Detector Output Impedance: 25 Ω Typically

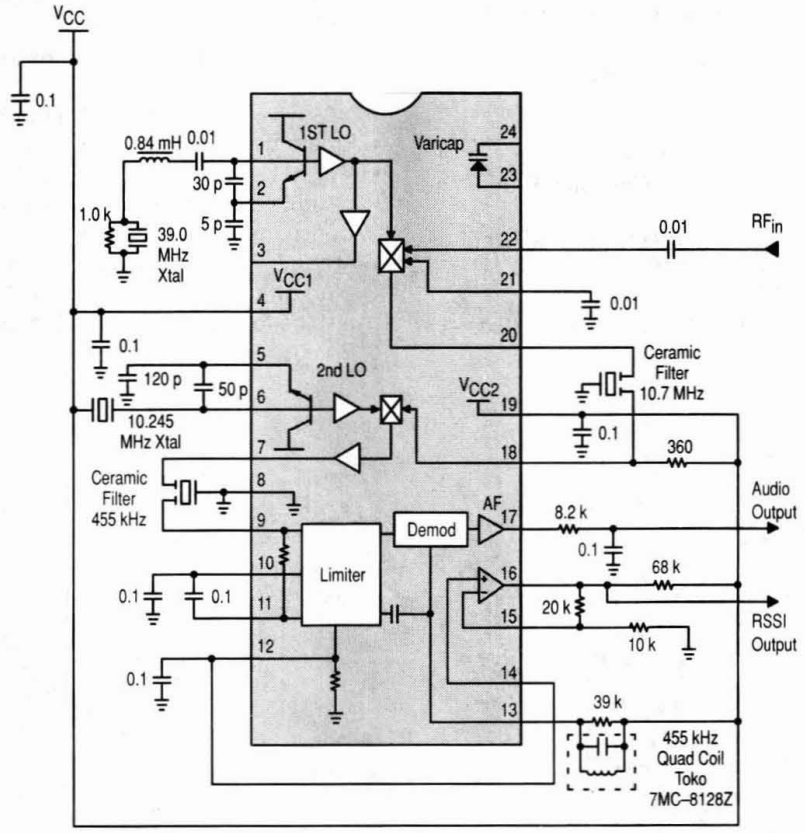

Low Power DC – 1.8 GHz LNA, Mixer and VCO

MC13142D

T_A = –40° to +85°C, Case 751B

The MC13142 is intended to be used as a first amplifier, voltage controlled oscillator and down converter for RF applications. It features wide band operation, low noise, high gain and high linearity while maintaining low current consumption. The circuit consists of a Low Noise Amplifier (LNA), a Voltage Controlled Oscillator (VCO), a buffered oscillator output, a mixer, an Intermediate Frequency amplifier (IF_{amp}) and a dc control section. The wide mixer IF bandwidth allows this part also to be used as an up converter and exciter amplifier.

- Wide RF Bandwidth: DC–1.8 GHz
- Wide LO Bandwidth: DC–1.8 GHz
- Wide IF Bandwidth: DC–1.8 GHz
- Low Power: 13 mA @ V_{CC} = 2.7 – 6.5 V
- High Mixer Linearity: $P_{i1.0\ dB}$ = 3.0 dBm
- Linearity Adjustment Increases IP_{3in} Up to 20 dBm
- Single–Ended 50 Ω Mixer Input
- Double Balanced Mixer Operation
- Open Collector Mixer Output
- Single Transistor Oscillator with Collector, Base and Emitter Pinned Out
- Buffered Oscillator Output

SO–16

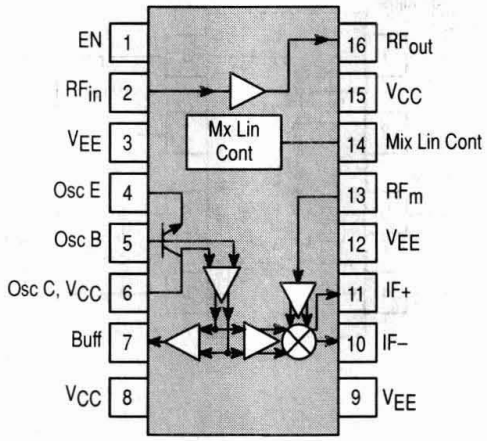

Ultra Low Power DC – 2.4 GHz Linear Mixer

MC13143,D

T_A = –40° to +85°C, Case 751

The MC13143 is a high compression linear mixer with single–ended RF input, differential IF output and differential LO inputs which consumes as little as 1.8 mW. A new circuit topology is used to achieve a high third order intermodulation intercept point, high linearity and high 1.0 dB output compression point while maintaining a linear 50 Ω input impedance. It is designed for Up or Down conversion anywhere from dc to 2.4 GHz.

Ultra Low Power: 1.0 mA @ V_{CC} = 1.8 – 6.5 V

- Wide Input Bandwidth: DC–2.4 GHz
- Wide Output Bandwidth: DC–2.4 GHz
- Wide LO Bandwidth: DC–2.4 GHz
- High Mixer Linearity: $P_{i1.0\ dB}$ = 3.0 dBm

Linearity Adjustment of up to IP_{3in} = 20 dBm

- 50 Ω Mixer Input
- Single–Ended Mixer Input
- Double Balanced Mixer Operation
- Differential Open Collector Mixer Output

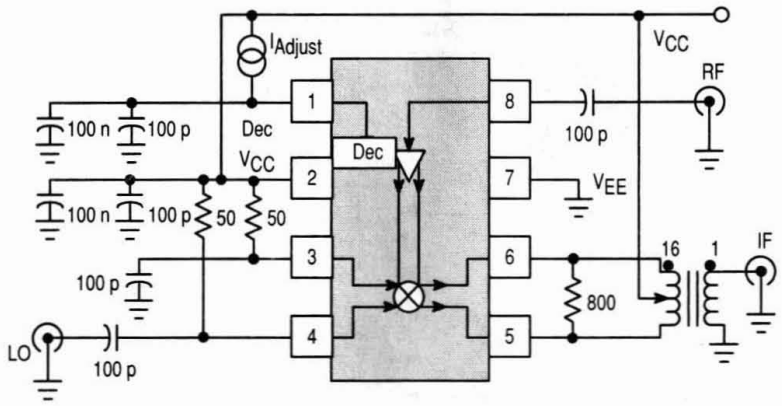

VHF – 2.0 GHz Low Noise Amplifier with Programmable Bias

MC13144,D

T_A = –40° to +85°C, Case 751

The MC13144 is designed in the Motorola High Frequency Bipolar MOSIAC V™ wafer process to provide excellent performance in analog and digital communication systems. It includes a cascoded LNA usable up to 2.0 GHz and at 1.8 Vdc, with 2 bit digital programming of the LNA bias. Targeted applications are in the UHF Family Radio Services, UHF and 800 MHz Special Mobile Radio, 800 MHz Cellular and GSM, PCS, DECT and PHS at 1.8 to 2.0 GHz and Cordless Telephones in the 902 to 928 MHz band covered by FCC Title 47; Part 15. The MC13144 offers the following features:

- 17 dB Gain at 900 MHz
- 1.4 dB Noise Figure at 900 MHz
- 1.0 dB Compression Point of –7.0 dBm; Input Third Order Intercept Point of –5.0 dBm
- Low Operating Supply Voltage (1.8 to 6.0 Vdc)
- Programmable Bias with Enable 1 and Enable 2
- Enable 1 and Enable 2 Programmed High for Optimal Noise Figure and Gain Associated with NF
- Can Override Enable and Externally Program In Up to 15 mA

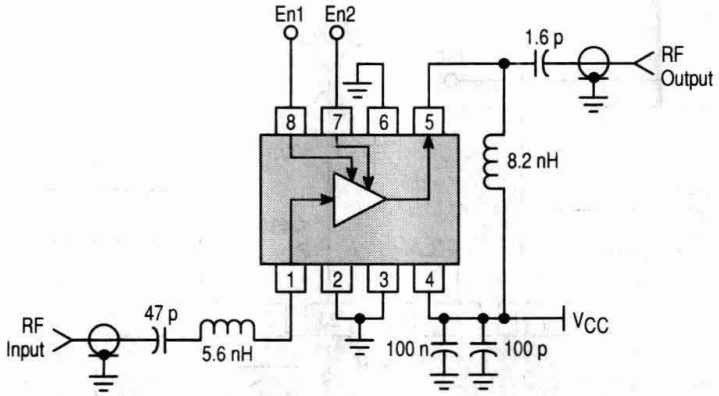

Narrowband FM Coilless Detector IF Subsystem

MC13150FTA, FTB

T_A = –40° to +85°C, Case 977, 873

The MC13150 is a narrowband FM IF subsystem targeted at cellular and other analog applications. Excellent high frequency performance is achieved, with low cost, through use of Motorola's MOSAIC 1.5™ RF bipolar process. The MC13150 has an onboard Colpitts VCO for Crystal controlled second LO in dual conversion receivers. The mixer is a double balanced configuration with excellent third order intercept. It is useful to beyond 200 MHz. The IF amplifier is split to accommodate two low cost cascaded filters. RSSI output is derived by summing the output of both IF sections. The quadrature detector is a unique design eliminating the conventional tunable quadrature coil.

Applications for the MC13150 include cellular, CT–1 900 MHz cordless telephone, data links and other radio systems utilizing narrowband FM modulation.

- Linear Coilless Detector
- Adjustable Demodulator Bandwidth
- 2.5 to 6.0 Vdc Operation
- Low Drain Current: < 2.0 mA
- Typical Sensitivity of 2.0 μV for 12 dB SINAD
- IIP3, Input Third Order Intercept Point of 0 dBm
- RSSI Range of Greater Than 100 dB
- Internal 1.4 kΩ Terminations for 455 kHz Filters
- Split IF for Improved Filtering and Extended RSSI Range

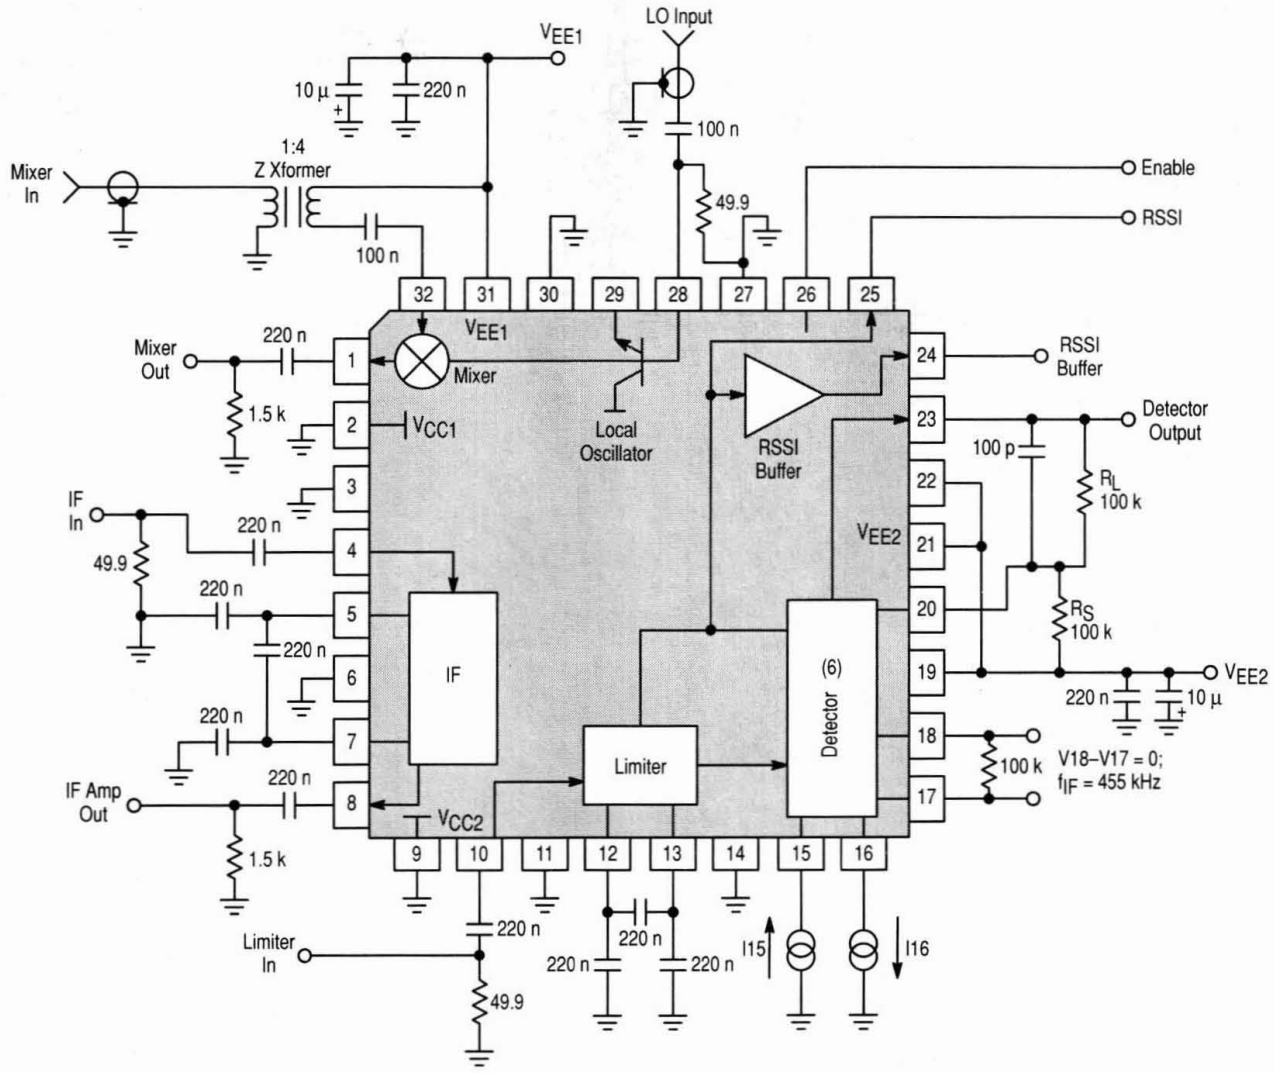

Wideband FM IF System

MC13156DW, FB

T_A = –40° to +85°C, Case 751E, 873

The MC13156 is a wideband FM IF subsystem targeted at high performance data and analog applications. Excellent high frequency performance is achieved, with low cost, through use of Motorola's MOSAIC 1.5™ RF bipolar process. The MC13156 has an onboard Colpitts VCO for PLL controlled multichannel operation. The mixer is useful to beyond 200 MHz and may be used in a differential, balanced, or single–ended configuration. The IF amplifier is split to accommodate two low cost cascaded filters. RSSI output is derived by summing the output of both IF sections. A precision data shaper has a hold function to preset the shaper for fast recovery of new data.

Applications for the MC13156 include CT–2, wideband data links, and other radio systems utilizing GMSK, FSK or FM modulation.

- 2.0 to 6.0 Vdc Operation
- Typical Sensitivity of 6.0 μV for 12 dB SINAD
- RSSI Dynamic Range Typically 80 dB
- High Performance Data Shaper for Enhanced CT–2 Operation
- Internal 300 Ω and 1.4 kΩ Terminations for 10.7 MHz and 455 kHz Filters
- Split IF for Improved Filtering and Extended RSSI Range

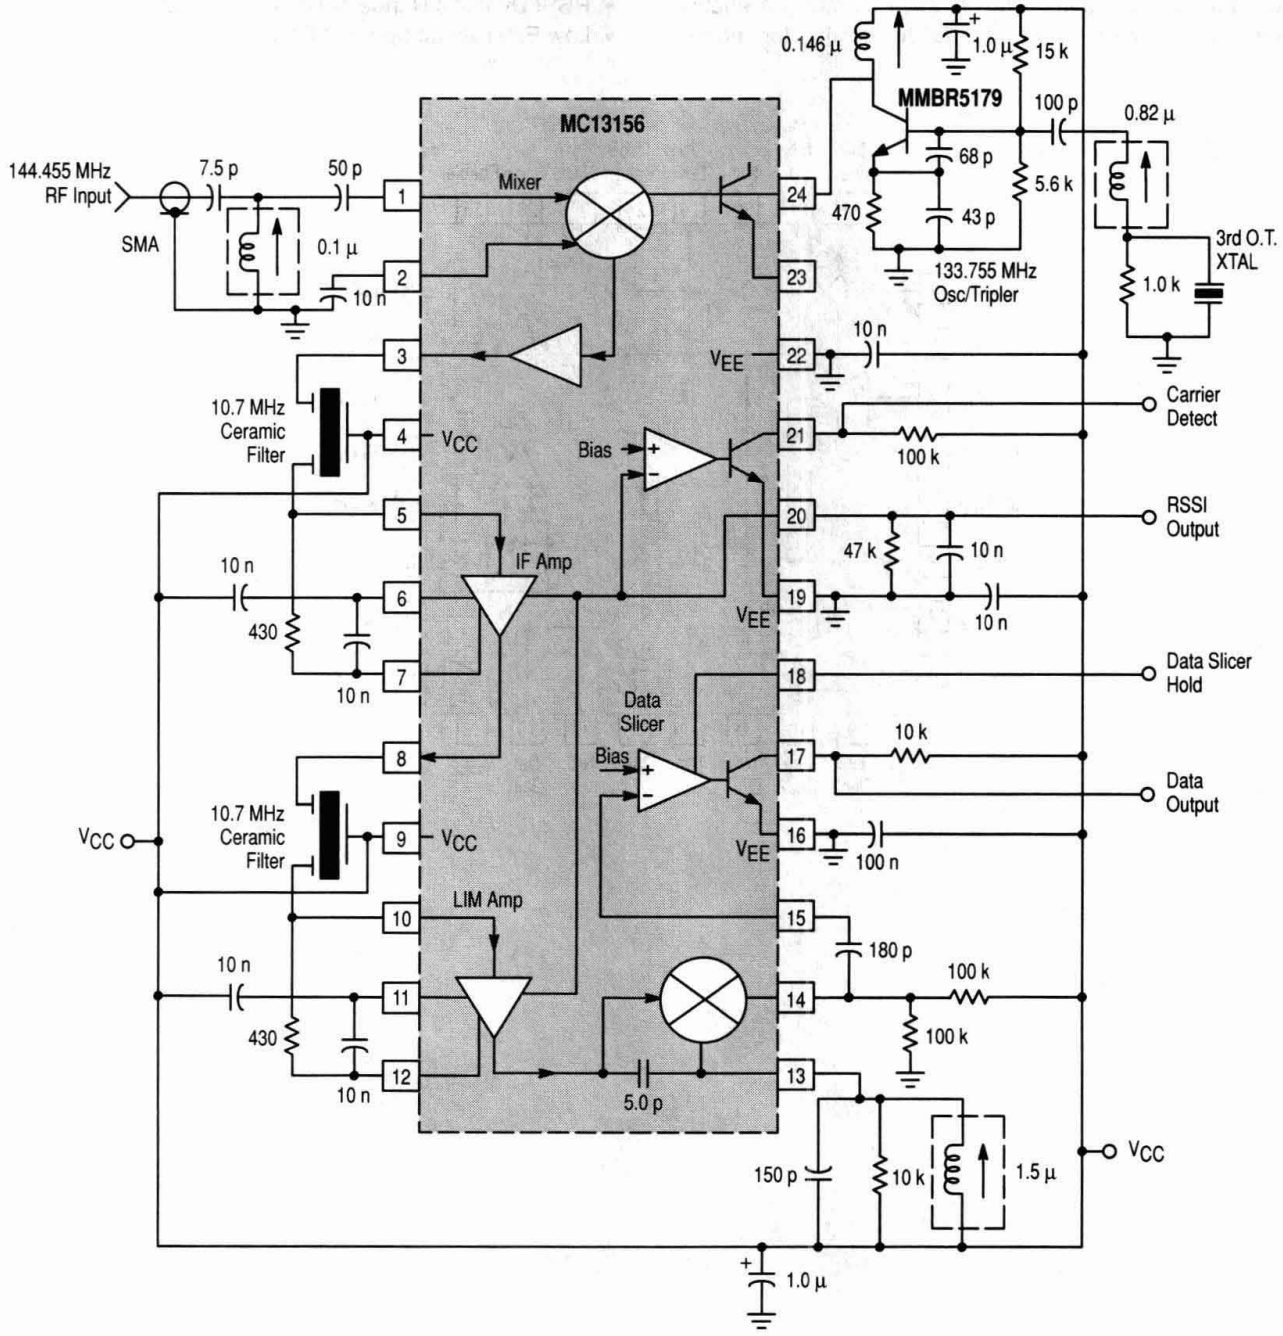

Wideband FM IF Subsystem

MC13158FTB

T_A = –40° to +85°C, Case 873

The MC13158 is a wideband IF subsystem that is designed for high performance data and analog applications. Excellent high frequency performance is achieved, with low cost, through the use of Motorola's MOSAIC 1.5™ RF bipolar process. The MC13158 has an on–board grounded collector VCO transistor that may be used with a fundamental or overtone crystal in single channel operation or with a PLL in multi–channel operation. The mixer is useful to 500 MHz and may be used in a balanced differential or single ended configuration. The IF amplifier is split to accommodate two low cost cascaded filters. RSSI output is derived by summing the output of both IF sections. A precision data shaper has an Off function to shut the output "off" to save current. An enable control is provided to power down the IC for power management in battery operated applications.

Applications include DECT, wideband wireless data links for personal and portable laptop computers and other battery operated radio systems which utilize GFSK, FSK or FM modulation.

- Designed for DECT Applications
- 1.8 to 6.0 Vdc Operating Voltage
- Low Power Consumption in Active and Standby Mode
- Greater than 600 kHz Detector Bandwidth
- Data Slicer with Special Off Function
- Enable Function for Power Down of Battery Operated Systems
- RSSI Dynamic Range of 80 dB Minimum
- Low External Component Count

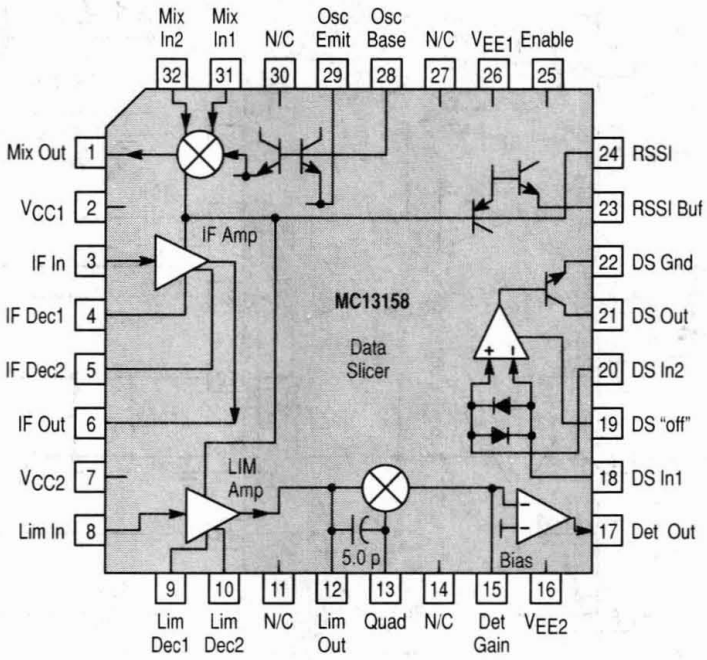

UHF, FM/AM Transmitter

MC13175/176D

T_A = 0° to +70°C, Case 751B

The MC13175 and MC13176 are one chip FM/AM transmitter subsystems designed for AM/FM communication systems operating in the 260 to 470 MHz band covered by FCC Title 47; Part 15. They include a Colpitts crystal reference oscillator, UHF oscillator, ÷8 (MC13175) or ÷32 (MC13176) prescaler, and phase detector forming a versatile PLL system. Another application is as a local oscillator in a UHF or 900 MHz receiver. MC13175/176 offer the following features:

- UHF Current Controlled Oscillator
- Use Easily Available 3rd Overtone or Fundamental Crystals for Reference
- Low Number of External Parts Required
- Low Operating Supply Voltage (1.8–5 Vdc)
- Low Supply Drain Currents
- Power Output Adjustable (Up to +10 dBm)
- Differential Output for Loop Antenna or Balun Transformer Networks
- Power Down Feature
- ASK Modulated by Switching Output "On"/"Off"
- MC13175 – f_O = 8 × f_{ref}
- MC13176 – f_O = 32 × f_{ref}

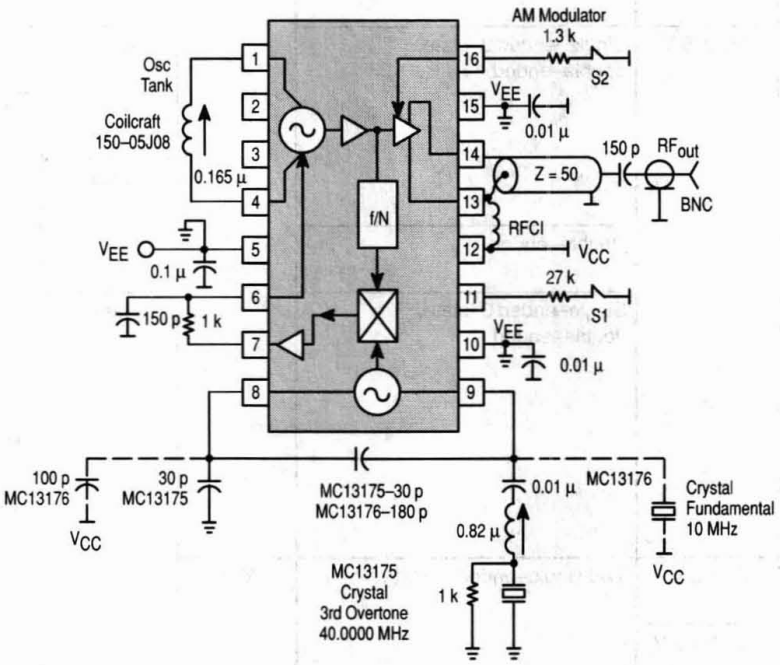

Phase–Locked Loop Components

Motorola offers a choice of phase–locked loop components ranging from complete functional frequency synthesizers for dedicated applications to a wide selection of general purpose PLL circuit elements. Technologies include CMOS for lowest power consumption and bipolar for high speed operation. Typical applications include TV, CATV, radios, scanners, WLANs, cordless telephones plus home and personal computers.

Table 1. PLL Frequency Synthesizers

Frequency (MHz)	Supply Voltage (V)	Nominal Supply Current (mA)	Phase Detector	Standby	Interface	Device	Suffix/ Case
4 @ 5 V	4.5 to 12	6 @ 5 V	Single–ended 3–state	No	Parallel	MC145106	P/707, DW/751D
15 @ 5 V	3 to 9	–	Two single–ended 3–state		Serial	MC145149*	P/738, DW/751D
		7.5 @ 5 V	Analog			MC145159–1	P/738, DW/751D
20 @ 5 V	3 to 9	7.5 @ 5 V	Single–ended 3–state, double–ended		4–Bit	MC145145–2	P/707, DW/751D
						MC145146–2	P/738, DW/751D
					Parallel	MC145151–2	P/710, DW/751F
			Double–ended			MC145152–2	P/710, DW/751F
			Single–ended 3–state, double–ended		Serial	MC145155–2	P/707, DW/751D
						MC145156–2	P/707, DW/751D
						MC145157–2	P/648, DW/751G
						MC145158–2	P/648, DW/751G
60 @ 3 V	2.5 to 5.5	3 @ 3 V	Two single–ended 3–state	Yes		MC145162*	P/648, D/751B
60 @ 2 V	1.8 to 3.6	1.5 @ 1.8 V				MC145165*	P/648, D/751B
60 @ 3 V	2.5 to 5.5	3 @ 3 V			Parallel	MC145166*	P/648, DW/751G
					Serial	MC145167*	P/648, DW/751G
					Parallel	MC145168*	
					Serial	MC145169*	
85 @ 3 V	2.5 to 5.5	3 @ 3 V				MC145162–1*	P/648, D/751B
40/130 @ 5 V	4.5 to 5.5	9 @ 5 V	Single–ended 3–state, Current source/sink			MC145173	DW/751E
100 @ 3 V 185 @ 5 V	2.5 to 5.5	2 @ 3 V 6 @ 5 V		No		MC145170–1	P/648, D/751B, DT/948C

* Dual PLL

PLL Frequency Synthesizers (continued)

Frequency (MHz)	Supply Voltage (V)	Nominal Supply Current (mA)	Phase Detector	Standby	Interface	Device	Suffix/ Case
1100	4.5 to 5.5	7 @ 5 V	Current source/sink, double–ended	Yes	Serial	MC145190	F/751J, DT/948D
						MC145191	F/751J, DT/948D
1100	2.7 to 5	6 @ 2.7 V				MC145192	F/751J, DT/948D
1100	2.7 to 5.5	12	Two current source/sink, double–ended			MC145220*	F/803C, DT/948D
1200, 400	1.8 to 3.6	5	Loop 1 = Current source/sink Loop 2 = Three–state			MC145225*	FTA/873C
2000	4.5 to 5.5	12 @ 5 V	Current source/sink, double–ended			MC145200	F/751J, DT/948D
2000	4.5 to 5.5	12 @ 5 V				MC145201	F/751J, DT/948D
2000	2.7 to 5.5	4 @ 3 V				MC145202	F/751J, DT/948D
2600, 400	1.8 to 3.6	7	Loop 1 = Current source/sink Loop 2 = Three–state			MC145230*	FTA/873C

* Dual PLL

NOTE: Evaluation kits available for the MC145190, MC145191, MC145192, MC145200, MC145201, MC145202, and MC145220. Order part number MC145_ _ _EVK.

Table 2. Phase–Locked Loop Functions

Device	Function	Pins	DIP	SM
MC12002	Analog Mixer	14	P	–
MC12009	480 MHz ÷5/6 Dual Modulus Prescaler	16	P	–
MC12011	550 MHz ÷8/9 Dual Modulus Prescaler	16	P	–
MC12013	550 MHz ÷10/11 Dual Modulus Prescaler	16	P	–
MC12015	225 MHz ÷32/33 Dual Modulus Prescaler	8	P	D
MC12016	225 MHz ÷40/41 Dual Modulus Prescaler	8	P	D
MC12017	225 MHz ÷64/65 Dual Modulus Prescaler	8	P	D
MC12018	520 MHz ÷128/129 Dual Modulus Prescaler	8	P	D
MC12019	225 MHz ÷20/21 Dual Modulus Prescaler	8	P	D
MC12022LVA	1.1 GHz ÷64/65, ÷128/129 Low Voltage Dual Modulus Prescaler	8	P	D
MC12022LVB	1.1 GHz ÷64/65, ÷128/129 Low Voltage Dual Modulus Prescaler	8	P	D
MC12023	225 MHz ÷64 Prescaler	8	P	D
MC12026A	1.1 GHz ÷8/9, ÷16/17 Dual Modulus Prescaler	8	P	D
MC12026B	1.1 GHz ÷8/9, ÷16/17 Dual Modulus Prescaler	8	P	D
MC12028A	1.1 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12028B	1.1 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12033A	2.0 GHz ÷32/33, ÷64/65 Low Voltage Dual Modulus Prescaler	8	P	D
MC12033B	2.0 GHz ÷32/33, ÷64/65 Low Voltage Dual Modulus Prescaler	8	P	D

Phase–Locked Loop Functions (continued)

Device	Function	Pins	DIP	SM
MC12034A	2.0 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12034B	2.0 GHz ÷32/33, ÷64/65 Dual Modulus Prescaler	8	P	D
MC12038A	1.1 GHz ÷64/65, ÷127/128, ÷255/256 Low Power Dual Modulus Prescaler	8	P	D
MC12040	Phase-Frequency Detector	14,20	P	–
MC12052A	1.1 GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler	8	–	D, SD
MC12053A	1.1 GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler With Stand-By Mode	8	–	D, SD
MC12054A	2.0 GHz ÷64/65, ÷128/129 Super Low Power Dual Modulus Prescaler	8	–	D, SD
MC12058	1.1 GHz ÷126/128. ÷254/256 Low Power Dual Modulus Prescaler	8	–	D, SD
MC12061	Crystal Oscillator	16	P	–
MC12066	1.3 GHz ÷64/256 Prescaler	8	–	D
MC12079	2.8 GHz ÷64/128/256 Prescaler	8	P	D
MC12080	1.1 GHz ÷10/20/40/80 Prescaler	8	P	D
MC12089	2.8 GHz ÷64/128 Prescaler	8	P	D
MC12093	1.1 GHz ÷2/4/8 Low Power Prescaler With Stand-By Mode	8	–	D, SD
MC12095	2.5 GHz ÷2/4 Low Power Prescaler With Stand-By Mode	8	–	D, SD
MC12098	2.5 GHz ÷8192 Prescaler	8	–	D, SD
MCH/K12140	Phase-Frequency Detector	8	–	D
MC12147	Low Power Voltage Controlled Oscillator Buffer	8	–	D, SD
MC12148	Low Power Voltage Controlled Oscillator	8	–	D, SD, P
MC12149	Ultra Low Power Voltage Controlled Oscillator	8	–	D, SD
MC12179	500–2800 MHz Single Channel Frequency Synthesizer	8	–	D
MC12181	125–1000 MHz Frequency Synthesizer	16	–	D

RF/IF Integrated Circuits Packages

CASE 646
P SUFFIX

CASE 648
P SUFFIX



CASE 707
P SUFFIX



CASE 710
P SUFFIX

CASE 724
P SUFFIX



CASE 738
P SUFFIX

CASE 751
D SUFFIX

CASE 751A
D SUFFIX

CASE 751B
D SUFFIX

CASE 751D
DW, FP SUFFIX

CASE 751E
DW SUFFIX

CASE 751F
DW SUFFIX

CASE 751G
DW SUFFIX

CASE 751J
F SUFFIX

CASE 803C
F SUFFIX

CASE 848B
FB SUFFIX

CASE 873
FB, FTB SUFFIX

CASE 873C
FTA SUFFIX

CASE 932
FTA SUFFIX

CASE 948C
DT SUFFIX

CASE 948D
DT SUFFIX

CASE 948F
DTB SUFFIX

CASE 976
FTB SUFFIX

CASE 977
FTA SUFFIX

Motorola RF Discrete Transistors

Motorola offers the most extensive group of RF Discrete Transistors offered by any semiconductor manufacturer anywhere in the world today.

From Bipolar to FET, from Low Power to High Power, the user can choose from a variety of packages. They include plastic, metal can and ceramic that are microstrip circuit compatible or surface mountable. Many are designed for automated assembly equipment.

Major sub–headings are Small Signal, Medium Power, Power MOSFETs and Bipolar Transistors.

Table of Contents

	Page
RF Discrete Transistors	5.9–31
RF Small Signal Transistors	5.9–32
Selection by Package	5.9–32
Plastic	5.9–32
Ceramic SOE Case	5.9–34
Selection by Application	5.9–35
Low Noise	5.9–35
CATV, MATV and Class A Linear	5.9–36
RF Medium Power Transistors	5.9–37
Discrete Wireless Transmitter Devices	5.9–37
RF High Power Transistors	5.9–38
RF Power MOSFETs	5.9–38
RF Power Bipolar Transistors	5.9–41
HF Transistors	5.9–41
VHF Transistors	5.9–41
UHF Transistors	5.9–42
900 MHz Transistors	5.9–43
1.5 GHz Transistors	5.9–44
Microwave Transistors	5.9–44
Linear Transistors	5.9–45

Motorola RF Small Signal Transistors

Motorola's broad line of RF Small Signal Transistors includes NPN and PNP Silicon Bipolar Transistors characterized for low noise amplifiers, mixers, oscillators, multipliers, non–saturated switches and low–power drivers.

These devices are available in a wide variety of package types: plastic Macro–X, ceramic and surface mounted. Most of these transistors are fully characterized with s–parameters.

RF Small Signal Transistor Gain Characteristics

Curve numbers apply to transistors listed in the subsequent tables.

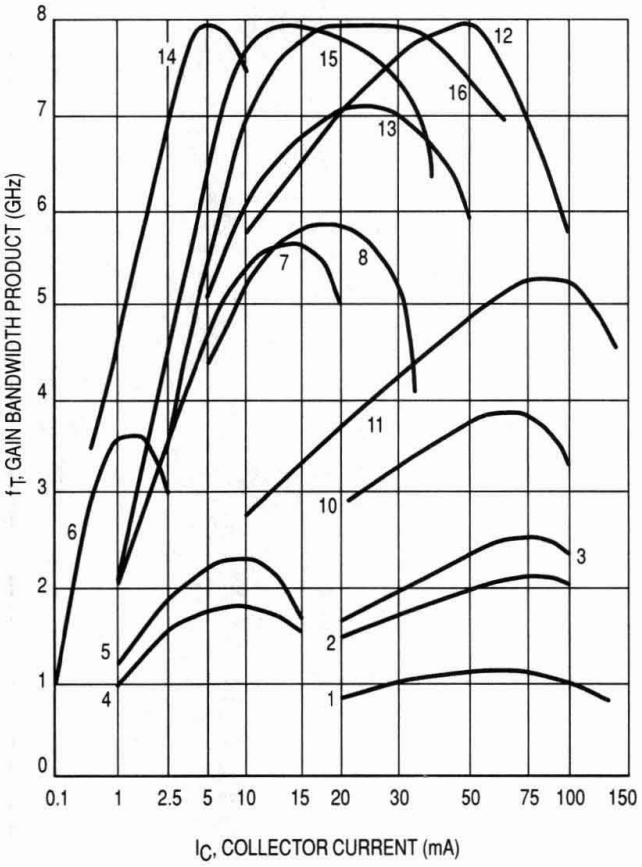

Selection by Package

In small–signal RF applications, the package style is often determined by the end application or circuit construction technique. To aid the circuit designer in device selection, the Motorola broad range of RF small–signal amplifier transistors is organized by package. Devices for other applications such as oscillators or switches are shown in the appropriate preceding tables. **These devices are NPN polarity unless otherwise designated.**

Plastic Packages

Table 1. Plastic

Device	Gain–Bandwidth @		Curve No. Page 5.9–32	NF_{min} @ f		Gain @ f		Maximum Ratings		Package
	f_T Typ GHz	I_C mA		Typ dB	MHz	Typ dB	MHz	$V_{(BR)CEO}$ Volts	I_C mA	
Case 317/2 — MACRO–X										
MRF571	8	50	12	1.5	1000	12	1000	10	70	
MRF559	3	100	10	—	—	13	512	18	150	
MRF581	5	75	11	2	500	15.5	500	18	200	
Case 317D/2										
MRF553	—	—	—	—	—	13	175	16	500	
MRF555	—	—	—	—	—	12.5	470	16	400	
MRF557	—	—	—	—	—	9	870	16	400	

Selection by Package (continued)

Table 1. Plastic (continued)

Device	Gain–Bandwidth @ f_T Typ GHz	@ I_C mA	Curve No. Page 5.9–32	NF_{min} @ f Typ dB	MHz	Gain @ f Typ dB	MHz	Maximum Ratings $V_{(BR)CEO}$ Volts	I_C mA	Package
Case 318–08/6 — SOT–23										
MMBR521LT1(17,18c)	3.4	–35	—	1.5	500	15	500	–10	–70	
MMBR5031LT1(18c)	1	5	—	2.5	450	17	450	10	20	
BFS17LT1(18c)	1.3	25	—	—	—	—	—	15	—	
BFR92ALT1(18c)	4.5	14	—	—	—	15	—	15	25	
MMBR901LT1(18c)	4	15	7	1.9	1000	12	1000	15	30	
MMBR901LT3(18d)	4	15	7	1.9	1000	12	1000	15	30	
BFR93ALT1(18c)	3.4	30	—	2.5	30	—	—	12	35	
MMBR5179LT1(18c)	1.4	5	4	—	—	15	200	12	50	
MMBR941LT1(18c)	8	15	15	2.1	2000	8.5	2000	10	50	
MMBR941LT3(18d)	8	15	15	2.1	2000	8.5	2000	10	50	
MMBR941BLT1(18c)	8	15	15	2.1	2000	8.5	2000	10	50	
MMBR911LT1(18c)	6	30	8	2	500	17	500	12	60	
MMBR571LT1(18c)	8	50	12	2	500	16.5	500	10	80	
MMBR951LT1(18c)	8	30	16	2.1	2000	7.5	2000	10	100	
MMBR951ALT1(18c)	8	30	16	2.1	2000	7.5	2000	10	100	
Case 318A/1 — SOT–143										
MRF5711LT1(18c)	8	50	12	1.6	1000	13.5	1000	10	70	
MRF5211LT1(17,18c)	4.2	–50	—	2.8	1000	11	1000	–10	–70	
MRF9411LT1(18c)	8	15	15	2.1	2000	9.5	2000	10	50	
MRF5811LT1(18c)	5	75	11	2.0	500	18.4	500	18	200	
MRF9511LT1(18c)	8	30	16	2.1	2000	9	2000	10	100	
Case 419/3 — SC–70/SOT–323										
MRF917T1(18c)★	6	20	8	2.3	1000	10	1000	12	60	
MRF577T1(18c)★	7	40	12	1.5	1000	10	1000	10	80	
MRF927T1(18c)	8	5	14	1.7	1000	9.8	1000	10	10	
MRF927T3(18d)	8	5	14	1.7	1000	9.8	1000	10	10	
MRF947T1(18c,d)	8	15	15	2.1	2000	10.5	1500	10	50	
MRF947T3(18d)	8	15	15	2.1	2000	10.5	1500	10	50	
MRF947AT1(18c)	8	15	15	2.1	2000	10.5	1500	10	50	
MRF947BT1(18c,d)	8	15	15	2.1	2000	10.5	1500	10	50	
MRF957T1(18c)	9	30	16	2.0	2000	9	1500	10	100	
Case 419B/16, 17 — SC–70ML/SOT–363										
MRF2947AT1(10,18c)★	9	15	15	1.5	1000	14	1000	10	50	
MRF2947RAT1(10,18c)★	9	15	15	1.5	1000	14	1000	10	50	
Case 463/1 — SC–90/SC–75										
MRF579T1(18c)★	8	40	12	1.5	1000	12	1000	—	80	
MRF949T1(18c)★	9	15	15	1.5	1000	14	1000	—	50	
MRF959T1(18c)★	9	30	15	1.6	1000	8	1000	—	100	

(10)Package contains two transistors.

(17)PNP

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

★New Product

Selection by Package (continued)

Table 1. Plastic (continued)

Device	Gain–Bandwidth @ f_T Typ GHz	Gain–Bandwidth @ I_C mA	Curve No. Page 5.9–32	NF_{min} @ f Typ dB	NF_{min} @ f MHz	Gain @ f Typ dB	Gain @ f MHz	Maximum Ratings $V_{(BR)CEO}$ Volts	Maximum Ratings I_C mA	Package
Case 751/1 — SO–8										
MRF3866R2(18b)	0.8	50	1	—	—	10.5	400	30	400	
MRF5812R1,R2(18a,b)	5.5	75	11	2	500	15.5	500	15	200	
MRF8372R1,R2(18a,b)	5	75	11	—	—	10	870	16	200	

Ceramic SOE Case

Table 2. Ceramic SOE Case

Device	Gain–Bandwidth @ f_T Typ GHz	Gain–Bandwidth @ I_C mA	Curve No. Page 5.9–32	NF @ f Typ dB	NF @ f MHz	Gain @ f Typ dB	Gain @ f MHz	Maximum Ratings $V_{(BR)CEO}$ Volts	Maximum Ratings I_C mA	Package
Case 244A/1										
MRF587	5.5	90	11	3	500	13	500	15	200	

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

Selection by Application

Table 3. Low Noise

The Small–Signal devices listed are designed for low noise and high gain amplifier mixer, and multiplier applications. Each transistor type is available in various packages. **Polarity is NPN unless otherwise noted.**

Package	Name	Case Number	Curve Number (See figure below)					
			1	2[17]	3	4	5	6
	MACRO–X	317/2	—	—	MRF571	MRF581	—	—
	SOT–23	318–08/6	MMBR941LT1 MMBR941LT3 MMBR941BLT1 MMBR951LT1[20]	MMBR521LT1	MMBR571LT1	—	MMBR901LT1 MMBR901LT3	MMBR911LT1
	SC–70/ SOT–323	419/3	MRF917T1 MRF577T1 MRF927T1 MRF927T3 MRF947AT1 MRF947T1 MRF947T3 MRF947BT1 MRF957T1[20]	—	—	—	—	—
	SC–70ML/ SOT–363	419B/ 16, 17	MRF2947AT1 MRF2947RAT1	—	—	—	—	—
	SC–90/ SC–75	463/1	MRF579T1 MRF949T1 MRF959T1	—	—	—	—	—
	SOT–143	318A/1	MRF9411LT1 MRF9511LT1[20]	MRF5211LT1	MRF5711LT1	MRF5811LT1	—	—
	SO–8	751/1	—	—	—	MRF5812R1,R2	—	—

[17]PNP

[20]Higher Current Version

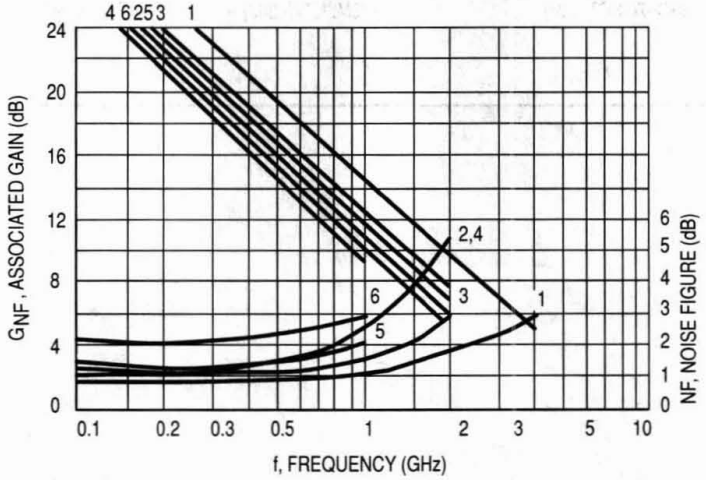

Gain and Noise Figure versus Frequency

Table 4. CATV, MATV and Class A Linear

For Class A linear CATV/MATV applications. Listed according to increasing gain bandwidth (f_T).

Device	Nominal Test Conditions V_{CE}/I_C Volts/mA	f_T Typ MHz	Noise Figure Typ/Freq. dB/MHz	Distortion Specifications 3rd Order IMD dBc	Distortion Specifications Output Level dBmV	$V_{(BR)CEO}$ V	Package/ Style
MMBR5179LT1(18c)	6/5	1500	4/450			12	318–08/6
MMBR5031LT1(18c,d)	6/5	2000	1.9/450			10	318–08/6
MRF5812R1,R2(18a,b)	10/75	5000	1.8/500	–65	+50	15	751/1
MRF581	10/75	5000	2.7/300	–65	+50	18	317/2
MRF587	15/90	5500	3/500	–72	+50	17	244A/1

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

RF Small Signal Transistors Packages



CASE 244A
STYLE 1



CASE 317
STYLE 2
(MACRO–X)

CASE 317D
STYLE 2
(POWER MACRO)

CASE 318–08
STYLE 6
(SOT–23)

CASE 318A
STYLE 1, 11
LOW PROFILE
(SOT–143)

CASE 419
STYLE 3
(SC–70/SOT–323)

CASE 419B
STYLE 16, 17
(SC–70ML/SOT–363)

CASE 463
STYLE 1
(SC–90/SC–75)

CASE 751
STYLE 1
(SO–8)

Motorola RF Medium Power Transistors

RF Medium Power Transistors are used in portable transmitter applications and low voltage drivers for higher power devices. They can be used for analog cellular, GSM and the newer digital handheld cellular phones. GaAs, LDMOS and Bipolar devices are available. RF Medium Power Transistors are supplied in industry standard SOT packages as well as Motorola's high performance PLD line of surface mount power RF packages. Other applications include talkback pagers, wireless modems and LANs, cable modems, highspeed drivers and instrumentation.

Discrete Wireless Transmitter Devices

Device	Freq. MHz	V_{DD} V	Typical Output Power dBm	Typical Drain Eff. %	Typical Gain dB	Semiconductor Technology	Package
3.5 V Applications							
MRF9822T1(18f)★	850	3.5	31.0	70	11	GaAs PHEMT	PLD–1
4.8 V Applications							
MRF9242T1(18f,46a)	900	4.8	31.5	65	9.5	LDMOS	PLD–1
MRF9282T1(18f,46a)	900	4.8	34.0	60	8	LDMOS	PLD–1
5.8 V Applications							
MXR9745T1(18f)★	850	5.8	31.5	60	8.5	LDMOS	SOT–89
MXR9745RT1(18f)★	850	5.8	31.5	60	8.5	LDMOS	SOT–89
MRF9251T1(18c,46a)	900	5.8	23.5	60	10.5	LDMOS	SOT–143
MRF9811T1(18c)★	900	5.8	22	60	15	GaAs MESFET	SOT–143
MRF9745T1(18f)★	900	5.8	30	55	10	LDMOS	PLD–1

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(46)To be introduced: a) 1Q98; b) 2Q98

★New Product

RF Medium Power Transistors Packages

CASE 318A
STYLE 7, 8
(SOT–143)

CASE 345–03
STYLE 8, 9
(SOT–89)



CASE 449
(PLD–1)

Motorola RF High Power Transistors

RF Power MOSFETs

Motorola RF Power MOSFETs are constructed using a planar process to enhance manufacturing repeatability. They are *N–channel field effect transistors* with an oxide insulated gate which controls vertical current flow.

Compared with bipolar transistors, RF Power FETs exhibit higher gain, higher input impedance, enhanced thermal stability and lower noise. The FETs listed in this section are specified for operation in RF Power Amplifiers and are grouped by frequency range of operation and type of application. Arrangement within each group is first by order of voltage then by increasing output power.

Table 1. To 54 MHz – Vertical MOSFETs

Designed for broadband HF/SSB commercial and industrial applications. The high gain, broadband performance and linear characterization of this device makes it ideal for large–signal, common–source amplifier applications in 12.5 volt mobile and amateur radio transmitters.

Device	P_{out} Output Power Watts	P_{in} Input Power Typical Watts	G_{ps} (Typ)/Freq. dB/MHz	η Eff., Typ %	Typical IMD d_3 dB	Typical IMD d_5 dB	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 Volts, Class AB								
MRF255	55	0.8	16/54	45	–30	–30	1.0	211–11/2

Table 2. To 150 MHz HF/SSB – Vertical MOSFETs

For military and commercial HF/SSB fixed, mobile and marine transmitters.

Device	P_{out} Output Power Watts	P_{in} Input Power Typical Watts	G_{ps} Typical Gain dB @ 30 MHz	Typical IMD d_3 dB	Typical IMD d_{11} dB	θ_{JC} °C/W	Package/Style
V_{DD} = 28 Volts, Class AB							
MRF140	150	4.7	15	–30	–60	0.6	211–11/2
MRF171A(46a)	30	0.45	19	–32	—	1.52	211–07/2
V_{DD} = 50 Volts, Class AB							
MRF148	30	0.5	18	–35	–60	1.5	211–07/2
MRF150	150	3	17	–32	–60	0.6	211–11/2
MRF154	600	12	17	–25	—	0.13	368/2
MRF157	600	6	20	–25	—	0.13	368/2

(46)To be introduced: a) 1Q98; b) 2Q98

Table 3. To 225 MHz VHF AM/FM – Vertical MOSFETs

For VHF military and commercial aircraft radio transmitters.

Device	P_{out} Output Power Watts	P_{in} Input Power Typical Watts	G_{ps} (Typ)/Freq. dB/MHz	η Efficiency Typical %	θ_{JC} °C/W	Package/Style
V_{DD} = 28 Volts, Class AB						
MRF134	5	0.2	14/150	55	10	211–07/2
MRF136	15	0.38	16/150	60	3.2	211–07/2
MRF136Y	30	1.2	14/150	54	1.8	319B/1
MRF137	30	0.75	16/150	60	1.8	211–07/2
MRF171A(46a)	45	0.56	19/150	65	1.52	211–07/2
MRF173	80	4	13/150	65	0.8	211–11/2
MRF175LV	100	4	14/225	65	0.65	333/1
MRF174	125	8.3	11.8/150	60	0.65	211–11/2
MRF141	150	15	10/175	55	0.6	211–11/2
MRF175GV	200	8	14/225	65	0.44	375/2
MRF141G	300	30	10/175	55	0.35	375/2
V_{DD} = 50 Volts, Class AB						
MRF151	150	7.5	13/175	45	0.6	211–11/2
MRF176GV	200	4	17/225	55	0.44	375/2
MRF151G	300	7.5	16/175	55	0.35	375/2

Table 4. To 500 MHz VHF/UHF AM/FM

For VHF/UHF military and commercial aircraft radio transmitters.

Device	P_{out} Output Power Watts	P_{in} Input Power Typical Watts	G_{ps} (Typ)/Freq. dB/MHz	η Eff., Typ %	θ_{JC} °C/W	Package/Style
V_{DD} = 28 Volts, Class AB – Vertical MOSFETs						
MRF158	2	0.035	17.5/500	52	13.2	305A/2
MRF160	4	0.08	17/500	55	7.2	249/3
MRF166C	20	0.62	15/500	54	2.5	319/3
MRF166W	40	1	13/500	50	1.0	412/1
MRF175LU	100	10	10/400	55	0.65	333/1
MRF177	100	6.4	12/400	60	0.65	744A/2
MRF175GU	150	9.5	12/400	55	0.44	375/2
MRF275L(46a)	100	12.5	9/500	55	0.65	333/2
MRF275G★	150	13.5	10.5/400	55	0.44	375/2
V_{DD} = 50 Volts, Class AB						
MRF176GU	150	6	14/400	50	0.44	375/2

(46)To be introduced: a) 1Q98; b) 2Q98

★New Product

Table 5. To 520 MHz

Designed for broadband VHF & UHF commercial and industrial applications. The high gain and broadband performance of these devices make them ideal for large–signal, common–source amplifier applications in 12.5/7.5 volt mobile, portable and base station operation.

Device	P_{out} Output Power Watts	P_{in} Input Power Typical Watts	G_{ps} (Typ)/Freq. dB/MHz	η Eff., Typ %	θ_{JC} °C/W	Package/Style
V_{DD} = 7.5 Volts, Class AB – Lateral MOSFET						
MRF1507(18f)★	8	0.6	11/520	65	2.0	466/1
V_{DD} = 12.5 Volts, Class AB – Lateral MOSFET						
MRF1508(18f,46a)	8	0.3	15/520	65	2.0	466/1
V_{DD}= 12.5 Volts, Class AB – Vertical MOSFETs						
MRF5015	15	1.1	11.5/512	55	3.5	319/3
MRF5035	35	6.3	7.5/512	55	1.8	316–01/3

Table 6. To 1.0 GHz – Lateral MOSFETs

Device	P_{out} Output Power Watts	P_{in} Input Power Typical Watts	G_{ps} (Typ)/Freq. dB/MHz	η Eff., Typ %	θ_{JC} °C/W	Package/Style
1.0 GHz, V_{DD} = 26 Volts, Class AB – LDMOS Die						
MRF6522–5(18a,46a)	5	0.06	19/960	55	15	458A/1
MRF6522–10(18a,46a)	10	0.16	18/960	55	6.0	458A/1
800 – 1.0 GHz, V_{DD} = 28 Volts, Class AB – LDMOS Die						
MRF181S(46a)	4	0.16	14/1000	40	3.6	458/1
MRF181Z(46a)	4	0.16	14/1000	40	3.6	458A/1
MRF182	30	1.2	14/1000	60	1.75	360B/1
MRF182S	30	1.2	14/1000	60	1.75	360C/1
MRF183(25)	45	2.3	13/945	36	1.5	360B/1
MRF183S(25)	45	2.3	13/945	36	1.5	360C/1
MRF184	60	1.9	15/1000	60	1.1	360B/1
MRF184S	60	1.9	15/1000	60	1.1	360C/1
MRF185 (3)	85	3.4	14/1000	55	0.7	375B/2
MRF186(3,46a)	120	7.6	12/1000	55	0.6	375B/2

(3)Internal Impedance Matched Push-Pull Transistors

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(25)Two–tone Performance, Power is PEP

(46)To be introduced: a) 1Q98; b) 2Q98

★New Product

RF Power Bipolar Transistors

Motorola's broad line of bipolar RF power transistors are characterized for operation in RF power amplifiers. Typical applications are in base stations, military and commercial landmobile, avionics and marine radio transmitters. Groupings are by frequency band and type of application. Within each group, the arrangement of devices is by major supply voltage rating, then in the order of increasing output power. All devices are NPN polarity except where otherwise noted.

HF Transistors

Table 1. 1.5 – 30 MHz, HF/SSB

Designed for broadband operation, these devices feature specified Intermodulation Distortion at rated power output. Applications include mobile, marine, fixed station, and amateur HF/SSB equipment, operating from 12.5, 13.6, 28, or 50 volt supplies.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min) Gain @ 30 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 or 13.6 Volts, Class AB					
MRF421	100 PEP/CW	10	10	0.6	211–11/1
V_{CC} = 28 Volts, Class AB					
MRF426	25 PEP/CW	0.16	22	2.5	211–07/1
MRF422	150 PEP/CW	15	10	0.6	211–11/1
V_{CC} = 50 Volts, Class AB					
MRF429	150 PEP/CW	7.5	13	0.8	211–11/1
MRF448	250 PEP/CW	15.7	12	0.6	211–11/1

Table 2. 14 – 30 MHz, CB/Amateur Band

These HF transistors are designed for economical, high–volume use in CW, AM and SSB applications.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min) Gain @ 50 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 or 13.6 Volts, Class AB					
MRF455	60	3	13	1	211–07/1
MRF454	80	5	12	0.7	211–11/1

Table 3. 27 – 50 MHz, Low–Band FM Band

For use in the FM "Low–Band," for Mobile communications.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min) Gain @ 50 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 or 13.6 Volts, Class AB					
MRF492	70	5.6	11	0.7	211–11/1

VHF Transistors

Table 4. 30 – 200 MHz Band

Designed for Military Radio and Commercial Aircraft VHF bands, these 28–volt devices include the all–gold metallized MRF314/16/17 high–reliability series.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min)/Freq. Power Gain dB/MHz	θ_{JC} °C/W	Package/Style
V_{CC} = 28 Volts, Class AB					
MRF314	30	3	10/150	2.2	211–07/1
MRF316(2)	80	8	10/150	0.8	316–01/1
MRF317(2)	100	12.5	9/150	0.65	316–01/1

(2)Internal Impedance Matched

VHF Transistors (continued)

Table 5. 136 – 174 MHz High Band

The "workhorse" VHF FM High–Band is served by Motorola with the broadest range of devices and package combinations in the industry.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min) Gain @ 175 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 Volts, Class C					
MRF4427R2(18b)	1	0.016	18(19)	125(1)	751/1
MRF553	1.5	0.11	11.5	25	317D/2
MRF2628	15	0.95	12	4	244/1
MRF1946	30	3	10	1.6	211–07/1
MRF1946A	30	3	10	1.8	145A–09/1
MRF240	40	5	9	2.2	145A–09/1
MRF247(2)	75	15	7	0.7	316–01/1

UHF Transistors

Table 6. 100 – 400 MHz Band

Stringent requirements of the UHF Military band are met by MRF325, 326, 327, 329 and 2N6439 types, with all–gold metal systems, specified ruggedness and programmed wirebond construction, to assure consistent input impedances for internally matched parts.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min) Gain @ 400 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 28 Volts, Class C					
MRF325(2)	30	4.3	8.5	2.2	316–01/1
MRF326(2)	40	5	9	1.6	316–01/1
2N6439(2)	60	10	7.8	1.2	316–01/1
MRF327(2)	80	14.9	7.3	0.7	316–01/1
MRF329(2)	100	20	7	0.7	333/1
MRF392(3)	125	19.8	8	0.7	744A/1

Table 7. 400 – 500 MHz Band

Similar to the 100–400 MHz transistors, these devices have bandwidth capabilities operating up to 500 MHz. All have nitride passivated die, gold metal systems, specified ruggedness and controlled wirebond construction to meet the stringent requirements of military space applications.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min)/Freq. Power Gain dB/MHz	θ_{JC} °C/W	Package/Style
V_{CC} = 28 Volts, Class C					
MRF313	1	0.03	15/400	28.5	305A/1
MRF321	10	0.62	12/400	6.4	244/1
MRF323	20	2	10/400	3.2	244/1
MRF338(2)	80	15	7.3/470	0.7	333/1
MRF393(3)	100	18	7.5/500	0.7	744A/1

(1) $R_{\theta JA}$. Thermal Resistance Junction to Ambient.

(2) Internal Impedance Matched

(3) Internal Impedance Matched Push-Pull Transistors

(18) Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(19) Typical

UHF Transistors (continued)

Table 8. 470 – 512 MHz Band

Higher power output devices in this UHF power transistor series feature internally input–matched construction, are designed for broadband operation, and have guaranteed ruggedness under output mismatch and RF overdrive conditions. Devices are specified for handheld, mobile and base station operation.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min)/Freq. Power Gain dB/MHz	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 Volts, Class C					
MRF581(4)	0.6	0.03	13/500	40	317/2
MRF555	1.5	0.15	10/470	25	317D/2
MRF652	5	0.5	10/512	7	244/1
MRF652S	5	0.5	10/512	7	249/1
MRF653	10	2	7/512	4	244/1
MRF641(2)	15	2.5	7.8/470	4	316–01/1
MRF654(2)	15	2.5	7.8/512	4	244/1
MRF644(2)	25	5.9	6.2/470	1.7	316–01/1
MRF650(2)	50	15.8	5.0/512	1.3	316–01/1
MRF658(2)	65	25	4.15/512	1	316–01/1

900 MHz Transistors

Table 9. 870 – 960 MHz Band

Designed specifically for the 900 MHz mobile radio band, these devices offer superior gain, ruggedness, stability and broadband operation. Devices are for mobile and base station applications.

Device	P_{out} Output Power Watts	P_{in} (Max) Input Power Watts	G_{PE} (Min)/Freq. Power Gain dB/MHz	θ_{JC} °C/W	Package/Style
V_{CC} = 12.5 Volts — Class C — Si Bipolar					
MRF559(5)	0.5	0.08	8/870	50	317/2
MRF581(5)	0.6	0.06	10(19)/870	40	317/2
MRF8372R1,R2(5,18a,b)	0.75	0.11	8/870	45	751/1
MRF557(5)	1.5	0.23	8/870	25	317D/2
MRF842(2,6)	20	5	6/870	1.5	319/1
MRF847(2,6)	45	16	4.5/870	1	319/1

(2)Internal Impedance Matched

(4)Small signal gain. P_o is Typ.

(5)Common Emitter Configuration

(6)Common Base Configuration

(18)Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

(19)Typical

900 MHz Transistors (continued)

Table 9. 870 – 960 MHz Band (continued)

Device	P_{out} Output Power Watts	Class	P_{in}(Max) Input Power Watts	Gp (Min)/Freq. Power Gain dB/MHz	θ_{JC} °C/W	Package/Style
V_{CC} = 24 Volts — Si Bipolar						
MRF857S	2.1 (CW)	A	0.4	12.5/900	8.4	305D/1
MRF858	3.6 (CW)	A	0.29	11/900	6.9	319/2
MRF858S	3.6 (CW)	A	0.29	11/900	6.9	319A/2
MRF891	5	AB	0.63	9/900	7	319/2
MRF891S	5	AB	0.63	9/900	7	319A/2
MRF859S	6.5 W (CW)	A	0.46	11.5/900	3.9	319A/2
MRF894(2)	30	C	6	7/900	1.5	319/1
MRF897(3)	30	AB	3	10/900	1.7	395B/1
MRF897R(3)	30	AB	3	10.5/900	1.7	395B/1
MRF898(2)	60	C	12	7/900	1	333A/1
V_{CC} = 26 Volts — Si Bipolar						
MRF6409	20	AB	26/50	10/960	3.8	319/2
MRF6414	50	AB	26/200	8.5/960	1.3	333A/2
MRF899(3)	150	AB	24	8/900	0.8	375A/1

1.5 GHz Transistors

Table 10. 1600 – 1640 MHz Band

Device	P_{out} Output Power Watts	Class	η Eff. (Min) %	Gp (Min)/Freq. Power Gain dB/MHz	θ_{JC} °C/W	Package/Style
MRA1600–2	2	C	40	8.4/1600	15	394/1
MRF16006	6	C	40	7.4/1600	6.8	395C/2
MRF3010★	10	AB	45	9.5/1600	3.6	360B/1 (LDMOS)
MRF16030	30	C	40	7.5/1600	1.7	395C/2

Microwave Transistors

Table 11. L–Band Pulse Power

These products are designed to operate in short pulse width, 10 µs, low duty cycle, 1%, power amplifiers operating in the 960–1215 MHz band. All devices have internal impedance matching. The prime application is avionics equipment for distance measuring (DME), area navigation (TACAN) and interrogation (IFF).

Device	P_{out} Output Power Watts	P_{in}(Max) Input Power Watts	Gp (Min) Gain @ 1090 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 18 Volts — Class A & AB Common Emitter					
MRF1000MB	0.2	0.02	10	25	332A/2
V_{CC} = 35 Volts — Class B & C Common Base					
MRF1004MB	4	0.4	10	25	332A/1

(2)Internal Impedance Matched

(3)Internal Impedance Matched Push-Pull Transistors

★New Product

Table 11. L–Band Pulse Power (continued)

Device	P_{out} Output Power Watts	P_{in}(Max) Input Power Watts	G_P (Min) Gain @ 1090 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 50 Volts — Class C Common Base					
MRF1015MB	15	1.5	10	10	332A/1
MRF1035MB	35	3.5	10	5	332A/1
MRF1090MA	90	9	10	0.6	332–04/1
MRF1090MB	90	9	10	0.6	332A/1
MRF1150MA	150	25	7.8	0.3	332–04/1
MRF1150MB	150	25	7.8	0.3	332A/1

Table 12. L–Band Long Pulse Power

These products are designed for pulse power amplifier applications in the 960–1215 MHz frequency range. They are capable of handling up to 10 μs pulses in long pulse trains resulting in up to a 50% duty cycle over a 3.5 millisecond interval. Overall duty cycle is limited to 25% maximum. The primary applications for devices of this type are military systems, specifically JTIDS and commercial systems, specifically Mode S. Package types are hermetic.

Device	P_{out} Output Power Watts	P_{in}(Max) Input Power Watts	G_{PB} (Min) Gain @ 1215 MHz dB	θ_{JC} °C/W	Package/Style
V_{CC} = 28 Volts — Class C Common Base					
MRF10005	5	0.71	8.5	8	336E/1
V_{CC} = 36 Volts — Class C Common Base					
MRF10031	30	3	10	3	376B/1
MRF10120	120	19	8	0.6	355C/1
V_{CC} = 50 Volts					
MRF10150	150	15	10(7)	0.25	376B/1
MRF10350	350	44	9(7)	0.11	355E/1
MRF10500	500	63	9(7)	0.12	355D/1
MRF10501	500	63	9(7)	0.12	355H/1

Linear Transistors

The following sections describe a wide variety of devices specifically characterized for linear amplification. Included are medium power and high power parts covering frequencies from 100 MHz–4 GHz.

Table 13. To 1 GHz, Class A

These devices offer a selection of performance and price for linear amplification to 1 GHz. The "MRA" prefix parts are input matched and feature high overdrive and extreme ruggedness capability.

Device	P_o @ 1 dB Comp. Point Watts	G_{SS} (Min)/Freq. Small Signal Gain dB/MHz	Bias Point (Vdc/A)	θ_{JC} °C/W	Package/Style
V_{CC} = 19 Volts					
MRA1000–7L	7	9/1000	19/1.2	4	145D–02/1
MRA1000–14L	14	8/1000	19/2.4	2.1	145D–02/1

Device	P_{out} Output Power Watts	Gp (Min)/Freq. Power Gain dB/MHz	Bias Point Per Side (Vdc/MA)	θ_{JC} °C/W	Package/Style
V_{CC} = 28 Volts					
MRA0510–50H	50	7/1000	28/120	1.4	391–01/1

(7)Typical @ 1090 MHz

Table 14. To 2 GHz, Class A

These parts offer low cost alternatives to matched devices used primarily as pre–drivers to 2 GHz.

Device	P_o @ 1 dB Comp. Point Watts	G_{SS} (Min)/Freq. Small Signal Gain dB/MHz	Bias Point (Vdc/A)	θ_{JC} °C/W	Package/Style
V_{CC} = 20 Volts					
MRF3095[9]	0.8	9/2000	20/0.12	35	328A/2

Table 15. UHF Ultra Linear For TV Applications

The following device has been characterized for ultra–linear applications such as low–power TV transmitters in Band IV and Band V and features diffused ballast resistors and an all–gold metal system to provide enhanced reliability and ruggedness.

Device	P_{ref} (Min) Watts	Gp (Min)/Freq. Small Signal Gain dB/MHz	3 Tone IMD[8] dB	θ_{JC} °C/W	Package/Style
V_{CC} = 28 Volts, Class AB					
TPV8100B	100[11]	8.5/860	—	0.7	398/1

[8]Vision Carrier: – 8 dB; Sound Carrier: – 7 dB; Sideband Carrier: – 16 dB

[9]Former Prefix was "RF"

[11]Output power at 1 dB compression in Class AB

Table 16. Microwave Linear for PCN Applications

The following devices have been developed for linear amplifiers in the 1.5–2 GHz region and have characteristics particularly suitable for PDC, PCS or DCS1800 base station applications.

Device	P_{out} Watts	Class	Bias Point Vdc/mA	Gain (Typ)/Freq dB/MHz	θ_{JC} °C/W	Package/Style
V_{CC} = 20 Volts–Bipolar Die						
MRF6401[12]	0.5	A	20/80	10/1880	30	305C/1
V_{CC} = 26 Volts–Bipolar Die						
MRF6402[13]	4.5	AB	26/40	10/1880	5	319/2
MRF6404[16]	30	AB	26/150	8.5/1880	1.4	395C/1
MRF6404K	30	AB	26/150	8.5/1880	1.4	395C/1
MRF6408	12	AB	26/100	8.8/1880	2.8	395C/1
MRF15030	30	A, AB	26/125	9/1490	1.4	395C/1
MRF15060	60	A, AB	26/200	10/1490	0.7	451/1
MRF15060S	60	A, AB	26/200	10/1490	0.7	451A/1
MRF15090	90	A, AB	26/250	7.5/1490	0.7	375A/1
MRF20030★	30	A, AB	26/120	10.5/2000	1.4	395D/1
MRF20060★	60	A, AB	26/200	9.4/2000	0.7	451/1
MRF20060S★	60	A, AB	26/200	9.4/2000	0.7	451A/1
V_{DD} = 26 Volts–LDMOS Die – Lateral MOSFETs						
MRF281S[46a]	4	A, AB	26/25	13.6/2000	8.75	458/1
MRF281Z[46a]	4	A, AB	26/25	13.6/2000	8.75	458A/1
MRF6525–5[18a,46a]	5	AB	26/70	11.5/2000	15	458A/1
MRF6525–10[18a,46a]	10	AB	26/130	10/2000	6.0	458A/1
MRF282S★	10	A, AB	26/75	13/2000	2.9	458/1
MRF282Z★	10	A, AB	26/75	13/2000	2.9	458A/1
MRF284 ★	30	A, AB	26/200	10.5/2000	2.0	360B/1
MRF284S★	30	A, AB	26/200	10.5/2000	2.0	360C/1
MRF286[46b]	60	A, AB	26/500	11/2000	.73	465/1
MRF286S[46b]	60	A, AB	26/500	11/2000	.73	465A/1

[12]Formerly known as "TP4001S"

[13]Formerly known as "TP4004"

[16]Formerly known as "TP4035"

[18]Tape and Reel Packaging Option Available by adding suffix: a) R1 = 500 units; b) R2 = 2,500 units; c) T1 = 3,000 units; d) T3 = 10,000 units; e) R2 = 1,500 units; f) T1 = 1,000 units; g) R2 = 4,000 units; h) R1 = 1,000 units.

[46]To be introduced: a) 1Q98; b) 2Q98

★New Product

RF Power MOSFETs and Bipolar Transistors Packages



CASE 145A–09
STYLE 1
(.380″ STUD)



CASE 145D–02
STYLE 1
(.380″ SOE)



CASE 211–07
STYLE 1, 2
(.380″ FLANGE)



CASE 211–11
STYLE 1, 2
(.500″ FLANGE)



CASE 244
STYLE 1
(.280″ STUD)



CASE 249
STYLE 1, 3
(.280″ PILL)



CASE 305
STYLE 1
(.204″ STUD)



CASE 305A
STYLE 1, 2
(.204″ PILL)



CASE 305C
STYLE 1



CASE 305D
STYLE 1



CASE 316–01
STYLE 1, 3
(.500″ CQ)



CASE 317
STYLE 1, 2
(MACRO–X)

CASE 317D
STYLE 2



CASE 319
STYLE 1, 2, 3
(CS–12)



CASE 319A
STYLE 2



CASE 319B
STYLE 1



CASE 328A–03
STYLE 1, 2



CASE 332–04
STYLE 1, 2
(.280″ STUD)



CASE 332A
STYLE 1, 2
(.280″ PILL)



CASE 333
STYLE 1, 2



CASE 333A
STYLE 1, 2
(MAAC PAC)



CASE 336E
STYLE 1



CASE 355C
STYLE 1



CASE 355D
STYLE 1



CASE 355E
STYLE 1



CASE 355H–01
STYLE 1



CASE 360B
STYLE 1
(Micro 250)



CASE 360C
STYLE 1



CASE 368
STYLE 2
(HOG PAC)



CASE 375
STYLE 2



CASE 375A
STYLE 1



CASE 375B
STYLE 2
(Micro 860)



CASE 376B
STYLE 1



CASE 391
STYLE 1



CASE 394
STYLE 1



CASE 395B
STYLE 1



CASE 395C
STYLE 1, 2



CASE 395D
STYLE 1



CASE 398
STYLE 1



CASE 400
STYLE 1



CASE 412
STYLE 1



CASE 451
STYLE 1



CASE 451A
STYLE 1

CASE 458
STYLE 1

CASE 458A
STYLE 1



CASE 465
STYLE 1



CASE 465A
STYLE 1

CASE 466
STYLE 1



CASE 744A
STYLE 1, 2

CASE 751
STYLE 1
(SO–8)

Motorola RF Amplifier Modules

Motorola's line of RF amplifiers designed and specified for use in land mobile radios and general purpose wideband amplification applications. They feature small size, matched inputs and outputs, high stability and guaranteed performance specifications. For the user, they offer the benefits of smaller and less complex system designs in less time and at lower overall cost.

Each amplifier uses modern transistor chips which are gold metallized and have silicon nitride passivation for increased reliability and long life. Chip and wire construction features MOS capacitors and laser trimmed nichrome resistors. Circuit substrates and metallization have been selected for optimum performance cost and reliablity.

Table of Contents

	Page
RF Amplifier Modules	5.9–51
Land Mobile/Portable	5.9–52
Base Stations	5.9–53
Wideband Linear Amplifiers	5.9–54

Motorola RF Amplifier Modules

Complete amplifiers with 50 ohm in/out impedances are available for a variety of applications including land mobile radios, base stations, and other uses requiring large–signal amplification, both linear and Class C. Frequencies covered range from 68–1990 MHz with power levels extending to 180 watts.

Land Mobile/Portable

The advantages of small size, reproducibility and overall lower cost become more pronounced with increasing frequency of operation. These amplifiers offer a wide range in power levels and gain, with guaranteed performance specifications for bandwidth, stability and ruggedness.

Table 1. VHF/UHF, Class C

Device	P_{out} Output Power Watts	P_{in} Input Power Watts	f Frequency MHz	G_P Power Gain, Min dB	V_{DD} Supply Voltage Volts	Package/Style
136–174 MHz, VHF Band — (LDMOS Die) – Lateral MOSFETs						
MHW2627–1(46b)	7	0.02	136–174	25.5	7.5	420AC/1

Device	P_{sat} Watts	ACP (P_{out} = 1.6 W @ f_o ±25 kHz, 18 kHz BW) (dBc)	f Frequency MHz	G_P Power Gain, Min dB	V_{DD} Supply Voltage Volts	Package/Style
380–470 MHz, Land Mobile Linear (for TransEuropean Trunked Radio – TETRA) — Class AB — (LDMOS Die) – Lateral MOSFETs						
MHW2701–1(46b)	4.5	–30	380–430	28	7	420Z/1
MHW2701–2(46b)	4.5	–30	420–470	28	7	420Z/1

Device	P_{sat} Watts	ACP (P_{out} = 5 W @ f_o ±25 kHz, 18 kHz BW) (dBc)	f Frequency MHz	G_P Power Gain, Min dB	V_{DD} Supply Voltage Volts	Package/Style
380–470 MHz, Land Mobile Linear (for TransEuropean Trunked Radio – TETRA) — Class AB — (LDMOS Die) – Lateral MOSFETs						
MHW2703–1(46b)	10	–30	380–400	28	7	420Z/1
MHW2723(46b)	12	–30	380–470	30	12.5	420Z/1

Device	P_{out} Output Power Watts	P_{in} Input Power Watts	f Frequency MHz	G_P Power Gain, Min dB	V_{DD} Supply Voltage Volts	Package/Style
400–520 MHz, UHF Band — Class D – A (Dynamic Bias via Gate Control) — (LDMOS Die) – Lateral MOSFETs						
MHW2727–1(46b)	7	0.02	400–470	25.5	7.5	420AC/1
MHW2727–2(46b)	7	0.02	450–520	25.5	7.5	420AC/1
806–821 MHz, UHF Band (for Integrated Digital Enhanced Network – iDEN™)— Class AB — (LDMOS Die) – Lateral MOSFETs						
MHW2801 (46a)	0.8	0.00025	806–821	35	6	420L/1

(46)To be introduced: a) 1Q98; b) 2Q98

Land Mobile/Portable (continued)

Table 1. VHF/UHF, Class C (continued)

Device	P_{out} Output Power Watts	P_{in} Input Power Watts	f Frequency MHz	G_P Power Gain, Min dB	V_{DD} Supply Voltage Volts	Package/Style
806 – 960 MHz, UHF Band — Class AB (LDMOS Die) – Lateral MOSFETs						
MHW2803(46a)	3.5	0.001	806–824	35.5	6	420L/1
MHW2805–1(46a)	5	0.004	806–870	31	7.5	420AB/1
MHW2805–2(46a)	5	0.004	890–950	31	7.5	420AB/1
MHW2820–1(46b)	20	<0.250	806–870	19	12.5	301G/1(42)
MHW2820–2(46b)	18	<0.300	890–950	17.9	12.5	301G/1(42)
MHW2821–1	20	<0.250	806–870	19	12.5	301AB/1
MHW2821–2	18	<0.300	890–950	17.9	12.5	301AB/1

Table 2. UHF, Linear – Lateral MOSFETs

Device	P_{out} Output Power Watts	P_{in} Input Power Watts	f Frequency MHz	G_P Power Gain, Min dB	V_{CC} Supply Voltage Volts	Package/Style
824–849 MHz (for Amps) — Class AB (LDMOS Die)						
MIM2901(46a)	1.41	0.004	824–849	25.5	3.6	TBD
880–915 MHz (for GSM) — Class AB (LDMOS Die)						
MIM2906(46a)	3.5	0.316	890–915	30.5	6	467A/1

Base Stations

Designed for applications such as a driver for a macro cell site or the final output in micro cell site, these class AB amplifiers are ideal for GSM based systems at 900 MHz and 2 GHz. These 50 ohm blocks provide 10 to 30 watt outputs with gains up to 30 dB in a compact hybrid module package.

Table 1. Base Stations

Device	P_{out} Output Power Watts	P_{in} Input Power Watts	f Frequency MHz	G_P Power Gain, Min dB	V_{DD} Supply Voltage Volts	Package/Style
880–960 MHz (for GSM) — Class AB (LDMOS Die) – Lateral MOSFETs						
MHW910(46a)	10	0.050	925–960	23	24	301AB/1
MHW913	14	0.1	880–915	21.5	12.5	301AB/1
MHW916	16	0.036	925–960	26.5	26	301AB/1
MHW930★	30	0.060	925–960	27	26	301AB/1

Device	P_{out} Output Power Watts	P_{in} Input Power Watts	f Frequency MHz	G_P Power Gain, Min dB	V_{CC} Supply Voltage Volts	Package/Style
1805–1880 MHz (for DCS1800) — Class AB (Silicon Bipolar Die)						
MHW1815★	15.0	0.015	1805–1880	30	26	301AK/1
1930–1990 MHz (for PCS1900) — Class AB (Silicon Bipolar Die)						
MHW1915★	15.0	0.019	1930–1990	29	26	301AK/1
MHW1916★	15.0	0.013	1930–1990	31	26	301AK/1

(42)Drop–in for bipolar MHW820

(46)To be introduced: a) 1Q98; b) 2Q98

★New Product

Base Stations (continued)

Table 2. Cellular Base Station Pre–Drivers

These 50 ohm amplifiers are recommended for modern, multi–tone, CDMA and/or TDMA base–station pre–driver applications. Their high third–order intercept, tight phase control and excellent group delay characteristics make these amplifiers ideal for use in high–power feedforward loops.

Ultra–Linear – Class A (Silicon Bipolar Die)

Device	BW MHz	V_{CC} (Nom.) Volts	I_{CC} (Nom.) mA	Gain (Nom.) dB	Gain Flatness (Typ) ±dB	P_{1dB} (Typ) dBm	3rd Order Intercept (Typ) dBm/MHz	NF (Typ) dB	Case/ Style
MHL9128	800–960	28	400	20	0.5	31	43	7.5	448/1

Ultra–Linear – Class A (LDMOS Die) – Lateral MOSFETs

Device	BW MHz	V_{DD} (Nom.) Volts	I_{DD} (Nom.) mA	Gain (Nom.) dB	Gain Flatness (Typ) ±dB	P_{1dB} (Typ) dBm	3rd Order Intercept (Typ) dBm/MHz	NF (Typ) dB	Case/ Style
MHL9236(46a)	800–960	26	525	30	.1	34	47	4.5	301AP/1
MHL9236M(46a)	800–960	26	525	30	.1	34	47	4.5	301AP/2

Wideband Linear Amplifiers

Table 1. Standard 50 Ohm Linear Hybrids

This series of RF linear hybrid amplifiers have been optimized for wideband, 50 ohm applications. These amplifiers were designed for multi–purpose RF applications where linearity, dynamic range and wide bandwidth are of primary concern. Each amplifier is available in various package options. The MHL series utilizes a new case style that provides microstrip input and output connections.

Device	BW MHz	V_{CC} (Nom.) Volts	I_{CC} (Nom.) mA	Gain/Freq. (Typ) dB/MHz	Gain Flatness (Typ) ±dB	P_{1dB} (Typ) dBm	3rd Order Intercept Point/Freq. (Typ) dBm/MHz	NF/Freq. (Typ) dB/MHz	Case/ Style
CA2832C	1–200	28	435	35.5/100	0.5	33	47/200	5/200	714F/1
CA2830C	5–200	24	300	34.5/100	0.5	29	46/200	4.7/200	714F/1
CA2810C	10–450	24	310	34/50	1.5	30	43/300	5/300	714F/1
MHL8118	40–1000	28	400	17.5/900	1	30	41.5/1000	8.5/1000	448/1
MHL8115	40–1000	15	700	17.5/900	1	30	41.5/1000	8.5/1000	448/2
MHL8018	40–1000	28	210	18.5/900	1	26	38/1000	7.5/1000	448/1
MHL8015	40–1000	15	380	18.5/900	1	26	38/1000	7.5/1000	448/2

(46)To be introduced: a) 1Q98; b) 2Q98

RF Amplifier Modules Packages



CASE 301AB
STYLE 1

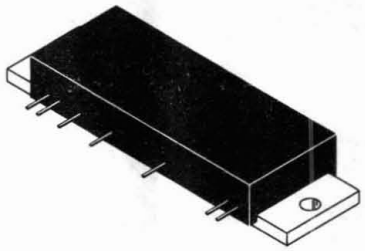

CASE 301AK
STYLE 1

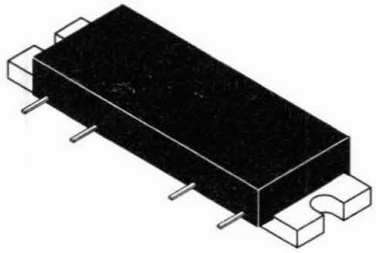

CASE 301AP
STYLE 1, 2

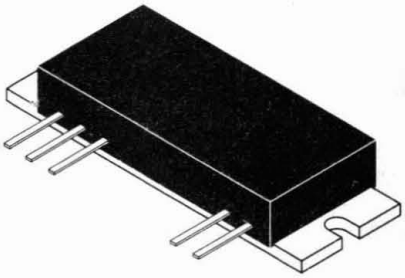

CASE 301G
STYLE 1



CASE 420AB
STYLE 1



CASE 420AC
STYLE 1



CASE 420L
STYLE 1



CASE 420Z
STYLE 1



CASE 448
STYLE 1, 2



CASE 467A
STYLE 1



CASE 714F
STYLE 1

Motorola RF CATV Distribution Amplifiers

Motorola Hybrids are manufactured using the latest generation technology which has set new standards for CATV system performance and reliability. These hybrids have been optimized to provide premium performance in all CATV systems up to 152 channels.

Table of Contents

	Page
RF CATV Distribution Amplifiers	5.9–57
Forward Amplifiers	5.9–58
Reverse Amplifiers	5.9–61

Motorola RF CATV Distribution Amplifiers

Motorola Hybrids are manufactured using the latest generation technology which has set new standards for CATV system performance and reliability. These hybrids have been optimized to provide premium performance in all CATV systems up to 152 channels.

Forward Amplifiers

40–1000 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 152 CH	Cross Modulation dB 152 CH	Noise Figure @ 860 MHz dB Max	Package/ Style
MHW9142	14	152	+38	−59(40)	−59	−63	8.5	714Y/1
MHW9182	18	152	+38	−59(40)	−59	−59	8.0	714Y/1
MHW9242	24	152	+38	−59(40)	−58	−59	8	714Y/1

40–860 MHz Hybrids

Device	Gain dB Typ	Frequency MHz	V_{CC} Volts	2nd Order IMD @ V_{out} = 50 dBmV/ch Max	DIN45004B @ f=860 MHz dBμV Min	Noise Figure @ 860 MHz dB Max	Package/ Style
CA901	17	40 – 860	24	−60	120	8	714P/2
CA901A	17	40 – 860	24	−64	120	8	714P/2
Power Doubling Hybrids							
CA912	17	40 – 860	15	−63	123	9.5	714P/3
CA922	17	40 – 860	24	−63	123	9.5	714P/2
CA922A	17	40 – 860	24	−67	123	9.5	714P/2
Hybrid Jumper							
CATHRU	0	1 – 1000	75 Ohm Broadband Hybrid Jumper				714V

40–860 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 128 CH	Cross Modulation FM = 55.25 MHz dB 128 CH	Noise Figure @ 860 MHz dB Max	Package/ Style
MHW8142	14	128	+38	−60(40)	− 61	− 66	8.0	714Y/1
MHW8182	18	128	+38	−60(40)	− 60	− 60	7	714Y/1
MHW8182A ★	18.3	128	+38	−63(40)	− 62	− 64	8.0	714Y/1
MHW8222	22	128	+38	−60(40)	− 60	− 60	7.5	714Y/1
MHW8242	24	128	+38	−60(40)	− 60	− 60	7.5	714Y/1
MHW8242A★	24	128	+38	−62(40)	− 64	− 62	7.5	714Y/1
MHW8272	27	128	+38	−60(40)	− 60	− 60	7.0	714Y/1
MHW8272A★	27.2	128	+38	−64(40)	− 64	− 62	7.0	714Y/1
MHW8292	29	128	+38	−56(40)	− 60	− 60	7.0	714Y/1

(40)Composite 2nd Order; V_{out} = +38 dBmV/ch

★New Product

CATV Distribution: Forward Amplifiers (continued)

40–860 MHz Hybrids, V_{CC} = 24 Vdc, Class A (continued)

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 128 CH	Cross Modulation FM = 55.25 MHz dB 128 CH	Noise Figure @ 860 MHz dB Max	Package/ Style
Power Doubling Hybrids								
MHW8185★	18.8	128	+40	–62(39)	– 64	– 64	8.0	714Y/1
MHW8185L(21,46b,52a)	18.9	128	+40	–62(39)	– 63	– 64	8.0	714Y/1
MHW8185R (14)★	18.8	128	+40	–62(39)	– 64	– 64	8.0	714Y/2
MHW8205★	19.8	128	+40	–60(39)	– 63	– 64	8.0	714Y/1
MHW8205L(22,46b,52a)	19.8	128	+40	–62(39)	– 63	– 64	8.0	714Y/1
Feedforward Hybrids								
MFF524B	24	128	+44	–68(36)	– 66	—	13.0	825A/2

40–750 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 110 CH	Cross Modulation FM = 55.25 MHz dB 110 CH	Noise Figure @ 750 MHz dB Max	Package/ Style
MHW7142	14	110	+40	–60(39)	– 62	– 66	8.0	714Y/1
MHW7182	18	110	+40	–62(39)	– 62	– 64	6.5	714Y/1
MHW7182A ★	18.3	110	+40	–62(39)	– 62	– 64	6.5	714Y/1
MHW7222	22	110	+40	–55(39)	– 60	– 60	7	714Y/1
MHW7222A★	22	110	+40	–57(39)	– 60	– 60	7	714Y/1
MHW7242	24	110	+40	–60(39)	– 60	– 60	7	714Y/1
MHW7242A★	24	110	+40	–62(39)	– 63	– 61	7	714Y/1
MHW7272	27	110	+40	–60(39)	– 60	– 60	6.5	714Y/1
MHW7272A ★	27.2	110	+40	–64(39)	– 64	– 60	6.5	714Y/1
MHW7292	29	110	+40	–60(39)	– 60	– 60	6.5	714Y/1
Power Doubling Hybrids								
MHW7185C★	18.8	110	+44	–64(36)	–62	–63	7.5	714Y/1
MHW7185CR (15)★	18.8	110	+44	–64(36)	–62	–63	7.5	714Y/2
MHW7185L(23,46b,52a)	18.9	110	+44	–64(36)	–61	–63	7.5	714Y/1
MHW7205C★	19.8	110	+44	–63(36)	–61	–62	7.5	714Y/1
MHW7205L(24,46b,52a)	19.8	110	+44	–63(36)	–61	–62	7.5	714Y/1
Feedforward Hybrids								
MFF424B	24	110	+44	–70(36)	–68	—	13	825A/2

(14)Forward Mirror Amplifier Version of MHW8185
(15)Forward Mirror Amplifier Version of MHW7185C
(21)Low DC Current Version of MHW8185
(22)Low DC Current Version of MHW8205
(23)Low DC Current Version of MHW7185C
(24)Low DC Current Version of MHW7205C
(36)Composite 2nd order; V_{out} = + 44 dBmV/ch
(39) Composite 2nd order; V_{out} = +40 dBmV/ch
(46)To be introduced: a) 1Q98; b) 2Q98
(52)Engineering samples available: a) 2Q98
★New Product

CATV Distribution: Forward Amplifiers (continued)

40–600 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 87 CH	Cross Modulation dB 87 CH	Noise Figure @ 600 MHz dB Max	Package/ Style
MHW6182–6	18	87	+44	–56(36)	–57	–55	6	714Y/1
Feedforward Hybrids								
MFF324B	24	85	+44	–86(38)	–73	–68	12.5	825A/2

40–550 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 77 CH	Cross Modulation dB 77 CH	Noise Figure @ 550 MHz dB Max	Package/ Style
MHW6142	14	77	+44	–72(35)	–59	–62	7.5	714Y/1
MHW6182	18	77	+44	–72(35)	–58	–62	7	714Y/1
MHW6222	22	77	+44	–66(35)	–57	–57	6	714Y/1
MHW6272	27	77	+44	–64(35)	–57	–57	6.5	714Y/1
MHW6342	34	77	+44	–64(35)	–57	–57	6.5	714Y/1
MHW6342T★	34	77	+44	–64(35)	–57	–57	6.5	714AA/1
Feedforward Hybrids								
MFF224B	24	77	+44	–86(35)	–75	–70	11	825A/2

40–450 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications: Output Level dBmV	2nd Order Test dB	Composite Triple Beat dB 60 CH	Cross Modulation dB 60 CH	Noise Figure @ 450 MHz dB Max	Package/ Style
MHW5182A	18	60	+46	–72(31)	–61	–59	6.5	714Y/1
MHW5222A	22	60	+46	–72(31)	–60	–59	5.5	714Y/1
MHW5342A	34	60	+46	–68(31)	–59	–59	6.0	714Y/1
MHW5342T★	34	60	+46	–68(31)	–59	–59	6.0	714AA/1
MHW5382A	38	60	+46	–64(31)	–59	–59	5.0	714Y/1
Power Doubling Hybrids								
MHW5185B	18	60	+46	–67(32)	–67	–67	7.0	714Y/1
Feedforward Hybrids								
MFF124B	24	60	+46	–84(31)	–79	–75	10	825A/2

(31)Channels 2 and M13 @ M22
(32)Composite 2nd order; V_{out} = +46 dBmV/ch
(35)Channels 2 and M30 @ M39
(36)Composite 2nd order; V_{out} = +44 dBmV/ch
(38)Channels 2 and M39 @ M48
★New Product

Reverse Amplifiers

5–200 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	Maximum Distortion Specifications						Noise Figure @ 175 MHz dB Max	Package/ Style
			Output Level dBmV	2nd Order Test(30) dB	Composite Triple Beat dB		Cross Modulation dB			
					22 CH	26 CH	22 CH	26 CH		
MHW1134	13	22	+50	–72	–73	–71(19)	–65	–65(19)	7	714Y/1
MHW1184	18	22	+50	–72	–70	–70(19)	–64	–64(19)	5.5	714Y/1
MHW1224	22	22	+50	–72	–69	–68.5(19)	–62	–62(19)	5.5	714Y/1
MHW1244	24	22	+50	–72	–68	–67.5(19)	–61	–61(19)	5	714Y/1

Low Current Amplifiers — 5–50 MHz Hybrids, V_{CC} = 24 Vdc, Class A

Device	Hybrid Gain (Nom.) dB	Channel Loading Capacity	I_{DC} mA Max	Maximum Distortion Specifications				Noise Figure @ 50 MHz dB Max	Package/ Style
				Output Level dBmV	2nd Order Test(30) dB	Composite Triple Beat dB	Cross Modulation dB		
						4 CH	4 CH		
MHW1304L	30	4	135	+50	–70	–66	–57	4.5	714Y/1

(19)Typical

(30)Channels 2 and A @ 7

RF CATV Distribution Amplifiers



CASE 714F
STYLE 1



CASE 714G
STYLE 1



CASE 714P
STYLE 2, 3



CASE 714T
STYLE 1, 2



CASE 714V

CASE 714Y
STYLE 1, 2

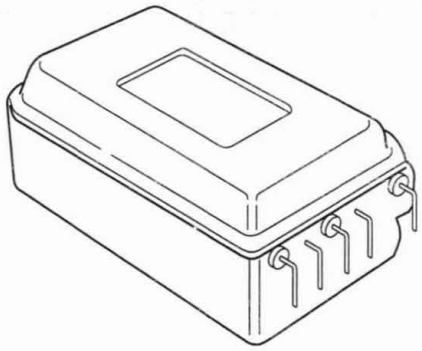

CASE 825A
STYLE 2

Surface Mount Information

In Brief . . .

Surface Mount Technology is now being utilized to offer answers to many problems that have been created in the use of insertion technology.

Limitations have been reached with insertion packages and PC board technology. Surface Mount Technology offers the opportunity to continue to advance the state–of–the–art designs that cannot be accomplished with Insertion Technology.

Surface Mount Packages allow more optimum device performance with the smaller Surface Mount configuration. Internal lead lengths, parasitic capacitance and inductance that placed limitations on chip performance have been reduced.

The lower profile of Surface Mount Packages allows more boards to be utilized in a given amount of space. They are stacked closer together and utilize less total volume than insertion populated PC boards.

Printed circuit costs are lowered with the reduction of the number of board layers required. The elimination or reduction of the number of plated through holes in the board contribute significantly to lower PC board prices.

Surface Mount assembly does not require the preparation of components that is common on insertion technology lines. Surface Mount components are sent directly to the assembly line, eliminating an intermediate step.

Automatic placement equipment is available that can place Surface Mount components at the rate of a few thousand per hour to hundreds of thousands of components per hour.

Surface Mount Technology is cost effective, allowing the manufacturer the opportunity to produce smaller units and offer increased functions with the same size product.

	Page
Information for Using Surface Mount Packages	5.10–2
Footprints for Soldering	5.10–5

INFORMATION FOR USING SURFACE MOUNT PACKAGES

RECOMMENDED FOOTPRINTS FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to ensure proper solder connection interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

POWER DISSIPATION FOR A SURFACE MOUNT DEVICE

The power dissipation for a surface mount device is a function of the drain/collector pad size. These can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by $T_{J(max)}$, the maximum rated junction temperature of the die, $R_{\theta JA}$, the thermal resistance from the device junction to ambient, and the operating temperature, T_A. Using the values provided on the data sheet, P_D can be calculated as follows:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature T_A of 25°C, one can calculate the power dissipation of the device. For example, for a SOT–223 device, P_D is calculated as follows.

$$P_D = \frac{150°C - 25°C}{156°C/W} = 800 \text{ milliwatts}$$

The 156°C/W for the SOT–223 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 800 milliwatts. There are other alternatives to achieving higher power dissipation from the surface mount packages. One is to increase the area of the drain/collector pad. By increasing the area of the drain/collector pad, the power dissipation can be increased. Although the power dissipation can almost be doubled with this method, area is taken up on the printed circuit board which can defeat the purpose of using surface mount technology. For example, a graph of $R_{\theta JA}$ versus drain pad area is shown in Figures 1, 2 and 3.

Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad™. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.

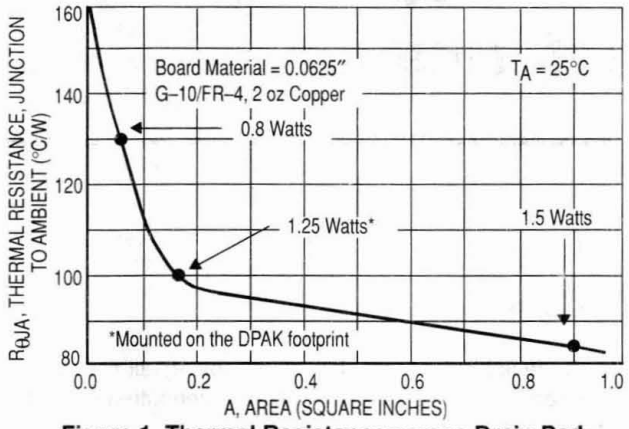

Figure 1. Thermal Resistance versus Drain Pad Area for the SOT–223 Package (Typical)

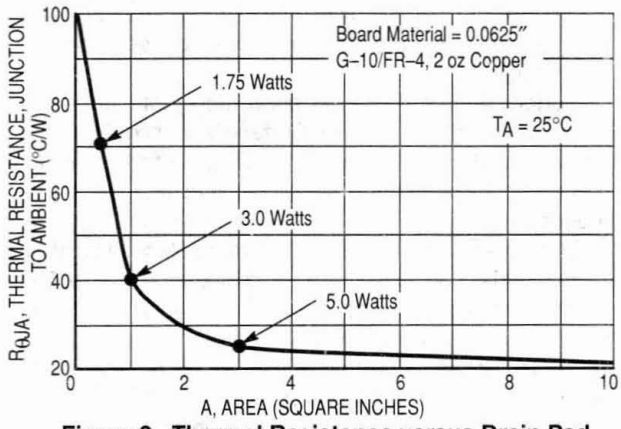

Figure 2. Thermal Resistance versus Drain Pad Area for the DPAK Package (Typical)

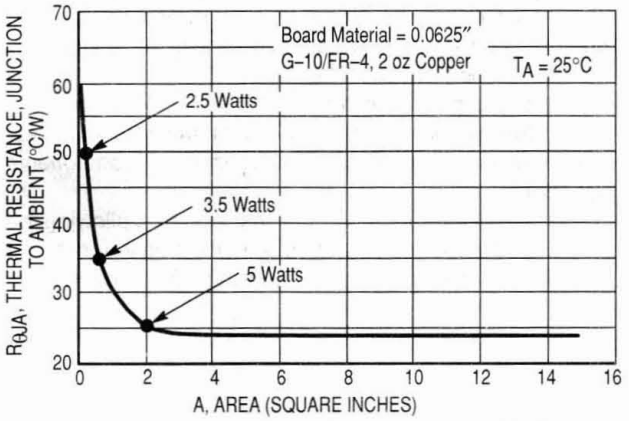

Figure 3. Thermal Resistance versus Drain Pad Area for the D²PAK Package (Typical)

SOLDER STENCIL GUIDELINES

Prior to placing surface mount components onto a printed circuit board, solder paste must be applied to the pads. Solder stencils are used to screen the optimum amount. These stencils are typically 0.008 inches thick and may be made of brass or stainless steel. For packages such as the TSOP–6, SC–59, SC–70/SOT–323, SOD–123, SOT–23, SOT–143, SOT–223, SO–8, SO–14, SO–16, Micro8, and SMA/SMB/SMC diode packages, the stencil opening should be the same as the pad size or a 1:1 registration. This is not the case with the DPAK, D^2PAK and D^3PAK packages. If a 1:1 opening is used to screen solder onto the drain pad, misalignment and/or "tombstoning" may occur due to an excess of solder. For these two packages, the opening in the stencil for the paste should be approximately 50% of the tab area. The opening for the leads is still a 1:1 registration. Figure 4 shows a typical stencil for the DPAK, D^2PAK and D^3PAK packages. The pattern of the opening in the stencil for the drain pad is not critical as long as it allows approximately 50% of the pad to be covered with paste.

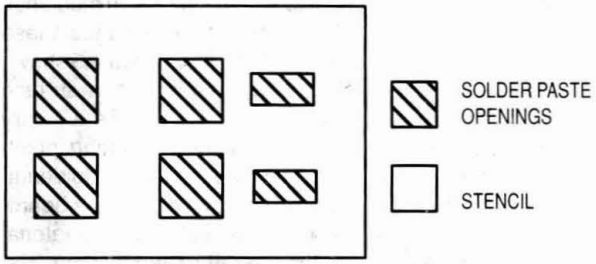

Figure 4. Typical Stencil for DPAK, D^2PAK and D^3PAK Packages

SOLDERING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference should be a maximum of 10°C.
- The soldering temperature and time should not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used since the use of forced cooling will increase the temperature gradient and will result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling.

* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

* Due to shadowing and the inability to set the wave height to incorporate other surface mount components, the D^2PAK is not recommended for wave soldering.

TYPICAL SOLDER HEATING PROFILE

For any given circuit board, there will be a group of control settings that will give the desired heat pattern. The operator must set temperatures for several heating zones and a figure for belt speed. Taken together, these control settings make up a heating "profile" for that particular circuit board. On machines controlled by a computer, the computer remembers these profiles from one operating session to the next. Figure 5 shows a typical heating profile for use when soldering a surface mount device to a printed circuit board. This profile will vary among soldering systems, but it is a good starting point. Factors that can affect the profile include the type of soldering system in use, density and types of components on the board, type of solder used, and the type of board or substrate material being used. This profile shows temperature versus time. The line on the graph shows the actual temperature that might be experienced on the surface of a test board at or near a central solder joint. The two profiles are based on a high density and a low density board. The Vitronics SMD310 convection/infrared reflow soldering system was used to generate this profile. The type of solder used was 62/36/2 Tin Lead Silver with a melting point between 177–189°C. When this type of furnace is used for solder reflow work, the circuit boards and solder joints tend to heat first. The components on the board are then heated by conduction. The circuit board, because it has a large surface area, absorbs the thermal energy more efficiently, then distributes this energy to the components. Because of this effect, the main body of a component may be up to 30 degrees cooler than the adjacent solder joints.

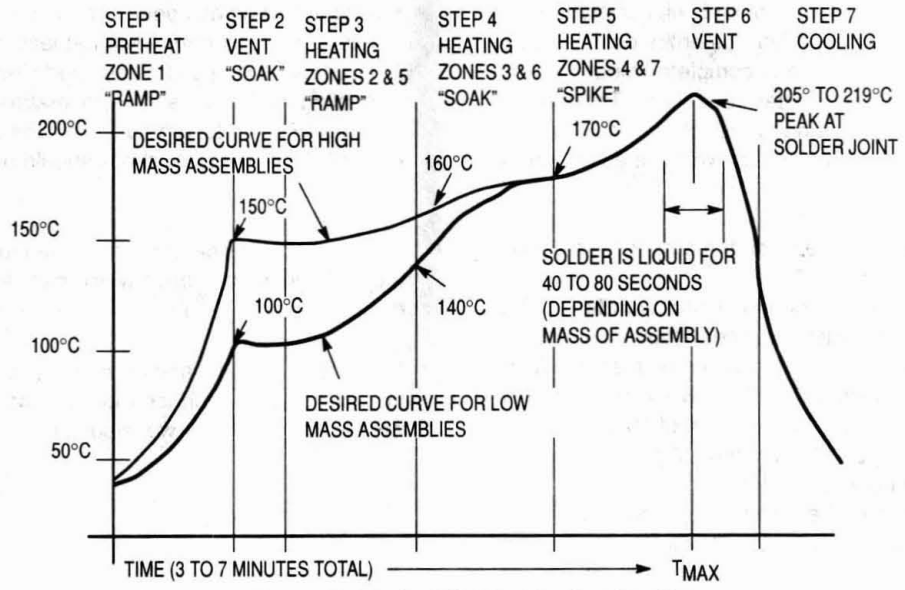

Figure 5. Typical Solder Heating Profile

Footprints for Soldering

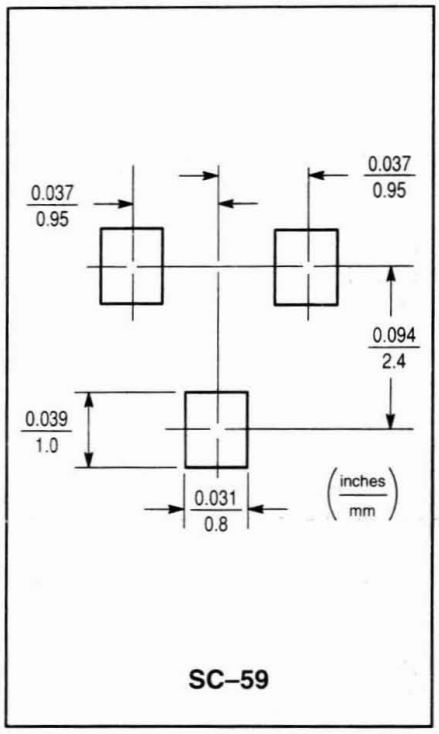

SC–59

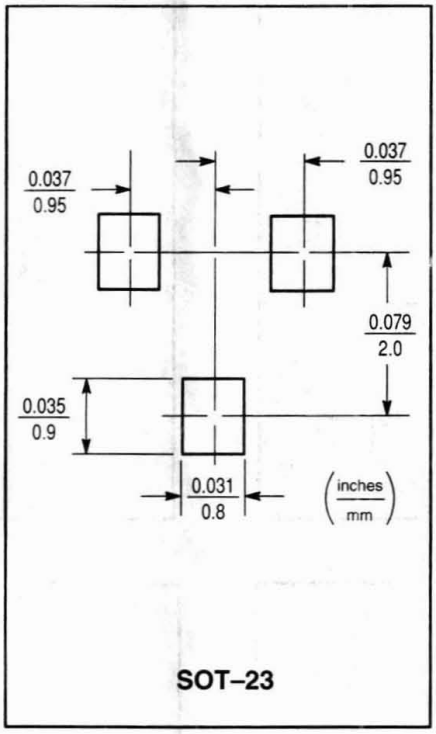

SOT–23

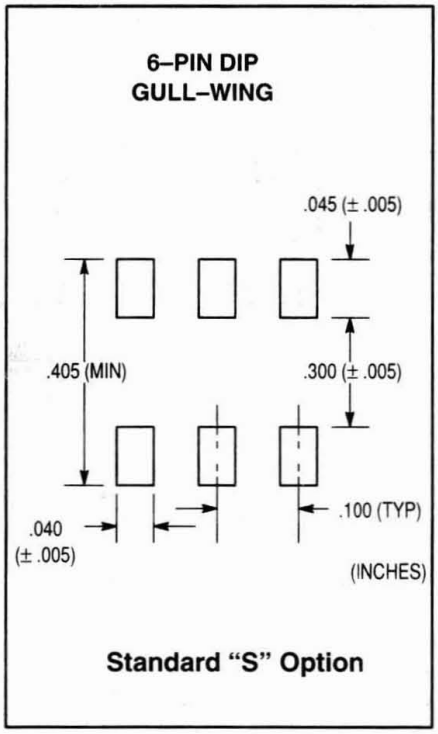

Standard "S" Option

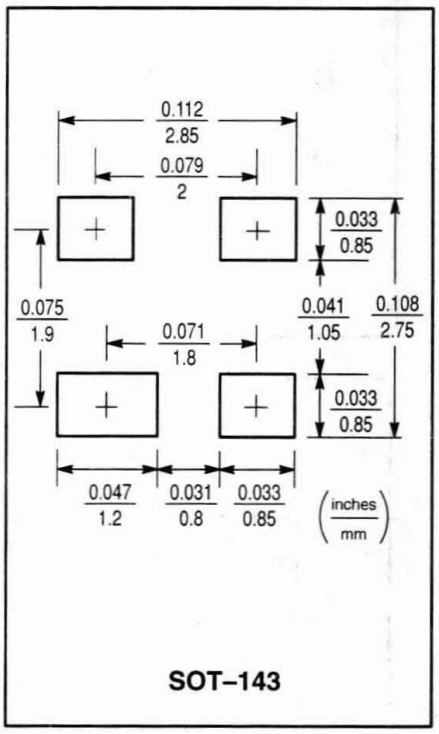

SOT–143

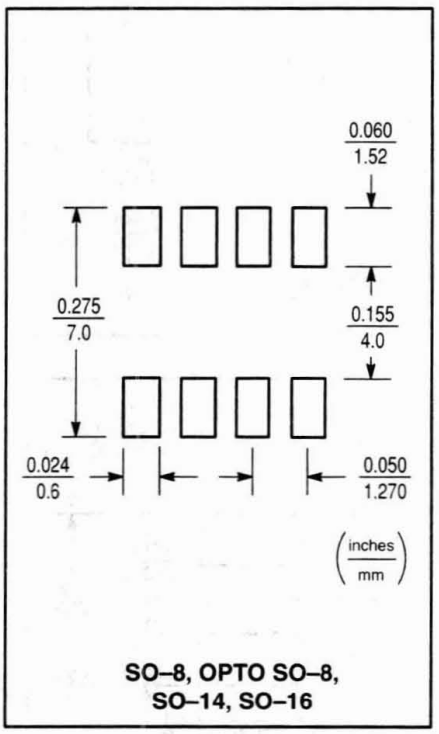

SO–8, OPTO SO–8,
SO–14, SO–16

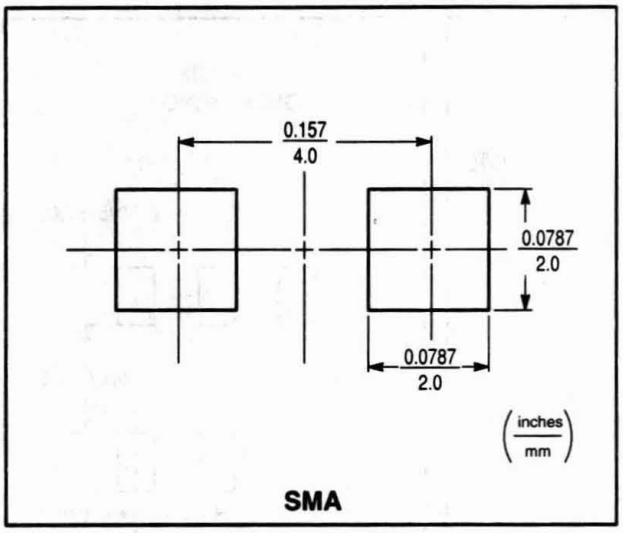

SMA

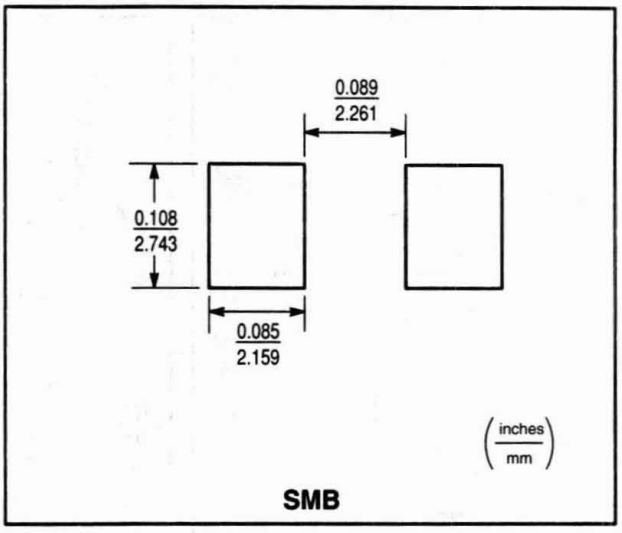

SMB

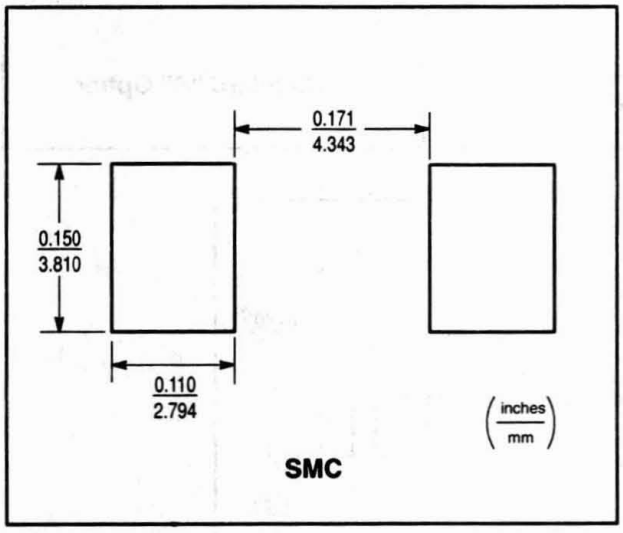

SMC

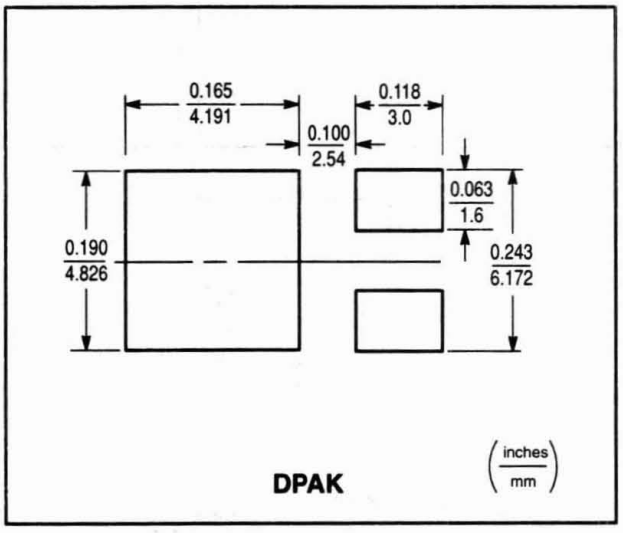

DPAK

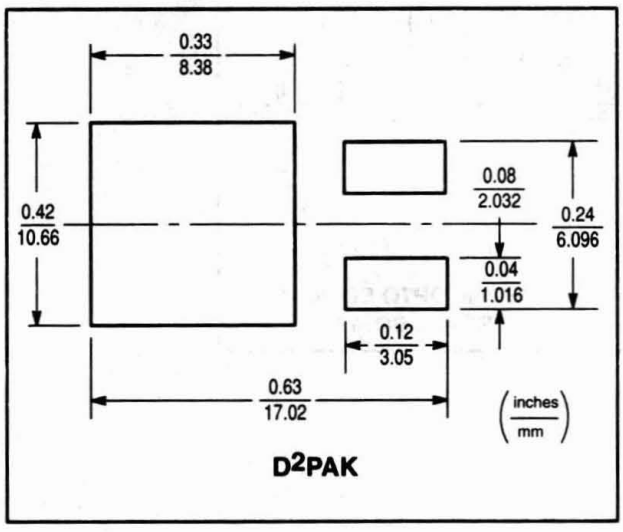

D²PAK

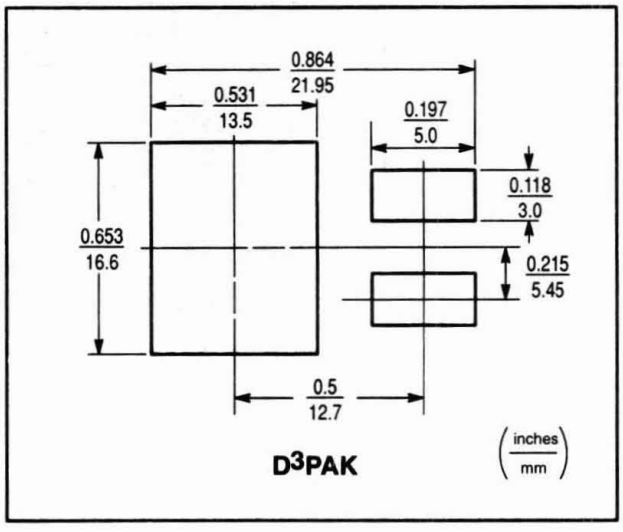

D³PAK

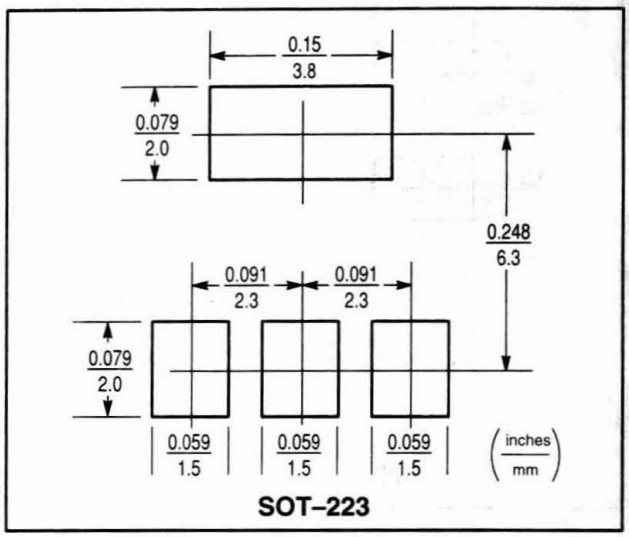

SOT–223

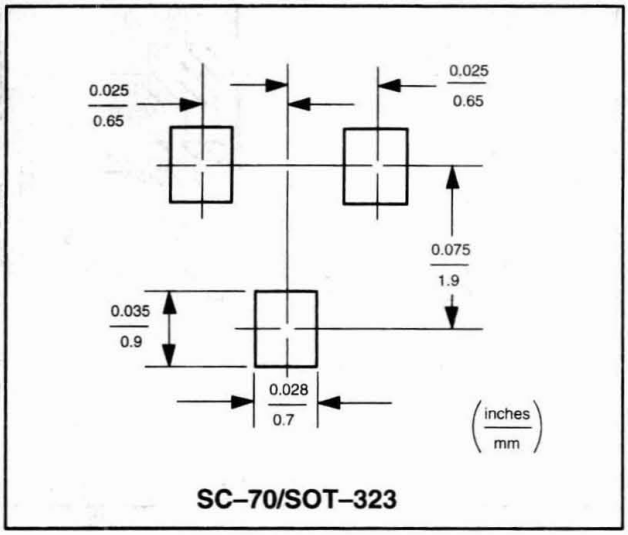

SC–70/SOT–323

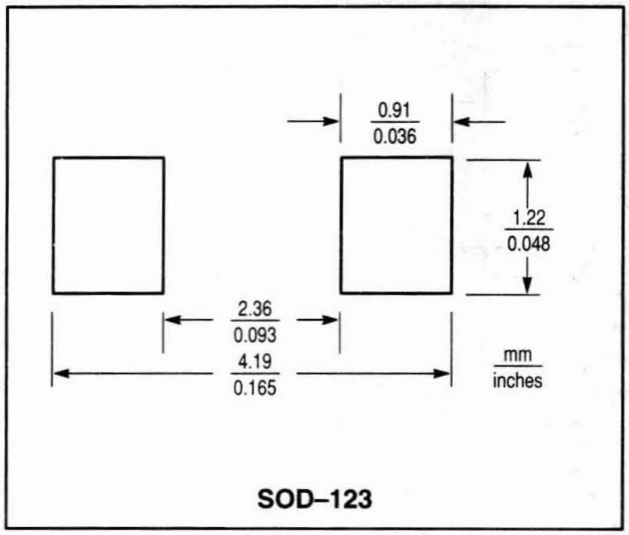

SOD–123

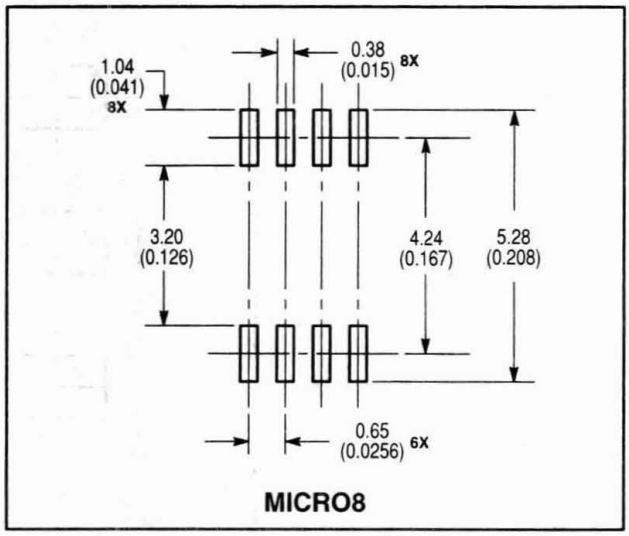

MICRO8

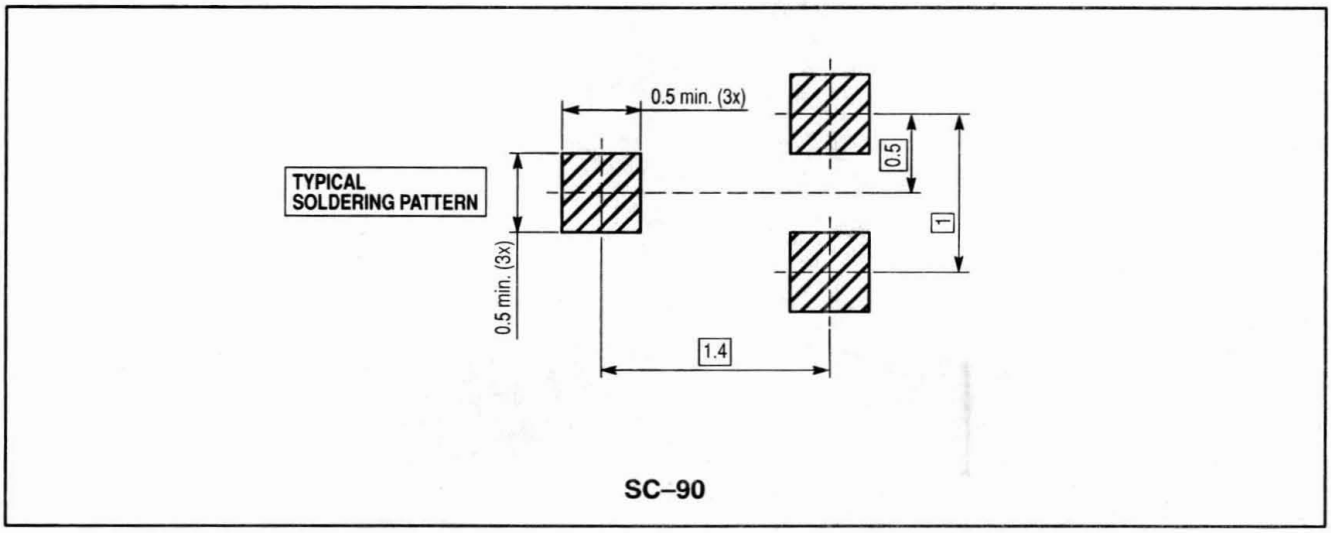

SC–90

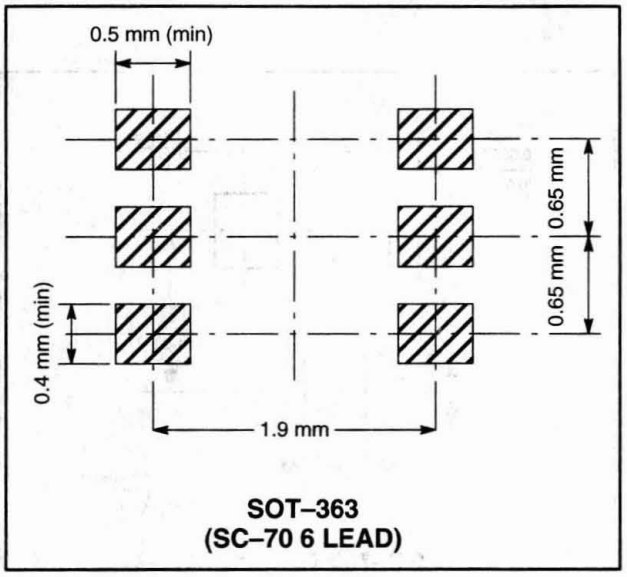

SOT–363
(SC–70 6 LEAD)

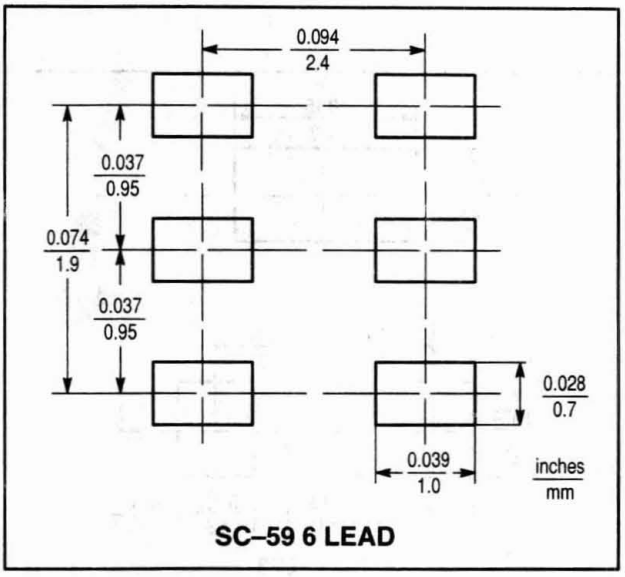

SC–59 6 LEAD

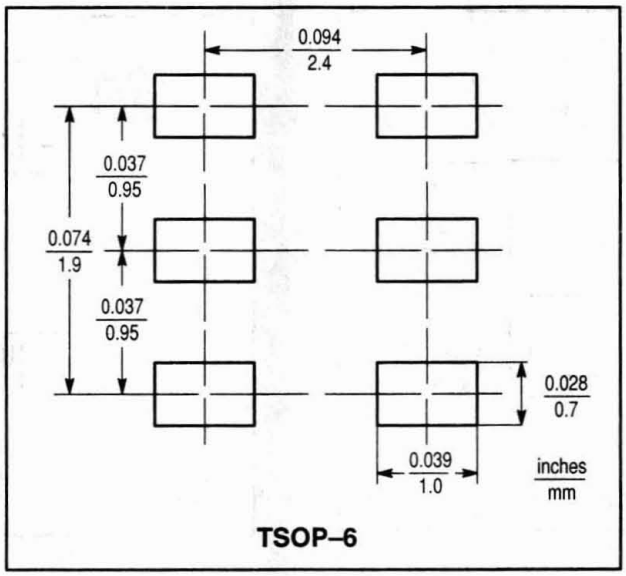

TSOP–6

Tape and Reel Specifications and Packaging Specifications

	Page
Tape and Reel Specifications	5.11–2
Embossed Tape and Reel Ordering Information	5.11–3
Embossed Tape and Reel Data for Discretes	5.11–4
Lead Tape Packaging Standards for Axial–Lead Components	5.11–6
Packaging Specifications	5.11–7
TO–92 EIA Radial Tape in Fan Fold Box or on Reel	5.11–7
Fan Fold Box Styles	5.11–9
Adhesion Pull Tests	5.11–9
Reel Styles	5.11–10
DO–35, DO–41, Surmetic 30 Radial Tape in Fan Fold Box or On Reel	5.11–11

Tape and Reel Specifications and Packaging Specifications

Embossed Tape and Reel is used to facilitate automatic pick and place equipment feed requirements. The tape is used as the shipping container for various products and requires a minimum of handling. The antistatic/conductive tape provides a secure cavity for the product when sealed with the "peel–back" cover tape.

- Two Reel Sizes Available (7″ and 13″)
- Used for Automatic Pick and Place Feed Systems
- Minimizes Product Handling
- EIA 481, –1, –2
- SOD–123, SC–59, SC–70/SOT–323, SC–70ML/SOT–363, SC–90/SC–75, SOT–23, SOT–143, TSOP–6, in 8 mm Tape
- SO–8, Micro8, OPTO SO–8, PLD–1, PLD–1.5, SOT–89, SOT–223, SMA, SMB in 12 mm Tape
- DPAK, PFP–16, SO–14, SO–16, SMC, TQFP–48, TSSOP–16, TSSOP–20 in 16 mm Tape
- D^2PAK, D^3PAK, 6–Pin Optoisolators in 24 mm Tape

Use the standard device title and add the required suffix as listed in the option table on the following page. Note that the individual reels have a finite number of devices depending on the type of product contained in the tape. Also note the minimum lot size is one full reel for each line item, and orders are required to be in increments of the single reel quantity.

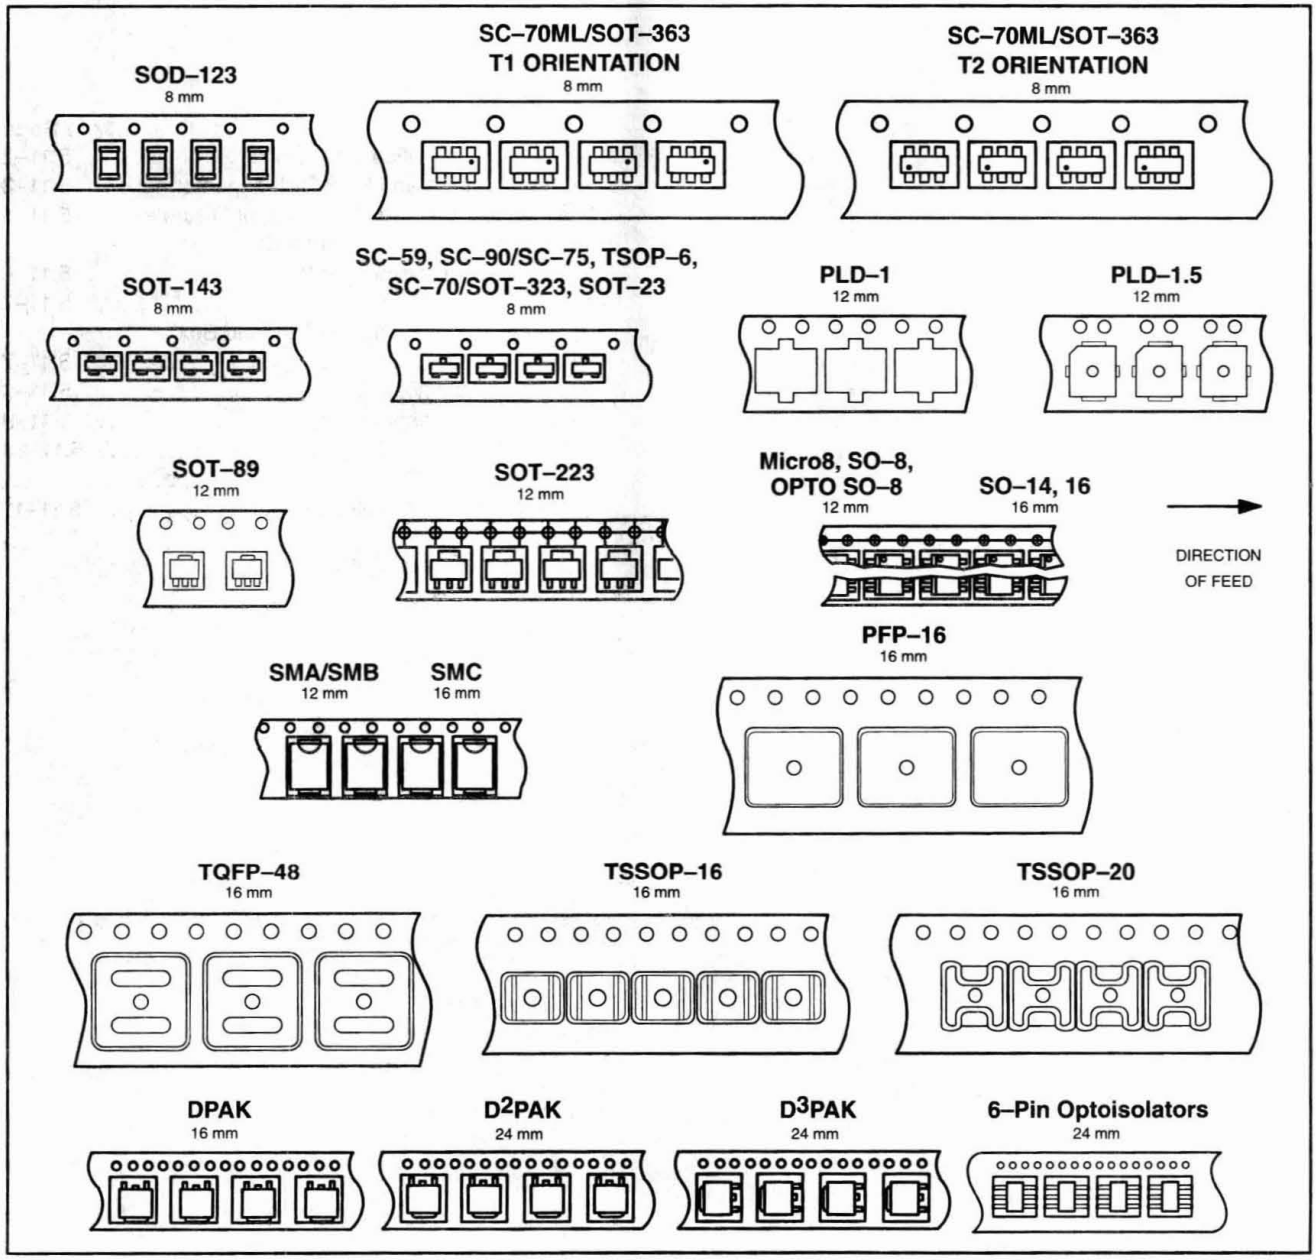

EMBOSSED TAPE AND REEL ORDERING INFORMATION

Package	Tape Width (mm)	Pitch mm (inch)	Reel Size mm (inch)	Devices Per Reel and Minimum Order Quantity	Device Suffix
DPAK	16	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	T4
D^2PAK	24	16.0 ± 0.1 (.630 ± .004)	330 (13)	800	T4
D^3PAK	24	24.0 ± 0.1 (.945 ± .004)	330 (13)	500	RL
SC–59/TSOP–6	8	4.0 ± 0.1 (.157 ± .004)	178 (7)	3,000	T1
SC–70/SOT–323	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SC–70ML/SOT–363	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 178 (7)	3,000 3,000	T1 T2
SC–90/SC–75	8	4.0 ± 0.1 (.157 ± .004)	178 (7)	3,000	T1
PLD–1	12	8.0 ± 0.1 (.315 ± .004)	178 (7)	1,000	T1
PLD–1.5	12	8.0 ± 0.1 (.315 ± .004)	178 (7)	1,000	T1
SMA	12	8.0 ± 0.1 (.315 ± .004)	330 (13)	5,000	T3
SMB	12	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	T3
SMC	16	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	T3
SO–8, OPTO SO–8	12 12	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	500 2,500	R1 R2
SOT–89	12	8.0 ± 0.1 (.315 ± .004)	178 (7)	1,000	T1
SO–14	16 16	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	500 2,500	R1 R2
SO–16	16 16	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	500 2,500	R1 R2
SOD–123	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SOT–23	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SOT–143	8 8	4.0 ± 0.1 (.157 ± .004)	178 (7) 330 (13)	3,000 10,000	T1 T3
SOT–223	12 12	8.0 ± 0.1 (.315 ± .004)	178 (7) 330 (13)	1,000 4,000	T1 T3
6–Pin Optoisolators	24	12.0 ± 0.1 (.472 ± .004)	330 (13)	1000	R2
Micro8	12	8.0 ± 0.1 (.315 ± .003)	330 (13)	4000	R2
PFP–16	16	12.0 ± 0.1 (.471 ± .004)	330 (13)	1,500	R2
TQFP–48	16	12.0 ± 0.1 (.471 ± .004)	330 (13)	1,500	R2
TSSOP–16	16	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	R2
TSSOP–20	16	8.0 ± 0.1 (.315 ± .004)	330 (13)	2,500	R2

EMBOSSED TAPE AND REEL DATA FOR DISCRETES

CARRIER TAPE SPECIFICATIONS

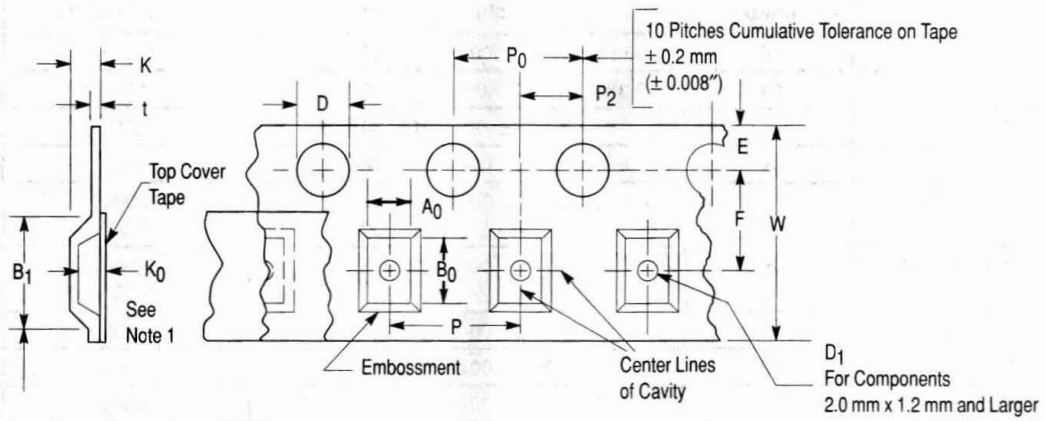

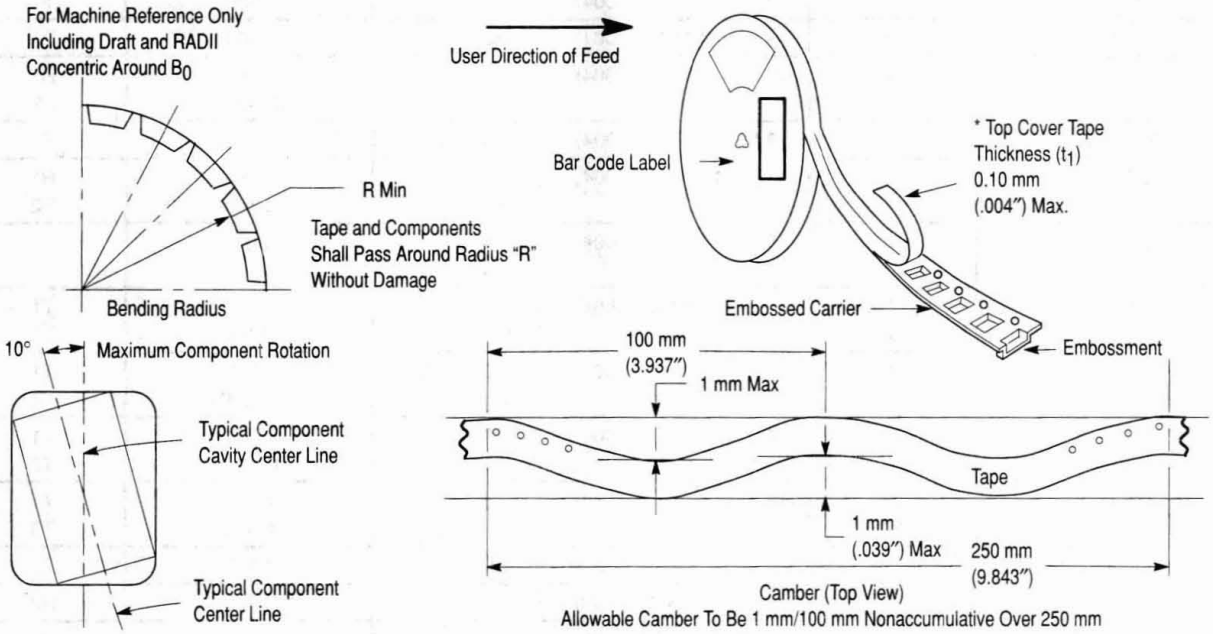

DIMENSIONS

Tape Size	B_1 Max	D	D_1	E	F	K	P_0	P_2	R Min	T Max	W Max
8 mm	4.55 mm (.179″)	1.5 + 0.1 mm −0.0 (.059 + .004″ −0.0)	1.0 Min (.039″)	1.75 ± 0.1 mm (.069 ± .004″)	3.5 ± 0.05 mm (.138 ± .002″)	2.4 mm Max (.094″)	4.0 ± 0.1 mm (.157 ± .004″)	2.0 ± 0.1 mm (.079 ± .002″)	25 mm (.98″)	0.6 mm (.024″)	8.3 mm (.327″)
12 mm	8.2 mm (.323″)		1.5 mm Min (.060″)		5.5 ± 0.05 mm (.217 ± .002″)	6.4 mm Max (.252″)			30 mm (1.18″)		12 ± .30 mm (.470 ± .012″)
16 mm	12.1 mm (.476″)				7.5 ± 0.10 mm (.295 ± .004″)	7.9 mm Max (.311″)					16.3 mm (.642″)
24 mm	20.1 mm (.791″)				11.5 ± 0.1 mm (.453 ± .004″)	11.9 mm Max (.468″)					24.3 mm (.957″)

Metric dimensions govern — English are in parentheses for reference only.

NOTE 1: A_0, B_0, and K_0 are determined by component size. The clearance between the components and the cavity must be within .05 mm min. to .50 mm max., the component cannot rotate more than 10° within the determined cavity.

NOTE 2: If B_1 exceeds 4.2 mm (.165) for 8 mm embossed tape, the tape may not feed through all tape feeders.

NOTE 3: Pitch information is contained in the Embossed Tape and Reel Ordering Information on pg. 5.12–3.

EMBOSSED TAPE AND REEL DATA FOR DISCRETES

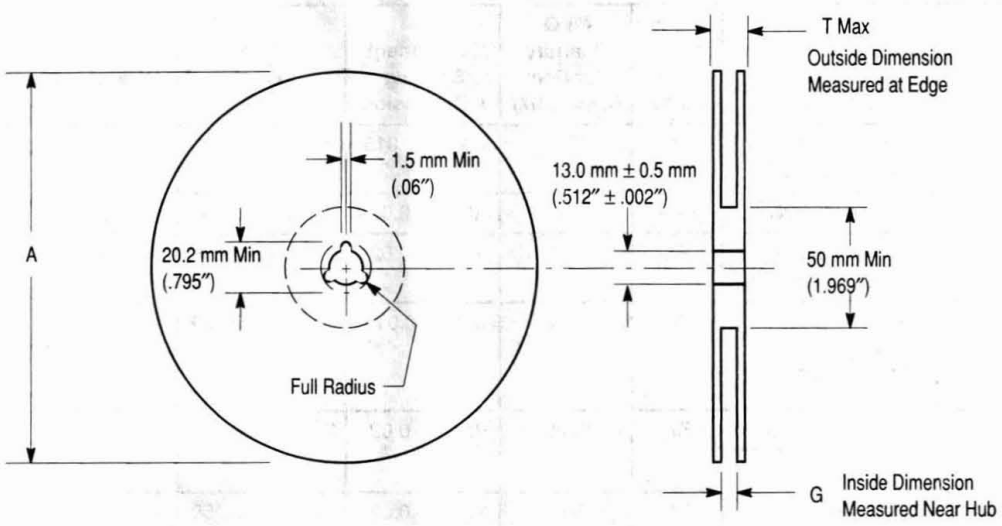

Size	A Max	G	T Max
8 mm	330 mm (12.992″)	8.4 mm + 1.5 mm, −0.0 (.33″ + .059″, −0.00)	14.4 mm (.56″)
12 mm	330 mm (12.992″)	12.4 mm + 2.0 mm, −0.0 (.49″ + .079″, −0.00)	18.4 mm (.72″)
16 mm	360 mm (14.173″)	16.4 mm + 2.0 mm, −0.0 (.646″ + .078″, −0.00)	22.4 mm (.882″)
24 mm	360 mm (14.173″)	24.4 mm + 2.0 mm, −0.0 (.961″ + .070″, −0.00)	30.4 mm (1.197″)

Reel Dimensions

Metric Dimensions Govern — English are in parentheses for reference only

LEAD TAPE PACKAGING STANDARDS FOR AXIAL–LEAD COMPONENTS

Case Type	Product Category	Device Title Suffix	MPQ Quantity Per Reel (Item 3.3.7)	Component Spacing A Dimension	Tape Spacing B Dimension	Reel Dimension C	Reel Dimension D (Max)	Max Off Alignment E
Case 17–02	Surmetic 40 & 600 Watt TVS	RL	4000	0.2 +/– 0.015	2.062 +/– 0.059	3	14	0.047
Case 41A–02	1500 Watt TVS	RL4	1500	0.4 +/– 0.02	2.062 +/– 0.059	3	14	0.047
Case 51–02	DO–7 Glass (For Reference only)	RL	3000	0.2 +/– 0.02	2.062 +/– 0.059	3	14	0.047
Case 59–03	DO–41 Glass & DO–41 Surmetic 30	RL	6000	0.2 +/– 0.015	2.062 +/– 0.059	3	14	0.047
	Rectifier							
Case 59–04	500 Watt TVS	RL	5000	0.2 +/– 0.02	2.062 +/– 0.059	3	14	0.047
	Rectifier							
Case 194–04	110 Amp TVS (Automotive)	RL	800	0.4 +/– 0.02	1.875 +/– 0.059	3	14	0.047
	Rectifier							
Case 267–02	Rectifier	RL	1500	0.4 +/– 0.02	2.062 +/– 0.059	3	14	0.047
Case 299–02	DO–35 Glass	RL	5000	0.2 +/– 0.02	2.062 +/– 0.059	3	14	0.047

Table 1. Packaging Details (all dimensions in inches)

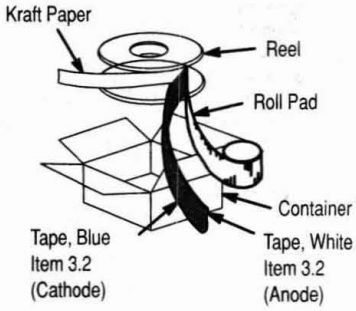

Figure 1. Reel Packing

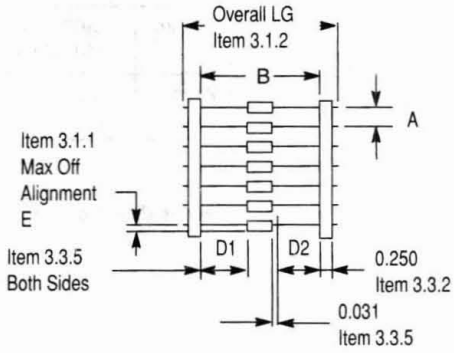

Figure 2. Component Spacing

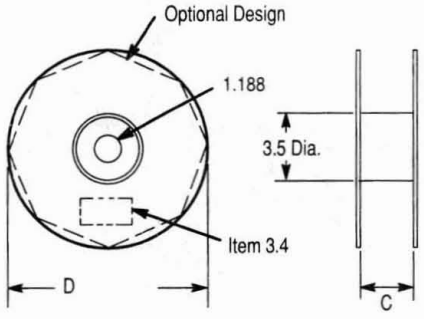

Figure 3. Reel Dimensions

TO–92 EIA, IEC, EIAJ Radial Tape in Fan Fold Box or On Reel

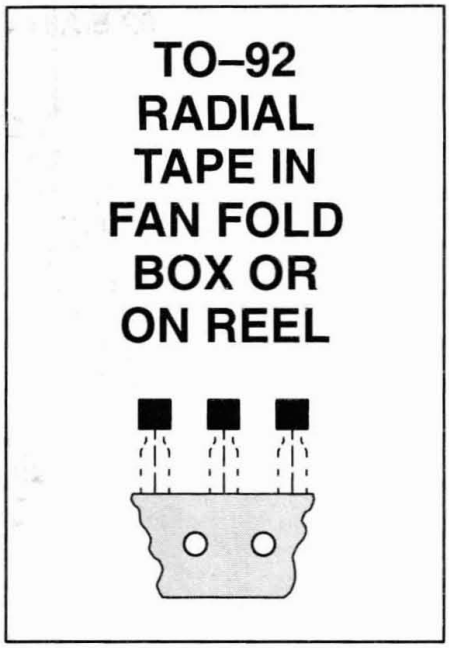

Radial tape in fan fold box or on reel of the reliable TO–92 package are the best methods of capturing devices for automatic insertion in printed circuit boards. These methods of taping are compatible with various equipment for active and passive component insertion.

- Available in Fan Fold Box
- Available on 365 mm Reels
- Accommodates All Standard Inserters
- Allows Flexible Circuit Board Layout
- 2.5 mm Pin Spacing for Soldering
- EIA–468, IEC 286–2, EIAJ RC1008B

Ordering Notes:

When ordering radial tape in fan fold box or on reel, specify the style per Figures 3 through 8. Add the suffix "RLR" and "Style" to the device title, i.e. MPS3904RLRA. This will be a standard MPS3904 radial taped and supplied on a reel per Figure 9.

Fan Fold Box Information — Minimum order quantity 1 Box/$200LL. Order in increments of 2000.

Reel Information — Minimum order quantity 1 Reel/$200LL. Order in increments of 2000.

US/European Suffix Conversions

US	EUROPE
RLRA	RL
RLRE	RL1
RLRM	ZL1

TO–92 EIA RADIAL TAPE IN FAN FOLD BOX OR ON REEL

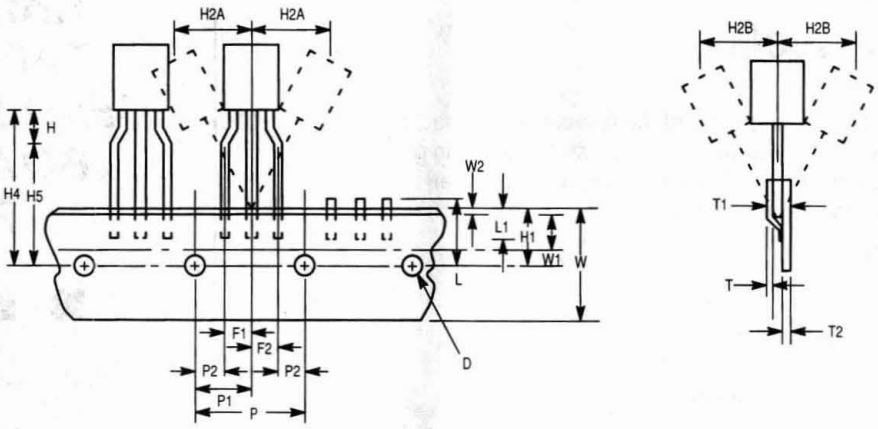

Figure 1. Device Positioning on Tape

Symbol	Item	Specification			
		Inches		Millimeter	
		Min	Max	Min	Max
D	Tape Feedhole Diameter	0.1496	0.1653	3.8	4.2
D2	Component Lead Thickness Dimension	0.015	0.020	0.38	0.51
F1, F2	Component Lead Pitch	0.0945	0.110	2.4	2.8
H	Bottom of Component to Seating Plane	.059	.156	1.5	4.0
H1	Feedhole Location	0.3346	0.3741	8.5	9.5
H2A	Deflection Left or Right	0	0.039	0	1.0
H2B	Deflection Front or Rear	0	0.051	0	1.0
H4	Feedhole to Bottom of Component	0.7086	0.768	18	19.5
H5	Feedhole to Seating Plane	0.610	0.649	15.5	16.5
L	Defective Unit Clipped Dimension	0.3346	0.433	8.5	11
L1	Lead Wire Enclosure	0.09842	—	2.5	—
P	Feedhole Pitch	0.4921	0.5079	12.5	12.9
P1	Feedhole Center to Center Lead	0.2342	0.2658	5.95	6.75
P2	First Lead Spacing Dimension	0.1397	0.1556	3.55	3.95
T	Adhesive Tape Thickness	0.06	0.08	0.15	0.20
T1	Overall Taped Package Thickness	—	0.0567	—	1.44
T2	Carrier Strip Thickness	0.014	0.027	0.35	0.65
W	Carrier Strip Width	0.6889	0.7481	17.5	19
W1	Adhesive Tape Width	0.2165	0.2841	5.5	6.3
W2	Adhesive Tape Position	.0059	0.01968	.15	0.5

NOTES:
1. Maximum alignment deviation between leads not to be greater than 0.2 mm.
2. Defective components shall be clipped from the carrier tape such that the remaining protrusion (L) does not exceed a maximum of 11 mm.
3. Component lead to tape adhesion must meet the pull test requirements established in Figures 5, 6 and 7.
4. Maximum non–cumulative variation between tape feed holes shall not exceed 1 mm in 20 pitches.
5. Holddown tape not to extend beyond the edge(s) of carrier tape and there shall be no exposure of adhesive.
6. No more than 1 consecutive missing component is permitted.
7. A tape trailer and leader, having at least three feed holes is required before the first and after the last component.
8. Splices will not interfere with the sprocket feed holes.

TO–92 EIA RADIAL TAPE IN FAN FOLD BOX OR ON REEL

FAN FOLD BOX STYLES

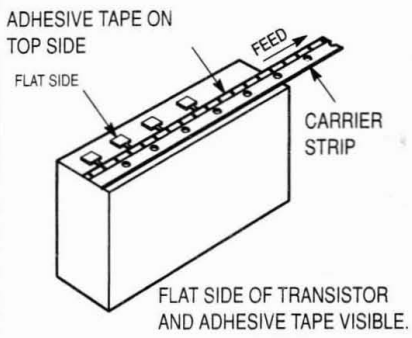

Style M fan fold box is equivalent to styles E and F of reel pack dependent on feed orientation from box.

Figure 2. Style M

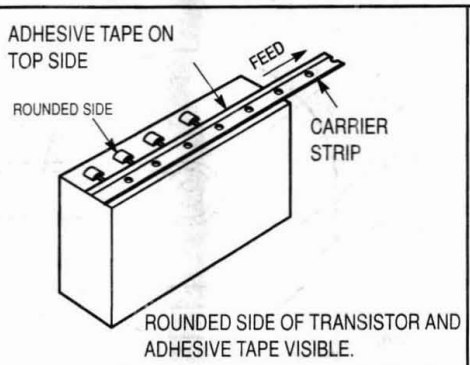

Style P fan fold box is equivalent to styles A and B of reel pack dependent on feed orientation from box.

Figure 3. Style P

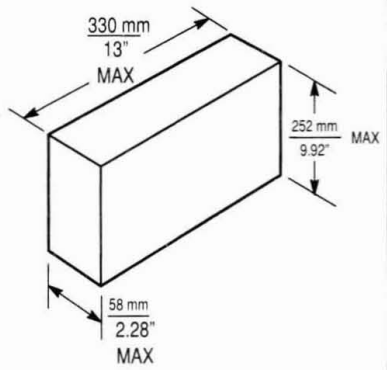

Figure 4. Fan Fold Box Dimensions

ADHESION PULL TESTS



The component shall not pull free with a 300 gram load applied to the leads for 3 ± 1 second.

Figure 5. Test #1



The component shall not pull free with a 70 gram load applied to the leads for 3 ± 1 second.

Figure 6. Test #2



There shall be no deviation in the leads and no component leads shall be pulled free of the tape with a 500 gram load applied to the component body for 3 ± 1 second.

Figure 7. Test #3

TO–92 EIA RADIAL TAPE IN FAN FOLD BOX OR ON REEL

REEL STYLES

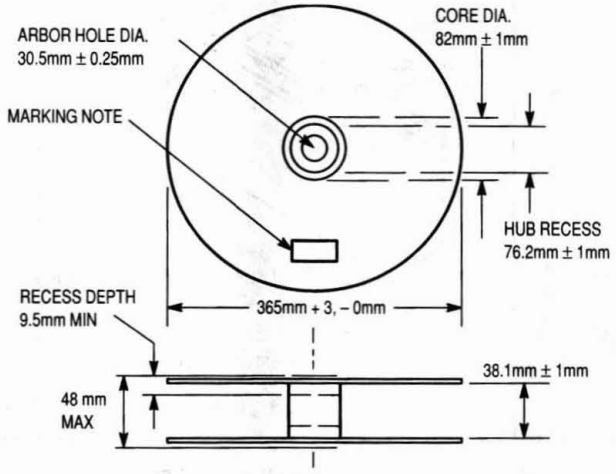

Material used must not cause deterioration of components or degrade lead solderability

Figure 8. Reel Specifications

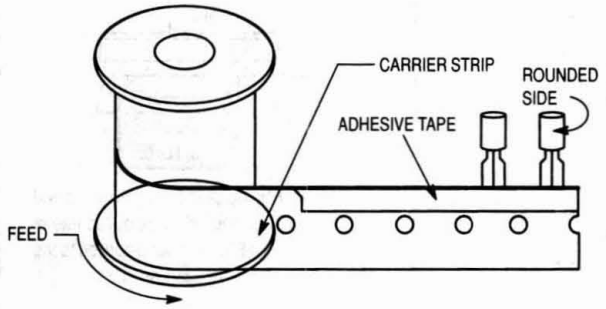

Rounded side of transistor and adhesive tape visible.

Figure 9. Style A

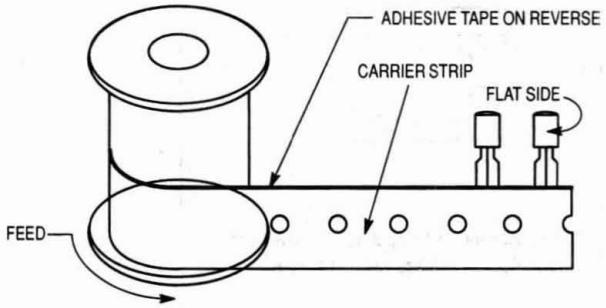

Flat side of transistor and carrier strip visible
(adhesive tape on reverse side).

Figure 10. Style B

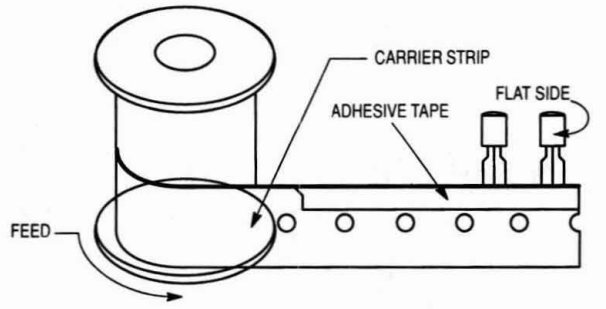

Flat side of transistor and adhesive tape visible.

Figure 11. Style E

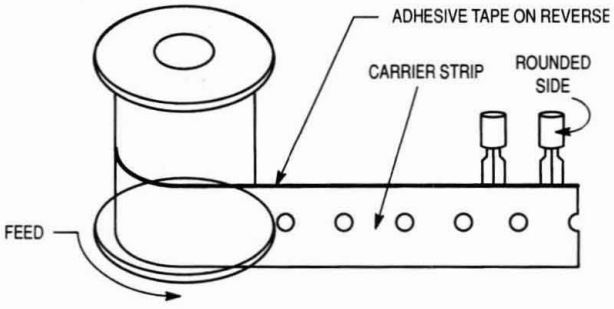

Rounded side of transistor and carrier strip visible
(adhesive tape on reverse side).

Figure 12. Style F

DO–35, DO–41, Surmetic 30 Radial Tape in Fan Fold Box or On Reel

AXIAL LEADED DEVICE RADIAL TAPE IN FAN FOLD BOX OR ON REEL



Radial tape in fan fold box or on reel for axial leaded devices is the best method of capturing devices for automatic insertion in printed circuit boards. These methods of taping are compatible with various equipment for active and passive component insertion.

- Available in Fan Fold Box
- Available on 365 mm Reels
- Accommodates All Standard Inserters
- Allows Flexible Circuit Board Layout
- 2.5 mm Pin Spacing for Soldering

Ordering Notes:

When ordering radial tape in fan fold box or on reel, specify the style per Figures 4 through 13. Add the appropriate suffix per Tables A and B as listed below:

Fan Fold Box Information — Minimum order quantity 1 Box/$200LL.
Order in increments of 3000.

Reel Information — Minimum order quantity 1 Reel/$200LL.
Order in increments of 3000.

CASE 299–02 (DO–35)

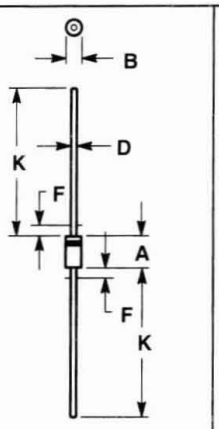

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	3.05	5.08	0.120	0.200
B	1.52	2.29	0.060	0.090
D	0.46	0.56	0.018	0.022
F	—	1.27	—	0.050
K	25.40	38.10	1.000	1.500

CASE 059–03 (DO–41)

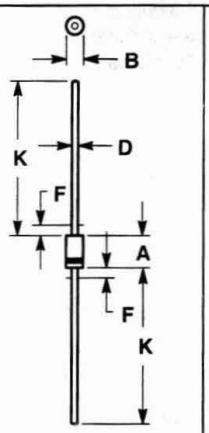

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	4.07	5.20	0.160	0.205
B	2.04	2.71	0.080	0.107
D	0.71	0.86	0.028	0.034
F	—	1.27	—	0.050
K	27.94	—	1.100	—

CASE 059–01 (Surmetic 30)

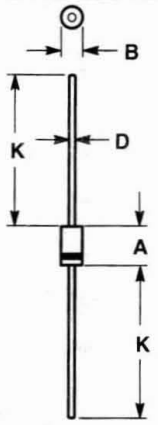

DIM	MILLIMETERS MIN	MILLIMETERS MAX	INCHES MIN	INCHES MAX
A	4.70	5.20	0.185	0.205
B	2.54	2.71	0.100	0.107
D	0.76	0.86	0.030	0.034
K	27.94	—	1.100	—

DEVICE TITLE SUFFIX DESIGNATOR TABLE

–RR1	Euroform radial format and reeled per Figures 4, 6, 9, 10. Polarity band up with cathode lead off first.
–RR2	Euroform radial format and reeled per Figures 4, 6, 9, 10. Polarity band down with anode lead off first.
–RB1	Euroform radial lead form with polarity band up per Figures 4, 12 and bulk packed.
–RB2	Euroform radial lead form with polarity band down per Figures 4, 13 and bulk packed.
–RA1	Euroform radial format and ammo packed per Figures 4, 10, 11. Polarity band up with cathode lead off first.
–RA2	Euroform radial format and ammo packed per Figures 4, 10, 11. Polarity band down with anode lead off first.

Table A

APPLICABLE SUFFIX DESIGNATIONS versus FIGURE OF REFERENCE

Suffix	Fig. 4	Fig. 5	Fig. 6	Fig. 7	Fig. 8	Fig. 10	Fig. 11	Fig. 12	Fig. 13
RR1	•	•		•	•				
RR2	•			•	•	•			
RB1	•							•	
RB2	•								•
RA1	•	•					•		
RA2	•					•	•		

Table B

DO–35, DO–41, SURMETIC 30 RADIAL TAPE IN FAN FOLD BOX OR ON REEL

TESTS

ADHESIVE POWER STRENGTH TEST



A load of 500 grams, minimum, shall be applied in the direction indicated by the arrow.

CRITERIA

No deviation in the leads, nor shall the part move

Figure 1

TAPE EXTRACTION STRENGTH

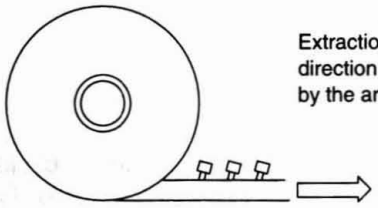

Extraction in the direction indicated by the arrow

CRITERIA

Tape shall be extracted at a force of not more than 500 grams

Figure 2

PULL TEST

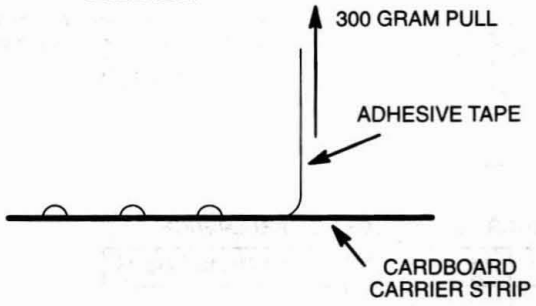

CRITERIA

Tape shall withstand a 300–gram pull without being removed from carrier strip.

Figure 3

DO–35, DO–41, SURMETIC 30 RADIAL TAPE IN FAN FOLD BOX OR ON REEL

CONFORMAL COATING SPECIFICATION

COATING NOT TO INTERFERE WITH SOLDERED LEAD OR DEVICE MARKING

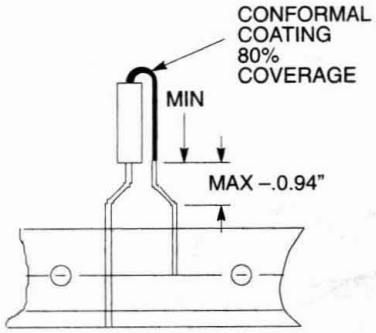

Figure 4

EURO FORM RADIAL TAPED

1 – Polarity band up, cathode off first

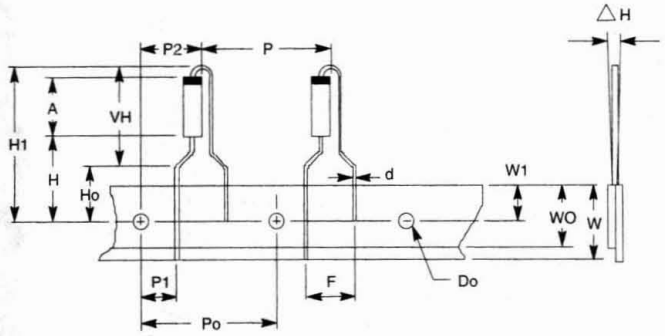

Figure 5

Item	Symbol	Value	Tolerance
Pitch of component	P	12.7	±1.0
Feed hole pitch Cumulative 1.0 mm / 20 pitch	PO	12.7	±0.2
Feed hole center to lead	P1	3.85	±0.7
Lead to lead distance	F	5.0	+8 / –0.2
Component alignment	AH	0	±1.0
Tape width	W	18.0	±0.5
Hold down tape width	Wo	12.0	MIN
Hole position	W1	9.0	+0.75 / –0.5
Hole down tape position	W2	0.5	MAX
Height of component to tape center	H	19.5	±1.0
Lead wire clinch height	Ho	16.0	±0.5
Component height	H1	23.25	MAX
Feed hole diameter	Do	4.0	±0.2
Total tape thickness	t	0.7	±0.2
Vertical in board height For case 299–02 only.	VH	10.0	MAX

DO–35, DO–41, SURMETIC 30 RADIAL TAPE IN FAN FOLD BOX OR ON REEL

REEL ASSEMBLY AND WINDING DIRECTION
TYPICAL CONSTRUCTION DRAWING ONLY

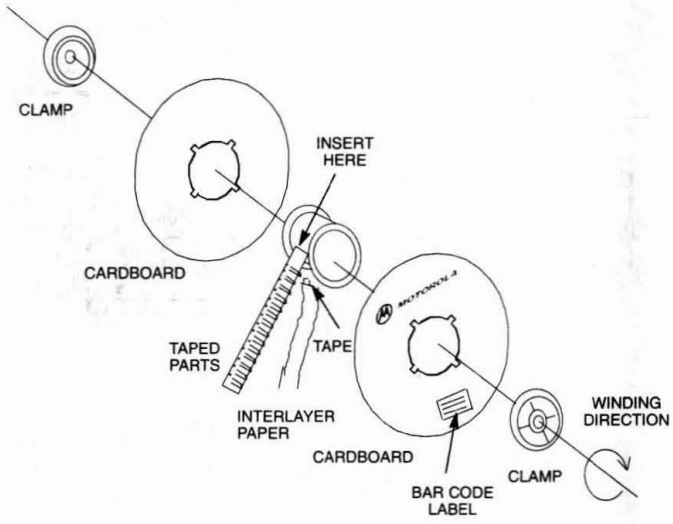

Figure 6

When the parts are wound onto the housing reel, the interlayer paper shall be used to prevent trouble in rewinding and deviations in the taping dimensions, caused by the parts touching one another.

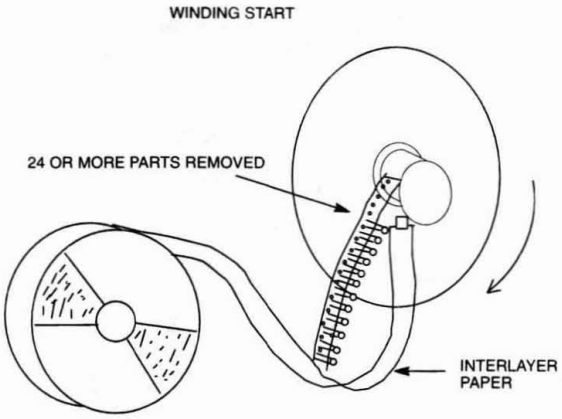

Figure 7

Relative to winding finish, the interlayer paper shall be wound at least once, upon completion of winding. The protective tape shall be wound once on top of the interlayer paper.

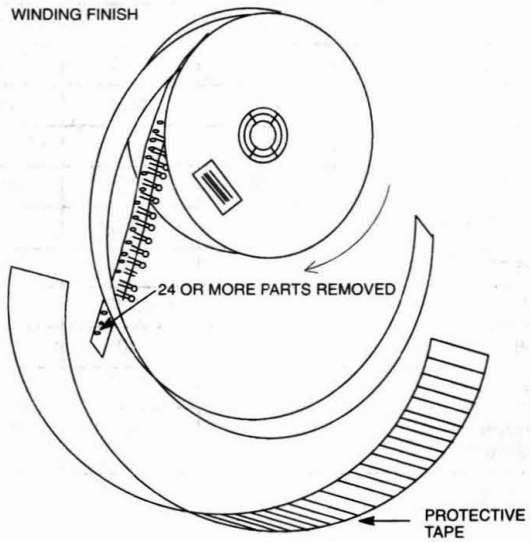

Figure 8

REEL DIMENSIONS AND DETAIL

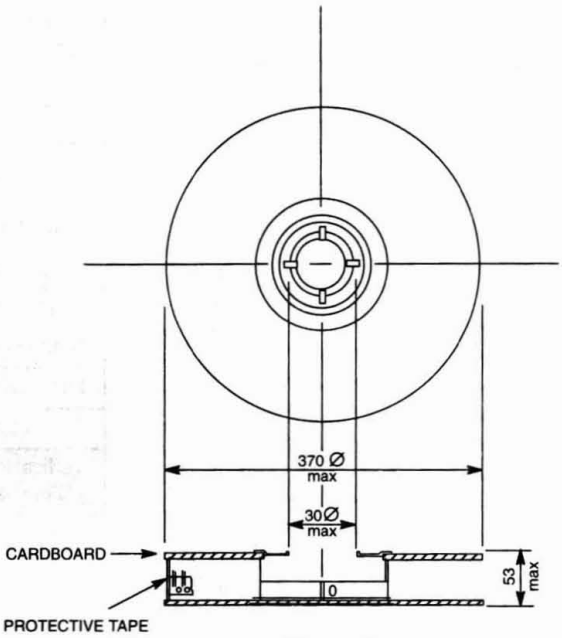

Figure 9

DO–35, DO–41, SURMETIC 30 RADIAL TAPE IN FAN FOLD BOX OR ON REEL

EURO FORM RADIAL TAPED

2 – Polarity band down, anode off first

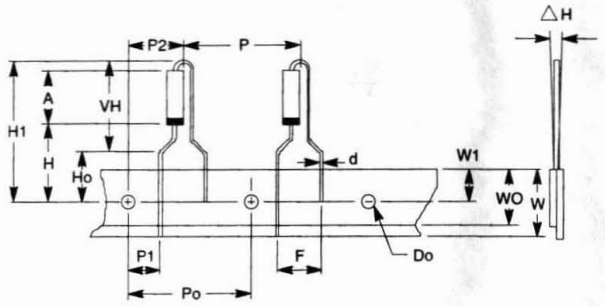

Figure 10

GENERAL GUIDE FOR PACKAGING IN "AMMUNITION BOXES"

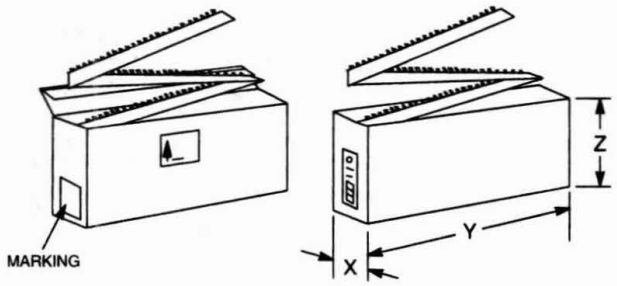

Figure 11

Item	Symbol	Value	Tolerance
Pitch of component	P	12.7	±1.0
Feed hole pitch Cumulative 1.0 mm / 20 pitch	PO	12.7	±0.2
Feed hole center to lead	P1	3.85	±0.7
Lead to lead distance	F	5.0	+8 / –0.2
Component alignment	AH	0	±1.0
Tape width	W	18.0	±0.5
Hold down tape width	Wo	12.0	MIN
Hole position	W1	9.0	+0.75 / –0.5
Hole down tape position	W2	0.5	MAX
Height of component to tape center	H	19.5	±1.0
Lead wire clinch height	Ho	16.0	±0.5
Component height	H1	23.25	MAX
Feed hole diameter	Do	4.0	±0.2
Total tape thickness	t	0.7	±0.2
Vertical in board height For case 299–02 only.	VH	10.0	MAX

"X"	"Y"	"Z"
1 5/8"	12 1/2"	10"
41 mm	318 mm	254 mm

DO–35, DO–41, SURMETIC 30 RADIAL TAPE IN FAN FOLD BOX OR ON REEL

RB1

POLARITY BAND UP



Figure 12

Item	Symbol	Value (mm)	Tolerance	Value (Inch)	Tolerance
Body Diameter	D	2.7	MAX	0.106	MAX
Body Height	A	5.2	MAX	0.207	MAX
Lead Wire Diameter	d	0.9	MAX	0.035	MAX
Seating Height	SH	10	MAX	0.394	MAX
Lead to Lead Distance	F	5	+1.0/–0.5	0.2	+0.26/–0.02
Lead Wire Clinch Height	HO	5	±0.5	0.2	±0.02

RB2

POLARITY BAND DOWN



Figure 13

Item	Symbol	Value (mm)	Tolerance	Value (Inch)	Tolerance
Body Diameter	D	2.7	MAX	0.106	MAX
Body Height	A	5.2	MAX	0.207	MAX
Lead Wire Diameter	d	0.9	MAX	0.035	MAX
Seating Height	SH	10	MAX	0.394	MAX
Lead to Lead Distance	F	5	+1.0/–0.5	0.2	+0.26/–0.02
Lead Wire Clinch Height	HO	5	±0.5	0.2	±0.02

Product Literature and Technical Training

In Brief . . .

With the pace of new semiconductor product introductions, the task of providing an effective and up–to–date perspective of available components is beyond the means of any single document. Hence, a comprehensive Motorola Literature System has been put in place to keep semiconductor users totally informed of all aspects of the Motorola product lines — from new product introductions, to applications, to major changes in directions.

The Motorola technical literature library and associated services consist of the following:

- An extensive library of Data Books, each containing a complete selection of data sheets associated with a particular product line.
- A series of User's Manuals and Design Manuals dealing with the application of highly complex products.
- A wide range of Application Notes and Article Reprints detailing the utilization of new and significant products.
- Instructor–led Training for: Digital Signal Processing (DSP) Family; M68000 Family; Embedded Controllers (EC); MC68360 QUIC; PowerPC; Microcontroller (MCU); RISC Family; plus the MC68302, MC68332, MC68340 and the MC68HC16.

These products and services are described on the following pages. However, because of different conditions and standards, some of these may not be available outside the USA.

	Page
Technical Data Services	6.1–1
Motorola Semiconductor Master Selection Guide	6.1–1
"IMAGINE" SPS Customer Magazine	6.1–1
M*fax* — Touch–Tone Fax	6.1–1
Internet Server	6.1–1
Motorola Data and Application Literature	6.1–2
Technical Training	6.1–6

Technical Data Services

Motorola Semiconductor Master Selection Guide

For the identification and preliminary selection of components for circuit and system designs

For the design engineer, the Motorola Master Selection Guide is perhaps the most important single document for the identification and preliminary selection of components for circuit and system designs. Within its pages is a complete listing and description of Motorola semiconductor devices currently in general use, and those recommended for new designs. It serves two purposes:

1. It lists all standard products in the vast Motorola semiconductor inventory for rapid identification.
2. It divides this total product offering into a variety of major product categories, with sufficient technical information to permit an intelligent first–order evaluation as to the most suitable devices for a specific application.

"IMAGINE" SPS Customer Magazine

Innovative new developments from Motorola's Semiconductor Products Sector

This highly informative periodical is available to all semiconductor users on a free subscription basis. The magazine provides information on new semiconductor products and developments and provides a quick–scan insight into new–product offerings. Concise, informative articles discuss significant new product capabilities as well as newly introduced services. In short, it represents an overview of the latest and most important events at Motorola that influence the efficient implementation and most cost–effective use of semiconductor devices.

To receive "IMAGINE" Magazine, in the USA, please contact the Literature Distribution Center by calling 1–800–441–2447.

M*fax* — Touch–Tone Fax

M*fax* offers access to over 30,000 Motorola documents for faxing to customers worldwide. With menus and voice instruction, customers can request the documents needed using their own touch–tone telephones from any location 7 days a week and 24 hours a day.

A number of features are offered within the **M*fax*** system, including HOT DOCS (4–digit code identifiers for currently referenced promotional or advertising material), product data sheets, application notes, engiineering bulletins, article reprints, selector guides, Literature Order Forms, and Technical Training Information.

Motorola has a full time staff dedicated to supporting the Internet service as well as the **M*fax*** Touch–Tone Faxing service.

How to reach us:
MFAX: RMFAX0@email.sps.com
or (602) 244–6609
or 1–800–774–1848 (U.S. and Canada)

Motorola SPS World Marketing Internet Server

Motorola SPS's Electronic Data Delivery organization has set up a World Wide Web Server to deliver Motorola SPS's technical data to the global Internet community.

Technical data such as the complete Master Selection Guide along with the OEM North American price book are available on the Internet server with full search capabilities. Other data on the server include abstracts of databooks, application notes, selector guides, and textbooks. All have easy text search capability. Ordering Literature from the Literature Distribution Center is available on line.

Other features of Motorola SPS's Internet server include the availability of a searchable press release database, technical training information with on–line registration capabilities, complete on–line access to the MFAX system for ordering faxes, an on–line technical support form to send technical questions and receive answers through email, information on product groups, full search capabilities of device models, a listing of the Domestic and International sales offices, and links directly to other Motorola world wide web servers.

After accessing the Internet, to locate the Motorola SPS World Marketing server, use the following URL:

http://sps–mot.com

For more information on Motorola SPS's Internet server you can request BR1307/D from MFAX.

Motorola Data and Application Literature

Complete technical data for the world's most comprehensive inventory of semiconductor components

To complement the industry's broadest line of semiconductor products, Motorola offers a complete library of Data books which detail the electrical characteristics of its products. These documents are supplemented by User's Manuals describing the capabilities of the products in circuit and system design.

Motorola attempts to fill the need for applications information concerning today's highly complex electronic components. Each year dozens of authors from colleges and universities, and from the industry, add their individual contributions to the collective literature. From these, Motorola has selected a number of texts which add substantially to the comprehension and applications of some of the more complex products. By buying these in large quantities and providing them to customers at lower than retail cost, Motorola hopes to foster a more comprehensive acquaintance with these products at greatly reduced prices.

Semiconductors in theory and practice

Application Notes, Engineering Bulletins and Article Reprints are part of a total information system to define the characteristics and applications of semiconductor devices. Motorola's library consists of such documents dealing with the applications of all types of semiconductors from discrete power transistors to the most complex microprocessors. All are described in an Application Note Catalog available from our Literature Distribution Center.

Individual application notes, application reports, engineering bulletins and article reprints can also be ordered from our Literature Distribution Center.

Contact the Literature Distribution Center for ordering information. In addition, there may be an alternative document available in some countries, contact your local Motorola Sales Office.

For complete summaries: order BR101/D from the Literature Distribution Center.

Data Books and Handbooks

BR1333/D, Timing Solutions
BR1334/D, High Performance Frequency Control Products
BR1339/D, LCX Data Low–Voltage CMOS Logic
BR1491/D, TSOP–6
BR1492/D, LVX Data: Low–Voltage CMOS Logic
DL110/D, RF Device Data
DL111/D, Bipolar Power Transistor Data
DL118/D, Optoelectronics Device Data
DL121/D, FAST and LS TTL Data
DL122/D, MECL Device Data
DL126/D, Small–Signal Transistors, FETs and Diodes Device Data
DL128/D, Analog/Interface ICs Device Data
DL129/D, High Speed CMOS Data
DL131/D, CMOS Logic Data
DL135/D, TMOS Power MOSFET Transistor Data
DL136/D, Communications Device Data
DL137/D, Thyristor Device Data
DL138/D, FACT Data
DL140/D, ECLinPS and ECLinPS Lite
DL150/D, TVS/Zener Device Data
DL151/D, Rectifier Device Data
DL156/D, Fast Static RAM – Component and Module Data
DL158/D, Multimedia Device Data
DL159/D, LonWorks Technology Device Data
DL160/D, Display Products Device Data
DL200/D, Pressure Sensor Device Data
DL201/D, FPGA Data: Field Programmable Gate Arrays
DL203/D, Advanced High–Speed CMOS Data
HB205/D, MECL System Design Handbook
HB214/D, Rectifier Applications Handbook
HB215/D, RF Application Reports
HB218/D, Senseon: Pressure Sensor Distributor Handbook

Selector Guides & Application Literature

BR101/D, Technical and Applications Literature Catalog
BR518/D, Reliability & Quality Handbook
BR729/D, Motorola 68K Source – Third Party Vendor Catalog
BR916/D, Packaging Manual for ASIC Arrays
BR923/D, Communications, Power & Signal Technologies Group – Reliability Audit Report
BR1100/D, Microprocessor and Memory Technologies Group: Reliability and Quality Report
BR1112/D, M68HC05 & M68HC08 Family Customer Specified Integrated Circuit (CSIC) Microcontroller Unit (MCU) Literature
BR1133/D, HIPPO: High–Performance Internal Product Portfolio Overview
BR1137/D, The Motorola Explorer's Guide to the World of Embedded Control Solutions
BR1138/D, 68HC08 – Innovate, Migrate, Accelerate
BR1202/D, Motorola Quality System Review Guidelines
BR1305/D, Analog Integrated Circuits: New Product Calendar
BR1306/D, CATS – Customer Analysis Tracking System
BR1341/D, MPA: Motorola Programmable Arrays — Products Update
BR1400/D, OACS (ASIC) – Open Architecture CAD System
BR1479/D, IDEA: Innovative Discrete Semiconductors for Emerging Applications
BR1486/D, SCSI Terminators
BR1487/D, Thermal Modeling and Management of Discrete Surface Mount Packages
BR3021/D, "IMAGINE" Magazine
BR3024/D, The Changing World — Demanding Power (Power Products Division)

Selector Guides & Application Literature (continued)

CALCPSTG/D, Communications, Power and Signal Technologies Group: New Product Calendar
CMRQS/D, CSIC Microcontrollers: Reliability and Quality Monitor Report
CR100/D, Communications, Power and Signal Technologies Group: Through–Hole to Surface Mount Cross Reference
CR101/D, Tag to Motorola Thyristor Cross Reference
CR103/D, Transient Voltage Suppressors, General Instruments Cross Reference
CR104/D, General Instrument–to–Motorola Optoelectronics Cross Reference
CR108/D, Low Voltage MOSFET Cross Reference
DSPNEWSL/D, DSP News
DSP56800WP1/D, Novel Digital Signal Processing Architecture with Microcontroller Features
EMDVPOC/D, Embedded Developer Pocket Guide
MRQS/D, Advanced Microcontroller Division: Reliability and Quality Monitor Report
MRQSY96/D, Microcontroller Technologies Group: Reliability and Quality — 1996 Annual Report
PSTR3003/D, The Motorola Silicon Community
SG46/D, RF Products Selector Guide & Cross Reference
SG73/D, Master Selection Guide
SG96/D, Analog/Interface ICs Selector Guide & Cross Reference
SG134/D, VARO to Motorola Rectifier Cross Reference
SG140/D, SCANSWITCH Selector Guide
SG146/D, Digital Signal Processors Update
SG162/D, Sensor Products Division
SG165/D, CSIC Microcontrollers Update
SG166/D, Advanced Microcontroller Division Update
SG167/D, High Performance Embedded Systems Fact Sheet
SG169/D, Mixed Signal Solutions from MOS Digital–Analog Integrated Circuits Division
SG171/D, Fast Static RAM Product Update
SG172/D, Dynamic Memory Update
SG173/D, CSIC Microcontrollers: Modular Development Tools
SG175/D, RISC Microprocessor Division: The PowerPC Microprocessor Family
SG180/D, Microcontroller Technologies Group: Development Tools Selector Guide
SG265/D, Power MOSFETs Product Update
SG266/D, Bipolar Power Transistors Product Update
SG267/D, Rectifier Product Update
SG268/D, Thyristor Product Update
SG273/D, Optoelectronic Operations Selector Guide
SG274/D, Zener Operations Selector Guide
SG275/D, Small–Signal Operations: Surface Mount Packages
SG370/D, Discrete Surface Mount Selector Guide
SG371/D, DPAK Surface Mount Selector Guide
SG378/D, Linear Voltage Regulators
SG379/D, North America Sales and Distribution Price List
SG381/D, Motorola RF Monolithic Integrated Circuits
SG382/D, Motorola RF CATV Distribution Amplifiers
SG384/D, Motorola RF LDMOS Product Family
SG385/D, Low Voltage MOSFET Selector Guide
SG417/D, Semiconductor Products for Wireless Communications
SG419/D, EMU: European Microcontroller Update
SG423/D, TIGER: The Integrated Guide to European RAMs
SG424/D, EAGLES: European Analog Guide for Leading & Emerging Systems
SG425/D, Lamp Ballast Selector Guide
SG426/D, DINO: Discrete Innovation News Overview

User's Manuals

ADCRM/AD, Analog–to–Digital Converter Reference Manual
CPU08RM/AD, M68HC08 Central Processor Unit Reference Manual
CPU16RM/AD, M68HC16 Family Reference Manual
CPU32RM/AD, CPU32 Central Processor Unit Reference Manual
CTMRM/D, Configurable Timer Module Reference Manual
DMA08RM/AD, DMA08 Direct Memory Access Reference Manual
DSPSOURCGUIDE/D, DSP Source Guide, 1997 Edition
DSP56KFAMUM/AD, DSP56000 Digital Signal Processor Family Manual
DSP56L811EMUM/AD, DSP56L811 Evaluation Module User's Manual
DSP56L811UM/AD, DSP56L811 User's Manual
DSP56000UM/AD, DSP56000/DSP56001 Digital Signal Processor User's Manual
DSP56002UM/AD, DSP56002 Digital Signal Processor User's Manual
DSP56003UM/AD, DSP56003/005 Digital Signal Processor User's Manual
DSP56004UM/AD, DSP56004 Digital Signal Processor User's Manual
DSP56009UM/AD, DSP56009 User's Manual
DSP56100FM/AD, DSP56100 Digital Signal Processor Family Manual
DSP56156UM/AD, DSP56156 Digital Signal Processor User's Manual
DSP56166UM/AD, DSP56166 Digital Signal Processor User's Manual
DSP56300FM/AD, DSP56300 24–Bit Digital Signal Processor Family Manual
DSP56301UM/AD, DSP56301 24–Bit Digital Signal Processor User's Manual
DSP56302EMUM/AD, DSP56302 Evaluation Module User's Manual
DSP56302UM/AD, DSP56302 User's Manual
DSP56303EMUM/AD, DSP56303 Evaluation Module User's Manual

Motorola Data and Application Literature: (continued)

User's Manuals (continued)

DSP56303UM/AD, DSP56303 User's Manual
DSP56304UM/AD, DSP56304 User's Manual
DSP56603EMUM/AD, DSP56603 Evaluation Module User's Manual
DSP56800FM/AD, DSP56800 Family Manual
DSP96002UM/AD, DSP96002 IEEE Floating–Point Dual–Port Processor User's Manual
FLASHMEMUM/AD, 8 Mbit MobileFLASH User's Manual
GPTRM/AD, Modular Microcontroller Family General Purpose Timer Reference Manual
H4CDM/D, H4C Series Design Reference Guide
H4CPDM/D, H4CPlus Series Design Reference Guide
H4EPDM/D, H4EPlus Series Design Reference Guide
HB219/D, Introduction to the Oncore ChipSet
HC05C0GRS/D, 68HC05C0 Specification (General Release)
HC05C12AGRS/D, MC68HC05C12A, MC68HCL05C12A, MC68HSC05C12A General Release Specification
HC05C4AGRS/D, MC68HC05C4A, MC68HCL05C4A, MC68HSC05C4A General Release Specification
HC05C8AGRS/D, MC68HC05C8A, MC68HCL05C8A, MC68HSC05C8A General Release Specification
HC05C9AGRS/D, MC68HC05C9A, MC68HCL05C9A, MC68HSC05C9A General Release Specification
HC05E5GRS/D, MC68HC05E5 General Release Specification
HC05PL4GRS/D, MC68HC05PL4 General Release Specification
HC05RC18GRS/D, 68HC05RC9/68HC05RC18 General Release Specification
HC08AS32GRS/D, 68HC08AS32 General Release Specification
HC705MC4GRS/D, MC68HC705MC4 General Release Specification
HC705RC17GRS/D, 68HC705RC17 General Release Specification
HC708KL8GRS/D, 68HC708KL8 General Release Specification
HC708MP16GRS/D, MC68HC708MP 16 General Release Specification
HC908AT32GRS/D, MC68HC908AT32 General Release Specification
HC908EB8GRS/D, MC68HC(9)08EB8 General Release Specification
HDCDM/D, HDC Series Design Reference Guide
LONUG/AD, LonBuilder User's Guide
LP2/D, Portable Power: The Competitive Edge of the 68HC11 – Low Power Design Guidebook
M5CDM/D, M5C Series Design Reference Guide
M68EM05C0UM/D, M68EM05C0 Emulation Module User's Module
M68HC05AG/AD, M68HC05 Applications Guide
M68HC08RG/AD, HC08 Family Reference Guide
M68HC11EVBU/AD2, M68HC11EVBU Universal Evaluation Board User's Manual
M68HC11RM/AD, M68HC11 Reference Manual
M68PRM/D, M6800 Programming Reference Manual
M6805UM/AD3, M6805 HMOS/M146805 CMOS Family User's Manual (1991)
M6809PM/AD, MC6809–MC6809E Microprocessor Programming Manual (1981)
M68000PM/AD, M68000 Family Programmer's Reference Manual
M68000UM/AD, M68000 8–/16–/32–bit Microprocessors User's Manual, Ninth Edition
M68020UM/AD, MC68020/MC68EC020 Microprocessors User's Manual
M68040UM/AD, MC68040, MC68040V, MC68LC040, MC68EC040, MC68EC040V Microprocessors User's Manual
M68060UM/AD, MC68060, MC68LC060, MC68EC060 Microprocessors User's Manual
MC68EC030UM/AD, MC68EC030 32–bit Embedded Controller User's Manual
MC68EN302RM/AD, MC68EN302 Integrated Multiprotocol Processor with Ethernet Reference Manual (Supplement to MC68302UM/AD)
MC68F333UM/AD, MC68F333 User's Manual
MC68HC05CxRG/AD, MC68HC05Cx HCMOS Single–Chip Microcontrollers Programming Reference Guide
MC68HC11A8RG/AD, MC68HC11A8 Programming Reference Guide
MC68HC11C0RG/AD, MC68HC11C0 Programming Reference Guide
MC68HC11D3RG/AD, MC68HC11D3/MC68HC711D3 Programming Reference Guide
MC68HC11ERG/AD, MC68HC11E Programming Reference Guide
MC68HC11F1RG/AD, MC68HC11F1 Programming Reference Guide
MC68HC11K4RG/AD, MC68HC11K4/MC68HC711K4 Programming Reference Guide
MC68HC11KA4RG/AD, MC68HC11KA4/MC68HC711KA4 Programming Reference Guide
MC68HC11L6RG/AD, MC68HCL6/MC68HC711L6 Programming Reference Guide
MC68HC11MRG/AD, M68HC11 M Series Programming Reference Guide
MC68HC11NRG/AD, MC68HC11N Series Programming Reference Guide
MC68HC16Y1UM/AD, MC68HC16Y1 User's Manual
MC68HC16Z2UM/AD, MC68HC16Z2 User's Manual
MC68HC16ZUM/AD, M68HC16 Z Series User's Manual
MC68HC901UM/AD, MC68HC901 Multi–Function Peripheral User's Manual
MC68LC302RM/AD, MC68LC302 Low Power Integrated Multiprotocol Processor Reference Manual
MC68PM302RM/AD, Integrated Multiprotocol Processor with PCMCIA Interface Reference Manual
MC68SC302UM/AD, MC68SC302 Passive ISDN Protocol Engine User's Manual
MC68030UM/AD, MC68030 Enhanced 32–bit MPU User's Manual, third edition
MC68302UM/AD, MC68302 Integrated Multiprotocol Processor User's Manual

Motorola Data and Application Literature: (continued)

User's Manuals (continued)

MC68306UM/AD, MC68306 Integrated EC000 Processor User's Manual
MC68322UM/AD, Bandit: MC68322 Integrated Printer Processor User's Manual
MC68328UM/AD, MC68328 (Dragonball) Integrated Processor User's Manual
MC68330UM/AD, MC68330 Integrated CPU32 Processor Users Manual
MC68331UM/AD, MC68331 User's Manual
MC68332UM/AD, MC68332 User's Manual
MC68340UM/AD, MC68340 Integrated Processor User's Manual
MC68356UM/AD, MC68356 Signal Processing Communications Engine User's Manual
MC68360UM/AD, MC68360 Quad Integrated Communications Controller User's Manual
MC68488UM/AD, MC68488 General Purpose Interface Adapter User's Manual
MC68605UM/AD, MC68605 X.25 Protocol Controller User's Manual
MC68606UM/AD, MC68606 Multi–Link LAPD Protocol Controller User's Manual
MC68824UM/AD, MC68824 Token Bus Products User's Manual
MC68836UM/AD, MC68836 FDDI User's Manual
MC68837UM/AD, MC68837 FDDI User's Manual
MC68838UM/AD, MC68838 FDDI User's Manual
MC68839UM/AD, MC68839 FDDI System Interface User's Manual
MC68840UM/AD, MC68840 Integrated Fiber Distributed Data Interface User's Manual
MC68847UM/AD, MC68847 Quad ELM FDDI User's Manual
MC88100UM/AD, MC88100 RISC Microprocessor User's Manual
MC88110UM/AD, MC88110 Second Generation RISC Microprocessor User's Manual
MC88200UM/AD, MC88200 Cache/Memory Management Unit User's Manual
MC88410UM/AD, MC88410 Secondary Cache Controller User's Manual
MC92005UM/D, MC92005 SBus Slave Interface Controller User's Manual
MCCIRM/AD, Multichannel Communication Interface Reference Manual
MCF5102UM/AD, MCF5102 ColdFire User's Manual
MCF5200PRM/AD, ColdFire Programmer's Reference Manual
MCF5202UM/AD, ColdFire MCF5202 User's Manual
MCUDEVTLDIR/D, Motorola Microcontroller Development Tools Directory
MPAA3UM/D, EasyAnalog Design Software User's Manual
MPCBUSIF/AD, PowerPC Microprocessor Family: the Bus Interface for 32–bit Microprocessors
MPCFPE/AD, PowerPC Microprocessor Family: The Programming Environments
MPCPRG/D, PowerPC Microprocessor Family: The Programmer's Reference Guide
MPCPRGREF/D, PowerPC Microprocessor Family: The Programmer's Pocket Reference Guide
MPC105UM/AD, PowerPC PCI Bridge/Memory Controller User's Manual
MPC601UM/AD, PowerPC 601 – RISC Microprocessor User's Manual
MPC603eUM/AD, PowerPC 603e RISC Microprocessor User's Manual
MPC604UM/AD, PowerPC 604 RISC Microprocessor User's Manual
MPC750UM/AD, MPC750 RISC Microprocessor User's Manual
MPC821UM/AD, MPC821 PowerPC Portable Systems Microprocessor User's Manual
MPC860UM/AD, MPC860 PowerQUICC User's Manual
QADCRM/AD, Queued Analog–to–Digital Converter Reference Manual
QMCSUPPLEMENT/D, QUICC Multichannel Controller User's Manual Supplement
QSMRM/AD, Queued Serial Module Reference Manual
RCPURM/AD, MPC500 Family: RCPU Reference Manual
SCIMRM/AD, Single–Chip Integration Module Reference Manual
SIMRM/AD, System Integration Module Reference Manual
SIURM/AD, MPC500 Family: System Integration Unit Reference Manual
TIM08RM/AD, TIM08 Timer Interface Module Reference Manual
TPURM/AD, M68300 Family Time Processor Unit Reference Manual

Technical Data Services

DK106/D, Scattering Parameter Plotting Utility
DK107/D, Impedance Matching Program
DK202/D, Spice Disk for AN1043/D 3.5 (Mac)
DK305/D, PLL Frequency Planning
DK306/D, PLL Lock–in Time Analysis
SG73/D, Master Selection Guide

Motorola Technical Training Courses

Motorola Technical Training Goes Global — And Multi–lingual

Motorola's Semiconductor Products Sector has gone through some far–reaching changes in the last several months — all the better to serve our customers. Our Technical Training organization, as part of this reorganization, has embarked on a new mission to expand our training programs globally. Our new intent is to be able to support your requests for training from anywhere in the world — for any specific course, in virtually any language, in virtually any location you desire.

Our in–plant courses can be tailored to meet your specific requirements, so that your people have exactly the training you need them to have — to effectively get your new products to market. Open–enrollment courses can be attended by anyone anywhere the classes are scheduled.

Motorola has been serving customer training needs for more than 20 years. Our training organization exists to provide quality training to customers who are in the purchase decision phase, or who have purchased Motorola products, or who are in the process of designing in Motorola microprocessors or microcontrollers.

As part of our commitment to be more responsive to our customers' specific needs, we have expanded our range of training offerings, and have focused on developing courses for all new leading–edge Motorola products.

Motorola Technical Training has broadened its scope to incorporate five major regions worldwide — Northern Europe, Central Europe, Southern Europe, Asia Pacific and the Americas. This will support us in more effectively attaining our goal of providing quality training to our customers anywhere in the world.

Please visit our web site at http://sps.motorola.com/training to see the expanded global training being offered. The site contains a complete and current list of scheduled courses, and offers on–line registration.

Device Index and Subject Index

In Brief . . .

Device Index

The following index lists the device numbers of the products contained in this selector guide and references the page number where each device is described in greater detail.(1) The listing is in a numeric sequence organized in a "computer sort." This means that all the devices listed herein follow a 39 character alphabet. This "new" alphabet starts with a Period, a Dash and a Slash (. – /), followed by the 26 letter alphabet (A thru Z), which is then followed by 10 numbers (0 thru 9).

The ranking or hierarchy of this 39 character alphabet is as follows:

. – / A B C D E F G H I J K L M N O P Q R S T U V W X Y Z 0 1 2 3 4 5 6 7 8 9

Therefore, if you are looking for a device starting with a letter of the alphabet like an MC1741CP, it would appear before a device starting with a number, such as 2N1132.

To find a device in this index, start with the first character of the device and find that section of the index; next move to the second character in the device number, and move to that character within the same portion of the listing; and so on until the device number is found. In other words, it is used just like a dictionary, character by character.

For example, to find the 2N6837, go to that section of the listing that begins with the number "2" (Notice that the section follows all devices that begin with a letter of the alphabet or "1"). Next, find that portion of the listing that begins with "2N" (Notice it follows those devices that begin with "2K"). Next, find that portion of the listing that begins with "2N6" (Notice it follows those devices that begin with "2N5"). Continue looking for those portions that begin with the next consecutive character until you have found the entire number.

Because of the way "Computer Sort" works it is not necessary to be concerned with the absolute value or number of characters in a part number, just move across the device part number, left to right, one character at a time until you find the number.

Subject Index

This listing is intended to simplify the identification of products where specific device numbers are not known.

	Page
Device Index	7.1–1
Subject Index	7.2–1

(1) The device numbers contained in this index are for reference only and do not necessarily represent the complete device number necessary to order the device. Contact your local Sales Office or Authorized Distributor for complete ordering information.

Device Index

Device Index	Page
AM26LS30	4.6–5
BAL99LT1	5.1–25
BAS16LT1	5.1–25
BAS16WT1	5.1–25
BAS21LT1	5.1–25
BAS40–04LT1	5.1–23
BAS40–06LT1	5.1–23
BAS40LT1	5.1–23
BAS70–04LT1	5.1–23
BAS70LT1	5.1–23
BAT54ALT1	5.1–23
BAT54LT1	5.1–23
BAT54SLT1	5.1–23
BAT54SWT1	5.1–23
BAT54T1	5.1–23
BAT54WT1	5.1–23
BAV70LT1	5.1–26
BAV70WT1	5.1–26
BAV74LT1	5.1–26
BAV99LT1	5.1–26
BAV99RWT1	5.1–26
BAV99WT1	5.1–26
BAW56LT1	5.1–26
BAW56WT1	5.1–26
BC182	5.1–2
BC212	5.1–2
BC237B	5.1–2
BC307B	5.1–2
BC327	5.1–2
BC328	5.1–2
BC337	5.1–2
BC338	5.1–2
BC368	5.1–4
BC369	5.1–4
BC373	5.1–3
BC489	5.1–4
BC490	5.1–4
BC517	5.1–3
BC546	5.1–2
BC546B	5.1–2
BC547	5.1–2
BC547A	5.1–2
BC547B	5.1–2
BC547C	5.1–2
BC548A	5.1–2
BC548B	5.1–2
BC548C	5.1–2
BC550C	5.1–3
BC556	5.1–2
BC556B	5.1–2
BC557	5.1–2
BC557A	5.1–2
BC557B	5.1–2
BC557C	5.1–2
BC558B	5.1–2
BC560C	5.1–3
BC618	5.1–3
BC639	5.1–4
BC640	5.1–4
BC807–16LT1	5.1–6
BC807–25LT1	5.1–6
BC807–40LT1	5.1–6
BC808–25WT1	5.1–7
BC808–40WT1	5.1–7
BC817–16LT1	5.1–6
BC817–25LT1	5.1–6
BC817–40LT1	5.1–6
BC818–25WT1	5.1–7
BC818–40WT1	5.1–7
BC818WT1	5.1–7
BC846ALT1	5.1–6
BC846AWT1	5.1–7
BC846BLT1	5.1–6
BC846BWT1	5.1–7
BC847ALT1	5.1–6
BC847AWT1	5.1–7
BC847BLT1	5.1–6
BC847BWT1	5.1–7
BC847CLT1	5.1–6
BC847CWT1	5.1–7
BC848ALT1	5.1–6
BC848AWT1	5.1–7
BC848BLT1	5.1–6
BC848BWT1	5.1–7
BC848CLT1	5.1–6
BC848CWT1	5.1–7
BC856ALT1	5.1–6
BC856AWT1	5.1–7
BC856BLT1	5.1–6
BC856BWT1	5.1–7
BC857ALT1	5.1–6
BC857AWT1	5.1–7
BC857BLT1	5.1–6
BC857BWT1	5.1–7
BC858ALT1	5.1–6
BC858AWT1	5.1–7
BC858BLT1	5.1–6
BC858BWT1	5.1–7
BC858CLT1	5.1–6
BC858CWT1	5.1–7
BCP53T1	5.1–11
BCP56T1	5.1–11
BCP68T1	5.1–12
BCP69T1	5.1–12
BD135	5.5–4
BD136	5.5–4
BD139	5.5–4
BD140	5.5–4
BD237	5.5–4
BD238	5.5–4
BD437	5.5–4
BD438	5.5–4
BD440	5.5–4
BD677	5.5–4
BD678	5.5–4
BD679	5.5–4
BD679A	5.5–4
BD680	5.5–4
BD680A	5.5–4
BD681	5.5–4
BD682	5.5–4
BD787	5.5–4
BD788	5.5–4
BD789	5.5–4
BD790	5.5–4
BDW42	5.5–3
BDW47	5.5–3
BDX33C	5.5–3
BDX34C	5.5–3
BDX53C	5.5–3
BDX54C	5.5–3
BF393	5.1–4
BF420	5.1–4
BF421	5.1–4
BF422	5.1–4
BF423	5.1–4
BF493S	5.1–4
BF720T1	5.1–12
BF721T1	5.1–12
BF959	5.1–5
BFR92ALT1	5.9–33
BFR93ALT1	5.9–33
BFS17LT1	5.9–33
BS170	5.1–15
BSP16T1	5.1–12
BSP19AT1	5.1–12
BSP52T1	5.1–12
BSP62T1	5.1–12
BSS63LT1	5.1–11
BSS64LT1	5.1–11
BSS84	5.4–5
BSS84LT1	5.1–17
BSS123LT1	5.1–17
BU407	5.5–3
BUD43B–1	5.5–10, 5.5–12
BUD44D2–1	5.5–12
BUF43B–1	5.5–10
BUH50	5.5–10, 5.5–11
BUH51	5.5–10, 5.5–12
BUH100	5.5–10, 5.5–11
BUH150	5.5–10, 5.5–11
BUL43B	5.5–10, 5.5–11
BUL44	5.5–10, 5.5–11
BUL44D2	5.5–10, 5.5–11
BUL44D2–1	5.5–10
BUL44F	5.5–6, 5.5–10, 5.5–12
BUL45	5.5–3, 5.5–10, 5.5–11
BUL45D2	5.5–10, 5.5–11
BUL45F	5.5–6, 5.5–10, 5.5–12
BUL146	5.5–3, 5.5–10, 5.5–11
BUL146F	5.5–6, 5.5–10, 5.5–12
BUL147	5.5–3, 5.5–10, 5.5–11
BUL147F	5.5–6, 5.5–10, 5.5–12
BUT11AF	5.5–6
BUV20	5.5–7
BUV48A	5.5–10
BUX85	5.5–3
BUX98	5.5–7
BZX84C4V7LT1	5.2–8
BZX84C5V1LT1	5.2–8
BZX84C5V6LT1	5.2–8
BZX84C6V2LT1	5.2–8
BZX84C6V8LT1	5.2–8
BZX84C8V2LT1	5.2–8
BZX84C9V1LT1	5.2–8
BZX84C10LT1	5.2–8
BZX84C12LT1	5.2–8
BZX84C15LT1	5.2–8
BZX84C30LT1	5.2–8
C106A	5.7–3
C106B	5.7–3
C106D	5.7–3
C106F	5.7–3
C106M	5.7–3
CA901	5.9–58

Device Index

Device Index	Page
CA901A	5.9–58
CA912	5.9–58
CA922	5.9–58
CA922A	5.9–58
CA2810C	5.9–54
CA2830C	5.9–54
CA2832C	5.9–54
CA3059	4.3–2
CATHRU	5.9–58
D44C12	5.5–3
D44H11	5.5–3
D44VH10	5.5–3
D45C12	5.5–3
D45H11	5.5–3
D45VH10	5.5–3
DAN222	5.1–26
DAP222	5.1–26
DS0026	4.2–42
DSP56L002	2.1–2
DSP56L007	2.1–3
DSP56L811	2.1–13, 2.1–24
DSP56L811EVM	2.1–24, 2.1–25
DSP56L812	2.1–13, 2.1–14
DSP56000	2.1–2, 2.1–3, 2.1–4, 2.1–6, 2.1–7, 2.1–8, 2.1–9, 2.1–10, 2.1–15
DSP56001A	2.1–2
DSP56002	2.1–2, 2.1–17
DSP56002ADS	2.1–17
DSP56002EVM	2.1–17, 2.1–18
DSP56004	2.1–2, 2.1–3, 2.1–19
DSP56004ROM	2.1–19
DSP56007	2.1–2, 2.1–3, 2.1–18, 2.1–19
DSP56007EVM	2.1–18, 2.1–19
DSP56009	2.1–2, 2.1–19, 2.1–20
DSP56009EVM	2.1–19, 2.1–20
DSP56011	2.1–2, 2.1–3
DSP56100	2.1–2, 2.1–4, 2.1–5, 2.1–15
DSP56156	2.1–4
DSP56167	2.1–5
DSP56300	2.1–6, 2.1–7, 2.1–8, 2.1–9, 2.1–10, 2.1–11, 2.1–12, 2.1–21, 2.1–22
DSP56301	2.1–6, 2.1–7
DSP56302	2.1–7, 2.1–8, 2.1–21
DSP56302EVM	2.1–21
DSP56303	2.1–8, 2.1–9, 2.1–12, 2.1–22
DSP56303EVM	2.1–22
DSP56304	2.1–9
DSP56305	2.1–10
DSP56600	2.1–11, 2.1–12, 2.1–23
DSP56602	2.1–11
DSP56603	2.1–23
DSP56603EVM	2.1–23
DSP56800	2.1–13, 2.1–14, 2.1–15, 2.1–24
DSP96002	2.1–2, 2.1–15
DTA114YE	5.1–9
DTA143EE	5.1–9
DTC114TE	5.1–9
DTC114YE	5.1–9
ICTE–5/MPTE–5	5.2–2
IRF530	5.4–7
IRF540	5.4–7
J110	5.1–14
J112	5.1–14
J308	5.1–13
J309	5.1–13
J310	5.1–13
L4949	4.9–2, 4.9–13
L4949D	4.2–10, 4.9–13
L4949N	4.2–10, 4.9–13
LF347	4.1–4
LF347B	4.1–4
LF351	4.1–2
LF353	4.1–3
LF411C	4.1–2
LF412C	4.1–3
LF442C	4.1–3
LF444C	4.1–4
LM201A	4.1–2
LM211	4.1–9
LM224	4.1–4
LM224A	4.1–4
LM239	4.1–9
LM239A	4.1–9
LM258	4.1–3
LM285Z–1.2	4.4–2
LM285Z–2.5	4.4–2
LM301A	4.1–2
LM308A	4.1–2
LM311	4.1–9
LM317	4.2–5
LM317B	4.2–4, 4.2–5
LM317L	4.2–4
LM317M	4.2–5
LM323	4.2–3
LM323A	4.2–3
LM324	4.1–4
LM324A	4.1–4
LM337	4.2–5
LM337B	4.2–5
LM337M	4.2–5
LM339	4.1–9
LM339A	4.1–9
LM340	4.2–3
LM340–24	4.2–3
LM340A–XX	4.2–3
LM350	4.2–5
LM350B	4.2–5
LM358	4.1–3
LM385BZ–1.2	4.4–2
LM385BZ–2.5	4.4–2
LM385Z–1.2	4.4–2
LM385Z–2.5	4.4–2
LM393	4.1–9
LM393A	4.1–9
LM833	4.1–3
LM2574N–3.3	4.2–15
LM2574N–5	4.2–15
LM2574N–12	4.2–15
LM2574N–15	4.2–15
LM2574N–ADJ	4.2–15
LM2574N–XX	4.2–20
LM2575D2T–3.3	4.2–15
LM2575D2T–5	4.2–15
LM2575D2T–12	4.2–15
LM2575D2T–15	4.2–15
LM2575D2T–ADJ	4.2–15
LM2575D2T–XX	4.2–21
LM2575T–3.3	4.2–15, 4.2–16
LM2575T–5	4.2–15, 4.2–16
LM2575T–12	4.2–15, 4.2–16
LM2575T–15	4.2–15, 4.2–16
LM2575T–ADJ	4.2–15, 4.2–16
LM2575T–XX	4.2–21
LM2575TV–3.3	4.2–15
LM2575TV–5	4.2–15
LM2575TV–12	4.2–15
LM2575TV–15	4.2–15
LM2575TV–ADJ	4.2–15
LM2575TV–XX	4.2–21
LM2576D2T–3.3	4.2–16
LM2576D2T–5	4.2–16
LM2576D2T–12	4.2–16
LM2576D2T–15	4.2–16
LM2576D2T–ADJ	4.2–16
LM2576D2T–XX	4.2–21
LM2576T–XX	4.2–21
LM2576TV–3.3	4.2–16
LM2576TV–5	4.2–16
LM2576TV–12	4.2–16
LM2576TV–15	4.2–16
LM2576TV–ADJ	4.2–16
LM2576TV–XX	4.2–21
LM2901	4.1–9
LM2901V	4.1–9
LM2902	4.1–5
LM2902V	4.1–5
LM2903	4.1–9
LM2903V	4.1–9
LM2904	4.1–4
LM2904V	4.1–4
LM2931 Series	4.9–2
LM2931	4.2–2, 4.2–3
LM2931A	4.2–3
LM2931A–5.0	4.2–2
LM2931C	4.2–4
LM2935	4.2–4, 4.9–2
LP2950AC	4.2–2, 4.2–3
LP2950C	4.2–2, 4.2–3
LP2951AC	4.2–4
LP2951C	4.2–4
M1MA141KT1	5.1–25
M1MA141WAT1	5.1–26
M1MA141WKT1	5.1–26
M1MA142KT1	5.1–25
M1MA142WAT1	5.1–26
M1MA142WKT1	5.1–26
M1MA151AT1	5.1–25
M1MA151KT1	5.1–25
M1MA151WAT1	5.1–26
M1MA151WKT1	5.1–26
M1MA174T1	5.1–25
M68HC05BPGMR	2.6–23
M68HC05C5EVS	2.6–23
M68HC05C9EVS	2.6–23
M68HC05D32EVS	2.6–23
M68HC05E1EVS	2.6–23
M68HC05F6EVM	2.6–23
M68HC05F8EVM	2.6–23
M68HC05G1EVM	2.6–23

Device Index

Device Index	Page
M68HC05G9EVM	2.6–23
M68HC05G10EVM	2.6–23
M68HC05H2EVS	2.6–23
M68HC05I8EVS	2.6–23
M68HC05J3EVS	2.6–23
M68HC05L1EVM	2.6–24
M68HC05L2EVS	2.6–24
M68HC05L4EVS	2.6–24
M68HC05L5EVS	2.6–24
M68HC05L9EVM2	2.6–24
M68HC05L10EVM	2.6–24
M68HC05L11EVM	2.6–24
M68HC05M4EVM	2.6–24
M68HC05P3EVS	2.6–24
M68HC05P8EVS	2.6–23, 2.6–24
M68HC05P9EVS	2.6–24
M68HC05PGMR–2	2.6–23
M68HC05SCEVS	2.6–24
M68HC05T2EVS	2.6–24
M68HC05T4EVM	2.6–24
M68HC05T7EVM	2.6–24
M68HC05T12EVM	2.6–24
M68HC05X4EVS	2.6–24
M68HC05X16EVS	2.6–23, 2.6–24
M68HC11EVB	2.6–24
M68HC11EVB2	2.6–24
M68HC11EVBU	2.6–24
M68HC11EVM	2.6–24
M68HC705F8PGMR	2.6–23
M68HC705G1PGMR	2.6–23
M68HC705G9PGMR	2.6–23
M68HC705J2PGMR	2.6–23
M68HC705KICS	2.6–23
M68HC705KIGANG	2.6–23
M68HC705L2PGMR	2.6–24
M68HC705L4PGMR	2.6–23, 2.6–24
M68HC705L5PGMR	2.6–24
M68HC705P9PGMR	2.6–24
M68HC705T10PGMR	2.6–24
M68HC705T12PGMR	2.6–24
M68HC705X4PGMR	2.6–24
M68HC705X16PGMR	2.6–24
M68HC711D3EVB	2.6–24
M68MEVB16Z1	2.6–25
M68MEVB333	2.6–25
M68701EVM	2.6–23
M143120EVK	2.7–9, 2.7–12
M143150EVK	2.7–9, 2.7–12
M143204EVK	2.7–9, 2.7–12
M143206EVK	2.7–9, 2.7–12
M143207EVK	2.7–12
M143208EVK	2.7–9, 2.7–12
M143221EVK	2.7–9
M143222EVK	2.7–9
M143223EVK	2.7–9
M143226EVK	2.7–9
M143232EVK	2.7–9
M143235EVK	2.7–9, 2.7–12
MAC08BT1	5.7–7
MAC8D	5.7–9
MAC8M	5.7–9
MAC08MT1	5.7–7
MAC8N	5.7–9
MAC8SD	5.7–9
MAC8SM	5.7–9
MAC8SN	5.7–9
MAC9D	5.7–9
MAC9M	5.7–9
MAC9N	5.7–9
MAC12D	5.7–12
MAC12M	5.7–12
MAC12N	5.7–12
MAC15A6	5.7–12
MAC15A6FP	5.7–12
MAC15A8	5.7–12
MAC15A8FP	5.7–12
MAC15A10	5.7–12
MAC15A10FP	5.7–12
MAC15M	5.7–12
MAC15N	5.7–12
MAC15SD	5.7–12
MAC15SM	5.7–12
MAC15SN	5.7–12
MAC16D	5.7–12
MAC16M	5.7–12
MAC16N	5.7–12
MAC97–8	5.7–7
MAC97A6	5.7–7
MAC97A8	5.7–7
MAC210A8	5.7–11
MAC210A8FP	5.7–11
MAC210A10FP	5.7–11
MAC212A6FP	5.7–11
MAC212A8	5.7–11
MAC212A8FP	5.7–11
MAC212A10FP	5.7–11
MAC218A6FP	5.7–9
MAC218A8	5.7–9
MAC218A10FP	5.7–9
MAC223A6	5.7–13
MAC223A6FP	5.7–13
MAC223A8	5.7–13
MAC223A8FP	5.7–13
MAC223A10	5.7–13
MAC223A10FP	5.7–13
MAC224A6	5.7–13
MAC224A8	5.7–13
MAC224A10	5.7–13
MAC228A4	5.7–10
MAC228A6	5.7–10
MAC228A8	5.7–10
MAC320A8FP	5.7–13
MBD110DWT1	5.1–23
MBD301	5.1–22, 5.1–23
MBD330DWT1	5.1–23
MBD701	5.1–22, 5.1–23
MBD770DWT1	5.1–23
MBR160	5.6–5
MBR340	5.6–5
MBR360	5.6–5
MBR0520LT1	5.6–3, 5.6–4
MBR0520LT3	5.6–3, 5.6–4
MBR0530T1	5.6–4
MBR0530T3	5.6–4
MBR0540T1	5.6–4
MBR0540T3	5.6–4
MBR745	5.6–5
MBR1045	5.6–5
MBR1060	5.6–5
MBR1100	5.6–5
MBR1545CT	5.6–5
MBR1645	5.6–5
MBR2030CTL	5.6–3, 5.6–5
MBR2045CT	5.6–5
MBR2060CT	5.6–5
MBR2515L	5.6–3, 5.6–5
MBR2535CTL	5.6–3, 5.6–5
MBR2545CT	5.6–5
MBR3045PT	5.6–6
MBR3045ST	5.6–5
MBR3045WT	5.6–6
MBR3100	5.6–5
MBR4015LWT	5.6–6
MBR4015WT	5.6–3
MBR4045PT	5.6–6
MBR4045WT	5.6–6
MBR5025L	5.6–3, 5.6–6
MBR6045PT	5.6–6
MBR6045WT	5.6–6
MBR7030WT	5.6–6
MBR10100	5.6–5
MBR20100CT	5.6–5
MBR20200CT	5.6–5
MBRA130LT3	5.6–4
MBRA140T3	5.6–4
MBRB1545CT	5.6–4
MBRB2060CT	5.6–4
MBRB2515L	5.6–3, 5.6–4
MBRB2535CTL	5.6–3, 5.6–4
MBRB2535CTL1	5.6–6
MBRB2545CT	5.6–4
MBRB3030CT	5.6–4
MBRB3030CT1	5.6–6
MBRB3030CTL	5.6–3, 5.6–4
MBRB4030	5.6–4
MBRB20100CT	5.6–4
MBRB20100CT1	5.6–6
MBRB20200CT	5.6–4
MBRB30100CT–001	5.6–6
MBRD360	5.6–4
MBRD640CT	5.6–4
MBRD660CT	5.6–4
MBRD835L	5.6–3, 5.6–4
MBRD1035CTL	5.6–3, 5.6–4
MBRD3100	5.6–4
MBRF745	5.6–6
MBRF1045	5.6–6
MBRF1545CT	5.6–5
MBRF2045CT	5.6–5
MBRF2060CT	5.6–5
MBRF2545CT	5.6–5
MBRF20100CT	5.6–5
MBRF20200CT	5.6–5
MBRM120T3	5.6–4
MBRM140T3	5.6–4
MBRP20030CTL	5.6–3, 5.6–7
MBRP20035L	5.6–3, 5.6–7
MBRP20045CT	5.6–7
MBRP20045L	5.6–3, 5.6–7
MBRP20060CT	5.6–7
MBRP30035L	5.6–3, 5.6–7
MBRP30045CT	5.6–7
MBRP30060CT	5.6–7
MBRP40045CTL	5.6–3, 5.6–7
MBRP60035CTL	5.6–3, 5.6–7

Device Index

Device Index	Page
MBRP200100L	5.6–3, 5.6–7
MBRP400100CTL	5.6–3, 5.6–7
MBRS130LT3	5.6–3, 5.6–4
MBRS140T3	5.6–4
MBRS240LT3	5.6–4
MBRS340T3	5.6–4
MBRS360T3	5.6–4
MBRS1100T3	5.6–4
MBRV7030CTL	5.6–4
MBS4991	5.7–14
MBS4992	5.7–14
MBS4993	5.7–14
MBT3904DW1T1	5.1–7
MBT3904DW9T1	5.1–7
MBT3906DW1T1	5.1–7, 5.1–8
MBT3906DW9T1	5.1–7
MC10E016	3.1–15
MC10E101	3.1–23
MC10E104	3.1–23
MC10E107	3.1–23
MC10E111	3.1–12
MC10E112	3.1–25
MC10E116	3.1–31
MC10E122	3.1–25
MC10E131	3.1–18
MC10E136	3.1–14
MC10E137	3.1–15
MC10E141	3.1–33
MC10E142	3.1–33
MC10E143	3.1–18
MC10E150	3.1–26
MC10E151	3.1–18
MC10E154	3.1–26
MC10E155	3.1–26
MC10E156	3.1–26
MC10E157	3.1–29
MC10E158	3.1–27
MC10E160	3.1–30
MC10E163	3.1–27
MC10E164	3.1–27
MC10E166	3.1–14
MC10E167	3.1–18
MC10E171	3.1–27
MC10E175	3.1–26
MC10E193	3.1–30
MC10E195	3.1–31
MC10E196	3.1–31
MC10E197	3.1–27
MC10E211	3.1–12
MC10E212	3.1–32
MC10E241	3.1–33
MC10E256	3.1–26
MC10E336	3.1–10
MC10E337	3.1–10
MC10E404	3.1–23
MC10E411	3.1–13
MC10E416	3.1–31
MC10E431	3.1–18
MC10E445	3.1–14
MC10E446	3.1–14
MC10E451	3.1–18
MC10E452	3.1–18
MC10E457	3.1–29
MC10E1651	3.1–14
MC10E1652	3.1–14
MC10EL01	3.1–22
MC10EL04	3.1–22
MC10EL05	3.1–22
MC10EL07	3.1–22
MC10EL11	3.1–12
MC10EL12	3.1–25
MC10EL15	3.1–12
MC10EL16	3.1–31
MC10EL31	3.1–18
MC10EL32	3.1–17
MC10EL33	3.1–17
MC10EL34	3.1–13
MC10EL35	3.1–19
MC10EL51	3.1–18
MC10EL52	3.1–18
MC10EL57	3.1–27
MC10EL58	3.1–27
MC10EL89	3.1–17
MC10ELT20	3.1–35
MC10ELT21	3.1–34
MC10ELT22	3.1–34
MC10ELT24	3.1–35
MC10ELT25	3.1–34
MC10ELT28	3.1–35
MC10H16	3.1–14
MC10H100	3.1–24
MC10H101	3.1–23
MC10H102	3.1–24
MC10H103	3.1–24
MC10H104	3.1–21
MC10H105	3.1–23
MC10H106	3.1–24
MC10H107	3.1–23
MC10H109	3.1–23
MC10H113	3.1–23
MC10H115	3.1–31
MC10H116	3.1–32
MC10H117	3.1–23
MC10H118	3.1–23
MC10H119	3.1–22
MC10H121	3.1–22
MC10H123	3.1–12
MC10H124	3.1–35
MC10H125	3.1–35
MC10H130	3.1–26
MC10H131	3.1–19
MC10H135	3.1–19
MC10H136	3.1–16
MC10H141	3.1–33
MC10H145	3.1–32
MC10H158	3.1–29
MC10H159	3.1–29
MC10H160	3.1–30
MC10H161	3.1–16
MC10H162	3.1–16
MC10H164	3.1–27
MC10H165	3.1–18
MC10H166	3.1–14
MC10H171	3.1–17
MC10H172	3.1–17
MC10H173	3.1–28
MC10H174	3.1–28
MC10H175	3.1–27
MC10H176	3.1–19
MC10H179	3.1–9
MC10H180	3.1–9
MC10H181	3.1–9
MC10H186	3.1–19
MC10H188	3.1–25
MC10H189	3.1–25
MC10H209	3.1–23
MC10H210	3.1–24
MC10H211	3.1–24
MC10H330	3.1–12
MC10H332	3.1–10
MC10H334	3.1–12
MC10H350	3.1–35
MC10H351	3.1–35
MC10H352	3.1–35
MC10H423	3.1–12
MC10H424	3.1–35
MC10H600	3.1–34
MC10H601	3.1–34
MC10H602	3.1–34
MC10H603	3.1–34
MC10H604	3.1–35
MC10H605	3.1–35
MC10H606	3.1–35
MC10H607	3.1–35
MC10H640	3.1–13
MC10H641	3.1–13
MC10H642	3.1–13
MC10H643	3.1–13
MC10H644	3.1–13
MC10H645	3.1–13
MC10H646	3.1–13
MC10H660	3.1–27
MC10H680	3.1–34
MC10H681	3.1–34
MC10SX1125	3.1–9
MC10SX1130	3.1–13, 3.1–17
MC10SX1189	3.1–13
MC14C88B	4.6–5
MC14C89AB	4.6–5
MC14C89B	4.6–5
MC14LC5447	4.7–43
MC14LC5447DW	4.7–43
MC14LC5447P	4.7–43
MC14LC5472	4.7–18
MC14LC5480	4.7–15, 4.7–18, 4.7–42
MC14LC5480DW	4.7–15
MC14LC5480EVK	4.7–18
MC14LC5480SD	4.7–15
MC14LC5540	4.7–16, 4.7–17, 4.7–18
MC14LC5540DW	4.7–16
MC14LC5540FU	4.7–16
MC14LC5540P	4.7–16
MC26LS30	4.6–5
MC44xxx Family	4.8–6
MC54HC00A	3.1–22
MC54HC02A	3.1–24
MC54HC04A	3.1–25
MC54HC08A	3.1–21
MC54HC14A	3.1–32
MC54HC27	3.1–24
MC54HC32A	3.1–24
MC54HC74A	3.1–19
MC54HC86	3.1–23

Device Index

Device Index	Page
MC54HC86A	3.1–23
MC54HC132A	3.1–32
MC54HC138A	3.1–16
MC54HC139A	3.1–17
MC54HC154	3.1–16
MC54HC157A	3.1–28
MC54HC158	3.1–28
MC54HC160	3.1–15
MC54HC161A	3.1–15
MC54HC162	3.1–15
MC54HC163A	3.1–15
MC54HC164	3.1–33
MC54HC164A	3.1–33
MC54HC165	3.1–33
MC54HC174A	3.1–19
MC54HC175	3.1–21
MC54HC175A	3.1–21
MC54HC240A	3.1–11
MC54HC241A	3.1–11
MC54HC244A	3.1–12
MC54HC245A	3.1–12
MC54HC251	3.1–27
MC54HC259	3.1–16
MC54HC273A	3.1–20
MC54HC354	3.1–27
MC54HC365	3.1–10
MC54HC366	3.1–10
MC54HC367	3.1–10
MC54HC373A	3.1–27
MC54HC374A	3.1–20
MC54HC390	3.1–15
MC54HC393	3.1–15
MC54HC533A	3.1–27
MC54HC534A	3.1–20
MC54HC540A	3.1–11
MC54HC541A	3.1–11
MC54HC563A	3.1–27
MC54HC573A	3.1–27
MC54HC574A	3.1–20
MC54HC589	3.1–33
MC54HC589A	3.1–33
MC54HC595A	3.1–33
MC54HC597	3.1–33
MC54HC597A	3.1–33
MC54HC640A	3.1–11
MC54HC646	3.1–12
MC54HC688	3.1–14
MC54HC4016	3.1–29
MC54HC4040A	3.1–14
MC54HC4049	3.1–25
MC54HC4050	3.1–25
MC54HC4051	3.1–27
MC54HC4053	3.1–29
MC54HC4060	3.1–14
MC54HC4060A	3.1–14
MC54HC4066	3.1–29
MC54HC4351	3.1–27
MC54HC4353	3.1–29
MC54HC4538A	3.1–29
MC54HCT00A	3.1–22
MC54HCT08A	3.1–21
MC54HCT14A	3.1–32
MC54HCT32A	3.1–24
MC54HCT161A	3.1–15
MC54HCT163A	3.1–15
MC54HCT241A	3.1–11
MC54HCT244A	3.1–11
MC54HCT245A	3.1–10
MC54HCT373A	3.1–26
MC54HCT374A	3.1–20
MC54HCT574A	3.1–20
MC68B00	2.6–10
MC68B09	2.6–10
MC68B09E	2.6–10
MC68B10	2.6–10
MC68B21	2.6–10
MC68B40	2.6–10
MC68B44	2.6–10
MC68B50	2.6–10
MC68B52	2.6–10
MC68B54	2.6–10
MC68B488	2.6–10
MC68F333	2.6–25
MC68HC05	4.7–19
MC68HC05B4	2.5–6, 2.6–23
MC68HC05B6	2.5–6, 2.6–23
MC68HC05B8	2.5–6, 2.6–23
MC68HC05B16	2.5–6, 2.6–23
MC68HC05BD3	2.5–6
MC68HC05BD5	2.5–6
MC68HC05C4	2.6–23
MC68HC05C4A	2.5–6, 2.6–23
MC68HC05C5	2.5–6, 2.6–23
MC68HC05C8	2.6–23
MC68HC05C8A	2.5–6
MC68HC05C9	2.6–23
MC68HC05C9A	2.5–6
MC68HC05C12	2.5–6, 2.6–23
MC68HC05CJ4	2.5–6
MC68HC05D9	2.5–6, 2.6–23
MC68HC05D24	2.5–6, 2.6–23
MC68HC05E1	2.5–6, 2.6–23
MC68HC05E6	2.5–6
MC68HC05E16	2.5–6
MC68HC05F5	2.5–6
MC68HC05F6	2.5–6
MC68HC05F8	2.5–7
MC68HC05G1	2.5–7, 2.6–23
MC68HC05G3	2.5–7
MC68HC05J1	2.6–23
MC68HC05J1A	2.5–7
MC68HC05J3	2.5–7
MC68HC05K0	2.5–7
MC68HC05K1	2.5–7
MC68HC05K3	2.5–7
MC68HC05L1	2.5–7
MC68HC05L5	2.5–7, 2.6–24
MC68HC05L7	2.6–24
MC68HC05L9	2.6–24
MC68HC05L10	2.6–24
MC68HC05L16	2.5–7
MC68HC05P1	2.6–24
MC68HC05P1A	2.5–7
MC68HC05P3	2.5–7
MC68HC05P4	2.5–7, 2.6–24
MC68HC05P6	2.5–7, 2.6–24
MC68HC05P7	2.5–7, 2.6–24
MC68HC05P8	2.5–7, 2.6–24
MC68HC05P9	2.5–7, 2.6–24
MC68HC05PE0	2.5–8
MC68HC05SC11	2.5–8
MC68HC05SC21	2.5–8
MC68HC05SC24	2.5–8
MC68HC05SC26	2.5–8
MC68HC05SC27	2.5–8
MC68HC05T1	2.5–8, 2.6–24
MC68HC05T7	2.6–24
MC68HC05T10	2.5–8, 2.6–24
MC68HC05T16	2.5–8
MC68HC05X1	2.5–8
MC68HC05X4	2.5–8
MC68HC05X16	2.5–8
MC68HC05X32	2.5–8
MC68HC11A0	2.6–6, 2.6–24
MC68HC11A1	2.6–6, 2.6–24
MC68HC11A7	2.6–6
MC68HC11A8	2.6–6, 2.6–24
MC68HC11D0	2.6–6, 2.6–24
MC68HC11D3	2.6–6, 2.6–24
MC68HC11E0	2.6–6, 2.6–24
MC68HC11E1	2.6–6, 2.6–24
MC68HC11E2	2.6–24
MC68HC11E8	2.6–6
MC68HC11E9	2.6–6, 2.6–24
MC68HC11ED0	2.6–6
MC68HC11F1	2.6–6, 2.6–25
MC68HC11G5	2.6–25
MC68HC11G7	2.6–25
MC68HC11K0	2.6–7, 2.6–25
MC68HC11K1	2.6–7, 2.6–25
MC68HC11K3	2.6–7
MC68HC11K4	2.6–7, 2.6–25
MC68HC11KA0	2.6–7
MC68HC11KA1	2.6–7
MC68HC11KA3	2.6–7
MC68HC11KA4	2.6–7, 2.6–25
MC68HC11L0	2.6–7, 2.6–25
MC68HC11L1	2.6–7, 2.6–25
MC68HC11L5	2.6–7
MC68HC11L6	2.6–7, 2.6–25
MC68HC11M2	2.6–8, 2.6–25
MC68HC11N4	2.6–25
MC68HC11P2	2.6–25
MC68HC16Y1	2.6–18, 2.6–25
MC68HC16Z1	2.6–18, 2.6–25
MC68HC16Z2	2.6–18, 2.6–25
MC68HC24	2.6–10
MC68HC27	2.6–10
MC68HC68L9	2.6–11
MC68HC705B5	2.5–9, 2.6–23
MC68HC705B16	2.5–9, 2.6–23
MC68HC705BD3	2.5–9
MC68HC705C4A	2.5–9
MC68HC705C8	2.6–23
MC68HC705C8A	2.5–9
MC68HC705C9A	2.5–9
MC68HC705CJ4	2.5–9
MC68HC705D9	2.6–23
MC68HC705E1	2.5–9, 2.6–23
MC68HC705F8	2.5–9
MC68HC705G1	2.5–9, 2.6–23
MC68HC705G4	2.5–9
MC68HC705J1A	2.5–9
MC68HC705J2	2.5–9, 2.6–23
MC68HC705K1	2.5–9

Device Index

Device Index	Page
MC68HC705L5	2.5–10, 2.6–24
MC68HC705L16	2.5–10
MC68HC705P6	2.5–10
MC68HC705P9	2.5–10
MC68HC705SR3	2.5–10
MC68HC705T10	2.5–10
MC68HC705T16	2.5–10
MC68HC705X16	2.6–24
MC68HC711D3	2.6–24
MC68HC711E9	2.6–24
MC68HC711G5	2.6–25
MC68HC711K4	2.6–25
MC68HC711L6	2.6–25
MC68HC711M2	2.6–25
MC68HC711N4	2.6–25
MC68HC711P2	2.6–25
MC68HC811A8	2.6–24
MC68HC811E2	2.6–6, 2.6–24
MC68HCB34	2.6–10
MC74AC00	3.1–22
MC74AC02	3.1–24
MC74AC04	3.1–25
MC74AC05	3.1–25
MC74AC08	3.1–21
MC74AC10	3.1–22
MC74AC11	3.1–22
MC74AC14	3.1–32
MC74AC20	3.1–21
MC74AC32	3.1–24
MC74AC74	3.1–18
MC74AC86	3.1–23
MC74AC109	3.1–19
MC74AC112	3.1–19
MC74AC113	3.1–19
MC74AC125	3.1–12
MC74AC126	3.1–12
MC74AC132	3.1–32
MC74AC138	3.1–16
MC74AC139	3.1–17
MC74AC151	3.1–27
MC74AC153	3.1–28
MC74AC157	3.1–29
MC74AC158	3.1–29
MC74AC160	3.1–16
MC74AC161	3.1–16
MC74AC162	3.1–16
MC74AC163	3.1–16
MC74AC174	3.1–19
MC74AC175	3.1–20
MC74AC190	3.1–16
MC74AC194	3.1–33
MC74AC240	3.1–11
MC74AC241	3.1–11
MC74AC244	3.1–11
MC74AC245	3.1–10
MC74AC251	3.1–27
MC74AC253	3.1–28
MC74AC256	3.1–26
MC74AC257	3.1–28
MC74AC258	3.1–28
MC74AC259	3.1–26
MC74AC273	3.1–20
MC74AC299	3.1–33
MC74AC323	3.1–33
MC74AC350	3.1–33
MC74AC352	3.1–28
MC74AC353	3.1–28
MC74AC373	3.1–26
MC74AC374	3.1–20
MC74AC377	3.1–20
MC74AC378	3.1–18
MC74AC533	3.1–26
MC74AC534	3.1–20
MC74AC540	3.1–11
MC74AC541	3.1–11
MC74AC563	3.1–26
MC74AC564	3.1–20
MC74AC573	3.1–26
MC74AC574	3.1–20
MC74AC620	3.1–10
MC74AC623	3.1–10
MC74AC640	3.1–10
MC74AC643	3.1–10
MC74AC646	3.1–11
MC74AC648	3.1–11
MC74AC652	3.1–11
MC74AC810	3.1–23
MC74AC4020	3.1–14
MC74AC4040	3.1–14
MC74ACT00	3.1–22
MC74ACT02	3.1–24
MC74ACT04	3.1–25
MC74ACT05	3.1–25
MC74ACT08	3.1–21
MC74ACT10	3.1–22
MC74ACT11	3.1–22
MC74ACT14	3.1–32
MC74ACT20	3.1–21
MC74ACT32	3.1–24
MC74ACT74	3.1–18
MC74ACT86	3.1–23
MC74ACT109	3.1–19
MC74ACT112	3.1–19
MC74ACT113	3.1–19
MC74ACT125	3.1–12
MC74ACT126	3.1–12
MC74ACT132	3.1–32
MC74ACT138	3.1–16
MC74ACT139	3.1–17
MC74ACT151	3.1–27
MC74ACT153	3.1–28
MC74ACT157	3.1–29
MC74ACT158	3.1–29
MC74ACT160	3.1–16
MC74ACT161	3.1–16
MC74ACT162	3.1–16
MC74ACT163	3.1–16
MC74ACT174	3.1–19
MC74ACT175	3.1–20
MC74ACT194	3.1–33
MC74ACT240	3.1–11
MC74ACT241	3.1–11
MC74ACT244	3.1–11
MC74ACT245	3.1–10
MC74ACT251	3.1–27
MC74ACT253	3.1–28
MC74ACT256	3.1–26
MC74ACT257	3.1–28
MC74ACT258	3.1–28
MC74ACT259	3.1–26
MC74ACT273	3.1–20
MC74ACT299	3.1–33
MC74ACT323	3.1–33
MC74ACT350	3.1–33
MC74ACT352	3.1–28
MC74ACT353	3.1–28
MC74ACT373	3.1–26
MC74ACT374	3.1–20
MC74ACT377	3.1–20
MC74ACT378	3.1–18
MC74ACT521	3.1–14
MC74ACT533	3.1–26
MC74ACT534	3.1–20
MC74ACT540	3.1–11
MC74ACT541	3.1–11
MC74ACT563	3.1–26
MC74ACT564	3.1–20
MC74ACT573	3.1–26
MC74ACT574	3.1–20
MC74ACT620	3.1–10
MC74ACT623	3.1–10
MC74ACT640	3.1–10
MC74ACT643	3.1–10
MC74ACT646	3.1–11
MC74ACT648	3.1–11
MC74ACT652	3.1–11
MC74ACT810	3.1–23
MC74F00	3.1–22
MC74F02	3.1–24
MC74F04	3.1–25
MC74F08	3.1–21
MC74F10	3.1–22
MC74F11	3.1–22
MC74F13	3.1–32
MC74F14	3.1–32
MC74F20	3.1–21
MC74F21	3.1–21
MC74F32	3.1–24
MC74F37	3.1–21
MC74F38	3.1–22
MC74F40	3.1–21
MC74F51	3.1–23
MC74F64	3.1–22
MC74F74	3.1–19
MC74F85	3.1–14
MC74F86	3.1–23
MC74F109	3.1–19
MC74F112	3.1–19
MC74F125	3.1–12
MC74F126	3.1–12
MC74F132	3.1–32
MC74F138	3.1–16
MC74F139	3.1–17
MC74F148	3.1–18
MC74F151	3.1–27
MC74F153	3.1–28
MC74F157A	3.1–28
MC74F158A	3.1–28
MC74F160A	3.1–15
MC74F161A	3.1–15
MC74F162A	3.1–15
MC74F163A	3.1–15
MC74F164	3.1–33
MC74F168	3.1–14
MC74F169	3.1–14

Device Index

Device Index	Page
MC74F174	3.1–19
MC74F175	3.1–20
MC74F181	3.1–9
MC74F182	3.1–9
MC74F194	3.1–33
MC74F195	3.1–33
MC74F240	3.1–11
MC74F241	3.1–11
MC74F242	3.1–12
MC74F243	3.1–12
MC74F244	3.1–11
MC74F245	3.1–10
MC74F251	3.1–27
MC74F253	3.1–28
MC74F256	3.1–26
MC74F257A	3.1–29
MC74F258A	3.1–29
MC74F259	3.1–26
MC74F269	3.1–15
MC74F280	3.1–30
MC74F283	3.1–9
MC74F299	3.1–33
MC74F323	3.1–33
MC74F350	3.1–33
MC74F352	3.1–28
MC74F353	3.1–28
MC74F365	3.1–10
MC74F366	3.1–10
MC74F367	3.1–10
MC74F368	3.1–10
MC74F373	3.1–26
MC74F374	3.1–20
MC74F377	3.1–20
MC74F378	3.1–32
MC74F379	3.1–21
MC74F381	3.1–9
MC74F382	3.1–9
MC74F398	3.1–29
MC74F399	3.1–29
MC74F521	3.1–14
MC74F533	3.1–26
MC74F534	3.1–20
MC74F537	3.1–16
MC74F538	3.1–16
MC74F539	3.1–16
MC74F544	3.1–11
MC74F568	3.1–14
MC74F569	3.1–14
MC74F574	3.1–20
MC74F579	3.1–15
MC74F620	3.1–11
MC74F623	3.1–11
MC74F640	3.1–11
MC74F646	3.1–11
MC74F657A	3.1–10
MC74F657B	3.1–10
MC74F779	3.1–15
MC74F803	3.1–13
MC74F823	3.1–10
MC74F827	3.1–10
MC74F828	3.1–10
MC74F1245	3.1–10
MC74F1803	3.1–13
MC74F2245	3.1–34
MC74F3893A	3.1–34

Device Index	Page
MC74HC00A	3.1–22
MC74HC02A	3.1–24
MC74HC03A	3.1–22
MC74HC04A	3.1–25
MC74HC08A	3.1–21
MC74HC10	3.1–22
MC74HC11	3.1–22
MC74HC14A	3.1–32
MC74HC20	3.1–21
MC74HC27	3.1–24
MC74HC30	3.1–21
MC74HC32A	3.1–24
MC74HC42	3.1–16
MC74HC51	3.1–22
MC74HC58	3.1–22
MC74HC73	3.1–19
MC74HC74A	3.1–19
MC74HC75	3.1–26
MC74HC76	3.1–19
MC74HC85	3.1–14
MC74HC86	3.1–23
MC74HC86A	3.1–23
MC74HC107	3.1–19
MC74HC109	3.1–19
MC74HC112	3.1–19
MC74HC125A	3.1–12
MC74HC126A	3.1–12
MC74HC132A	3.1–32
MC74HC133	3.1–21
MC74HC137	3.1–16
MC74HC138A	3.1–16
MC74HC139A	3.1–17
MC74HC147	3.1–18
MC74HC151	3.1–27
MC74HC153	3.1–28
MC74HC154	3.1–16
MC74HC157A	3.1–28
MC74HC158	3.1–28
MC74HC158A	3.1–28
MC74HC160	3.1–15
MC74HC161A	3.1–15
MC74HC162	3.1–15
MC74HC163	3.1–15
MC74HC164	3.1–33
MC74HC164A	3.1–33
MC74HC165	3.1–33
MC74HC173	3.1–21
MC74HC174A	3.1–19
MC74HC175	3.1–21
MC74HC175A	3.1–21
MC74HC194	3.1–33
MC74HC195	3.1–33
MC74HC237	3.1–16
MC74HC240A	3.1–11
MC74HC241A	3.1–11
MC74HC242	3.1–12
MC74HC244A	3.1–12
MC74HC245A	3.1–12
MC74HC251	3.1–27
MC74HC253	3.1–28
MC74HC257	3.1–28
MC74HC259	3.1–16
MC74HC273A	3.1–20
MC74HC280	3.1–30
MC74HC299	3.1–33

Device Index	Page
MC74HC354	3.1–27
MC74HC365	3.1–10
MC74HC366	3.1–10
MC74HC367	3.1–10
MC74HC368	3.1–10
MC74HC373A	3.1–27
MC74HC374A	3.1–20
MC74HC390	3.1–15
MC74HC393	3.1–15
MC74HC533A	3.1–27
MC74HC534A	3.1–20
MC74HC540A	3.1–11
MC74HC541A	3.1–11
MC74HC563A	3.1–27
MC74HC564A	3.1–20
MC74HC573A	3.1–27
MC74HC574A	3.1–20
MC74HC589	3.1–33
MC74HC589A	3.1–33
MC74HC595A	3.1–33
MC74HC597	3.1–33
MC74HC597A	3.1–33
MC74HC640A	3.1–11
MC74HC646	3.1–12
MC74HC688	3.1–14
MC74HC4002	3.1–24
MC74HC4016	3.1–29
MC74HC4017	3.1–15
MC74HC4020A	3.1–14
MC74HC4024	3.1–29
MC74HC4040A	3.1–14
MC74HC4046A	3.1–35
MC74HC4049	3.1–25
MC74HC4050	3.1–25
MC74HC4051	3.1–27
MC74HC4052	3.1–28
MC74HC4053	3.1–29
MC74HC4060	3.1–14
MC74HC4060A	3.1–14
MC74HC4066	3.1–29
MC74HC4075	3.1–25
MC74HC4078	3.1–23
MC74HC4316	3.1–29
MC74HC4351	3.1–27
MC74HC4353	3.1–29
MC74HC4511	3.1–17
MC74HC4514	3.1–16
MC74HC4538A	3.1–29
MC74HC4851A	3.1–27
MC74HC4852A	3.1–27
MC74HC4853A	3.1–27
MC74HC7266	3.1–23
MC74HC7266A	3.1–23
MC74HCT00A	3.1–22
MC74HCT04A	3.1–25
MC74HCT08A	3.1–21
MC74HCT14A	3.1–32
MC74HCT32A	3.1–24
MC74HCT74A	3.1–19
MC74HCT138A	3.1–16
MC74HCT157A	3.1–28
MC74HCT161A	3.1–15
MC74HCT163A	3.1–15
MC74HCT174A	3.1–19
MC74HCT240A	3.1–11

Device Index

Device Index	Page
MC74HCT241A	3.1–11
MC74HCT244A	3.1–11
MC74HCT245A	3.1–10
MC74HCT273A	3.1–20
MC74HCT373A	3.1–26
MC74HCT374A	3.1–20
MC74HCT541A	3.1–11
MC74HCT573A	3.1–27
MC74HCT574A	3.1–20
MC74HCU04	3.1–25
MC74HCU04A	3.1–25
MC74LCX00	3.1–21
MC74LCX02	3.1–24
MC74LCX04	3.1–25
MC74LCX08	3.1–21
MC74LCX32	3.1–24
MC74LCX86	3.1–23
MC74LCX125	3.1–9
MC74LCX138	3.1–17
MC74LCX157	3.1–28
MC74LCX240	3.1–9
MC74LCX244	3.1–9
MC74LCX245	3.1–34
MC74LCX373	3.1–26
MC74LCX374	3.1–20
MC74LCX540	3.1–9
MC74LCX541	3.1–9
MC74LCX573	3.1–26
MC74LCX574	3.1–20
MC74LCX652	3.1–34
MC74LCX2952	3.1–34
MC74LCX16240A	3.1–9
MC74LCX16244	3.1–9
MC74LCX16245	3.1–34
MC74LCX16373	3.1–26
MC74LCX16374	3.1–20
MC74LCX16500	3.1–34
MC74LCX16501	3.1–34
MC74LCX16543A	3.1–34
MC74LVQ00	3.1–21
MC74LVQ04	3.1–25
MC74LVQ32	3.1–24
MC74LVQ125	3.1–10
MC74LVQ138	3.1–17
MC74LVQ240	3.1–10
MC74LVQ244	3.1–9
MC74LVQ245	3.1–34
MC74LVQ373	3.1–26
MC74LVQ374	3.1–20
MC74LVQ541	3.1–9
MC74LVQ573	3.1–26
MC74LVQ574	3.1–20
MC74LVQ646	3.1–34
MC74LVQ652	3.1–34
MC74LVX4245	3.1–34
MC74VHC02	3.1–24
MC74VHC04	3.1–25
MC74VHC08	3.1–21
MC74VHC14	3.1–32
MC74VHC32	3.1–24
MC74VHC74	3.1–19
MC74VHC125	3.1–12
MC74VHC138	3.1–16
MC74VHC157	3.1–28
MC74VHC244	3.1–12
MC74VHC245	3.1–12
MC74VHC373	3.1–27
MC74VHC374	3.1–20
MC74VHC541	3.1–11
MC74VHC573	3.1–27
MC74VHC574	3.1–20
MC74VHC595	3.1–33
MC78BC00	4.2–6
MC78BC00N	4.2–6
MC78BC30NTR	4.2–6
MC78BC33NTR	4.2–6
MC78BC50NTR	4.2–6
MC78FC00	4.2–6
MC78FC00H	4.2–6
MC78FC30HT1	4.2–6
MC78FC33HT1	4.2–6
MC78FC40HT1	4.2–6
MC78FC40NTR	4.2–6
MC78FC50HT1	4.2–6
MC78L24AB	4.2–2
MC78L24AC	4.2–2
MC78L24C	4.2–2
MC78LC00	4.2–5
MC78LC00H	4.2–5
MC78LC00N	4.2–5
MC78LC30HT1	4.2–5
MC78LC30NTR	4.2–5
MC78LC33HT1	4.2–5
MC78LC33NTR	4.2–5
MC78LC40HT1	4.2–5
MC78LC40NTR	4.2–5
MC78LC50HT1	4.2–5
MC78LC50NTR	4.2–5
MC78LXXAB	4.2–2
MC78LXXAC	4.2–2
MC78LXXC	4.2–2
MC78MXXB	4.2–2
MC78MXXC	4.2–2
MC78T15AC	4.2–3
MC78T15C	4.2–3
MC78TXXAC	4.2–3
MC78TXXC	4.2–3
MC78XXAC	4.2–3
MC78XXB	4.2–3
MC78XXC	4.2–3
MC79L05AB	4.2–2
MC79L05AC	4.2–2
MC79L05C	4.2–2
MC79L24AB	4.2–2
MC79L24AC	4.2–2
MC79L24C	4.2–2
MC79LXXAB	4.2–2
MC79LXXAC	4.2–2
MC79LXXC	4.2–2
MC79MXXB	4.2–2
MC79MXXC	4.2–2
MC79XXAC	4.2–3
MC79XXC	4.2–3
MC88LV926	3.1–13
MC88PL117	3.1–13
MC100E016	3.1–15
MC100E101	3.1–23
MC100E104	3.1–23
MC100E107	3.1–23
MC100E111	3.1–12
MC100E112	3.1–25
MC100E116	3.1–31
MC100E122	3.1–25
MC100E131	3.1–18
MC100E136	3.1–14
MC100E137	3.1–15
MC100E141	3.1–33
MC100E142	3.1–33
MC100E143	3.1–18
MC100E150	3.1–26
MC100E151	3.1–18
MC100E154	3.1–26
MC100E155	3.1–26
MC100E156	3.1–26
MC100E157	3.1–29
MC100E158	3.1–27
MC100E160	3.1–30
MC100E163	3.1–27
MC100E164	3.1–27
MC100E166	3.1–14
MC100E167	3.1–18
MC100E171	3.1–27
MC100E175	3.1–26
MC100E193	3.1–30
MC100E195	3.1–31
MC100E196	3.1–31
MC100E210	3.1–9
MC100E211	3.1–12
MC100E212	3.1–32
MC100E241	3.1–33
MC100E256	3.1–26
MC100E310	3.1–9
MC100E336	3.1–10
MC100E337	3.1–10
MC100E404	3.1–23
MC100E416	3.1–31
MC100E431	3.1–18
MC100E445	3.1–14
MC100E446	3.1–14
MC100E451	3.1–18
MC100E452	3.1–18
MC100E457	3.1–29
MC100EL01	3.1–22
MC100EL04	3.1–22
MC100EL05	3.1–22
MC100EL07	3.1–22
MC100EL11	3.1–12
MC100EL12	3.1–25
MC100EL13	3.1–9
MC100EL14	3.1–12
MC100EL15	3.1–12
MC100EL16	3.1–31
MC100EL17	3.1–31
MC100EL29	3.1–19
MC100EL30	3.1–21
MC100EL31	3.1–18
MC100EL32	3.1–17
MC100EL33	3.1–17
MC100EL34	3.1–13
MC100EL35	3.1–19
MC100EL38	3.1–13
MC100EL39	3.1–13
MC100EL51	3.1–18
MC100EL52	3.1–18
MC100EL56	3.1–28

Device Index

Device Index	Page
MC100EL57	3.1–27
MC100EL58	3.1–27
MC100EL59	3.1–29
MC100EL90	3.1–35
MC100ELT20	3.1–35
MC100ELT21	3.1–34
MC100ELT22	3.1–34
MC100ELT23	3.1–34
MC100ELT24	3.1–35
MC100ELT25	3.1–34
MC100ELT28	3.1–35
MC100H600	3.1–34
MC100H601	3.1–34
MC100H602	3.1–34
MC100H603	3.1–34
MC100H604	3.1–35
MC100H605	3.1–35
MC100H606	3.1–35
MC100H607	3.1–35
MC100H640	3.1–13
MC100H641	3.1–13
MC100H642	3.1–13
MC100H643	3.1–13
MC100H644	3.1–13
MC100H646	3.1–13
MC100H660	3.1–27
MC100H680	3.1–34
MC100H681	3.1–34
MC100LVE111	3.1–12
MC100LVE164	3.1–28
MC100LVE210	3.1–9
MC100LVE222	3.1–13
MC100LVE310	3.1–9
MC100LVEL01	3.1–22
MC100LVEL05	3.1–22
MC100LVEL11	3.1–9
MC100LVEL12	3.1–25
MC100LVEL13	3.1–9
MC100LVEL14	3.1–12
MC100LVEL16	3.1–31
MC100LVEL17	3.1–31
MC100LVEL29	3.1–19
MC100LVEL30	3.1–21
MC100LVEL31	3.1–20
MC100LVEL32	3.1–17
MC100LVEL33	3.1–17
MC100LVEL38	3.1–13
MC100LVEL39	3.1–13
MC100LVEL51	3.1–18
MC100LVEL56	3.1–28
MC100LVEL59	3.1–29
MC100LVEL90	3.1–35
MC100LVEL91	3.1–35
MC100LVEL92	3.1–35
MC100LVELT22	3.1–34
MC100SX1230	3.1–18
MC660	3.1–18
MC661	3.1–18
MC662	3.1–18
MC663	3.1–19
MC664	3.1–20
MC667	3.1–29
MC668	3.1–25
MC669	3.1–18
MC670	3.1–25
MC671	3.1–25
MC672	3.1–25
MC677	3.1–25
MC678	3.1–25
MC830	3.1–21
MC832	3.1–9
MC836	3.1–25
MC837	3.1–25
MC840	3.1–25
MC844	3.1–18
MC845	3.1–18
MC846	3.1–22
MC936	3.1–25
MC937	3.1–25
MC944	3.1–18
MC945	3.1–18
MC946	3.1–22
MC951	3.1–29
MC952	3.1–19
MC953	3.1–19
MC1350	4.1–7, 4.8–3
MC1350D	4.1–7
MC1378	4.8–3
MC1391	4.8–3
MC1403	4.4–2
MC1403A	4.4–2
MC1404P5	4.4–2
MC1404P6	4.4–2
MC1404P10	4.4–2
MC1413	4.6–6
MC1413B	4.6–6
MC1416	4.6–6
MC1416B	4.6–6
MC1436	4.1–2
MC1436C	4.1–2
MC1455BP1	4.10–2
MC1455D	4.10–2
MC1455P1	4.10–2
MC1458	4.1–3
MC1458C	4.1–3
MC1488	4.6–5
MC1489	4.6–5
MC1489A	4.6–5
MC1490	4.1–7
MC1494P	4.10–2
MC1495BP	4.10–2
MC1495D	4.10–2
MC1495P	4.10–2
MC1496	4.7–4, 5.9–14
MC1648	3.1–30, 4.7–49
MC1650	3.1–14
MC1651	3.1–14
MC1658	3.1–29, 4.7–49
MC1660	3.1–23
MC1662	3.1–24
MC1670	3.1–20
MC1672	3.1–23
MC1692	3.1–31
MC1723C	4.2–5
MC1741C	4.1–2
MC1776C	4.1–2
MC2833	4.7–4, 5.9–14
MC3302	4.1–9
MC3303	4.1–5
MC3334	4.9–2
MC3346	4.8–4
MC3356	4.7–2, 5.9–12
MC3357	4.7–3, 5.9–13
MC3358	4.1–3
MC3359	4.7–3, 5.9–13
MC3362	4.7–3, 5.9–13
MC3363	4.7–3, 5.9–13
MC3371	4.7–3, 5.9–13
MC3372	4.7–3, 5.9–13
MC3392	4.9–3, 4.9–8
MC3392DW	4.9–8
MC3392T	4.9–8
MC3392T–1	4.9–8
MC3399	4.9–3
MC3399DW	4.3–3
MC3399T	4.3–3
MC3403	4.1–4
MC3405	4.1–8, 4.1–9
MC3418	4.7–44, 4.7–46
MC3418DW	4.7–44
MC3418P	4.7–44
MC3419	4.7–14
MC3423D	4.2–31
MC3423P1	4.2–31
MC3425	4.2–31
MC3425P1	4.2–31
MC3456P	4.10–2
MC3458	4.1–3
MC3476	4.1–2
MC3479	4.3–9
MC3479FN	4.3–9
MC3479P	4.3–9
MC4016	3.1–16
MC4018	3.1–16
MC4024	3.1–29
MC4044	3.1–17
MC4316	3.1–16
MC4324	3.1–29
MC4344	3.1–17
MC4558AC	4.1–3
MC4558C	4.1–3
MC4741C	4.1–4
MC6801	2.6–10, 2.6–23
MC6801U4	2.6–10, 2.6–23
MC6802	2.6–10
MC6803	2.6–10, 2.6–23
MC6803U4	2.6–10, 2.6–23
MC6805P2	2.6–11
MC6805P6	2.6–11
MC6805R2	2.6–11, 2.6–25
MC6805R3	2.6–11, 2.6–25
MC6805R6	2.6–11
MC6805S2	2.6–11
MC6805S3	2.6–11
MC6805U2	2.6–11
MC6805U3	2.6–11
MC6845	2.6–10
MC7824AC	4.2–3
MC7824B	4.2–3
MC7824C	4.2–3
MC7924C	4.2–3
MC10101	3.1–23
MC10102	3.1–24
MC10103	3.1–24
MC10104	3.1–21

Device Index

Device Index	Page
MC10105	3.1–23
MC10106	3.1–24
MC10107	3.1–23
MC10109	3.1–23
MC10110	3.1–24
MC10111	3.1–24
MC10113	3.1–23
MC10114	3.1–32
MC10115	3.1–31
MC10116	3.1–32
MC10117	3.1–23
MC10121	3.1–22
MC10123	3.1–12
MC10124	3.1–35
MC10125	3.1–35
MC10129	3.1–31
MC10130	3.1–26
MC10131	3.1–19
MC10133	3.1–27
MC10134	3.1–28
MC10135	3.1–19
MC10136	3.1–16
MC10137	3.1–16
MC10138	3.1–15
MC10141	3.1–33
MC10153	3.1–27
MC10154	3.1–15
MC10158	3.1–28
MC10159	3.1–28
MC10160	3.1–30
MC10161	3.1–16
MC10162	3.1–16
MC10163	3.1–17
MC10164	3.1–27
MC10165	3.1–18
MC10166	3.1–14
MC10170	3.1–30
MC10171	3.1–16
MC10172	3.1–17
MC10173	3.1–29
MC10174	3.1–28
MC10175	3.1–27
MC10176	3.1–19
MC10177	3.1–35
MC10178	3.1–15
MC10180	3.1–9
MC10181	3.1–9
MC10186	3.1–19
MC10188	3.1–25
MC10189	3.1–25
MC10190	3.1–35
MC10191	3.1–35
MC10192	3.1–12
MC10193	3.1–17
MC10195	3.1–25
MC10197	3.1–21
MC10198	3.1–29
MC10210	3.1–24
MC10211	3.1–24
MC10212	3.1–23
MC10216	3.1–31
MC10231	3.1–19
MC10804	3.1–34
MC10805	3.1–34
MC12002	3.1–17, 4.7–49, 5.9–27
MC12009	3.1–31, 4.7–49, 5.9–27
MC12011	3.1–31, 4.7–49, 5.9–27
MC12013	3.1–31, 4.7–49, 5.9–27
MC12014	3.1–15
MC12015	3.1–31, 4.7–49, 5.9–27
MC12016	3.1–31, 4.7–49, 5.9–27
MC12017	3.1–31, 4.7–49, 5.9–27
MC12018	3.1–31, 4.7–49, 5.9–27
MC12019	3.1–31, 4.7–49, 5.9–27
MC12022A	3.1–30
MC12022B	3.1–30
MC12022LVA	3.1–30, 4.7–49, 5.9–27
MC12022LVB	3.1–30, 4.7–49, 5.9–27
MC12022SLA	3.1–30
MC12022SLB	3.1–30
MC12022TSA	3.1–30
MC12022TSB	3.1–30
MC12022TVA	3.1–30
MC12022TVB	3.1–30
MC12023	3.1–31, 4.7–49, 5.9–27
MC12025	3.1–31
MC12026A	3.1–30, 4.7–49, 5.9–27
MC12026B	3.1–30, 4.7–49, 5.9–27
MC12028A	3.1–30, 4.7–49, 5.9–27
MC12028B	3.1–30, 4.7–49, 5.9–27
MC12031A	3.1–31
MC12031B	3.1–31
MC12032A	3.1–31
MC12032B	3.1–31
MC12033A	3.1–31, 4.7–50, 5.9–27
MC12033B	3.1–31, 4.7–50, 5.9–27
MC12034A	3.1–31, 4.7–50, 5.9–28
MC12034B	3.1–31, 4.7–50, 5.9–28
MC12036A	3.1–30
MC12036B	3.1–30
MC12038A	3.1–30, 4.7–50, 5.9–28
MC12040	3.1–17, 4.7–50, 5.9–28
MC12052A	3.1–30, 4.7–50, 5.9–28
MC12053A	3.1–30, 4.7–50, 5.9–28
MC12054A	3.1–31, 4.7–50, 5.9–28
MC12058	3.1–30, 4.7–50, 5.9–28
MC12061	3.1–29, 4.7–50, 5.9–28
MC12066	3.1–30, 4.7–50, 5.9–28
MC12073	3.1–30
MC12074	3.1–30
MC12075	3.1–30
MC12076	3.1–31
MC12078	3.1–31
MC12079	3.1–31, 4.7–50, 5.9–28
MC12080	3.1–30, 4.7–50, 5.9–28
MC12083	3.1–30
MC12089	3.1–31, 4.7–50, 5.9–28
MC12090	3.1–31
MC12093	3.1–30, 4.7–50, 5.9–28
MC12095	3.1–31, 4.7–50, 5.9–28
MC12098	3.1–31, 4.7–50, 5.9–28
MC12100	3.1–29
MC12101	3.1–29
MC12147	3.1–35, 4.7–50, 5.9–28
MC12148	3.1–29, 4.7–50, 5.9–28
MC12149	3.1–35, 4.7–50, 5.9–28
MC12179	3.1–34, 4.7–50, 5.9–28
MC12181	3.1–34, 4.7–50, 5.9–28
MC12202	3.1–34
MC12206	3.1–34
MC12210	3.1–34
MC12429	3.1–13
MC12430	3.1–13
MC12439	3.1–13
MC13020	4.8–2
MC13022	4.8–2
MC13022A	4.8–2
MC13024	4.8–2
MC13025	4.8–2
MC13027	4.8–2
MC13028A	4.8–2
MC13029A	4.8–2
MC13030	4.8–2
MC13035	4.8–2
MC13037	4.8–2
MC13055	4.7–2, 5.9–12
MC13060	4.7–46, 4.8–2
MC13077	4.8–3, 4.8–5, 4.8–12, 4.8–17
MC13077DW	4.8–17
MC13077P	4.8–17
MC13081X	4.8–4
MC13109	4.7–3, 4.7–5, 5.9–13, 5.9–15
MC13109FB	4.7–5, 5.9–15
MC13109FTA	4.7–5, 5.9–15
MC13110	4.7–3, 4.7–6, 5.9–13, 5.9–16
MC13110FB	4.7–6, 5.9–16
MC13111	4.7–3, 4.7–7, 5.9–13, 5.9–17
MC13111FB	4.7–7, 5.9–17
MC13122	4.8–2
MC13135	4.7–3, 4.7–8, 5.9–13, 5.9–18
MC13135DW	4.7–8, 5.9–18
MC13135P	4.7–8, 5.9–18
MC13136	4.7–3, 4.7–8, 5.9–13, 5.9–18
MC13136DW	4.7–8, 5.9–18
MC13142	4.7–2, 5.9–12, 5.9–19
MC13142D	5.9–19
MC13143	4.7–2, 5.9–12, 5.9–20
MC13143D	5.9–20
MC13144	4.7–2, 5.9–12, 5.9–21
MC13144D	5.9–21
MC13145	5.9–12
MC13146	4.7–2, 5.9–12
MC13150	4.7–3, 4.7–9, 5.9–13, 5.9–22
MC13150FTA	4.7–9, 5.9–22
MC13150FTB	4.7–9, 5.9–22
MC13155	4.7–2, 5.9–12
MC13156	4.7–2, 4.7–10, 5.9–12, 5.9–23
MC13156DW	4.7–10, 5.9–23
MC13156FB	4.7–10, 5.9–23
MC13158	4.7–2, 5.9–12
MC13158FTB	4.7–11, 5.9–24
MC13159	4.7–2, 5.9–12
MC13173	4.7–4, 5.9–14
MC13175	4.7–4, 4.7–12, 5.9–14, 5.9–25
MC13175D	4.7–12, 5.9–25

Device Index

Device Index	Page
MC13176	4.7–4, 4.7–12, 5.9–14, 5.9–25
MC13176D	4.7–12, 5.9–25
MC13280AY	4.8–4
MC13281A	4.8–4
MC13281B	4.8–4
MC13282A	4.8–4
MC13283	4.8–4
MC14001B	3.1–24
MC14001UB	3.1–24
MC14002B	3.1–24
MC14002UB	3.1–24
MC14006B	3.1–32
MC14007UB	3.1–25
MC14008B	3.1–9
MC14011B	3.1–22
MC14011UB	3.1–22
MC14012B	3.1–21
MC14012UB	3.1–21
MC14013B	3.1–18
MC14014B	3.1–33
MC14015B	3.1–33
MC14016B	3.1–29
MC14017B	3.1–15
MC14018B	3.1–15
MC14020B	3.1–14
MC14021B	3.1–33
MC14022B	3.1–15
MC14023B	3.1–22
MC14023UB	3.1–22
MC14024B	3.1–14
MC14025B	3.1–24
MC14025UB	3.1–24
MC14027B	3.1–19
MC14028B	3.1–16
MC14029B	3.1–15
MC14035B	3.1–33
MC14038B	3.1–9
MC14040B	3.1–14
MC14042B	3.1–27
MC14043B	3.1–27
MC14044B	3.1–27
MC14046B	3.1–30
MC14049B	3.1–25
MC14049UB	3.1–25
MC14050B	3.1–25
MC14051B	3.1–27
MC14052B	3.1–28
MC14053B	3.1–29
MC14060B	3.1–14
MC14066B	3.1–29
MC14067B	3.1–27
MC14068B	3.1–21
MC14069UB	3.1–25
MC14070B	3.1–23
MC14071B	3.1–24
MC14072B	3.1–24
MC14073B	3.1–22
MC14075B	3.1–25
MC14076B	3.1–21
MC14077B	3.1–23
MC14078B	3.1–24
MC14081B	3.1–21
MC14082B	3.1–21
MC14093B	3.1–32
MC14094B	3.1–33
MC14099B	3.1–26
MC14106B	3.1–32
MC14161B	3.1–14
MC14163B	3.1–14
MC14174B	3.1–19
MC14175B	3.1–21
MC14194B	3.1–33
MC14415	3.1–30
MC14467–1	4.10–3
MC14468	4.10–3
MC14470	4.10–3
MC14489	4.6–7
MC14490	3.1–9
MC14495–1	4.6–7
MC14500B	3.1–25
MC14501UB	3.1–23
MC14502B	3.1–25
MC14503B	3.1–10
MC14504B	3.1–35
MC14506UB	3.1–23
MC14508B	3.1–26
MC14510B	3.1–15
MC14511B	3.1–17, 4.6–7
MC14512B	3.1–27
MC14513B	3.1–17, 4.6–7
MC14514B	3.1–16
MC14515B	3.1–16
MC14516B	3.1–15
MC14517B	3.1–34
MC14518B	3.1–15
MC14519B	3.1–22
MC14520B	3.1–15
MC14521B	3.1–30
MC14522B	3.1–15
MC14526B	3.1–15
MC14527B	3.1–9
MC14528B	3.1–29
MC14529B	3.1–28
MC14530B	3.1–23
MC14531B	3.1–30
MC14532B	3.1–17
MC14534B	3.1–14
MC14536B	3.1–30
MC14538B	3.1–29
MC14539B	3.1–28
MC14541B	3.1–30
MC14543B	3.1–17, 4.6–7
MC14544B	3.1–17, 4.6–7
MC14547B	3.1–17, 4.6–7
MC14549B	3.1–34, 4.5–2
MC14551B	3.1–28
MC14553B	3.1–14
MC14555B	3.1–17
MC14556B	3.1–17
MC14557B	3.1–32
MC14558B	3.1–17, 4.6–7
MC14559B	3.1–34, 4.5–2
MC14560B	3.1–9
MC14561B	3.1–9
MC14562B	3.1–32
MC14566B	3.1–15
MC14568B	3.1–15
MC14569B	3.1–15
MC14572UB	3.1–23
MC14573	4.1–8
MC14574	4.1–9
MC14575	4.1–8, 4.1–9
MC14576C	4.1–8, 4.8–4
MC14577C	4.1–8, 4.8–4
MC14578	4.1–9, 4.10–3
MC14580B	3.1–32
MC14583B	3.1–32
MC14584B	3.1–32
MC14585B	3.1–14
MC14598B	3.1–26
MC14599B	3.1–26
MC14618	2.6–11
MC33023	4.2–14
MC33025	4.2–17
MC33030DW	4.3–8
MC33030P	4.3–8
MC33033	4.3–4, 4.3–5, 4.3–7
MC33033DW	4.3–5
MC33033P	4.3–5
MC33035	4.3–4, 4.3–5, 4.3–6
MC33035DW	4.3–6
MC33035P	4.3–6
MC33039	4.3–7
MC33039D	4.3–7
MC33039P	4.3–7
MC33060A	4.2–13
MC33063A	4.2–15
MC33064	4.2–34
MC33064D–5	4.2–34
MC33064DM–5	4.2–34
MC33064P–5	4.2–34
MC33065	4.2–27
MC33066	4.2–17
MC33067	4.2–17
MC33071	4.1–2
MC33071A	4.1–2
MC33072	4.1–3
MC33072A	4.1–3
MC33074	4.1–5
MC33074A	4.1–5
MC33076	4.1–3
MC33077	4.1–3
MC33078	4.1–3
MC33079	4.1–5
MC33091	4.9–9
MC33091A	4.9–4
MC33091AD	4.9–9
MC33091AP	4.9–9
MC33092	4.9–3
MC33092DW	4.9–14
MC33093	4.9–2
MC33094	4.9–2
MC33095	4.9–3
MC33102	4.1–3
MC33110	4.7–46
MC33111	4.7–46
MC33120	4.7–14, 4.7–18, 4.7–45
MC33121	4.7–13, 4.7–45
MC33121FN	4.7–13
MC33121P	4.7–13
MC33128	4.2–8, 4.2–10
MC33128D	4.2–10
MC33129	4.2–13
MC33143	4.9–3, 4.9–7

Device Index

Device Index	Page
MC33143DW	4.9–7
MC33151D	4.2–42
MC33151P	4.2–42
MC33152D	4.2–42
MC33152P	4.2–42
MC33153	4.2–42
MC33153D	4.2–42
MC33153P	4.2–42
MC33154D	4.2–43
MC33154P	4.2–43
MC33160	4.2–2, 4.2–8
MC33160DW	4.2–9
MC33160P	4.2–9
MC33161	4.2–35
MC33161D	4.2–35
MC33161P	4.2–35
MC33163	4.2–15
MC33164	4.2–34
MC33164D–3	4.2–34
MC33164D–5	4.2–34
MC33164DM–3	4.2–34
MC33164DM–5	4.2–34
MC33164P–3	4.2–34
MC33164P–5	4.2–34
MC33166	4.2–15
MC33167	4.2–15
MC33169	4.2–8, 4.2–11
MC33169DTB	4.2–11
MC33171	4.1–2
MC33172	4.1–3
MC33174	4.1–5
MC33178	4.1–3
MC33179	4.1–5
MC33181	4.1–2
MC33182	4.1–3
MC33184	4.1–5
MC33192	4.9–4
MC33192DW	4.9–10
MC33193	4.9–4, 4.9–10
MC33193D	4.9–10
MC33193P	4.9–10
MC33197A	4.9–4,4.9–11
MC33197AD	4.9–11
MC33197AP	4.9–11
MC33199	4.9–3, 4.9–12
MC33199D	4.9–12
MC33201	4.1–2
MC33202	4.1–4
MC33204	4.1–5
MC33206	4.1–4
MC33207	4.1–5
MC33215	4.7–38, 4.7–40, 4.7–45, 4.7–46
MC33215B	4.7–38
MC33215FB	4.7–38
MC33218A	4.7–36, 4.7–39, 4.7–46
MC33218AP	4.7–36
MC33218DW	4.7–36
MC33219A	4.7–37, 4.7–40, 4.7–46
MC33219ADW	4.7–37
MC33219AP	4.7–37
MC33261	4.2–28
MC33262	4.2–28, 4.2–29
MC33262D	4.2–29
MC33262P	4.2–29
MC33264	4.2–7
MC33264D	4.2–7
MC33264D–2.8	4.2–7
MC33264D–3.0	4.2–7
MC33264D–3.3	4.2–7
MC33264D–3.8	4.2–7
MC33264D–4.0	4.2–7
MC33264D–4.75	4.2–7
MC33264D–5.0	4.2–7
MC33264DM	4.2–7
MC33264DM–2.8	4.2–7
MC33264DM–3.0	4.2–7
MC33264DM–3.3	4.2–7
MC33264DM–3.8	4.2–7
MC33264DM–4.0	4.2–7
MC33264DM–4.75	4.2–7
MC33264DM–5.0	4.2–7
MC33267	4.2–2, 4.2–3, 4.2–8, 4.2–9, 4.9–2
MC33267T	4.2–9
MC33267TV	4.2–9
MC33269	4.2–5, 4.9–2
MC33269–XX	4.2–2, 4.2–3
MC33272A	4.1–3
MC33274A	4.1–5
MC33282	4.1–3
MC33284	4.1–5
MC33290	4.9–3, 4.9–15
MC33290D	4.9–15
MC33290P	4.9–15
MC33291	4.9–3, 4.9–16
MC33291DW	4.9–16
MC33293A	4.9–3
MC33293AT	4.9–5
MC33293ATV	4.9–5
MC33298	4.9–3, 4.9–6
MC33298DW	4.9–6
MC33298P	4.9–6
MC33304	4.1–5
MC33340	4.2–36
MC33340D	4.2–36
MC33340P	4.2–36
MC33341	4.2–37
MC33341D	4.2–37
MC33341P	4.2–37
MC33345	4.2–38
MC33345DTB	4.2–38
MC33345DW	4.2–38
MC33346	4.2–39
MC33346DTB	4.2–39
MC33346DW	4.2–39
MC33347	4.2–40
MC33347D	4.2–40
MC33347DTB	4.2–40
MC33348	4.2–41
MC33348D	4.2–41
MC33348D–1	4.2–41
MC33348D–2	4.2–41
MC33348D–3	4.2–41
MC33348D–4	4.2–41
MC33348D–5	4.2–41
MC33348D–6	4.2–41
MC33362	4.2–16, 4.2–24
MC33362DW	4.2–24
MC33362P	4.2–24
MC33363	4.2–16, 4.2–25
MC33363A	4.2–16, 4.2–25
MC33363ADW	4.2–25
MC33363AP	4.2–25
MC33363DW	4.2–25
MC33363P	4.2–25
MC33364	4.2–26
MC33364D	4.2–26
MC33364D1	4.2–26
MC33364D2	4.2–26
MC33368	4.2–28, 4.2–30
MC33368D	4.2–30
MC33368P	4.2–30
MC33463	4.2–18
MC33463H	4.2–18
MC33463H–30KT1	4.2–18
MC33463H–30LT1	4.2–18
MC33463H–33KT1	4.2–18
MC33463H–33LT1	4.2–18
MC33463H–50KT1	4.2–18
MC33463H–50LT1	4.2–18
MC33463H–XXKT1	4.2–18
MC33463H–XXLT1	4.2–18
MC33464	4.2–32
MC33464H	4.2–32
MC33464H–09AT1	4.2–32
MC33464H–09CT1	4.2–32
MC33464H–20AT1	4.2–32
MC33464H–20CT1	4.2–32
MC33464H–27AT1	4.2–32
MC33464H–27CT1	4.2–32
MC33464H–30AT1	4.2–32
MC33464H–30CT1	4.2–32
MC33464H–45AT1	4.2–32
MC33464H–45CT1	4.2–32
MC33464N	4.2–32
MC33464N–09ATR	4.2–32
MC33464N–09CTR	4.2–32
MC33464N–20ATR	4.2–32
MC33464N–20CTR	4.2–32
MC33464N–27ATR	4.2–32
MC33464N–27CTR	4.2–32
MC33464N–30ATR	4.2–32
MC33464N–30CTR	4.2–32
MC33464N–45ATR	4.2–32
MC33464N–45CTR	4.2–32
MC33465	4.2–33
MC33465N	4.2–33
MC33465N–09ATR	4.2–33
MC33465N–09CTR	4.2–33
MC33465N–20ATR	4.2–33
MC33465N–20CTR	4.2–33
MC33465N–27ATR	4.2–33
MC33465N–27CTR	4.2–33
MC33465N–30ATR	4.2–33
MC33465N–30CTR	4.2–33
MC33465N–45ATR	4.2–33
MC33465N–45CTR	4.2–33
MC33466	4.2–19
MC33466H	4.2–19
MC33466H–30JT1	4.2–19
MC33466H–30LT1	4.2–19
MC33466H–33JT1	4.2–19
MC33466H–33LT1	4.2–19
MC33466H–50JT1	4.2–19

Device Index

Device Index	Page
MC33466H–50LT1	4.2–19
MC33466H–XXJT1	4.2–19
MC33466H–XXLT1	4.2–19
MC33502	4.1–6
MC33502D	4.1–6
MC33502P	4.1–6
MC34001	4.1–2
MC34001B	4.1–2
MC34002	4.1–3
MC34002B	4.1–3
MC34004	4.1–4
MC34004B	4.1–4
MC34010	4.7–28, 4.7–45
MC34010FN	4.7–28
MC34010P	4.7–28
MC34012–1	4.7–45
MC34012–2	4.7–45
MC34012–3	4.7–45
MC34014	4.7–45
MC34016	4.7–45
MC34016DW	4.7–31
MC34016P	4.7–31
MC34017	4.7–29
MC34017–1	4.7–45
MC34017–2	4.7–45
MC34017–3	4.7–45
MC34017D	4.7–29
MC34017P	4.7–29
MC34018	4.7–34, 4.7–39, 4.7–46
MC34018DW	4.7–34
MC34018P	4.7–34
MC34023	4.2–14
MC34025	4.2–17
MC34055	4.6–6
MC34055DW	4.6–3
MC34058	4.6–4, 4.6–5
MC34058FTA	4.6–4
MC34059	4.6–4, 4.6–5
MC34059FTA	4.6–4
MC34060A	4.2–13
MC34063A	4.2–15
MC34064	4.2–34
MC34064D–5	4.2–34
MC34064DM–5	4.2–34
MC34064P–5	4.2–34
MC34065	4.2–27
MC34066	4.2–17
MC34067	4.2–17
MC34071	4.1–2
MC34071A	4.1–2
MC34072	4.1–3
MC34072A	4.1–3
MC34074	4.1–4
MC34074A	4.1–4
MC34080B	4.1–2
MC34081B	4.1–2
MC34082	4.1–3
MC34083B	4.1–3
MC34084	4.1–4
MC34085B	4.1–4
MC34114	4.7–45
MC34114DW	4.7–30
MC34114P	4.7–30
MC34115	4.7–44, 4.7–46
MC34115DW	4.7–44
MC34115P	4.7–44
MC34118	4.7–35, 4.7–39, 4.7–46
MC34118DW	4.7–35
MC34118P	4.7–35
MC34119	4.7–35, 4.7–36, 4.7–37, 4.7–39, 4.7–40, 4.7–41, 4.7–46, 4.8–2
MC34119D	4.7–41
MC34119P	4.7–41
MC34129	4.2–13, 4.7–18, 4.7–46
MC34129D	4.7–41
MC34129P	4.7–41
MC34151	4.2–42
MC34151D	4.2–42
MC34151P	4.2–42
MC34152	4.2–42
MC34152D	4.2–42
MC34152P	4.2–42
MC34156	4.6–6
MC34160	4.2–8, 4.2–9
MC34160DW	4.2–9
MC34160P	4.2–9
MC34161	4.2–35
MC34161D	4.2–35
MC34161P	4.2–35
MC34163	4.2–15
MC34164	4.2–34
MC34164D–3	4.2–34
MC34164D–5	4.2–34
MC34164DM–3	4.2–34
MC34164DM–5	4.2–34
MC34164P–3	4.2–34
MC34164P–5	4.2–34
MC34166	4.2–15
MC34167	4.2–15
MC34181	4.1–2
MC34182	4.1–3
MC34184	4.1–4
MC34216	4.7–45
MC34216A	4.7–45
MC34216DW	4.7–32
MC34217	4.7–45
MC34217D	4.7–29
MC34217P	4.7–29
MC34261	4.2–28
MC34262	4.2–28, 4.2–29
MC34262D	4.2–29
MC34262P	4.2–29
MC34268	4.2–2, 4.2–3, 4.2–12
MC34268D	4.2–12
MC34268DT	4.2–12
MC34270	4.2–27
MC34271	4.2–27
MC44002	4.8–3, 4.8–8, 4.8–9
MC44002P	4.8–9
MC44007	4.8–3, 4.8–8, 4.8–9
MC44007P	4.8–9
MC44011	4.8–3, 4.8–5, 4.8–6, 4.8–12
MC44011FB	4.8–6
MC44011FN	4.8–6
MC44131	4.8–8
MC44140	4.8–3, 4.8–5, 4.8–8, 4.8–9
MC44144	4.8–4
MC44200	4.5–3, 4.8–4, 4.8–5
MC44251	4.5–2, 4.8–3, 4.8–4, 4.8–5, 4.8–7, 4.8–12
MC44251FN	4.8–7
MC44251FU	4.8–7
MC44302A	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC44306	4.8–5, 4.8–12
MC44306A	4.8–12
MC44311	4.8–5, 4.8–8, 4.8–12
MC44353	4.8–4
MC44354	4.8–4
MC44355	4.8–4
MC44361	4.8–5, 4.8–12
MC44362	4.8–5, 4.8–12
MC44365	4.8–5, 4.8–12
MC44453	4.8–12
MC44454	4.8–12
MC44455	4.8–12
MC44461	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC44462	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC44463	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC44465	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC44468	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC44602	4.2–14
MC44603A	4.2–22, 4.8–8
MC44603ADW	4.2–22
MC44603AP	4.2–22
MC44604	4.2–22
MC44604P	4.2–22
MC44605	4.2–23, 4.8–8
MC44605P	4.2–23
MC44702	4.8–5
MC44817	4.8–4, 4.8–5, 4.8–8, 4.8–12, 4.8–13, 4.8–14, 4.8–15
MC44817B	4.8–4, 4.8–13
MC44817BD	4.8–13
MC44817D	4.8–13
MC44818	4.8–4, 4.8–5, 4.8–8, 4.8–12, 4.8–14, 4.8–15
MC44818D	4.8–14
MC44826	4.8–5, 4.8–8, 4.8–12
MC44827	4.8–4, 4.8–5, 4.8–8, 4.8–12, 4.8–15
MC44827BDTB	4.8–15
MC44827DTB	4.8–15
MC44828	4.8–4, 4.8–5, 4.8–8, 4.8–12, 4.8–15
MC44828DTB	4.8–15
MC44829	4.8–4, 4.8–5, 4.8–8, 4.8–12, 4.8–16
MC44829D	4.8–16
MC44864	4.8–4, 4.8–5, 4.8–8, 4.8–12
MC44868	4.8–4, 4.8–5, 4.8–8, 4.8–12
MC44871	4.8–4, 4.8–5, 4.8–8, 4.8–12, 4.8–15
MC44871DTB	4.8–15
MC68150*33	3.1–10

Device Index

Device Index	Page
MC68150*40	3.1–10
MC68160	4.6–2, 4.6–6
MC68160B	4.6–2
MC68160BFB	4.6–2
MC68160C	4.6–2
MC68160CFB	4.6–2
MC68160FB	4.6–2
MC68175	2.1–16, 2.1–25
MC68175FDB	2.1–25
MC68194	3.1–12
MC68302	4.7–18, 4.7–20
MC68331	2.6–21, 2.6–25
MC68332	2.6–21, 2.6–25
MC68360	4.6–2, 4.6–6
MC68701	2.6–10, 2.6–23
MC68701U4	2.6–10, 2.6–23
MC75172B	4.6–5
MC75174B	4.6–5
MC79076	4.9–2
MC88100	2.3–2, 2.3–3
MC88110	2.3–2, 2.3–3
MC88110RC	2.3–2
MC88200	2.3–3
MC88200RC	2.3–3
MC88204RC	2.3–3
MC88410	2.3–3
MC88913	3.1–13
MC88914	3.1–13
MC88915*55	3.1–13
MC88915*70	3.1–13
MC88915T*55	3.1–13
MC88915T*70	3.1–13
MC88915T*100	3.1–13
MC88915T*133	3.1–13
MC88915T*160	3.1–13
MC88916*70	3.1–13
MC88916*80	3.1–13
MC88920	3.1–13
MC88921	3.1–13
MC141620	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC141621	4.8–10
MC141621A	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC141621FB	4.8–10
MC141622A	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC141622AFU	4.8–11
MC141624	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC141627	4.8–3, 4.8–5, 4.8–8, 4.8–12
MC143120	2.7–2, 2.7–3, 2.7–6, 2.7–7, 2.7–8, 2.7–12
MC143120B1	2.7–3, 2.7–4, 2.7–6
MC143120DW	2.7–6
MC143120E2	2.7–3, 2.7–4, 2.7–6
MC143120FE2	2.7–3, 2.7–4, 2.7–6
MC143120LE2	2.7–3, 2.7–4, 2.7–6
MC143150	2.7–2, 2.7–3, 2.7–6, 2.7–7, 2.7–8, 2.7–12
MC143150B1FB	2.7–6
MC143150B1FU1	2.7–3, 2.7–4, 2.7–6
MC143150FU	2.7–6
MC143150FU1	2.7–6
MC143416	4.7–27
MC143416PB	4.7–27
MC144110	4.5–3
MC144111	4.5–3
MC144112	4.5–3
MC145000	4.6–7
MC145001	4.6–7
MC145010	4.10–3
MC145011	4.10–3
MC145012	4.10–3
MC145013	4.10–3
MC145017	4.10–3
MC145018	4.10–3
MC145050	4.5–2
MC145051	4.5–2
MC145053	4.5–2
MC145073	4.5–2, 4.8–5
MC145074	4.5–3, 4.8–5, 4.8–12
MC145076	4.5–3, 4.8–5, 4.8–12
MC145106	4.7–48, 5.9–26
MC145145–2	4.7–48, 5.9–26
MC145146–2	4.7–48, 5.9–26
MC145149	4.7–48, 5.9–26
MC145151–2	4.7–48, 5.9–26
MC145152–2	4.7–48, 5.9–26
MC145155–2	4.7–48, 5.9–26
MC145156–2	4.7–48, 5.9–26
MC145157–2	4.7–48, 5.9–26
MC145158–2	4.7–48, 5.9–26
MC145159–1	4.7–48, 5.9–26
MC145162	4.7–48, 5.9–26
MC145162–1	5.9–26
MC145165	4.7–48, 5.9–26
MC145166	4.7–48, 5.9–26
MC145167	4.7–48, 5.9–26
MC145168	5.9–26
MC145169	5.9–26
MC145170–1	4.7–48, 5.9–26
MC145173	5.9–26
MC145190	4.7–49, 5.9–27
MC145191	4.7–49, 5.9–27
MC145192	4.7–49, 5.9–27
MC145200	4.7–49, 5.9–27
MC145201	4.7–49, 5.9–27
MC145202	4.7–49, 5.9–27
MC145220	4.7–49, 5.9–27
MC145225	4.7–49, 5.9–27
MC145230	4.7–49, 5.9–27
MC145403	4.6–5
MC145404	4.6–5
MC145405	4.6–5
MC145406	4.6–5, 4.7–18
MC145407	4.6–5, 4.7–18
MC145408	4.6–5
MC145421DW	4.7–22
MC145421P	4.7–22
MC145422	4.7–21, 4.7–22
MC145422DW	4.7–21
MC145422P	4.7–21
MC145425DW	4.7–22
MC145425P	4.7–22
MC145426	4.7–21
MC145426DW	4.7–21
MC145426P	4.7–21
MC145436A	4.7–18
MC145436AP	4.7–18
MC145436DW	4.7–18
MC145442DW	4.7–42
MC145442P	4.7–42
MC145443DW	4.7–42
MC145443P	4.7–42
MC145444DW	4.7–42
MC145444H	4.7–42
MC145446AFW	4.7–42
MC145447DW	4.7–43
MC145447P	4.7–43
MC145453	4.6–7
MC145460EVK	4.7–43
MC145481	4.7–15
MC145481DW	4.7–15
MC145481SD	4.7–15
MC145482	4.7–15
MC145482DW	4.7–15
MC145482SD	4.7–15
MC145483	2.1–24, 4.7–15
MC145483DW	4.7–15
MC145483SD	4.7–15
MC145484	4.7–15
MC145484DW	4.7–15
MC145484SD	4.7–15
MC145500	4.7–14, 4.7–18, 4.7–21
MC145502	4.7–14
MC145503	4.7–14
MC145505	4.7–14
MC145532	4.7–18, 4.7–42
MC145532DW	4.7–42
MC145532L	4.7–42
MC145536	4.7–42
MC145536EVK	4.7–17
MC145537EVK	4.7–17
MC145554	4.7–14
MC145557	4.7–14
MC145564	4.7–14
MC145567	4.7–14
MC145572	4.7–18, 4.7–19
MC145572EVK	4.7–20
MC145572FN	4.7–19
MC145572PB	4.7–19
MC145574	4.7–18, 4.7–19, 4.7–20
MC145574DW	4.7–19
MC145574PB	4.7–19
MC145583	4.6–6
MC145705	4.6–6
MC145706	4.6–6
MC145707	4.6–6
MC146805E2	2.6–11
MC146818A	2.6–11
MC146823	2.6–11
MCCS142233	3.1–32
MCCS142235	3.1–32
MCCS142236	3.1–32
MCCS142237	3.1–32
MCCS142238	3.1–32
MCCS142239	3.1–32
MCH/K12140	4.7–50, 5.9–28
MCH12140	3.1–17
MCK12140	3.1–17
MCK143455	4.7–26
MCM63F733	2.8–2

Device Index

Device Index	Page
MCM63P631	2.8–2
MCM63P733	2.8–2
MCM63Z736	2.8–3
MCM63Z737	2.8–3
MCM63Z818	2.8–3
MCM63Z819	2.8–3
MCM67A618A	2.8–3
MCM67A618B	2.8–3
MCM67B618A	2.8–2
MCM67B618B	2.8–2
MCM67C618A	2.8–2
MCM67C618B	2.8–2
MCM67M618A	2.8–2
MCM67M618B	2.8–2
MCM67Q709A	2.8–3
MCM67Q909	2.8–3
MCM69C232	2.8–3
MCM69C432	2.8–3
MCM69D536	2.8–3
MCM69D618	2.8–3
MCM69F536B	2.8–2
MCM69F536C	2.8–2
MCM69F618C	2.8–2
MCM69F737	2.8–2
MCM69F819	2.8–2
MCM69L737A	2.8–2
MCM69L738A	2.8–2
MCM69L819A	2.8–2
MCM69L820A	2.8–2
MCM69P536B	2.8–2
MCM69P536C	2.8–2
MCM69P618C	2.8–2
MCM69P737	2.8–2
MCM69P819	2.8–2
MCM69R736A	2.8–2
MCM69R737A	2.8–2
MCM69R738A	2.8–2
MCM69R818A	2.8–2
MCM69R819A	2.8–2
MCM69R820A	2.8–2
MCM69T618	2.8–3
MCM72F6DG	2.8–4
MCM72F7DG	2.8–4
MCM72F8DG	2.8–4
MCM72F9DG	2.8–4
MCM6206BB	2.8–3
MCM6226BB	2.8–3
MCM6227B	2.8–3
MCM6229BB	2.8–3
MCM6246	2.8–3
MCM6249	2.8–3
MCM6323	2.8–3
MCM6323A	2.8–3
MCM6341	2.8–3
MCM6343	2.8–3
MCM6706B	2.8–3
MCM6706BR	2.8–3
MCM6726C	2.8–3
MCM6726D	2.8–3
MCM6729D	2.8–3
MCM6926A	2.8–3
MCM6929A	2.8–3
MCM6946	2.8–3
MCM6949	2.8–3
MCM10143	3.1–32
MCM10145	3.1–32
MCM10146	3.1–31
MCM10152	3.1–31
MCM56824A	2.8–3
MCM62110	2.3–3
MCR08BT1	5.7–2
MCR8D	5.7–4
MCR08DT1	5.7–2
MCR8M	5.7–4
MCR08MT1	5.7–2
MCR8N	5.7–4
MCR8SD	5.7–4
MCR8SM	5.7–4
MCR8SN	5.7–4
MCR12D	5.7–5
MCR12LD	5.7–5
MCR12LM	5.7–5
MCR12LN	5.7–5
MCR12M	5.7–5
MCR12N	5.7–5
MCR16D	5.7–5
MCR16M	5.7–5
MCR16N	5.7–5
MCR22–6	5.7–2
MCR22–8	5.7–2
MCR25D	5.7–5
MCR25M	5.7–5
MCR25N	5.7–5
MCR72–6	5.7–4
MCR72–8	5.7–4
MCR100–6	5.7–2
MCR100–8	5.7–2
MCR106–6	5.7–3
MCR106–8	5.7–3
MCR218–6FP	5.7–4
MCR225–8FP	5.7–6
MCR225–10FP	5.7–6
MCR264–4	5.7–6
MCR264–6	5.7–6
MCR264–8	5.7–6
MCR265–4	5.7–6
MCR265–6	5.7–6
MCR265–8	5.7–6
MCR265–10	5.7–6
MCR310–8	5.7–4
MCR310–10	5.7–4
MCR716–1	5.7–3
MCR718–1	5.7–3
MDC3105LT1	5.1–27
MFF124B	5.9–60
MFF224B	5.9–60
MFF324B	5.9–60
MFF424B	5.9–59
MFF524B	5.9–59
MG8MEVB16Y1	2.6–25
MGB20N35CL	5.4–8
MGB20N40CL	5.4–8
MGP4N60E	5.4–8
MGP4N60ED	5.4–8
MGP7N60E	5.4–8
MGP7N60ED	5.4–8
MGP11N60E	5.4–8
MGP11N60ED	5.4–8
MGP14N60E	5.4–8
MGP15N60U	5.4–8
MGP20N14CL	5.4–8
MGP20N35CL	5.4–8
MGP20N40CL	5.4–8
MGP20N60	5.4–8
MGP20N60U	5.4–8
MGSF1N02LT1	5.1–17, 5.4–5
MGSF1N03LT1	5.1–17, 5.4–5
MGSF1P02ELT1	5.1–17, 5.4–5
MGSF1P02LT1	5.1–17, 5.4–5
MGSF3441V	5.4–5
MGSF3441X	5.4–5
MGSF3442V	5.4–5
MGSF3442X	5.4–5
MGSF3454V	5.4–5
MGSF3454X	5.4–5
MGSF3455V	5.4–5
MGSF3455X	5.4–5
MGW12N120	5.4–8
MGW12N120D	5.4–8
MGW14N60ED	5.4–8
MGW20N60D	5.4–8
MGW20N120	5.4–8
MGY20N120D	5.4–8
MGY25N120	5.4–8
MGY25N120D	5.4–8
MHL8015	5.9–54
MHL8018	5.9–54
MHL8115	5.9–54
MHL8118	5.9–54
MHL9128	5.9–54
MHL9236	5.9–54
MHL9236M	5.9–54
MHPM6B5A120D	5.3–3
MHPM6B7E60D3	5.3–4
MHPM6B10A60D	5.3–3
MHPM6B10A120D	5.3–3
MHPM6B10E60D3	5.3–4
MHPM6B10N120SL	5.3–6
MHPM6B10N120SS	5.3–6
MHPM6B15A120D	5.3–3
MHPM6B15E60D3	5.3–4
MHPM6B15N120SL	5.3–6
MHPM6B15N120SS	5.3–6
MHPM6B20A60D	5.3–3
MHPM6B20E60D3	5.3–4
MHPM6B25N120SL	5.3–6
MHPM6B25N120SS	5.3–6
MHPM7A5S120DC3	5.3–5
MHPM7A8A120A	5.3–7
MHPM7A10E60DC3	5.3–5
MHPM7A10S120DC3	5.3–5
MHPM7A12A120A	5.3–7
MHPM7A15A60A	5.3–7
MHPM7A15S120DC3	5.3–5
MHPM7A16A120B	5.3–7
MHPM7A20A60A	5.3–7
MHPM7A20E60DC3	5.3–5
MHPM7A25A120B	5.3–7
MHPM7A25S120DC3	5.3–5
MHPM7A30A60B	5.3–7
MHPM7A30E60DC3	5.3–5
MHPM7B8A120A	5.3–7
MHPM7B12A120A	5.3–7
MHPM7B15A60A	5.3–7
MHPM7B16A120B	5.3–7

Device Index

Device Index	Page
MHPM7B20A60A	5.3–7
MHPM7B25A120B	5.3–7
MHPM7B30A60B	5.3–7
MHW910	5.9–53
MHW913	5.9–53
MHW916	5.9–53
MHW930	5.9–53
MHW1134	5.9–61
MHW1184	5.9–61
MHW1224	5.9–61
MHW1244	5.9–61
MHW1304L	5.9–61
MHW1815	5.9–53
MHW1915	5.9–53
MHW1916	5.9–53
MHW2627–1	5.9–52
MHW2701–1	5.9–52
MHW2701–2	5.9–52
MHW2703–1	5.9–52
MHW2723	5.9–52
MHW2727–1	5.9–52
MHW2727–2	5.9–52
MHW2801	5.9–52
MHW2803	5.9–53
MHW2805–1	5.9–53
MHW2805–2	5.9–53
MHW2820–1	5.9–53
MHW2820–2	5.9–53
MHW2821–1	5.9–53
MHW2821–2	5.9–53
MHW5182A	5.9–60
MHW5185B	5.9–60
MHW5222A	5.9–60
MHW5342A	5.9–60
MHW5342T	5.9–60
MHW5382A	5.9–60
MHW6142	5.9–60
MHW6182	5.9–60
MHW6182–6	5.9–60
MHW6222	5.9–60
MHW6272	5.9–60
MHW6342	5.9–60
MHW6342T	5.9–60
MHW7142	5.9–59
MHW7182	5.9–59
MHW7182A	5.9–59
MHW7185C	5.9–59
MHW7185CR	5.9–59
MHW7185L	5.9–59
MHW7205C	5.9–59
MHW7205L	5.9–59
MHW7222	5.9–59
MHW7222A	5.9–59
MHW7242	5.9–59
MHW7242A	5.9–59
MHW7272	5.9–59
MHW7272A	5.9–59
MHW7292	5.9–59
MHW8142	5.9–58
MHW8182	5.9–58
MHW8182A	5.9–58
MHW8185	5.9–59
MHW8185L	5.9–59
MHW8185R	5.9–59
MHW8205	5.9–59
MHW8205L	5.9–59
MHW8222	5.9–58
MHW8242	5.9–58
MHW8242A	5.9–58
MHW8272	5.9–58
MHW8272A	5.9–58
MHW8292	5.9–58
MHW9142	5.9–58
MHW9182	5.9–58
MHW9242	5.9–58
MIM2901	5.9–53
MIM2906	5.9–53
MJ413	5.5–7
MJ802	5.5–7
MJ1001	5.5–7
MJ1302A	5.5–7, 5.5–8
MJ2501	5.5–7
MJ2955	5.5–7
MJ2955A	5.5–8
MJ3001	5.5–7
MJ3281A	5.5–7, 5.5–8
MJ4502	5.5–7
MJ10009	5.5–7
MJ10012	5.5–7
MJ10015	5.5–7
MJ10023	5.5–7
MJ11015	5.5–7
MJ11016	5.5–7
MJ11032	5.5–7
MJ11033	5.5–7
MJ13333	5.5–7
MJ14002	5.5–7
MJ14003	5.5–7
MJ15001	5.5–7, 5.5–8
MJ15002	5.5–7, 5.5–8
MJ15003	5.5–7, 5.5–8
MJ15004	5.5–7, 5.5–8
MJ15011	5.5–7
MJ15012	5.5–7
MJ15015	5.5–7, 5.5–8
MJ15016	5.5–7, 5.5–8
MJ15020	5.5–7, 5.5–8
MJ15021	5.5–7, 5.5–8
MJ15022	5.5–7
MJ15023	5.5–7
MJ15024	5.5–8
MJ15025	5.5–8
MJ16020	5.5–7
MJ16110	5.5–7
MJ21193	5.5–7, 5.5–8
MJ21194	5.5–7, 5.5–8
MJ21195	5.5–7
MJ21196	5.5–7
MJD31	5.5–5
MJD31C	5.5–5
MJD32	5.5–5
MJD32C	5.5–5
MJD41C	5.5–5
MJD42C	5.5–5
MJD44E3	5.5–5
MJD44H11	5.5–5
MJD45H11	5.5–5
MJD47	5.5–5
MJD50	5.5–5
MJD112	5.5–5
MJD117	5.5–5
MJD122	5.5–5
MJD127	5.5–5
MJD148	5.5–5
MJD200	5.5–5
MJD210	5.5–5
MJD243	5.5–5
MJD253	5.5–5
MJD340	5.5–5
MJD350	5.5–5
MJD2955	5.5–5
MJD3055	5.5–5
MJD5731	5.5–5
MJD6036	5.5–5
MJD6039	5.5–5
MJD13003	5.5–5
MJD13003–1	5.5–10
MJE171	5.5–4
MJE172	5.5–4
MJE181	5.5–4
MJE182	5.5–4
MJE200	5.5–4
MJE210	5.5–4
MJE243	5.5–4
MJE253	5.5–4
MJE270	5.5–4
MJE271	5.5–4
MJE340	5.5–4
MJE344	5.5–4
MJE350	5.5–4
MJE371	5.5–4
MJE521	5.5–4
MJE700	5.5–4
MJE702	5.5–4
MJE703	5.5–4
MJE800	5.5–4
MJE802	5.5–4
MJE803	5.5–4
MJE2361T	5.5–3
MJE2955T	5.5–3
MJE3055T	5.5–3
MJE3439	5.5–4
MJE5731A	5.5–3
MJE5852	5.5–3
MJE13003	5.5–4, 5.5–10, 5.5–12
MJE13003–1	5.5–10
MJE13005	5.5–3, 5.5–10
MJE13007	5.5–3, 5.5–10
MJE13009	5.5–3, 5.5–10
MJE15030	5.5–3, 5.5–8
MJE15031	5.5–3, 5.5–8
MJE15032	5.5–3, 5.5–8
MJE15033	5.5–3, 5.5–8
MJE16002	5.5–3
MJE18002	5.5–3, 5.5–10, 5.5–11
MJE18004	5.5–10, 5.5–11
MJE18004D2	5.5–10, 5.5–11
MJE18006	5.5–10, 5.5–11
MJE18008	5.5–10, 5.5–11
MJE18009	5.5–10, 5.5–11
MJE18204	5.5–3, 5.5–10, 5.5–11
MJE18206	5.5–10, 5.5–11
MJE18604D2	5.5–10, 5.5–11
MJF31C	5.5–6
MJF32C	5.5–6

Device Index

Device Index	Page
MJF44H11	5.5–6
MJF45H11	5.5–6
MJF47	5.5–6
MJF122	5.5–6
MJF127	5.5–6
MJF2955	5.5–6
MJF3055	5.5–6
MJF6107	5.5–6
MJF6388	5.5–6
MJF6668	5.5–6
MJF13007	5.5–6
MJF13009	5.5–6
MJF15030	5.5–6
MJF15031	5.5–6
MJF16002	5.5–6
MJF16204	5.5–6
MJF18002	5.5–6, 5.5–10, 5.5–12
MJF18004	5.5–6, 5.5–10, 5.5–12
MJF18006	5.5–6, 5.5–10, 5.5–12
MJF18008	5.5–6, 5.5–10, 5.5–12
MJF18009	5.5–10, 5.5–12
MJF18204	5.5–10, 5.5–12
MJF18206	5.5–10, 5.5–12
MJL1302A	5.5–5, 5.5–8
MJL3281A	5.5–5, 5.5–8
MJL16218	5.5–5
MJL21193	5.5–5, 5.5–8
MJL21194	5.5–5, 5.5–8
MJL21195	5.5–5
MJL21196	5.5–5
MLP1N06CL	5.4–8
MLP2N06CL	5.4–8
MMA1000P	5.8–12
MMA2000W	5.8–12
MMBD301LT1	5.1–22, 5.1–23
MMBD330T1	5.1–23
MMBD354LT1	5.1–23
MMBD701LT1	5.1–22, 5.1–23
MMBD770T1	5.1–23
MMBD914LT1	5.1–25
MMBD2835LT1	5.1–26
MMBD2836LT1	5.1–26
MMBD2837LT1	5.1–26
MMBD2838LT1	5.1–26
MMBD6050LT1	5.1–25
MMBD6100LT1	5.1–26
MMBD7000LT1	5.1–26
MMBF170LT1	5.1–17, 5.4–5
MMBF0201NLT1	5.1–17, 5.4–5
MMBF0202PLT1	5.1–17, 5.4–5
MMBF2201NT1	5.1–17, 5.4–5
MMBF2201PT1	5.1–17
MMBF2202PT1	5.4–5
MMBF4391LT1	5.1–17
MMBF4392LT1	5.1–17
MMBF4393LT1	5.1–17
MMBF4416LT1	5.1–16
MMBF5457LT1	5.1–16
MMBF5460LT1	5.1–16
MMBF5484LT1	5.1–16
MMBFJ175LT1	5.1–17
MMBFJ177LT1	5.1–17
MMBFJ309LT1	5.1–16
MMBFJ310LT1	5.1–16
MMBFU310LT1	5.1–16
MMBR521LT1	5.9–33, 5.9–35
MMBR571LT1	5.9–33, 5.9–35
MMBR901LT1	5.9–33, 5.9–35
MMBR901LT3	5.9–33, 5.9–35
MMBR911LT1	5.9–33, 5.9–35
MMBR941BLT1	5.9–33, 5.9–35
MMBR941LT1	5.9–33, 5.9–35
MMBR941LT3	5.9–33, 5.9–35
MMBR951ALT1	5.9–33
MMBR951LT1	5.9–33, 5.9–35
MMBR5031LT1	5.9–33, 5.9–36
MMBR5179LT1	5.9–33, 5.9–36
MMBT918LT1	5.1–10
MMBT2222ALT1	5.1–6
MMBT2222AWT1	5.1–7
MMBT2484LT1	5.1–10
MMBT2907ALT1	5.1–6
MMBT2907AWT1	5.1–7
MMBT3904LT1	5.1–6
MMBT3904WT1	5.1–7
MMBT3906LT1	5.1–6
MMBT3906WT1	5.1–7
MMBT4401LT1	5.1–6
MMBT4403LT1	5.1–6
MMBT5087LT1	5.1–10
MMBT5089LT1	5.1–10
MMBT5401LT1	5.1–11
MMBT5551LT1	5.1–11
MMBT6428LT1	5.1–10
MMBT6429LT1	5.1–10
MMBT6517LT1	5.1–11
MMBT6520LT1	5.1–11
MMBTA06LT1	5.1–11
MMBTA14LT1	5.1–10
MMBTA42LT1	5.1–11
MMBTA56LT1	5.1–11
MMBTA64LT1	5.1–10
MMBTA92LT1	5.1–11
MMBTH10LT1	5.1–10
MMBV105GLT1	5.1–20, 5.1–21
MMBV109LT1	5.1–20, 5.1–21
MMBV409LT1	5.1–20, 5.1–21
MMBV609LT1	5.1–21
MMBV809LT1	5.1–20, 5.1–21
MMBV2101LT1	5.1–18
MMBV2105LT1	5.1–18, 5.1–19
MMBV2107LT1	5.1–19
MMBV2109LT1	5.1–18, 5.1–19
MMBV3401LT1	5.1–24, 5.1–25
MMBV3700LT1	5.1–24, 5.1–25
MMBZ5226BLT1	5.2–8
MMBZ5229BLT1	5.2–8
MMBZ5230BLT1	5.2–8
MMBZ5231BLT1	5.2–8
MMBZ5232BLT1	5.2–8
MMBZ5234BLT1	5.2–8
MMBZ5235BLT1	5.2–8
MMBZ5236BLT1	5.2–8
MMBZ5237BLT1	5.2–8
MMBZ5239BLT1	5.2–8
MMBZ5240BLT1	5.2–8
MMBZ5242BLT1	5.2–8
MMBZ5245BLT1	5.2–8
MMBZ5254BLT1	5.2–8
MMBZ5255BLT1	5.2–8
MMDF1N05E	5.4–3
MMDF2C01HD	5.4–3
MMDF2C02E	5.4–3
MMDF2C02HD	5.4–3
MMDF2C03HD	5.4–3
MMDF2N02E	5.4–3
MMDF2N05Z	5.4–4
MMDF2P01HD	5.4–3
MMDF2P02E	5.4–3
MMDF2P02HD	5.4–3
MMDF2P03HD	5.4–3
MMDF3N02HD	5.4–3
MMDF3N03HD	5.4–3
MMDF3N04HD	5.4–3
MMDF3N06HD	5.4–3
MMDF4N01HD	5.4–3
MMDF6N02HD	5.4–3
MMDF6N03HD	5.4–3
MMDF7N02Z	5.4–4
MMDF1300	5.4–3
MMDF3200Z	5.4–4
MMDJ3N03BJT	5.5–4
MMDJ3P03BJT	5.5–4
MMFT1N10E	5.4–4
MMFT2N02EL	5.4–4
MMFT5P03HD	5.4–4
MMFT2955E	5.4–4
MMFT3055V	5.4–4
MMFT3055VL	5.4–4
MMH0026	4.2–42
MMJT9410	5.5–5
MMJT9435	5.5–5
MMQA5V6T1	5.2–4
MMQA5V6T3	5.2–4
MMQA6V2T1	5.2–4
MMQA6V2T3	5.2–4
MMQA6V8T1	5.2–4
MMQA6V8T3	5.2–4
MMQA12VT1	5.2–4
MMQA12VT3	5.2–4
MMQA13VT1	5.2–4
MMQA13VT3	5.2–4
MMQA15VT1	5.2–4
MMQA15VT3	5.2–4
MMQA18VT1	5.2–4
MMQA18VT3	5.2–4
MMQA20VT1	5.2–4
MMQA20VT3	5.2–4
MMQA21VT1	5.2–4
MMQA21VT3	5.2–4
MMQA22VT1	5.2–4
MMQA22VT3	5.2–4
MMQA24VT1	5.2–4
MMQA24VT3	5.2–4
MMQA27VT1	5.2–4
MMQA27VT3	5.2–4
MMQA30VT1	5.2–4
MMQA30VT3	5.2–4
MMQA33VT1	5.2–4
MMQA33VT3	5.2–4
MMSD71RKT1	5.1–25
MMSD301T1	5.1–23
MMSD701T1	5.1–23
MMSD914T1	5.1–25
MMSF2P02E	5.4–3

Device Index

Device Index	Page
MMSF3P02HD	5.4–3
MMSF3P03HD	5.4–3
MMSF4P01HD	5.4–3
MMSF5N02HD	5.4–3
MMSF5N03HD	5.4–3
MMSF5P02HD	5.4–3
MMSF7N03HD	5.4–3
MMSF7N03Z	5.4–4
MMSF10N02Z	5.4–4
MMSF3205	5.4–3
MMSF3300	5.4–3
MMSZ3V3T1	5.2–8
MMSZ4V3T1	5.2–8
MMSZ4V7T1	5.2–8
MMSZ5V1T1	5.2–8
MMSZ5V6T1	5.2–8
MMSZ6V2T1	5.2–8
MMSZ6V8T1	5.2–8
MMSZ7V5T1	5.2–8
MMSZ8V2T1	5.2–8
MMSZ9V1T1	5.2–8
MMSZ10T1	5.2–8
MMSZ12T1	5.2–8
MMSZ15T1	5.2–8
MMSZ18T1	5.2–8
MMSZ24T1	5.2–8
MMSZ27T1	5.2–8
MMSZ30T1	5.2–8
MMSZ75T1	5.2–8
MMSZ4684T1	5.2–8
MMSZ4687T1	5.2–8
MMSZ4688T1	5.2–8
MMSZ4689T1	5.2–8
MMSZ4690T1	5.2–8
MMSZ4691T1	5.2–8
MMSZ4692T1	5.2–8
MMSZ4693T1	5.2–8
MMSZ4694T1	5.2–8
MMSZ4696T1	5.2–8
MMSZ4697T1	5.2–8
MMSZ4699T1	5.2–8
MMSZ4702T1	5.2–8
MMSZ4705T1	5.2–8
MMSZ4709T1	5.2–8
MMSZ4711T1	5.2–8
MMSZ4712T1	5.2–8
MMSZ4713T1	5.2–8
MMSZ5226BT1	5.2–8
MMSZ5229BT1	5.2–8
MMSZ5230BT1	5.2–8
MMSZ5231BT1	5.2–8
MMSZ5232BT1	5.2–8
MMSZ5233BT1	5.2–8
MMSZ5234BT1	5.2–8
MMSZ5235BT1	5.2–8
MMSZ5236BT1	5.2–8
MMSZ5237BT1	5.2–8
MMSZ5239BT1	5.2–8
MMSZ5240BT1	5.2–8
MMSZ5242BT1	5.2–8
MMSZ5244BT1	5.2–8
MMSZ5245BT1	5.2–8
MMSZ5248BT1	5.2–8
MMSZ5252BT1	5.2–8
MMSZ5254BT1	5.2–8
MMSZ5255BT1	5.2–8
MMSZ5256BT1	5.2–8
MMSZ5264BT1	5.2–8
MMSZ5267BT1	5.2–8
MMSZ5270BT1	5.2–8
MMSZ47011T1	5.2–8
MMT10V275	5.7–14
MMT10V400	5.7–14
MMUN2111LT1	5.1–8
MMUN2112LT1	5.1–8
MMUN2113LT1	5.1–8
MMUN2114LT1	5.1–8
MMUN2115LT1	5.1–8
MMUN2116LT1	5.1–8
MMUN2130LT1	5.1–8
MMUN2131LT1	5.1–8
MMUN2132LT1	5.1–8
MMUN2133LT1	5.1–8
MMUN2134LT1	5.1–8
MMUN2211LT1	5.1–8
MMUN2212LT1	5.1–8
MMUN2213LT1	5.1–8
MMUN2214LT1	5.1–8
MMUN2215LT1	5.1–8
MMUN2216LT1	5.1–8
MMUN2230LT1	5.1–8
MMUN2231LT1	5.1–8
MMUN2232LT1	5.1–8
MMUN2233LT1	5.1–8
MMUN2234LT1	5.1–8
MPA1016	3.1–18
MPA1036	3.1–18
MPA1064	3.1–18
MPA1100	3.1–18
MPA1765	3.1–32
MPA17128	3.1–32
MPC903	3.1–12
MPC904	3.1–12
MPC905	3.1–12
MPC911	3.1–13
MPC930	3.1–13
MPC931	3.1–13
MPC946	3.1–13
MPC947	3.1–12
MPC948	3.1–12
MPC948L	3.1–12
MPC949	3.1–13
MPC950	3.1–13
MPC951	3.1–13
MPC952	3.1–13
MPC956	3.1–13
MPC970	3.1–13
MPC972	3.1–13
MPC973	3.1–13
MPC974	3.1–13
MPC980	3.1–13
MPC990	3.1–13
MPC991	3.1–13
MPC992	3.1–13
MPC2105C	2.8–4
MPC2106C	2.8–4
MPC2605	2.8–3
MPF102	5.1–13
MPF4392	5.1–14
MPF4393	5.1–14
MPN3404	5.1–24, 5.1–25
MPN3700	5.1–24, 5.1–25
MPS651	5.1–4
MPS751	5.1–4
MPS918	5.1–5
MPS2222A	5.1–2
MPS2907A	5.1–2
MPS3563	5.1–5
MPS3904	5.1–3
MPS3906	5.1–3
MPS5179	5.1–5
MPS6428	5.1–3
MPS6521	5.1–3
MPS6523	5.1–3
MPS6602	5.1–2
MPS6652	5.1–2
MPS8099	5.1–2
MPS8599	5.1–2
MPSA05	5.1–2
MPSA06	5.1–2
MPSA13	5.1–3
MPSA14	5.1–3
MPSA18	5.1–3
MPSA20	5.1–2
MPSA27	5.1–3
MPSA29	5.1–3
MPSA42	5.1–4
MPSA55	5.1–2
MPSA56	5.1–2
MPSA63	5.1–3
MPSA64	5.1–3
MPSA70	5.1–2
MPSA75	5.1–3
MPSA77	5.1–3
MPSA92	5.1–4
MPSH10	5.1–5
MPSH17	5.1–5
MPSW01A	5.1–4
MPSW06	5.1–2
MPSW42	5.1–4
MPSW45A	5.1–3
MPSW51A	5.1–4
MPSW56	5.1–2
MPSW64	5.1–3
MPSW92	5.1–4
MPX10D	5.8–7, 5.8–8
MPX10DP	5.8–8
MPX10GP	5.8–8
MPX10GS	5.8–8
MPX50D	5.8–7, 5.8–8
MPX50DP	5.8–8
MPX50GP	5.8–8
MPX100A	5.8–7, 5.8–8
MPX100AP	5.8–8
MPX100AS	5.8–8
MPX100ASX	5.8–8
MPX100D	5.8–7, 5.8–8
MPX100DP	5.8–8
MPX100GP	5.8–8
MPX200D	5.8–7, 5.8–8
MPX200DP	5.8–8
MPX200GP	5.8–8
MPX700A	5.8–7
MPX700D	5.8–7
MPX2010D	5.8–7, 5.8–9

Device Index

Device Index	Page
MPX2010DP	5.8–9
MPX2010GP	5.8–9
MPX2010GS	5.8–9
MPX2010GSX	5.8–9
MPX2050D	5.8–7, 5.8–9
MPX2050DP	5.8–9
MPX2050GP	5.8–9
MPX2050GSX	5.8–9
MPX2100	5.8–4
MPX2100A	5.8–7, 5.8–9
MPX2100AP	5.8–9
MPX2100ASX	5.8–9
MPX2100D	5.8–7, 5.8–9
MPX2100DP	5.8–9
MPX2100GP	5.8–9
MPX2100GSX	5.8–9
MPX2100GVP	5.8–9
MPX2200A	5.8–7, 5.8–9
MPX2200AP	5.8–9
MPX2200D	5.8–7, 5.8–9
MPX2200DP	5.8–9
MPX2200GP	5.8–9
MPX2300DT1	5.8–7
MPX2700A	5.8–7, 5.8–9
MPX2700D	5.8–7, 5.8–9
MPX2700DP	5.8–9
MPX4100A	5.8–7, 5.8–9
MPX4100AP	5.8–9
MPX4100AS	5.8–9
MPX4101A	5.8–7, 5.8–9
MPX4115A	5.8–7, 5.8–9
MPX4115AP	5.8–9
MPX4115AS	5.8–9
MPX4250A	5.8–7, 5.8–9
MPX4250AP	5.8–9
MPX5006	5.8–7
MPX5010D	5.8–7, 5.8–10
MPX5010DP	5.8–10
MPX5010GP	5.8–10
MPX5010GS	5.8–10
MPX5010GSX	5.8–10
MPX5050D	5.8–7, 5.8–10
MPX5050DP	5.8–10
MPX5050GP	5.8–10
MPX5100A	5.8–10
MPX5100AP	5.8–10
MPX5100D	5.8–4, 5.8–7, 5.8–10
MPX5100DP	5.8–10
MPX5100GP	5.8–10
MPX5500D	5.8–7, 5.8–10
MPX5500DP	5.8–10
MPX5500GP	5.8–10
MPX5700D	5.8–7, 5.8–10
MPX5700DP	5.8–10
MPX5700GP	5.8–10
MPX5999D	5.8–7, 5.8–10
MPX7050D	5.8–7, 5.8–10
MPX7050DP	5.8–10
MPX7050GP	5.8–10
MPX7050GS	5.8–10
MPX7050GSX	5.8–10
MPX7100A	5.8–7, 5.8–10
MPX7100AP	5.8–10
MPX7100D	5.8–7, 5.8–10
MPX7100DP	5.8–10
MPX7100GP	5.8–10
MPX7100GS	5.8–10
MPX7200A	5.8–7, 5.8–10
MPX7200D	5.8–7, 5.8–10
MPX7200GP	5.8–10
MPXL10	5.8–7
MPXL5010	5.8–7
MPXS4100A	5.8–7, 5.8–9
MPXS4115A	5.8–7, 5.8–9
MPXT2010	5.8–7
MPXT4100	5.8–7
MPXT4101	5.8–7
MR754	5.6–10
MR760	5.6–10
MR852	5.6–10
MR856	5.6–10
MR2504	5.6–10
MR2510	5.6–10
MR2535L	5.6–10
MRA0510–50H	5.9–45
MRA1000–7L	5.9–45
MRA1000–14L	5.9–45
MRA1600–2	5.9–44
MRA4003T3	5.6–10
MRA4004T3	5.6–10
MRA4005T3	5.6–10
MRA4006T3	5.6–10
MRA4007T3	5.6–10
MRF134	5.9–39
MRF136	5.9–39
MRF136Y	5.9–39
MRF137	5.9–39
MRF140	5.9–38
MRF141	5.9–39
MRF141G	5.9–39
MRF148	5.9–38
MRF150	5.9–38
MRF151	5.9–39
MRF151G	5.9–39
MRF154	5.9–38
MRF157	5.9–38
MRF158	5.9–39
MRF160	5.9–39
MRF166C	5.9–39
MRF166W	5.9–39
MRF171A	5.9–38, 5.9–39
MRF173	5.9–39
MRF174	5.9–39
MRF175GU	5.9–39
MRF175GV	5.9–39
MRF175LU	5.9–39
MRF175LV	5.9–39
MRF176GU	5.9–39
MRF176GV	5.9–39
MRF177	5.9–39
MRF181S	5.9–40
MRF181Z	5.9–40
MRF182	5.9–40
MRF182S	5.9–40
MRF183	5.9–40
MRF183S	5.9–40
MRF184	5.9–40
MRF184S	5.9–40
MRF185	5.9–40
MRF186	5.9–40
MRF240	5.9–42
MRF247	5.9–42
MRF255	5.9–38
MRF275G	5.9–39
MRF275L	5.9–39
MRF281S	5.9–47
MRF281Z	5.9–47
MRF282S	5.9–47
MRF282Z	5.9–47
MRF284	5.9–47
MRF284S	5.9–47
MRF286	5.9–47
MRF286S	5.9–47
MRF313	5.9–42
MRF314	5.9–41
MRF316	5.9–41
MRF317	5.9–41
MRF321	5.9–42
MRF323	5.9–42
MRF325	5.9–42
MRF326	5.9–42
MRF327	5.9–42
MRF329	5.9–42
MRF338	5.9–42
MRF392	5.9–42
MRF393	5.9–42
MRF421	5.9–41
MRF422	5.9–41
MRF426	5.9–41
MRF429	5.9–41
MRF448	5.9–41
MRF454	5.9–41
MRF455	5.9–41
MRF492	5.9–41
MRF553	5.9–32, 5.9–42
MRF555	5.9–32, 5.9–43
MRF557	5.9–32, 5.9–43
MRF559	5.9–32, 5.9–43
MRF571	5.9–32, 5.9–35
MRF577T1	5.9–33, 5.9–35
MRF579T1	5.9–33, 5.9–35
MRF581	5.9–32, 5.9–35, 5.9–36, 5.9–43
MRF587	5.9–34, 5.9–36
MRF641	5.9–43
MRF644	5.9–43
MRF650	5.9–43
MRF652	5.9–43
MRF652S	5.9–43
MRF653	5.9–43
MRF654	5.9–43
MRF658	5.9–43
MRF842	5.9–43
MRF847	5.9–43
MRF857S	5.9–44
MRF858	5.9–44
MRF858S	5.9–44
MRF859S	5.9–44
MRF891	5.9–44
MRF891S	5.9–44
MRF894	5.9–44
MRF897	5.9–44
MRF897R	5.9–44
MRF898	5.9–44
MRF899	5.9–44

Device Index

Device Index	Page
MRF917T1	5.9–33, 5.9–35
MRF927T1	5.9–33, 5.9–35
MRF927T3	5.9–33, 5.9–35
MRF947AT1	5.9–33, 5.9–35
MRF947BT1	5.9–33, 5.9–35
MRF947T1	5.9–33, 5.9–35
MRF947T3	5.9–33, 5.9–35
MRF949T1	5.9–33, 5.9–35
MRF957T1	5.9–33, 5.9–35
MRF959T1	5.9–33, 5.9–35
MRF1000MB	5.9–44
MRF1004MB	5.9–44
MRF1015MB	5.9–45
MRF1035MB	5.9–45
MRF1090MA	5.9–45
MRF1090MB	5.9–45
MRF1150MA	5.9–45
MRF1150MB	5.9–45
MRF1507	5.9–40
MRF1508	5.9–40
MRF1946	5.9–42
MRF1946A	5.9–42
MRF2628	5.9–42
MRF2947AT1	5.9–33, 5.9–35
MRF2947RAT1	5.9–33, 5.9–35
MRF3010	5.9–44
MRF3095	5.9–46
MRF3866R2	5.9–34
MRF4427R2	5.9–42
MRF5015	5.9–40
MRF5035	5.9–40
MRF5211LT1	5.9–33, 5.9–35
MRF5711LT1	5.9–33, 5.9–35
MRF5811LT1	5.9–33, 5.9–35
MRF5812R1	5.9–34, 5.9–35, 5.9–36
MRF5812R2	5.9–34, 5.9–35, 5.9–36
MRF6401	5.9–47
MRF6402	5.9–47
MRF6404	5.9–47
MRF6404K	5.9–47
MRF6408	5.9–47
MRF6409	5.9–44
MRF6414	5.9–44
MRF6522–5	5.9–40
MRF6522–10	5.9–40
MRF6525–5	5.9–47
MRF6525–10	5.9–47
MRF8372R1	5.9–34, 5.9–43
MRF8372R2	5.9–34, 5.9–43
MRF9242T1	5.9–37
MRF9251T1	5.9–37
MRF9282T1	5.9–37
MRF9411LT1	5.9–33, 5.9–35
MRF9511LT1	5.9–33, 5.9–35
MRF9745T1	5.9–37
MRF9811T1	5.9–37
MRF9820T1	5.9–4
MRF9822T1	5.9–37
MRF10005	5.9–45
MRF10031	5.9–45
MRF10120	5.9–45
MRF10150	5.9–45
MRF10350	5.9–45
MRF10500	5.9–45
MRF10501	5.9–45

Device Index	Page
MRF15030	5.9–47
MRF15060	5.9–47
MRF15060S	5.9–47
MRF15090	5.9–47
MRF16006	5.9–44
MRF16030	5.9–44
MRF20030	5.9–47
MRF20060	5.9–47
MRF20060S	5.9–47
MRFIC0001	5.9–5
MRFIC0903	5.9–4
MRFIC0904	5.9–6
MRFIC0910	5.9–6
MRFIC0912	5.9–6
MRFIC0913	5.9–7
MRFIC0915	5.9–4, 5.9–5
MRFIC0916	5.9–4, 5.9–5
MRFIC0917	5.9–7
MRFIC0920	5.9–7
MRFIC0931	5.9–6, 5.9–7
MRFIC1501	5.9–5
MRFIC1502	5.9–5
MRFIC1801	5.9–4
MRFIC1803	5.9–7, 5.9–8
MRFIC1804	5.9–5
MRFIC1805	5.9–7
MRFIC1806	5.9–7
MRFIC1807	5.9–7, 5.9–8
MRFIC1808	5.9–5
MRFIC1808DM	5.9–5
MRFIC1813	5.9–7, 5.9–8
MRFIC1814	5.9–5
MRFIC1817	5.9–7
MRFIC1818	5.9–7
MRFIC2001	5.9–4
MRFIC2002	5.9–6
MRFIC2004	5.9–6
MRFIC2006	5.9–6
MRFIC2101	5.9–6
MRFIC2401	5.9–5
MRFIC2403	5.9–8
MRFIC2404	5.9–8
MRFIC2406	5.9–8
MS143450SK	4.7–24
MS143452SK	4.7–25
MSB709–RT1	5.1–7
MSB710–RT1	5.1–7
MSB1218A–RT1	5.1–7
MSC2295–BT1	5.1–10
MSC2295–CT1	5.1–10
MSC3130T1	5.1–10
MSC3930–BT1	5.1–7
MSD601–RT1	5.1–7
MSD601–ST1	5.1–7
MSD602–RT1	5.1–7
MSD1328–RT1	5.1–7
MSD1819A–RT1	5.1–7
MSRD620CT	5.6–3, 5.6–7
MSRP10040	5.6–3, 5.6–7
MTB1N100E	5.4–6
MTB2N40E	5.4–6
MTB2N60E	5.4–6
MTB2P50E	5.4–6
MTB3N100E	5.4–6
MTB3N120E	5.4–6

Device Index	Page
MTB4N80E	5.4–6
MTB6N60E	5.4–6
MTB8N50E	5.4–6
MTB9N25E	5.4–6
MTB10N40E	5.4–6
MTB15N06V	5.4–6
MTB16N25E	5.4–6
MTB20N20E	5.4–6
MTB23P06V	5.4–6
MTB29N15E	5.4–6
MTB30N06VL	5.4–6
MTB33N10E	5.4–6
MTB35N06ZL	5.4–6
MTB36N06V	5.4–6
MTB40N10E	5.4–6
MTB50N06V	5.4–6
MTB50N06VL	5.4–6
MTB50P03HDL	5.4–6
MTB52N06V	5.4–6
MTB52N06VL	5.4–6
MTB55N06Z	5.4–6
MTB60N06HD	5.4–6
MTB75N03HDL	5.4–6
MTB75N05HD	5.4–6
MTB75N06HD	5.4–6
MTB1306	5.4–6
MTD1N50E	5.4–6
MTD1N60E	5.4–6
MTD1N80E	5.4–6
MTD1P50E	5.4–6
MTD2N40E	5.4–6
MTD2N50E	5.4–6
MTD3N20E	5.4–6
MTD3N25E	5.4–6
MTD4N20E	5.4–6
MTD5N25E	5.4–6
MTD5P06V	5.4–6
MTD6N10E	5.4–6
MTD6N15	5.4–6
MTD6N20E	5.4–6
MTD6P10E	5.4–6
MTD9N10E	5.4–6
MTD10N10EL	5.4–6
MTD12N06EZL	5.4–6
MTD14N10E	5.4–6
MTD15N06V	5.4–6
MTD15N06VL	5.4–6
MTD20N03HDL	5.4–6
MTD20N06HD	5.4–6
MTD20N06HDL	5.4–6
MTD20N06V	5.4–6
MTD20P03HDL	5.4–6
MTD20P06HDL	5.4–6
MTD30P06V	5.4–7
MTD1302	5.4–6
MTD2955V	5.4–6
MTD3055V	5.4–6
MTD3055VL	5.4–6
MTD3410	5.4–6
MTDF1C02HD	5.4–4
MTDF1N02HD	5.4–4
MTDF1N03HD	5.4–4
MTDF1P02HD	5.4–4
MTP1N50E	5.4–7
MTP1N60E	5.4–7

Device Index

Device Index	Page
MTP1N100E	5.4–7
MTP2N40E	5.4–7
MTP2N50E	5.4–7
MTP2N60E	5.4–7
MTP2P50E	5.4–7
MTP3N25E	5.4–7
MTP3N50E	5.4–7
MTP3N60E	5.4–7
MTP3N100E	5.4–7
MTP3N120E	5.4–7
MTP4N40E	5.4–7
MTP4N50E	5.4–7
MTP4N80E	5.4–7
MTP5N40E	5.4–7
MTP5P06V	5.4–7
MTP6N60E	5.4–7
MTP6P20E	5.4–7
MTP7N20E	5.4–7
MTP8N50E	5.4–7
MTP9N25E	5.4–7
MTP10N10E	5.4–7
MTP10N10EL	5.4–7
MTP10N40E	5.4–7
MTP12N10E	5.4–7
MTP12P10	5.4–7
MTP15N05EL	5.4–7
MTP15N06V	5.4–7
MTP15N06VL	5.4–7
MTP16N25E	5.4–7
MTP20N06V	5.4–7
MTP20N20E	5.4–7
MTP23P06V	5.4–7
MTP27N10E	5.4–7
MTP29N15E	5.4–7
MTP30N06VL	5.4–7
MTP33N10E	5.4–7
MTP36N06V	5.4–7
MTP40N10E	5.4–7
MTP50N06V	5.4–7
MTP50N06VL	5.4–7
MTP50P03HDL	5.4–7
MTP60N06HD	5.4–7
MTP75N05HD	5.4–7
MTP75N06HD	5.4–7
MTP1302	5.4–7
MTP1304	5.4–7
MTP1306	5.4–7
MTP2955V	5.4–7
MTP3055V	5.4–7
MTP3055VL	5.4–7
MTP3402	5.4–7
MTP3600	5.4–7
MTSF1P02HD	5.4–4
MTSF2P02HD	5.4–4
MTSF2P03HD	5.4–4
MTSF3N02HD	5.4–4
MTSF3N03HD	5.4–4
MTV6N100E	5.4–7
MTV10N100E	5.4–7
MTV16N50E	5.4–7
MTV20N50E	5.4–7
MTV25N50E	5.4–7
MTV32N20E	5.4–7
MTV32N25E	5.4–7
MTW6N100E	5.4–7
MTW7N80E	5.4–7
MTW8N60E	5.4–7
MTW10N100E	5.4–7
MTW14N50E	5.4–7
MTW16N40E	5.4–7
MTW20N50E	5.4–7
MTW24N40E	5.4–7
MTW32N20E	5.4–7
MTW32N25E	5.4–7
MTW35N15E	5.4–7
MTW45N10E	5.4–7
MTY14N100E	5.4–8
MTY16N80E	5.4–8
MTY20N50E	5.4–8
MTY25N60E	5.4–8
MTY30N50E	5.4–8
MTY55N20E	5.4–8
MTY100N10E	5.4–8
MUN2111T1	5.1–8
MUN2112T1	5.1–8
MUN2113T1	5.1–8
MUN2114T1	5.1–8
MUN2115T1	5.1–8
MUN2116T1	5.1–8
MUN2130T1	5.1–8
MUN2131T1	5.1–8
MUN2132T1	5.1–8
MUN2133T1	5.1–8
MUN2134T1	5.1–8
MUN2211T1	5.1–8
MUN2212T1	5.1–8
MUN2213T1	5.1–8
MUN2214T1	5.1–8
MUN2215T1	5.1–8
MUN2216T1	5.1–8
MUN2230T1	5.1–8
MUN2231T1	5.1–8
MUN2232T1	5.1–8
MUN2233T1	5.1–8
MUN2234T1	5.1–8
MUN5111DW1T1	5.1–9
MUN5111T1	5.1–9
MUN5112DW1T1	5.1–9
MUN5112T1	5.1–9
MUN5113DW1T1	5.1–9
MUN5113T1	5.1–9
MUN5114DW1T1	5.1–9
MUN5114T1	5.1–9
MUN5115DW1T1	5.1–9
MUN5115T1	5.1–9
MUN5116DW1T1	5.1–9
MUN5116T1	5.1–9
MUN5130DW1T1	5.1–9
MUN5130T1	5.1–9
MUN5131DW1T1	5.1–9
MUN5131T1	5.1–9
MUN5132DW1T1	5.1–9
MUN5132T1	5.1–9
MUN5133DW1T1	5.1–9
MUN5133T1	5.1–9
MUN5134DW1T1	5.1–9
MUN5134T1	5.1–9
MUN5135DW1T1	5.1–9
MUN5211DW1T1	5.1–9
MUN5211T1	5.1–9
MUN5212DW1T1	5.1–9
MUN5212T1	5.1–9
MUN5213DW1T1	5.1–9
MUN5213T1	5.1–9
MUN5214DW1T1	5.1–9
MUN5214T1	5.1–9
MUN5215DW1T1	5.1–9
MUN5215T1	5.1–9
MUN5216DW1T1	5.1–9
MUN5216T1	5.1–9
MUN5230DW1T1	5.1–9
MUN5230T1	5.1–9
MUN5231DW1T1	5.1–9
MUN5231T1	5.1–9
MUN5232DW1T1	5.1–9
MUN5232T1	5.1–9
MUN5233DW1T1	5.1–9
MUN5233T1	5.1–9
MUN5234DW1T1	5.1–9
MUN5234T1	5.1–9
MUN5235DW1T1	5.1–9
MUN5311DW1T1	5.1–9
MUN5312DW1T1	5.1–9
MUN5313DW1T1	5.1–9
MUN5314DW1T1	5.1–9
MUN5315DW1T1	5.1–9
MUN5316DW1T1	5.1–9
MUN5330DW1T1	5.1–9
MUN5331DW1T1	5.1–9
MUN5332DW1T1	5.1–9
MUN5333DW1T1	5.1–9
MUN5334DW1T1	5.1–9
MUR120	5.6–8
MUR140	5.6–8
MUR160	5.6–8
MUR420	5.6–8
MUR440	5.6–8
MUR460	5.6–8
MUR620CT	5.6–9
MUR820	5.6–9
MUR840	5.6–9
MUR860	5.6–9
MUR880E	5.6–9
MUR1100E	5.6–8
MUR1520	5.6–9
MUR1540	5.6–9
MUR1560	5.6–9
MUR1620CT	5.6–9
MUR1620CTR	5.6–9
MUR1640CT	5.6–9
MUR1660CT	5.6–9
MUR3020PT	5.6–9
MUR3020WT	5.6–9
MUR3040	5.6–9
MUR3040PT	5.6–9
MUR3060PT	5.6–9
MUR3060WT	5.6–9
MUR3080	5.6–9
MUR4100E	5.6–8
MUR6040	5.6–9
MUR8100E	5.6–9
MUR10120E	5.6–9
MUR10150E	5.6–9
MURB1620CT	5.6–8
MURB1660CT	5.6–8

Device Index

Device Index	Page
MURD320	5.6–8
MURD620CT	5.6–8
MURF82	5.6–9
MURF1620CT	5.6–9
MURF1660CT	5.6–9
MURH840CT	5.6–3, 5.6–9
MURH860CT	5.6–3, 5.6–9
MURH8100E	5.6–3, 5.6–9
MURHB840CT	5.6–3, 5.6–8
MURHB860CT	5.6–3, 5.6–8
MURHF860CT	5.6–3, 5.6–9
MURP20020CT	5.6–9
MURP20040CT	5.6–9
MURS120T3	5.6–8
MURS160T3	5.6–8
MURS320T3	5.6–8
MURS360T3	5.6–8
MV209	5.1–20, 5.1–21
MV2101	5.1–18
MV2105	5.1–18
MV2109	5.1–18
MV2115	5.1–18
MXR9745RT1	5.9–37
MXR9745T1	5.9–37
NE556D	4.10–2
NE556N	4.10–2
P2N2222A	5.1–5
P2N2907A	5.1–5
P6KE6.8A	5.2–2
P6KE6.8CA	5.2–2
P6KE13A	5.2–2
P6KE13CA	5.2–2
P6KE15A	5.2–2
P6KE15CA	5.2–2
P6KE27A	5.2–2
P6KE27CA	5.2–2
P6KE33A	5.2–2
P6KE33CA	5.2–2
P6KE36A	5.2–2
P6KE36CA	5.2–2
P6KE62A	5.2–2
P6KE62CA	5.2–2
P6SMB13AT3	5.2–5
P6SMB13CAT3	5.2–5
P6SMB15AT3	5.2–5
P6SMB15CAT3	5.2–5
P6SMB27AT3	5.2–5
P6SMB27CAT3	5.2–5
P6SMB30AT3	5.2–5
P6SMB30CAT3	5.2–5
P6SMB33AT3	5.2–5
P6SMB33CAT3	5.2–5
P6SMB36AT3	5.2–5
P6SMB36CAT3	5.2–5
P6SMB51AT3	5.2–5
P6SMB51CAT3	5.2–5
P6SMB62AT3	5.2–5
P6SMB62CAT3	5.2–5
PC68F333	2.6–21
PC68HC11G0	2.6–6
PC68HC11G5	2.6–7
PC68HC11G7	2.6–7
PC68HC11J6	2.6–7
PC68HC711D3	2.6–8
PC68HC711E9	2.6–8

Device Index	Page
PC68HC711E20	2.6–8
PC68HC711G5	2.6–8
PC68HC711J6	2.6–8
PC68HC711K4	2.6–8
PC68HC711L6	2.6–8
PC68HC711M2	2.6–8
PC68HC711N4	2.6–8
PZT651T1	5.1–12
PZT751T1	5.1–12
PZT2222AT1	5.1–11
PZT2907AT1	5.1–11
PZTA14T1	5.1–12
PZTA42T1	5.1–12
PZTA92T1	5.1–12
SA5.0A	5.2–2
SA5.0CA	5.2–2
SA6.0A	5.2–2
SA6.0CA	5.2–2
SA12A	5.2–2
SA12CA	5.2–2
SA13A	5.2–2
SA13CA	5.2–2
SA15A	5.2–2
SA15CA	5.2–2
SAA1042	4.3–9
SAA1042V	4.3–9
SC143150B1FU	2.7–6
SG3525A	4.2–16
SG3526	4.2–16
SN54LS00	3.1–22
SN54LS01	3.1–22
SN54LS02	3.1–24
SN54LS03	3.1–22
SN54LS04	3.1–25
SN54LS05	3.1–25
SN54LS08	3.1–21
SN54LS09	3.1–21
SN54LS10	3.1–22
SN54LS11	3.1–22
SN54LS12	3.1–22
SN54LS13	3.1–32
SN54LS14	3.1–32
SN54LS15	3.1–22
SN54LS20	3.1–21
SN54LS21	3.1–21
SN54LS22	3.1–21
SN54LS26	3.1–21
SN54LS27	3.1–24
SN54LS28	3.1–24
SN54LS30	3.1–21
SN54LS32	3.1–24
SN54LS33	3.1–24
SN54LS37	3.1–21
SN54LS38	3.1–22
SN54LS40	3.1–21
SN54LS42	3.1–16
SN54LS47	3.1–17
SN54LS48	3.1–17
SN54LS51	3.1–23
SN54LS54	3.1–22
SN54LS55	3.1–22
SN54LS73A	3.1–19
SN54LS74A	3.1–19
SN54LS75	3.1–26
SN54LS76A	3.1–19

Device Index	Page
SN54LS77	3.1–26
SN54LS83A	3.1–9
SN54LS85	3.1–14
SN54LS86	3.1–23
SN54LS90	3.1–15
SN54LS92	3.1–15
SN54LS93	3.1–14
SN54LS95B	3.1–33
SN54LS107A	3.1–19
SN54LS109A	3.1–19
SN54LS112A	3.1–19
SN54LS113A	3.1–19
SN54LS114A	3.1–19
SN54LS122	3.1–29
SN54LS123	3.1–29
SN54LS125A	3.1–12
SN54LS126A	3.1–12
SN54LS132	3.1–32
SN54LS133	3.1–21
SN54LS137	3.1–16
SN54LS138	3.1–16
SN54LS139	3.1–17
SN54LS145	3.1–16
SN54LS147	3.1–17
SN54LS148	3.1–18
SN54LS151	3.1–27
SN54LS153	3.1–28
SN54LS155	3.1–16
SN54LS156	3.1–16
SN54LS157	3.1–28
SN54LS158	3.1–28
SN54LS160A	3.1–14
SN54LS161A	3.1–14
SN54LS162A	3.1–14
SN54LS163A	3.1–14
SN54LS164	3.1–33
SN54LS165	3.1–33
SN54LS166	3.1–33
SN54LS168	3.1–15
SN54LS169	3.1–15
SN54LS170	3.1–32
SN54LS173A	3.1–18
SN54LS174	3.1–19
SN54LS175	3.1–21
SN54LS190	3.1–15
SN54LS191	3.1–15
SN54LS192	3.1–15
SN54LS193	3.1–15
SN54LS194A	3.1–33
SN54LS195A	3.1–34
SN54LS196	3.1–14
SN54LS197	3.1–14
SN54LS221	3.1–29
SN54LS240	3.1–11
SN54LS241	3.1–11
SN54LS242	3.1–12
SN54LS243	3.1–12
SN54LS244	3.1–11
SN54LS245	3.1–11
SN54LS247	3.1–17
SN54LS248	3.1–17
SN54LS249	3.1–17
SN54LS251	3.1–27
SN54LS253	3.1–28
SN54LS256	3.1–26

Device Index

Device Index	Page
SN54LS257B	3.1–28
SN54LS258B	3.1–29
SN54LS259	3.1–26
SN54LS260	3.1–24
SN54LS266	3.1–23
SN54LS273	3.1–20
SN54LS279	3.1–27
SN54LS280	3.1–30
SN54LS283	3.1–9
SN54LS290	3.1–15
SN54LS293	3.1–14
SN54LS298	3.1–28
SN54LS299	3.1–33
SN54LS322A	3.1–33
SN54LS323	3.1–33
SN54LS348	3.1–18
SN54LS352	3.1–28
SN54LS353	3.1–28
SN54LS365A	3.1–10
SN54LS366A	3.1–10
SN54LS367A	3.1–10
SN54LS368A	3.1–10
SN54LS373	3.1–26
SN54LS374	3.1–20
SN54LS375	3.1–26
SN54LS377	3.1–20
SN54LS378	3.1–19
SN54LS379	3.1–18
SN54LS386	3.1–23
SN54LS390	3.1–15
SN54LS393	3.1–15
SN54LS398	3.1–29
SN54LS399	3.1–29
SN54LS490	3.1–15
SN54LS540	3.1–11
SN54LS541	3.1–11
SN54LS569A	3.1–14
SN54LS623	3.1–11
SN54LS640	3.1–11
SN54LS641	3.1–34
SN54LS642	3.1–34
SN54LS645	3.1–11
SN54LS669	3.1–16
SN54LS670	3.1–32
SN54LS682	3.1–14
SN54LS684	3.1–14
SN54LS688	3.1–14
SN54LS748	3.1–18
SN54LS795	3.1–10
SN54LS796	3.1–10
SN54LS797	3.1–10
SN54LS798	3.1–10
SN54LS848	3.1–18
SN74LS00	3.1–22
SN74LS01	3.1–22
SN74LS02	3.1–24
SN74LS03	3.1–22
SN74LS04	3.1–25
SN74LS05	3.1–25
SN74LS08	3.1–21
SN74LS09	3.1–21
SN74LS10	3.1–22
SN74LS11	3.1–22
SN74LS12	3.1–22
SN74LS13	3.1–32
SN74LS14	3.1–32
SN74LS15	3.1–22
SN74LS20	3.1–21
SN74LS21	3.1–21
SN74LS22	3.1–21
SN74LS26	3.1–21
SN74LS27	3.1–24
SN74LS28	3.1–24
SN74LS30	3.1–21
SN74LS32	3.1–24
SN74LS33	3.1–24
SN74LS37	3.1–21
SN74LS38	3.1–22
SN74LS40	3.1–21
SN74LS42	3.1–16
SN74LS47	3.1–17
SN74LS48	3.1–17
SN74LS51	3.1–23
SN74LS54	3.1–22
SN74LS55	3.1–22
SN74LS73A	3.1–19
SN74LS74A	3.1–19
SN74LS75	3.1–26
SN74LS76A	3.1–19
SN74LS77	3.1–26
SN74LS83A	3.1–9
SN74LS85	3.1–14
SN74LS86	3.1–23
SN74LS90	3.1–15
SN74LS92	3.1–15
SN74LS93	3.1–14
SN74LS95B	3.1–33
SN74LS107A	3.1–19
SN74LS109A	3.1–19
SN74LS112A	3.1–19
SN74LS113A	3.1–19
SN74LS114A	3.1–19
SN74LS122	3.1–29
SN74LS123	3.1–29
SN74LS125A	3.1–12
SN74LS126A	3.1–12
SN74LS132	3.1–32
SN74LS133	3.1–21
SN74LS136	3.1–23
SN74LS137	3.1–16
SN74LS138	3.1–16
SN74LS139	3.1–17
SN74LS145	3.1–16
SN74LS147	3.1–17
SN74LS148	3.1–18
SN74LS151	3.1–27
SN74LS153	3.1–28
SN74LS155	3.1–16
SN74LS156	3.1–16
SN74LS157	3.1–28
SN74LS158	3.1–28
SN74LS160A	3.1–14
SN74LS161A	3.1–14
SN74LS162A	3.1–14
SN74LS163A	3.1–14
SN74LS164	3.1–33
SN74LS165	3.1–33
SN74LS166	3.1–33
SN74LS168	3.1–15
SN74LS169	3.1–15
SN74LS170	3.1–32
SN74LS173A	3.1–18
SN74LS174	3.1–19
SN74LS175	3.1–21
SN74LS190	3.1–15
SN74LS191	3.1–15
SN74LS192	3.1–15
SN74LS193	3.1–15
SN74LS194A	3.1–33
SN74LS195A	3.1–34
SN74LS196	3.1–14
SN74LS197	3.1–14
SN74LS221	3.1–29
SN74LS240	3.1–11
SN74LS241	3.1–11
SN74LS242	3.1–12
SN74LS243	3.1–12
SN74LS244	3.1–11
SN74LS245	3.1–11
SN74LS247	3.1–17
SN74LS248	3.1–17
SN74LS249	3.1–17
SN74LS251	3.1–27
SN74LS253	3.1–28
SN74LS257B	3.1–28
SN74LS258B	3.1–29
SN74LS259	3.1–26
SN74LS260	3.1–24
SN74LS266	3.1–23
SN74LS273	3.1–20
SN74LS279	3.1–27
SN74LS280	3.1–30
SN74LS283	3.1–9
SN74LS290	3.1–15
SN74LS293	3.1–14
SN74LS298	3.1–28
SN74LS299	3.1–33
SN74LS322A	3.1–33
SN74LS323	3.1–33
SN74LS348	3.1–18
SN74LS352	3.1–28
SN74LS353	3.1–28
SN74LS365A	3.1–10
SN74LS366A	3.1–10
SN74LS367A	3.1–10
SN74LS368A	3.1–10
SN74LS373	3.1–26
SN74LS374	3.1–20
SN74LS375	3.1–26
SN74LS377	3.1–20
SN74LS378	3.1–19
SN74LS379	3.1–18
SN74LS386	3.1–23
SN74LS390	3.1–15
SN74LS393	3.1–15
SN74LS395	3.1–33
SN74LS398	3.1–29
SN74LS399	3.1–29
SN74LS490	3.1–15
SN74LS540	3.1–11
SN74LS541	3.1–11
SN74LS569A	3.1–14
SN74LS623	3.1–11
SN74LS640	3.1–11
SN74LS641	3.1–34

Device Index

Device Index	Page
SN74LS642	3.1–34
SN74LS645	3.1–11
SN74LS669	3.1–16
SN74LS670	3.1–32
SN74LS682	3.1–14
SN74LS684	3.1–14
SN74LS688	3.1–14
SN74LS748	3.1–18
SN74LS795	3.1–10
SN74LS796	3.1–10
SN74LS797	3.1–10
SN74LS798	3.1–10
SN74LS848	3.1–18
T2322B	5.7–7
T2322D	5.7–7
T2322M	5.7–7
T2500D	5.7–8
T2500DFP	5.7–9
T2500M	5.7–8
T2500N	5.7–8
T2800D	5.7–10
TCA0372	4.1–4
TCA3385	4.7–45
TCA3388	4.7–45
TCA3388DP	4.7–33
TCA3388FP	4.7–33
TCF5600	4.2–27
TCF6000	4.9–4
TDA1085C	4.3–10
TDA1085CD	4.3–10
TIP29C	5.5–3
TIP30C	5.5–3
TIP31B	5.5–3
TIP31C	5.5–3
TIP32B	5.5–3
TIP32C	5.5–3
TIP41B	5.5–3
TIP41C	5.5–3
TIP42B	5.5–3
TIP42C	5.5–3
TIP47	5.5–3
TIP50	5.5–3
TIP100	5.5–3
TIP102	5.5–3
TIP105	5.5–3
TIP107	5.5–3
TIP110	5.5–3
TIP112	5.5–3
TIP115	5.5–3
TIP117	5.5–3
TIP120	5.5–3
TIP122	5.5–3
TIP125	5.5–3
TIP127	5.5–3
TL062AC	4.1–3
TL062C	4.1–3
TL062V	4.1–3
TL064AC	4.1–4
TL064C	4.1–4
TL064V	4.1–5
TL071AC	4.1–2
TL071C	4.1–2
TL072AC	4.1–3
TL072C	4.1–3
TL074AC	4.1–4
TL074C	4.1–4
TL081AC	4.1–2
TL081C	4.1–2
TL082AC	4.1–3
TL082C	4.1–3
TL084AC	4.1–4
TL084C	4.1–4
TL431AC	4.4–2
TL431AI	4.4–2
TL431BC	4.4–2
TL431BI	4.4–2
TL431C	4.4–2
TL431I	4.4–2
TL494	4.2–16
TL594	4.2–16
TPV8100B	5.9–46
UAA1041	4.9–10
UAA1041B	4.9–10
UAA2016	4.3–3
UAA2016D	4.3–3
UAA2016P	4.3–3
UC2842A	4.2–13
UC2842B	4.2–14
UC2843A	4.2–13
UC2843B	4.2–14
UC2844	4.2–13
UC2844B	4.2–14
UC2845	4.2–13
UC2845B	4.2–14
UC3842A	4.2–13
UC3842B	4.2–13
UC3842BV	4.2–13
UC3843A	4.2–13
UC3843B	4.2–14
UC3843BV	4.2–14
UC3844	4.2–13
UC3844B	4.2–14
UC3844BV	4.2–14
UC3845	4.2–13
UC3845B	4.2–14
UC3845BV	4.2–14
ULN2003A	4.6–6
ULN2004A	4.6–6
ULN2803	4.6–6
ULN2804	4.6–6
VN0610LL	5.1–15
VN2222LL	5.1–15
XC68HC05C4	2.6–23
XC68HC05D32	2.5–6, 2.6–23
XC68HC05F2	2.6–23
XC68HC05F6	2.6–23
XC68HC05F8	2.6–23
XC68HC05G9	2.6–23
XC68HC05G10	2.6–23
XC68HC05H2	2.6–23
XC68HC05I8	2.6–23
XC68HC05J3	2.6–23
XC68HC05K0	2.6–23
XC68HC05K1	2.6–23
XC68HC05L1	2.6–24
XC68HC05L2	2.6–24
XC68HC05L4	2.6–24
XC68HC05L11	2.6–24
XC68HC05M4	2.6–24
XC68HC05P3	2.6–24
XC68HC05P18	2.5–7
XC68HC05RC16	2.5–8
XC68HC05SC11	2.6–24
XC68HC05SC21	2.6–24
XC68HC05SC24	2.6–24
XC68HC05SC27	2.6–24
XC68HC05SC28	2.5–8
XC68HC05T2	2.5–8, 2.6–24
XC68HC05T3	2.6–24
XC68HC05T4	2.6–24
XC68HC05T12	2.6–24
XC68HC05X4	2.6–24
XC68HC05X16	2.6–24
XC68HC11C0	2.6–6
XC68HC11E20	2.6–6
XC68HC11N4	2.6–8
XC68HC11P2	2.6–8
XC68HC705B32	2.5–9
XC68HC705C	2.6–23
XC68HC705C5	2.6–23
XC68HC705D9	2.5–9
XC68HC705F6	2.5–9
XC68HC705F8	2.6–23
XC68HC705G9	2.6–23
XC68HC705G10	2.6–23
XC68HC705I8	2.6–23
XC68HC705J3	2.6–23
XC68HC705K1	2.6–23
XC68HC705L1	2.5–10, 2.6–24
XC68HC705L2	2.6–24
XC68HC705L4	2.6–24
XC68HC705P9	2.6–24
XC68HC705T10	2.6–24
XC68HC705T12	2.6–24
XC68HC705V8	2.5–10
XC68HC705X4	2.5–10, 2.6–24
XC68HC711P2	2.6–8
XC68HC916X1	2.6–18
XC68HC916Y1	2.6–18
XC68334	2.6–21
µA78S40	4.2–15
1.5KE6.8A	5.2–3
1.5KE6.8CA	5.2–3
1.5KE24A	5.2–3
1.5KE24CA	5.2–3
1.5KE30A	5.2–3
1.5KE30CA	5.2–3
1.5KE33A	5.2–3
1.5KE33CA	5.2–3
1.5KE36A	5.2–3
1.5KE36CA	5.2–3
1.5KE51A	5.2–3
1.5KE51CA	5.2–3
1.5KE62A	5.2–3
1.5KE62CA	5.2–3
1.5SMC36AT3	5.2–6
1.5SMC56AT3	5.2–6
1N626/A	5.2–3
1N4004	5.6–10
1N4007	5.6–10
1N4728A	5.2–7
1N4731A	5.2–7
1N4733A	5.2–7
1N4734A	5.2–7
1N4735A	5.2–7

Device Index

Device Index	Page
1N4742A	5.2–7
1N4743A	5.2–7
1N4744A	5.2–7
1N4746A	5.2–7
1N4747A	5.2–7
1N4749A	5.2–7
1N4750A	5.2–7
1N4751A	5.2–7
1N4935	5.6–10
1N4937	5.6–10
1N5221B	5.2–7
1N5226B	5.2–7
1N5229B	5.2–7
1N5231B	5.2–7
1N5232B	5.2–7
1N5234B	5.2–7
1N5237B	5.2–7
1N5240B	5.2–7
1N5242B	5.2–7
1N5243B	5.2–7
1N5250B	5.2–7
1N5252B	5.2–7
1N5256B	5.2–7
1N5258B	5.2–7
1N5333B	5.2–7
1N5338B	5.2–7
1N5339B	5.2–7
1N5349B	5.2–7
1N5350B	5.2–7
1N5352B	5.2–7
1N5355B	5.2–7
1N5357B	5.2–7
1N5359B	5.2–7
1N5361B	5.2–7
1N5363B	5.2–7
1N5365B	5.2–7
1N5404	5.6–10
1N5406	5.6–10
1N5817	5.6–5
1N5818	5.6–5
1N5819	5.6–5
1N5820	5.6–5
1N5821	5.6–5
1N5822	5.6–5
1N5908	5.2–2
1N5918B	5.2–7
1N5920B	5.2–7
1N5929B	5.2–7
1N5934B	5.2–7
1N5936B	5.2–7
1N6280A	5.2–3
1N6282A	5.2–3
1N6283A	5.2–3
1N6284A	5.2–3
1N6288A	5.2–3
1N6290A	5.2–3
1N6373	5.2–2
1SMA5913BT3	5.2–5, 5.2–8
1SMA5914BT3	5.2–5
1SMA5915BT3	5.2–5
1SMA5916BT3	5.2–5, 5.2–8
1SMA5917BT3	5.2–5, 5.2–8
1SMA5918BT3	5.2–5, 5.2–8
1SMA5919BT3	5.2–5, 5.2–8
1SMA5920BT3	5.2–5, 5.2–8

Device Index	Page
1SMA5921BT3	5.2–5, 5.2–8
1SMA5922BT3	5.2–5, 5.2–8
1SMA5923BT3	5.2–5, 5.2–8
1SMA5924BT3	5.2–5, 5.2–8
1SMA5925BT3	5.2–5, 5.2–8
1SMA5926BT3	5.2–5
1SMA5927BT3	5.2–5, 5.2–8
1SMA5928BT3	5.2–5
1SMA5929BT3	5.2–5, 5.2–8
1SMA5930BT3	5.2–5
1SMA5931BT3	5.2–5, 5.2–8
1SMA5932BT3	5.2–5
1SMA5933BT3	5.2–5
1SMA5934BT3	5.2–5, 5.2–8
1SMA5935BT3	5.2–5, 5.2–8
1SMA5936BT3	5.2–5, 5.2–8
1SMA5937BT3	5.2–5
1SMA5938BT3	5.2–5
1SMA5939BT3	5.2–5
1SMA5940BT3	5.2–5
1SMA5941BT3	5.2–5
1SMA5942BT3	5.2–5
1SMA5943BT3	5.2–5
1SMA5944BT3	5.2–5
1SMA5945BT3	5.2–5
1SMB13AT3	5.2–6
1SMB13CAT3	5.2–6
1SMB15AT3	5.2–6
1SMB15CAT3	5.2–6
1SMB30AT3	5.2–6
1SMB30CAT3	5.2–6
1SMB33AT3	5.2–6
1SMB33CAT3	5.2–6
1SMB36AT3	5.2–6
1SMB36CAT3	5.2–6
1SMB5918BT3	5.2–8
1SMB5920BT3	5.2–8
1SMB5925BT3	5.2–8
1SMB5927BT3	5.2–8
1SMB5929BT3	5.2–8
1SMB5931BT3	5.2–8
1SMB5934BT3	5.2–8
1SMB5936BT3	5.2–8, 2.1–17, 2.1–18, 2.1–20, 2.1–22, 2.1–23
2N3055	5.5–7
2N3055A	5.5–8
2N3716	5.5–7
2N3773	5.5–7
2N3792	5.5–7
2N3904	5.1–2
2N3906	5.1–2
2N4399	5.5–7
2N4400	5.1–2
2N4401	5.1–2
2N4402	5.1–2
2N4403	5.1–2
2N4410	5.1–2
2N4918	5.5–4
2N4920	5.5–4
2N4921	5.5–4
2N4923	5.5–4
2N5087	5.1–3
2N5088	5.1–3
2N5089	5.1–3
2N5191	5.5–4

Device Index	Page
2N5192	5.5–4
2N5194	5.5–4
2N5195	5.5–4
2N5302	5.5–7
2N5401	5.1–4
2N5457	5.1–13
2N5458	5.1–13
2N5460	5.1–13
2N5461	5.1–13
2N5462	5.1–13
2N5485	5.1–13
2N5486	5.1–13
2N5551	5.1–4
2N5555	5.1–14
2N5639	5.1–14
2N5655	5.5–4
2N5657	5.5–4
2N5684	5.5–7
2N5686	5.5–7
2N5883	5.5–7
2N5885	5.5–7
2N6027	5.7–14
2N6028	5.7–14
2N6036	5.5–4
2N6039	5.5–4
2N6052	5.5–7
2N6059	5.5–7
2N6071A	5.7–8
2N6071B	5.7–8
2N6073A	5.7–8
2N6073B	5.7–8
2N6075	5.7–8
2N6075A	5.7–8
2N6075B	5.7–8
2N6107	5.5–3
2N6240	5.7–3
2N6241	5.7–3
2N6283	5.5–7
2N6284	5.5–7
2N6286	5.5–7
2N6287	5.5–7
2N6292	5.5–3
2N6341	5.5–7
2N6344	5.7–10
2N6348A	5.7–12
2N6349	5.7–10
2N6388	5.5–3
2N6426	5.1–3
2N6427	5.1–3
2N6439	5.9–42
2N6507	5.7–5
2N6508	5.7–5
2N6509	5.7–5
2N6517	5.1–4
2N6519	5.1–4
2N6520	5.1–4
2N6609	5.5–7
2N6668	5.5–3
2N7000	5.1–15
2N7002LT1	5.1–17, 5.4–5
2N7008	5.1–15
2SA1774	5.1–8
2SC4617	5.1–8
68HC05A16	2.5–13
68HC05B4	2.5–13

Device Index

Device Index	Page
68HC05B6	2.5–13
68HC05B8	2.5–13
68HC05B16	2.5–13
68HC05B32	2.5–11, 2.5–13
68HC05BD3	2.5–13
68HC05BD5	2.5–13
68HC05BS8	2.5–13
68HC05C0	2.5–11, 2.5–13
68HC05C4	2.5–13
68HC05C4A	2.5–13
68HC05C5	2.5–13, 2.5–16
68HC05C8A	2.5–13
68HC05C9	2.5–14
68HC05C9A	2.5–14
68HC05C12A	2.5–13
68HC05CCV	2.5–14, 2.5–16
68HC05CJ4	2.5–14
68HC05D9	2.5–14
68HC05D24	2.5–14
68HC05D32	2.5–14
68HC05E6	2.5–14
68HC05F4	2.5–14
68HC05F6	2.5–14
68HC05F8	2.5–14
68HC05G1	2.5–14
68HC05G3	2.5–14
68HC05J1	2.5–14
68HC05J1A	2.5–14, 2.5–16
68HC05J3	2.5–14
68HC05K0	2.5–14, 2.5–16
68HC05K1	2.5–14, 2.5–16
68HC05K3	2.5–14
68HC05L1	2.5–14
68HC05L2	2.5–14
68HC05L5	2.5–14
68HC05L7	2.5–14, 2.5–16
68HC05L9	2.5–14, 2.5–16
68HC05L10	2.5–16
68HC05L11	2.5–14, 2.5–16
68HC05L16	2.5–14
68HC05M4	2.5–14, 2.5–16
68HC05MC4	2.5–11, 2.5–14
68HC05P1	2.5–15
68HC05P3	2.5–14
68HC05P4	2.5–15
68HC05P6	2.5–15
68HC05P7	2.5–15
68HC05P8	2.5–15
68HC05P9	2.5–15
68HC05P9A	2.5–11
68HC05P18	2.5–11, 2.5–15
68HC05RC16	2.5–15
68HC05RC17	2.5–11
68HC05SC11	2.5–15
68HC05SC21	2.5–15
68HC05SC24	2.5–15
68HC05SC27	2.5–15
68HC05SR3	2.5–11, 2.5–15
68HC05T1	2.5–15, 2.5–16
68HC05T2	2.5–15, 2.5–16
68HC05T10	2.5–15
68HC05V7	2.5–11, 2.5–15
68HC05V12	2.5–15
68HC05X4	2.5–15
68HC05X16	2.5–15
68HC05X32	2.5–15
68HC08XL36	2.5–11, 2.5–15
68HC705A24	2.5–13, 2.5–17
68HC705B5	2.5–13, 2.5–17
68HC705B16	2.5–13, 2.5–17
68HC705B32	2.5–13, 2.5–17
68HC705BD3	2.5–13, 2.5–17
68HC705BD5	2.5–13, 2.5–17
68HC705BS8	2.5–13
68HC705C4A	2.5–13, 2.5–17
68HC705C5	2.5–13, 2.5–16, 2.5–17
68HC705C8	2.5–17
68HC705C8A	2.5–13, 2.5–17
68HC705C9	2.5–14, 2.5–17
68HC705C9A	2.5–14
68HC705CCV	2.5–14, 2.5–16
68HC705CJ4	2.5–14
68HC705D9	2.5–14, 2.5–17
68HC705D32A	2.5–11, 2.5–14
68HC705E5	2.5–11
68HC705E6	2.5–14, 2.5–17
68HC705F4	2.5–14, 2.5–17
68HC705F6	2.5–14, 2.5–17
68HC705F8	2.5–14, 2.5–17
68HC705G1	2.5–14, 2.5–17
68HC705G4	2.5–14
68HC705J1A	2.5–14, 2.5–16, 2.5–17
68HC705J2	2.5–14, 2.5–17
68HC705J3	2.5–14, 2.5–17
68HC705JP7	2.5–11
68HC705K1	2.5–14, 2.5–16, 2.5–17
68HC705L1	2.5–14, 2.5–17
68HC705L2	2.5–14, 2.5–17
68HC705L5	2.5–14, 2.5–17
68HC705L10	2.5–14
68HC705L16	2.5–14, 2.5–17
68HC705MC4	2.5–11, 2.5–14, 2.5–17
68HC705P3	2.5–17
68HC705P6	2.5–15, 2.5–17
68HC705P6A	2.5–11
68HC705P9	2.5–15, 2.5–17
68HC705RC16	2.5–11, 2.5–15
68HC705RC17	2.5–11
68HC705SR3	2.5–15, 2.5–17
68HC705T10	2.5–15, 2.5–17
68HC705V8	2.5–15, 2.5–17
68HC705V12	2.5–15, 2.5–17
68HC705X4	2.5–15, 2.5–17
68HC705X32	2.5–11, 2.5–15, 2.5–17
68HC708XL36	2.5–11, 2.5–15, 2.5–17
68HC805K3	2.5–11
68HC805P18	2.5–15, 2.5–17

Subject Index

A

Advanced Digital Consumer Products 1.0–1
Advanced Digital Consumer (ADC) Division 1.1–1
High Definition TV 1.1–4
Legacy Converter Box 1.1–2
Standard Definition TV 1.1–3
Amplifier Modules, RF
Base Stations 5.9–53–5.9–54
Land Mobile/Portable 5.9–52–5.9–53
Wideband Linear 5.9–54
Amplifiers 5.9–51
RF 5.9–51
CATV Distribution 5.9–57–5.9–62
Integrated Power 5.9–6–5.9–7
Amplifiers and Comparators 4.1–1
Amplifiers and Comparators Package Overview 4.1–10
Comparators 4.1–9
Dual 4.1–9
Bipolar 4.1–9
CMOS 4.1–9
Quad 4.1–9
Bipolar 4.1–9
CMOS 4.1–9
Single 4.1–9
Bipolar 4.1–9
CMOS 4.1–9
High Frequency Amplifiers 4.1–7
AGC Amplifiers 4.1–7
Family Wideband General Purpose 4.1–7
Miscellaneous Amplifiers 4.1–8
Bipolar 4.1–8
Dual Operational Amplifier and Dual Voltage Comparator 4.1–8
CMOS 4.1–8
Dual Programmable Operational Amplifier and Dual Programmable Comparator 4.1–8
Dual Video Amplifiers 4.1–8
Quad Programmable Operational Amplifier 4.1–8
One Volt SMARTMOS Rail–to–Rail Dual Operational Amplifier 4.1–6
Operational Amplifiers 4.1–2
Dual Operational Amplifiers 4.1–3
Quad Operational Amplifiers 4.1–4
Single Operational Amplifiers 4.1–2
Application Specific Rectifiers 5.6–3
Automotive Electronic Circuits 4.9–1
Alternator Regulators 4.9–3
Alternator Voltage Regulator 4.9–14
Automotive Direction Indicator 4.9–10
Automotive Electronic Circuits Package Overview 4.9–17
Automotive ISO 9141 Serial Link Driver 4.9–12
Automotive Wash Wiper Timer 4.9–11
Basic Octal Serial Switch with Serial Peripherial Interface I/O 4.9–16
Communication Bus Circuits 4.9–3
Dual High–Side Switch 4.9–7
Electronic Ignition Circuits 4.9–2
High Side TMOS Driver 4.9–9
ISO Serial Link Interface 4.9–15
Low Side Protected Switch 4.9–8
Low– and High–Side Switches 4.9–3
MI–Bus Interface Stepper Motor Controller 4.9–10
Multifunction Very Low Dropout Voltage Regulator 4.9–13
Octal Serial Switch 4.9–6

A (continued)

Quad Fuel Injector Driver 4.9–5
Special Function Circuits 4.9–4
Voltage Regulators 4.9–2

B

Base Stations, RF 5.9–53–5.9–54
Bipolar Power Transistors 5.5–2
Audio 5.5–8
Audio/Servo Loads 5.5–8
DPAK 5.5–12
DPAK–Surface Mount 5.5–5
Electronic Lamp Ballasts 5.5–9, 5.5–11
TO–220 ..... 5.5–12
TO–220AB 5.5–11
Metal 5.5–7
TO–204AA 5.5–7
TO–204AE 5.5–7
Plastic 5.5–4, 5.5–5
TO–220 ..... 5.5–6
TO–220AB 5.5–3
TO–225AA 5.5–4, 5.5–12
TO–264 ..... 5.5–5
SO–8 ..... 5.5–4
SOT–223 ..... 5.5–5

C

C Compiler Packages 2.1–26
Communication Circuits 4.7–1
Analog Front End ICs 4.7–27
Dual 16–Bit Linear Codec–Filter 4.7–27
Communications Circuits Package Overview 4.7–51
Electronic Telephone 4.7–28
The Complete Electronic Telephone Circuit 4.7–28
High–Speed Modem Chip Sets 4.7–23
External Active Modem Chip Set and Software 4.7–24
ISA Passive Modem Chip Set and Software 4.7–25
PCI Passive Modem Chip Set and Software 4.7–26
ISDN Voice/Data Circuits 4.7–18
Integrated Services Digital Network 4.7–18
Second Generation S/T–Interface Transceivers 4.7–19
Second Generation U–Interface Transceivers 4.7–19
U–Interface Transceiver Evaluation Kit 4.7–20
Low Power DC – 1.8 GHz LNA, Mixer and VCO 5.9–19
Low Power DC – 2.4 GHz Linear Mixer 5.9–20
Narrowband FM Coilless Detector IF Subsystem 4.7–9, 5.9–22
Narrowband FM Receiver 4.7–8, 5.9–18
Phase–Locked Loop Components 4.7–48, 5.9–26
Phase–Locked Loop Functions 4.7–49, 5.9–27
PLL Frequency Synthesizers 4.7–48, 5.9–26
RF Communications 4.7–2, 5.9–12
Balanced Modulator/Demodulator 4.7–4, 5.9–14
Infrared Transceivers 4.7–4, 5.9–14
Narrowband Dual Conversion Receivers – FM/FSK – VHF 4.7–3, 5.9–13
Narrowband Single Conversion Receivers – VHF 4.7–3, 5.9–13
RF Front End ICs 4.7–2, 5.9–12
Transmitters – AM/FM/FSK 4.7–4, 5.9–14
Universal Cordless Phone Subsystem ICs 4.7–3, 5.9–13
Wideband (FM/FSK) IFs 4.7–2, 5.9–12
Wideband Single Conversion Receivers – VHF 4.7–2, 5.9–12

Subject Index

C (continued)

- Speakerphones ... 4.7–34
  - Telephone Line Interface and Speakerphone Circuit ... 4.7–38
  - The Motorola Family of Speakerphone Integrated Circuits ... 4.7–39
  - Voice Switched Speakerphone Circuit ... 4.7–34, 4.7–35, 4.7–37
  - Voice Switched Speakerphone with µProcessor Interface ... 4.7–36
- Speech Networks ... 4.7–30
  - Cordless Universal Telephone Interface ... 4.7–31
  - Programmable Telephone Line Interface Circuit with Loudspeaker Amplifier ... 4.7–32
  - Telephone Line Interface ... 4.7–33
  - Telephone Speech Network with Dialer Interface ... 4.7–30
- Telecommunications ... 4.7–13
  - PBX Architecture (Analog Transmission) ... 4.7–14
    - Dual Tone Multiple Frequency Receiver ... 4.7–18
    - PCM Monocircuits Codec–Filters (CMOS LSI) ... 4.7–14
  - Subscriber Loop Interface Circuit (SLIC) ... 4.7–13
- Telephone Accessory Circuits ... 4.7–41
  - 300 Baud FSK Modems ... 4.7–42
  - ADPCM Transcoder ... 4.7–42
  - Audio Amplifier ... 4.7–41
  - Calling Line ID Receiver Evaluation Kit ... 4.7–43
  - Calling Line Identification (CLID) Receiver with Ring Detector ... 4.7–43
  - Continuously Variable Slope Delta (CVSD) Modulator/Demodulator ... 4.7–44
  - Current Mode Switching Regulator ... 4.7–41
  - Summary of Bipolar Telecommunication Circuits ... 4.7–45
- Tone Ringers ... 4.7–29
- UHF, FM/AM Transmitter ... 4.7–12, 5.9–25
- Universal Cordless Telephone Subsystem IC ... 4.7–5, 5.9–15
- Universal Cordless Telephone Subsystem IC with Scrambler ... 4.7–6, 5.9–16
- VHF – 2.0 GHz Low Noise Amplifier with Programmable Bias ... 5.9–21
- Voice/Data Communication (Digital Transmission) ... 4.7–21
  - 2–Wire ISDN Universal Digital Loop Transceiver II (UDLT II) ... 4.7–22
  - 2–Wire Universal Digital Loop Transceiver (UDLT) ... 4.7–21
- Wideband FM IF Subsystem ... 4.7–11, 5.9–24
- Wideband FM IF System ... 4.7–10, 5.9–23

Consumer Electronic Circuits ... 4.8–1

- Consumer Electronic Circuits Package Overview ... 4.8–18
- Entertainment Radio Receiver Circuits ... 4.8–2
  - Audio Amplifiers ... 4.8–2
  - C–Quam AM Stereo Decoders ... 4.8–2
  - Entertainment Receiver RF/IF ... 4.8–2
- Video Circuits ... 4.8–3
  - Advanced Comb Filter–II (ACF–II) ... 4.8–11
  - Advanced NTSC Comb Filter ... 4.8–10
  - Advanced PAL/NTSC Encoder ... 4.8–17
  - Comb Filters ... 4.8–3
  - Deflection ... 4.8–3
  - Digitally Controlled Video Processor for Multimedia Applications ... 4.8–6
  - Encoders ... 4.8–3
  - Miscellaneous ... 4.8–4
  - Modulator ... 4.8–4

C (continued)

- Monitor Subsystem ... 4.8–4
- Multistandard Video/Timebase Processor ... 4.8–9
- PLL Tuning Circuit with 3–Wire Bus ... 4.8–15
- PLL Tuning Circuit with DC/DC Converter and I2C Bus ... 4.8–15
- PLL Tuning Circuit with I2C Bus ... 4.8–14, 4.8–15, 4.8–16
- PLL Tuning Circuits with 3–Wire Bus ... 4.8–13
- Triple 8–Bit A/D Converter ... 4.8–7
- Tuner PLL Circuits ... 4.8–4
- TV Decoder ... 4.8–3
- TV IF Circuits ... 4.8–3
- TV Picture–in–Picture ... 4.8–3
- Video Capture Chip Sets ... 4.8–3
- Video Data Converters ... 4.8–4

Converters, Digital Signal Processors ... 2.1–1

D

D2PAK ... 5.4–6, 5.6–3

- Rectifiers ... 5.6–3, 5.6–4, 5.6–8
- TMOS Power ... 5.4–6

D2PAK – SL, Rectifiers ... 5.6–6

D3PAK ... 5.4–7

- TMOS Power ... 5.4–7

Data Conversion ... 4.5–1

- A–D Converters ... 4.5–2
  - CMOS ... 4.5–2
  - Sigma–Delta ... 4.5–2
- D–A Converters ... 4.5–3
  - CMOS ... 4.5–3
  - Sigma–Delta ... 4.5–3
- Data Conversion Package Overview ... 4.5–4

Development Tools

- Digital Signal Processors ... 2.1–1
- Echelon Products, Support Tools ... 2.7–10
- LonWorks Products ... 2.7–1, 2.7–2
  - Support Tools ... 2.7–9

Discrete Products ... 5.0–1

- RF ... 5.9–1, 5.9–2

DO–41 ... 5.2–7

- Zener Diodes ... 5.2–7

DPAK ... 5.4–6, 5.5–12, 5.6–3

- Bipolar Power Transistors ... 5.5–12
- Rectifiers ... 5.6–3, 5.6–4, 5.6–7, 5.6–8
- TMOS Power ... 5.4–6

DSP Development Tools ... 2.1–17

E

Evaluation Boards, RF Monolithic Integrated Circuits ... 5.9–3

Evaluation Modules ... 2.1–17

EZFET ... 5.4–4

- Power MOSFETs ... 5.4–4

F

Field Programmable Gate Arrays (FPGA) ... 3.1–1

Field–Effect Transistors ... 5.1–1, 5.1–13, 5.4–1

- JFETs, Small Signal ... 5.1–13
- MOSFETs, Small Signal ... 5.1–15
- Power MOSFETs ... 5.4–1
- Surface Mount FETs, Small Signal ... 5.1–16

Subject Index

I

IGBT, TMOS Power **5.4–8**
Ignition IGBTs **5.4–8**
TMOS Power 5.4–8
Integrated Circuits, Monolithic **5.9–3–5.9–9**
RF 5.9–3–5.9–9
Evaluation Boards 5.9–3
Receiver Functions 5.9–4–5.9–5
Switching 5.9–4
Transmitter Functions 5.9–5–5.9–8
Interface Circuits **4.6–1**
CMOS Display Drivers 4.6–7
Display Drivers 4.6–7
Functions 4.6–7
Enhanced Ethernet Transceiver 4.6–2
Hex EIA–485 Transceiver with Three–State Outputs 4.6–4
Inkjet Drivers 4.6–6
28–Channel Inkjet Driver 4.6–6
Interface Circuits Package Overview 4.6–8
ISO 8802–3 [IEEE 802.3] 10BASE–T Transceiver 4.6–3
Line Drivers 4.6–5
EIA Standard 4.6–5
EIA–232–E/V.28 CMOS Drivers/Receivers 4.6–5
IEEE 802.3 Transceivers 4.6–6
Line Transceivers 4.6–5
Peripheral Drivers 4.6–6
Line Receivers 4.6–5
EIA Standard 4.6–5

L

LDMOS, RF **5.9–6, 5.9–37, 5.9–40, 5.9–44, 5.9–47, 5.9–52–5.9–55**
Amplifier Modules 5.9–52–5.9–55
High Power Discrete Transistors 5.9–40, 5.9–44, 5.9–47
Medium Power Discrete Transistors 5.9–37
Monolithic Integrated Circuits 5.9–6
Linear Amplifiers, Wideband **5.9–54**
RF 5.9–54
Logic Integrated Circuits, Programmable Logic **3.1–1**
LONWORKS Device Data, Introduction, Features **2.7–5**

M

Mfax – Touch–Tone FAX for Technical Data **6.1–1**
Micro–8 ..... **5.9–5**
RF 5.9–5
Micro8 ..... **5.4–4**
HDTMOS Products 5.4–4
Microcomputer Components
ATM 2.9–1
ATM Cell Processor 2.9–3
Features of the MC92501 ..... 2.9–3
ATM Network 2.9–2
Description 2.9–2
Fuzzy Logic 2.6–26
M68000 Family
Coprocessors 2.2–10
Data Communication Devices 2.2–12
DMA Controllers 2.2–10
Embedded Controllers 2.2–5
Fiber Distributed Data Interface 2.2–13
General Purpose I/O 2.2–12

M (continued)

Integrated Processors 2.2–7
Microprocessors 2.2–1, 2.2–2
Network Devices 2.2–10
M88000 RISC Family 2.3–1
Cache/Memory Management Units 2.3–3
Microprocessors 2.3–2
Memory Products 2.8–1
Fast Static RAMs 2.8–2
Asynchronous 2.8–3
Modules 2.8–4
Flash Memory 2.8–5
Microcontroller Development Tools 2.5–13, 2.6–22
On-Line Help 2.5–22, 2.6–26
PowerPC RISC Family 2.4–1
MPC105 PCI Microprocessor 2.4–15
MPC106 PCI Microprocessor 2.4–16
MPC601 RISC Microprocessor 2.4–2
MPC602 RISC Microprocessor 2.4–3
MPC603 RISC Microprocessor 2.4–3
MPC603e RISC Microprocessor 2.4–6
MPC604 RISC Microprocessor 2.4–9
MPC604e RISC Microprocessor 2.4–9
MPC620 RISC Microprocessor 2.4–13
Single-Chip Microcontrollers (MCU) 2.5–1, 2.6–1
Configuration and Order Information for MMDS/MMEVS 2.5–13
Configuration and Order Information for Other Motorola Development Tools (EVM/EVS/ICS) 2.5–16
Configuration and Order Information for Programmers 2.5–17
M6800 Series Microprocessors and Peripherals 2.6–10
M68300 Family 2.6–19
M68HC05 CSIC Family 2.5–2
M68HC08 Family 2.5–12
M68HC11 Family 2.6–2
M68HC16 Family 2.6–14
MC68HC05 Microcontrollers 2.5–6
Modular Microcontrollers 2.6–12
One-Time Programmable (OTP) / Emulator MCUs 2.5–9
Third Party Developers for 68HC05 and 68HC705 Family MCUs 2.5–18
Third-Party Support 2.6–27
Mini Mosorb **5.2–2**
Transient Voltage Suppressors 5.2–2
Modular Power Systems **5.3–1**
16 Pin 3&3 VersaPower 5.3–4
16 Pin VersaPower 5.3–3
24 Pin VersaPower 5.3–5
Cheval 5.3–7
E–Power 5.3–6
Module Part Numbering System 5.3–2
MOSFETs **5.4–4**
MOSFETs, Power, TMOS **5.4–1**
Mosorb **5.2–2, 5.2–3**
Transient Voltage Suppressors 5.2–2, 5.2–3
Motorola Programmable Array (MPA) **3.1–1**
Motorola RF/IF Integrated Circuits **5.9–11**
Motorola SPS World Marketing Internet Server **6.1–1**
Motorola Technical Training Courses **6.1–6**
MPA Design System **3.1–1**

Subject Index

O

Other Analog Circuits **4.10–1**
Multipliers 4.10–2
Linear Four–Quadrant Multipliers 4.10–2
Other Analog Circuits Package Overview 4.10–4
Smoke Detectors (CMOS) 4.10–3
Timing Circuits 4.10–2
Duals 4.10–2
Singles 4.10–2

P

Packaging Specifications
Adhesion Pull Tests 5.11–9
Fan Fold Box Styles 5.11–9
TO–92 EIA Radial Tape 5.11–7
PFP–16 ..... **5.9–6–5.9–7**
RF 5.9–6–5.9–7
PLD–1 ..... **5.9–37**
RF 5.9–37
PLD–1.5 ..... **5.9–40**
RF 5.9–40
Power MOSFETs, TMOS **5.4–1**
Power Supply Circuits **4.2–1**
Battery Management Circuits 4.2–36
Battery Charger ICs 4.2–36
Battery Fast Charge Controller 4.2–36
Power Supply, Battery Charger, Regulation Control Circuit 4.2–37
Battery Pack ICs 4.2–38
Lithium Battery Protection Circuit for One Cell Battery Packs 4.2–41
Lithium Battery Protection Circuit for One or Two Cell Battery Packs 4.2–40
Lithium Battery Protection Circuit for One to Four Cell Battery Packs 4.2–38
Lithium Battery Protection Circuit for Three to Four Cell Battery Packs 4.2–39
Linear Voltage Regulators 4.2–2
Adjustable Output 4.2–4
Adjustable Output Regulators 4.2–4
Fixed Output 4.2–2
Fixed Voltage Medium and Low Dropout Regulators 4.2–3
Linear Voltage Regulators 4.2–2
Micropower Voltage Regulators for Portable Applications 4.2–5
120 mA Micropower Voltage Regulator 4.2–6
80 mA Micropower Voltage Regulator 4.2–5
Micropower smallCAP Voltage Regulators with On/Off Control 4.2–7
Micropower Voltage Regulator for External Power Transistor 4.2–6
MOSFET/IGBT Drivers 4.2–42
High Speed Dual Drivers 4.2–42
Inverting 4.2–42
Noninverting 4.2–42
Single IGBT Driver 4.2–42
Single IGBT Gate Driver 4.2–43
Power Supply Circuits Package Overview 4.2–44
Special Regulators 4.2–8
SCSI Regulator 4.2–12
Voltage Regulator/Supervisory 4.2–8
Special Switching Regulator Controllers 4.2–27

P (continued)

Dual Channel Controllers 4.2–27
Power Factor Controllers 4.2–28, 4.2–29
Universal Microprocessor Power Supply Controllers 4.2–27
Supervisory Circuits 4.2–31
Micropower Undervoltage Sensing Circuits 4.2–32
Micropower Undervoltage Sensing Circuits with Programmable Output Delay 4.2–33
Over/Undervoltage Protection Circuit 4.2–31
Overvoltage Crowbar Sensing Circuit 4.2–31
Undervoltage Sensing Circuit 4.2–34
Universal Voltage Monitor 4.2–35
Switching Regulator Control Circuits 4.2–13
CMOS Micropower DC–to–DC Converters 4.2–18
Fixed Frequency PWM Micropower DC–to–DC Converter 4.2–19
Variable Frequency Micropower DC–to–DC Converter 4.2–18
Critical Conduction SMPS Controller 4.2–26
Double–Ended Controllers 4.2–16
Easy Switcher Single–Ended Controllers with On–Chip Power Switch 4.2–15, 4.2–20
Step–Down Voltgae Regulators 4.2–20, 4.2–21
Single–Ended Controllers 4.2–13
Single–Ended Controllers with On–Chip Power Switch 4.2–15
Single–Ended GreenLine Controllers 4.2–22
Enhanced Mixed Frequency Mode GreenLine PWM Controller 4.2–22
High Safety Latched Mode GreenLine PWM Controller for (Multi)Synchronized Applications 4.2–23
High Safety Standby Ladder Mode GreenLine PWM Controller 4.2–22
Very High Voltage Single–Ended Controller with On–Chip Power Switch 4.2–16
Very High Voltage Switching Regulator 4.2–24, 4.2–25
Voltage Regulator/Supervisory
GaAs Power Amplifier Support IC 4.2–11
Low Dropout Regulator 4.2–9
Microprocessor Voltage Regulator and Supervisory Circuit 4.2–9
Power Management Controller 4.2–10
Very Low Dropout Regulator 4.2–10
Power/Motor Control Circuits **4.3–1**
Motor Controllers 4.3–4
Brushless DC Motor Controllers 4.3–4
Closed Loop Brushless Motor Adapter 4.3–7
DC Servo Motor Controller/Driver 4.3–8
Stepper Motor Driver 4.3–9
Universal Motor Speed Controller 4.3–10
Power Controllers 4.3–2
High–Side Driver Switch 4.3–3
Zero Voltage Controller 4.3–3
Zero Voltage Switch 4.3–2
Power/Motor Control Circuits Package Overview 4.3–11
POWERMITE **5.6–4**
Rectifiers 5.6–4
PowerPC RISC Microprocessors **2.4–2**
POWERTAP, Rectifiers **5.6–7, 5.6–9**
POWERTAP II **5.6–3**
Rectifiers 5.6–3, 5.6–7
POWERTAP III **5.6–3**
Rectifiers 5.6–3
Processors, Digital Signal Processors **2.1–1**

Subject Index

P (continued)

16–Bit 2.1–4, 2.1–5, 2.1–11, 2.1–12, 2.1–13, 2.1–14, 2.1–15
24–Bit 2.1–2, 2.1–3, 2.1–6, 2.1–7, 2.1–8, 2.1–9, 2.1–10
32–Bit 2.1–15

R

Receiver Functions 5.9–4
RF 5.9–4
1.5 – 2.2 GHz Front End 5.9–5
2.4 GHz Front End 5.9–5
900 MHz Front End 5.9–4
Rectifier Numbering System 5.6–2
Rectifiers 5.6–1
Application Specific 5.6–3
Axial Lead Schottky 5.6–5
D2PAK 5.6–5
Fast Recovery 5.6–10
General Purpose 5.6–10
Low VF Schottky 5.6–3
MEGAHERTZ 5.6–3, 5.6–9
POWERTAP II 5.6–9
POWERTAP II Schottky 5.6–7
POWERTAP III Schottky 5.6–7
Schottky 5.6–4
Surface Mount 5.6–4
TC–218 ..... 5.6–6, 5.6–9
TO–220 ..... 5.6–5
TO–220AB 5.6–5
TO–247 ..... 5.6–6, 5.6–9
Ultrafast 5.6–8
Axial Lead 5.6–8
POWERTAP II 5.6–9
Surface Mount 5.6–8
TO–218 ..... 5.6–9
TO–220 Type 5.6–9
TO–247 ..... 5.6–9
UltraSoft 5.6–3, 5.6–7
RF Products 5.9–1, 5.9–2
RF, LDMOS 5.9–6, 5.9–37, 5.9–40, 5.9–44, 5.9–47, 5.9–52–5.9–55
Amplifier Modules 5.9–52–5.9–55
High Power Discrete Transistors 5.9–40, 5.9–44, 5.9–47
Medium Power Discrete Transistors 5.9–37
Monolithic Integrated Circuits 5.9–6

S

SC–59 ..... 5.2–4
Bipolar Transistors, Small Signal 5.1–7
Switching Diodes, Small Signal 5.1–25
TVS/Zeners 5.2–4, 5.2–5
SC–70/SOT–323 ..... 5.4–5, 5.9–33
Bipolar Transistors, Small Signal 5.1–7
Dual Schottky Diodes, Small Signal 5.1–23
RF 5.9–33
Single Schottky Diodes, Small Signal 5.1–23
Switching Diodes, Small Signal 5.1–25
TMOS Power 5.4–5
SC–70ML/SOT–363 ..... 5.9–33
RF 5.9–33
SC–90/SC–75 ..... 5.9–33
RF 5.9–33

S (continued)

Semiconductor Components Group 5.0–1
Sensors 5.8–1
Acceleration 5.8–12
Gas 5.8–12
Pressure 5.8–2
Compensated and Calibrated 5.8–7, 5.8–9
High Impedance 5.8–7, 5.8–10
Signal Conditioned 5.8–7, 5.8–9
Uncompensated 5.8–7, 5.8–8
Silicon Controlled Rectifiers 5.7–2
Thyristors 5.7–2
SMA 5.2–5, 5.6–4
Rectifiers 5.6–4, 5.6–10
TVS/Zeners 5.2–5, 5.2–8
Small Signal Multi–integrated Devices 5.1–27
Integrated Relay/Solenoid Driver 5.1–27
Low–Voltage Bias Stabilizer 5.1–27
Small Signal Transistors 5.1–1, 5.1–2
Bipolar Transistors 5.1–2
Plastic–Encapsulated 5.1–2
Plastic–Encapsulated Surface Mount 5.1–6
Small Signal Tuning and Switching Diodes 5.1–1, 5.1–18
Abrupt Junction 5.1–18
Hyper–Abrupt Junction 5.1–20
Schottky 5.1–22
Switching 5.1–24
SMARTDISCRETES 5.4–8
Ignition IGBTs 5.4–8
TMOS Power 5.4–8
TO–220AB 5.4–8
SMB 5.2–5, 5.6–3, 5.6–4
Rectifiers 5.6–3
TVS/Zeners 5.2–5, 5.2–8
SMC 5.2–6, 5.6–4
Rectifiers 5.6–4, 5.6–8
TVS/Zeners 5.2–6
SO–16 ..... 5.9–5–5.9–9
RF 5.9–5–5.9–9
SO–8 ..... 5.4–3, 5.9–4–5.9–9, 5.9–43
MiniMOS 5.4–3
RF 5.9–4–5.9–9, 5.9–34–5.9–36, 5.9–43
TMOS Power 5.4–3
SOD–123 ..... 5.2–8, 5.6–3
Rectifiers 5.6–3, 5.6–4
TVS/Zeners 5.2–8
SOT–143 ..... 5.9–33, 5.9–37
RF 5.9–4–5.9–5, 5.9–33, 5.9–37
SOT–223 ..... 5.4–4
Bipolar Transistors, Small Signal 5.1–11
Thyristors 5.7–2
TMOS Power 5.4–4
SOT–23 ..... 5.1–27, 5.2–3, 5.4–5, 5.9–33
Bipolar Transistors, Small Signal 5.1–6
Dual Schottky Diodes, Small Signal 5.1–23
FETs, Small Signal 5.1–16
Multi–integrated Devices, Small Signal 5.1–27
RF 5.9–33, 5.9–35–5.9–36
Schottky Diodes, Small Signal 5.1–23
Single Schottky Diodes, Small Signal 5.1–23

Subject Index

S (continued)

Switching Diodes, Small Signal 5.1–26
TMOS Power 5.4–5
Tuning Diodes, Small Signal 5.1–19
TVS/Zeners 5.2–3, 5.2–8

SOT–363 ..... 5.1–7
Plastic–Encapsulated Surface Mount Transistors, Small Signal 5.1–7
Schottky Diodes, Small Signal 5.1–23

SOT–416/SC–90 ..... 5.1–8
Plastic–Encapsulated Surface Mount Transistors, Small Signal 5.1–8
Switching Diodes, Small Signal 5.1–26

SOT–89 ..... 5.9–37
RF 5.9–37

Surface Mount Information
Footprints for Soldering
D2PAK 5.10–5
D3PAK 5.10–5
DPAK 5.10–5
MICRO8 ..... 5.10–5
OPTO SO–8 ..... 5.10–5
SC–59 ..... 5.10–5
SC–70/SOT–323 ..... 5.10–5
SC–90 ..... 5.10–5
SMA 5.10–5
SMB 5.10–5
SMC 5.10–5
SO–14 ..... 5.10–5
SO–16 ..... 5.10–5
SO–8 ..... 5.10–5
SOD–123 ..... 5.10–5
SOT–143 ..... 5.10–5
SOT–223 ..... 5.10–5
SOT–23 ..... 5.10–5
SOT–363 ..... 5.10–5
TSSOP–6 ..... 5.10–5
Using Surface Mount Packages 5.10–2

Surface Mount Products 5.2–3, 5.4–1, 5.5–2, 5.5–5, 5.6–4, 5.9–43
Bipolar Power Transistors 5.5–2
Rectifiers 5.6–4
Schottky 5.6–4
Ultrafast 5.6–8
RF 5.9–43
Micro–8 ..... 5.9–5, 5.9–9
PFP–16 ..... 5.9–6–5.9–7, 5.9–9
PLD–1 ..... 5.9–37
PLD–1.5 ..... 5.9–40
SC–70/SOT–323 ..... 5.9–33, 5.9–35–5.9–36
SC–70ML/SOT–363 ..... 5.9–33, 5.9–35–5.9–36
SC–90/SC–75 ..... 5.9–33, 5.9–35–5.9–36
SO–16 ..... 5.9–5–5.9–9
SO–8 ..... 5.9–4–5.9–9, 5.9–34–5.9–36, 5.9–43
SOT–143 ..... 5.9–4–5.9–5, 5.9–33, 5.9–35–5.9–36, 5.9–37
SOT–23 ..... 5.9–33, 5.9–35–5.9–36
TQFP–48 ..... 5.9–5, 5.9–9
TSSOP–16 ..... 5.9–5, 5.9–7–5.9–9
TSSOP–20 ..... 5.9–5, 5.9–9
TSSOP–20HS 5.9–7, 5.9–9
Thyristors, SOT–223 ..... 5.7–7
TMOS Power 5.4–1, 5.4–4, 5.4–5
D2PAK 5.4–6
D3PAK 5.4–7

S (continued)

DPAK 5.4–6
SC–70/SOT–323 ..... 5.4–5
SO–8 ..... 5.4–3
SOT–223 ..... 5.4–4
SOT–23 ..... 5.4–5
TSOP–6 ..... 5.4–5
TVS/Zeners 5.2–3
SC–59 ..... 5.2–4
SMA 5.2–5, 5.2–8
SMB 5.2–5, 5.2–8
SMC 5.2–6
SOD–123 ..... 5.2–8
SOT–23 ..... 5.2–3, 5.2–8
TO–236AB 5.2–8

Surface Mount Products, SCG 5.1–27
Small Signal 5.1–27
SC–59 ..... 5.1–7, 5.1–25
SC–70/SOT–323 ..... 5.1–7, 5.1–17, 5.1–25
SOT–223 ..... 5.1–12
SOT–23 ..... 5.1–6, 5.1–16, 5.1–25, 5.1–26, 5.1–27
SOT–363 ..... 5.1–7, 5.1–23
SOT–416/SC–90 ..... 5.1–8, 5.1–26

Surmetic 30 ..... 5.2–2
Transient Voltage Suppressors 5.2–2

Surmetic 40 ..... 5.2–2
Transient Voltage Suppressors 5.2–2
Zener Diodes 5.2–7

Switching 5.9–4
RF 5.9–4

T

Tape and Reel Options 4.11–1
Analog MPQ Table 4.11–5
Tape/Reel and Ammo Pack 4.11–5
D2PAK 4.11–5
DPAK 4.11–5
Micro–8 ..... 4.11–5
PLCC 4.11–5
SOIC 4.11–5
SOT–23 (5 Pin) 4.11–5
SOT–89 (3 Pin) 4.11–5
SOT–89 (5 Pin) 4.11–5
TO–92 ..... 4.11–5
Tape and Reel Configurations 4.11–2
Tape and Reel Information Table 4.11–4

Tape and Reel Specifications 5.11–2
Embossed Tape and Reel Data 5.11–4
Embossed Tape and Reel Ordering Information 5.11–3
Lead Tape Packaging Specifications for Axial–Lead Components 5.11–6

Technical Data and Literature 6.1–2

Technical Data Services
"IMAGINE" SPS Customer Magazine 6.1–1
Mfax – Touch–Tone FAX 6.1–1
Motorola SPS World Marketing Internet Server 6.1–1

Thyristors 5.7–1, 5.7–2
Silicon Controlled Rectifiers 5.7–2
General Purpose, Plastic 5.7–2
TRIACs 5.7–7
General Purpose, Plastic 5.7–7

Subject Index

T (continued)

Triggers 5.7–1
High Voltage Bidirectional TVS Devices 5.7–14
Programmable Unijunction Transistors 5.7–14
Silicon Bidirectional Switch 5.7–14

TMOS MOSFETs 5.1–15
Small Signal 5.1–15

TMOS Power MOSFETs 5.4–1

TMOS Power MOSFETs Numbering System 5.4–2

TO–218 ..... 5.6–3, 5.6–6, 5.6–9
Rectifiers 5.6–3, 5.6–6, 5.6–9

TO–218AC 5.6–6, 5.6–9
Rectifiers 5.6–6, 5.6–9

TO–220 ..... 5.6–3
Rectifiers 5.6–3

TO–220AB 5.4–7, 5.6–5
Rectifiers 5.6–9
Thyristors 5.7–4, 5.7–8
TMOS Power 5.4–7, 5.4–8

TO–220AC 5.6–5
Rectifiers 5.6–5, 5.6–9

TO–225AA (TO–126) 5.7–3
Thyristors 5.7–3, 5.7–7

TO–226AA (TO–92)
Bipolar Transistors, Small Signal 5.1–2
JFETs, Small Signal 5.1–13
Thyristors 5.7–2, 5.7–7, 5.7–14
TMOS MOSFETs, Small Signal 5.1–15
Tuning and Switching Diodes, Small Signal 5.1–19, 5.1–24

TO–226AC (TO–92)
Schottky Diodes, Small Signal 5.1–23
Tuning and Switching Diodes, Small Signal 5.1–18, 5.1–21, 5.1–25

TO–226AE (TO–92), Bipolar Transistors, Small Signal 5.1–2

TO–236AB
Bipolar Transistors, Small Signal 5.1–6
FETs, Small Signal 5.1–16
Schottky Diodes, Small Signal 5.1–23
Tuning and Switching Diodes, Small Signal 5.1–19, 5.1–21, 5.1–25

TO–247 ..... 5.4–7, 5.6–3, 5.6–6, 5.6–9
Rectifiers 5.6–3, 5.6–6, 5.6–9
TMOS Power 5.4–7

TO–264 ..... 5.4–8
TMOS Power 5.4–8

TQFP–48 ..... 5.9–5
RF 5.9–5

Transceivers, Digital Signal Processors 2.1–1

Transient Voltage Suppressors 5.2–2
Axial Leaded for Through–Hole Designs 5.2–2

T (continued)

Transistors, Discrete 5.9–31
RF 5.9–31
Medium Power 5.9–37
Power Bipolar 5.9–41–5.9–47
1.5 GHz 5.9–44
900 MHz 5.9–43–5.9–44
HF 5.9–41
Linear 5.9–45–5.9–47
Microwave 5.9–44–5.9–45
UHF 5.9–42–5.9–43
VHF 5.9–41–5.9–42
Power MOSFETs 5.9–38–5.9–40
Small Signal 5.9–32–5.9–36

Transmitter Functions 5.9–5
RF 5.9–5
1.5 – 2.2 GHz Transmit Chain 5.9–7–5.9–8
2.4 GHz Transmit Chain 5.9–8
900 MHz Transmit Chain 5.9–6–5.9–7

TRIACs 5.7–7
Thyristors 5.7–7

TSOP–6 ..... 5.4–5
TMOS Power 5.4–5

TSSOP–16 ..... 5.9–5
RF 5.9–5, 5.9–7–5.9–9

TSSOP–20 ..... 5.9–5
RF 5.9–5

TSSOP–20HS 5.9–7
RF 5.9–7

TVS/Zeners 5.2–1
Transient Voltage Suppressors 5.2–2
General–Purpose 5.2–2
Surface Mount 5.2–3
Zener Diodes, Voltage Regulator 5.2–7

U

Ultrafast Rectifiers 5.6–8
Axial Lead 5.6–8
POWERTAP 5.6–9
Surface Mount 5.6–8
TO–218 Type 5.6–9
TO–247 Type 5.6–9

UltraSoft Rectifiers 5.6–7

V

Voltage References 4.4–1
Precision Low Voltage References 4.4–2
Voltage References Package Overview 4.4–2

Voltage Regulator Diodes 5.2–7
TVS/Zeners 5.2–7

Z

Zener Diodes, Voltage Regulator 5.2–7
Axial Leaded for Through–Hole Designs 5.2–7
Surface Mount Packages 5.2–8

MOTOROLA AUTHORIZED DISTRIBUTOR & WORLDWIDE SALES OFFICES

NORTH AMERICAN DISTRIBUTORS

UNITED STATES

ALABAMA

Huntsville
- Allied Electronics, Inc. ..... (205)721–3500
- Arrow Electronics ..... (205)837–6955
- FAI ..... (205)837–9209
- Future Electronics ..... (205)830–2322
- Hamilton/Hallmark ..... (205)837–8700
- Newark ..... (205)837–9091
- Wyle Electronics ..... (205)830–1119

Mobile
- Allied Electronics, Inc. ..... (334)476–1875

ARIZONA

Phoenix
- Allied Electronics, Inc. ..... (602)831–2002
- FAI ..... (602)731–4661
- Future Electronics ..... (602)968–7140
- Hamilton/Hallmark ..... (602)736–7000
- Wyle Electronics ..... (602)804–7000

Tempe
- Arrow Electronics ..... (602)431–0030
- Newark ..... (602)966–6340
- PENSTOCK ..... (602)967–1620

CALIFORNIA

Agoura Hills
- Future Electronics ..... (818)865–0040

Calabassas
- Arrow Electronics ..... (818)880–9686
- Wyle Electronics ..... (818)880–9000

Culver City
- Hamilton/Hallmark ..... (310)558–2000

Irvine
- Arrow Electronics ..... (714)587–0404
- Arrow Zeus ..... (714)581–4622
- FAI ..... (714)753–4778
- Future Electronics ..... (714)453–1515
- Hamilton/Hallmark ..... (714)789–4100
- Wyle Laboratories Corporate . (714)753–9953
- Wyle Electronics ..... (714)789–9953

Los Angeles
- FAI ..... (818)879–1234

Manhattan Beach
- PENSTOCK ..... (310)546–8953

Newberry Park
- PENSTOCK ..... (805)375–6680

Orange County
- Allied Electronics, Inc. ..... (714)727–3010

Palo Alto
- Newark ..... (415)812–6300

Rancho Cordova
- Wyle Electronics ..... (916)638–5282

Riverside
- Allied Electronics, Inc. ..... (909)980–6522
- Newark ..... (909)980–2105

Rocklin
- Hamilton/Hallmark ..... (916)632–4500

Roseville
- Wyle Electronics ..... (916)783–9953

Sacramento
- Allied Electronics, Inc. ..... (916)632–3104
- FAI ..... (916)782–7882
- Newark ..... (916)565–1760

San Diego
- Allied Electronics, Inc. ..... (619)279–2550
- Arrow Electronics ..... (619)565–4800
- FAI ..... (619)623–2888
- Future Electronics ..... (619)625–2800
- Hamilton/Hallmark ..... (619)571–7540
- Newark ..... (619)453–8211
- PENSTOCK ..... (619)623–9100
- Wyle Electronics ..... (619)558–6600

San Fernando Valley
- Allied Electronics, Inc. ..... (818)598–0130

CALIFORNIA – continued

San Jose
- Allied Electronics, Inc. ..... (408)383–0366
- Arrow Electronics ..... (408)441–9700
- Arrow Electronics ..... (408)428–6400
- Arrow Zeus ..... (408)629–4789
- FAI ..... (408)434–0369
- Future Electronics ..... (408)434–1122

Santa Clara
- Wyle Electronics ..... (408)727–2500

Santa Fe Springs
- Newark ..... (310)929–9722

Sierra Madre
- PENSTOCK ..... (818)355–6775

Sunnyvale
- Hamilton/Hallmark ..... (408)435–3600
- PENSTOCK ..... (408)730–0300

Thousand Oaks
- Newark ..... (805)449–1480

Woodland Hills
- Hamilton/Hallmark ..... (818)594–0404

COLORADO

Lakewood
- FAI ..... (303)237–1400
- Future Electronics ..... (303)232–2008

Denver
- Allied Electronics, Inc. ..... (303)790–1664
- Newark ..... (303)373–4540

Englewood
- Arrow Electronics ..... (303)799–0258
- Hamilton/Hallmark ..... (303)790–1662
- PENSTOCK ..... (303)799–7845

Thornton
- Wyle Electronics ..... (303)457–9953

CONNECTICUT

Bloomfield
- Newark ..... (203)243–1731

Cheshire
- Allied Electronics, Inc. ..... (203)272–7730
- FAI ..... (203)250–1319
- Future Electronics ..... (203)250–0083
- Hamilton/Hallmark ..... (203)271–5700

Wallingford
- Arrow Electronics ..... (203)265–7741
- Wyle Electronics ..... (203)269–8077

FLORIDA

Altamonte Springs
- Future Electronics ..... (407)865–7900

Clearwater
- FAI ..... (813)530–1665
- Future Electronics ..... (813)530–1222

Deerfield Beach
- Arrow Electronics ..... (305)429–8200
- Wyle Electronics ..... (954)420–0500

Ft. Lauderdale
- FAI ..... (954)428–9494
- Future Electronics ..... (954)426–4043
- Hamilton/Hallmark ..... (954)677–3500
- Newark ..... (954)486–1151

Jacksonville
- Allied Electronics, Inc. ..... (904)739–5920
- Newark ..... (904)399–5041

Lake Mary
- Arrow Electronics ..... (407)333–9300
- Arrow Zeus ..... (407)333–3055

Largo/Tampa/St. Petersburg
- Hamilton/Hallmark ..... (813)507–5000
- Newark ..... (813)287–1578
- Wyle Electronics ..... (813)576–3004

Miami
- Allied Electronics, Inc. ..... (305)558–2511

Maitland
- Wyle Electronics ..... (407)740–7450

Orlando
- Allied Electronics, Inc. ..... (407)539–0055
- FAI ..... (407)865–9555
- Newark ..... (407)896–8350

FLORIDA – continued

Tallahassee
- FAI ..... (904)668–7772

Tampa
- Allied Electronics, Inc. ..... (813)579–4660
- Newark ..... (813)287–1578
- PENSTOCK ..... (813)247–7556

Winter Park
- Hamilton/Hallmark ..... (407)657–3300
- PENSTOCK ..... (407)672–1114

GEORGIA

Atlanta
- Allied Electronics, Inc. ..... (770)497–9544
- FAI ..... (404)447–4767

Duluth
- Arrow Electronics ..... (404)497–1300
- Hamilton/Hallmark ..... (770)623–4400

Norcross
- Future Electronics ..... (770)441–7676
- Newark ..... (770)448–1300
- PENSTOCK ..... (770)734–9990
- Wyle Electronics ..... (770)441–9045

IDAHO

Boise
- Allied Electronics, Inc. ..... (208)331–1414
- FAI ..... (208)376–8080
- Newark ..... (208)342–4311

ILLINOIS

Addison
- Wyle Laboratories ..... (708)620–0969

Arlington Heights
- Hamilton/Hallmark ..... (847)797–7300

Chicago
- Allied Electronics, Inc. (North) . (847)548–9330
- Allied Electronics, Inc. (South) . (708)535–0038
- FAI ..... (708)843–0034
- Newark Electronics Corp. .... (773)784–5100

Hoffman Estates
- Future Electronics ..... (708)882–1255

Itasca
- Arrow Electronics ..... (708)250–0500
- Arrow Zeus ..... (630)595–9730

Lombard
- Newark ..... (630)317–1000

Palatine
- PENSTOCK ..... (708)934–3700

Rockford
- Allied Electronics, Inc. ..... (815)636–1010

Springfield
- Newark ..... (217)787–9972

Wood Dale
- Allied Electronics, Inc. ..... (630)860–0007

INDIANA

Indianapolis
- Allied Electronics, Inc. ..... (317)571–1880
- Arrow Electronics ..... (317)299–2071
- Hamilton/Hallmark ..... (317)575–3500
- FAI ..... (317)469–0441
- Future Electronics ..... (317)469–0447
- Newark ..... (317)844–0047
- Wyle Electronics ..... (317)581–6152

Ft. Wayne
- Newark ..... (219)484–0766
- PENSTOCK ..... (219)432–1277

IOWA

Bettendorf
- Newark ..... (319)359–3711

Cedar Rapids
- Allied Electronics, Inc. ..... (319)390–5730
- Newark ..... (319)393–3800

KANSAS

Kansas City
- Allied Electronics, Inc. ..... (913)338–4372
- FAI ..... (913)381–6800

Lenexa
- Arrow Electronics ..... (913)541–9542

AUTHORIZED DISTRIBUTORS – continued

UNITED STATES – continued

KANSAS – continued

Olathe
- PENSTOCK ..... (913)829–9330

Overland Park
- Future Electronics ..... (913)649–1531
- Hamilton/Hallmark ..... (913)663–7900
- Newark ..... (913)677–0727

KENTUCKY

Louisville
- Allied Electronics, Inc. ..... (502)452–2293
- Newark ..... (502)423–0280

LOUISIANA

New Orleans
- Allied Electronics, Inc. ..... (504)466–7575

MARYLAND

Baltimore
- Allied Electronics, Inc. ..... (410)312–0810
- FAI ..... (410)312–0833

Columbia
- Arrow Electronics ..... (301)596–7800
- Arrow Zeus ..... (410)309–1541
- Future Electronics ..... (410)290–0600
- Hamilton/Hallmark ..... (410)720–3400
- PENSTOCK ..... (410)290–3746
- Wyle Electronics ..... (410)312–4844

Hanover
- Newark ..... (410)712–6922

MASSACHUSETTS

Bedford
- Wyle Electronics ..... (781)271–9953

Boston
- Allied Electronics, Inc. ..... (617)255–0361
- Arrow Electronics ..... (508)658–0900
- FAI ..... (508)779–3111
- Newark 1–800–4NEWARK

Bolton
- Future Corporate ..... (508)779–3000

Burlington
- PENSTOCK ..... (617)229–9100

Peabody
- Allied Electronics, Inc. ..... (508)538–2401
- Hamilton/Hallmark ..... (508)532–3701

Wilmington
- Arrow Zeus ..... (978)658–4776

Woburn
- Newark ..... (617)935–8350

MICHIGAN

Detroit
- Allied Electronics, Inc. ..... (313)416–9300
- FAI ..... (313)513–0015
- Future Electronics ..... (616)698–6800

Grand Rapids
- Allied Electronics, Inc. ..... (616)365–9960
- Newark ..... (616)954–6700

Livonia
- Arrow Electronics ..... (810)455–0850
- Future Electronics ..... (313)261–5270
- Hamilton/Hallmark ..... (313)416–5800

Novi
- Wyle Electronics ..... (248)374–9953

Saginaw
- Newark ..... (517)799–0480

Troy
- Newark ..... (248)583–2899

MINNESOTA

Bloomington
- Wyle Electronics ..... (612)853–2280

Burnsville
- PENSTOCK ..... (612)882–7630

Eden Prairie
- Arrow Electronics ..... (612)941–5280
- FAI ..... (612)947–0909
- Future Electronics ..... (612)944–2200
- Hamilton/Hallmark ..... (612)881–2600

Minneapolis
- Allied Electronics, Inc. ..... (612)938–5633
- Newark ..... (612)331–6350

MISSISSIPPI

Jackson
- Newark ..... (601)956–3834

MISSOURI

Earth City
- Hamilton/Hallmark ..... (314)770–6300

St. Louis
- Allied Electronics, Inc. ..... (314)240–9405
- Arrow Electronics ..... (314)567–6888
- Future Electronics ..... (314)469–6805
- FAI ..... (314)542–9922
- Newark ..... (314)453–9400

NEBRASKA

Omaha
- Allied Electronics, Inc. ..... (402)697–0038
- Newark ..... (402)592–2423

NEVADA

Las Vegas
- Allied Electronics, Inc. ..... (702)258–1087
- Wyle Electronics ..... (702)765–7117

NEW JERSEY

Bridgewater
- PENSTOCK ..... (908)575–9490

East Brunswick
- Allied Electronics, Inc. ..... (908)613–0828
- Newark ..... (908)937–6600

Fairfield
- FAI ..... (201)331–1133

Marlton
- Arrow Electronics ..... (609)596–8000
- FAI ..... (609)988–1500
- Future Electronics ..... (609)596–4080

Mt. Laurel
- Hamilton/Hallmark ..... (609)222–6400
- Wyle Electronics ..... (609)439–9110

Oradell
- Wyle Electronics ..... (201)261–3200

Pinebrook
- Arrow Electronics ..... (201)227–7880
- Wyle Electronics ..... (973)882–8358

Parsippany
- Future Electronics ..... (201)299–0400
- Hamilton/Hallmark ..... (201)515–1641

NEW MEXICO

Albuquerque
- Allied Electronics, Inc. ..... (505)266–7565
- Hamilton/Hallmark ..... (505)293–5119
- Newark ..... (505)828–1878

NEW YORK

Albany
- Newark ..... (518)783–0983

Buffalo
- Newark ..... (716)631–2311

Great Neck
- Allied Electronics, Inc. ..... (516)487–5211

Hauppauge
- Allied Electronics, Inc. ..... (516)234–0485
- Arrow Electronics ..... (516)231–1000
- FAI ..... (516)348–3700
- Future Electronics ..... (516)234–4000
- Hamilton/Hallmark ..... (516)434–7400
- Newark ..... (516)567–4200
- PENSTOCK ..... (516)724–9580
- Wyle Electronics ..... (516)231–7850

Henrietta
- Wyle Electronics ..... (716)334–5970

Konkoma
- Hamilton/Hallmark ..... (516)737–0600

Pittsford
- Newark ..... (716)381–4244

Poughkeepsie
- Allied Electronics, Inc. ..... (914)452–1470
- Newark ..... (914)298–2810

Purchase
- Arrow Zeus ..... (914)701–7400

NEW YORK – continued

Rochester
- Allied Electronics, Inc. ..... (716)292–1670
- Arrow Electronics ..... (716)427–0300
- Future Electronics ..... (716)387–9550
- FAI ..... (716)387–9600
- Hamilton/Hallmark ..... (716)272–2740

Syracuse
- Allied Electronics, Inc. ..... (315)446–7411
- FAI ..... (315)451–4405
- Future Electronics ..... (315)451–2371
- Newark ..... (315)457–4873

NORTH CAROLINA

Charlotte
- Allied Electronics, Inc. ..... (704)525–0300
- FAI ..... (704)548–9503
- Future Electronics ..... (704)547–1107
- Newark ..... (704)535–5650

Greensboro
- Newark ..... (910)294–2142

Morrisville
- Wyle Electronics ..... (919)469–1502

Raleigh
- Allied Electronics, Inc. ..... (919)876–5845
- Arrow Electronics ..... (919)876–3132
- FAI ..... (919)876–0088
- Future Electronics ..... (919)790–7111
- Hamilton/Hallmark ..... (919)872–0712

OHIO

Centerville
- Arrow Electronics ..... (513)435–5563

Cincinnati
- Allied Electronics, Inc. ..... (513)771–6990
- Newark ..... (513)772–8181

Cleveland
- Allied Electronics, Inc. ..... (216)831–4900
- FAI ..... (216)446–0061
- Newark ..... (216)391–9330

Columbus
- Allied Electronics, Inc. ..... (614)785–1270
- Newark ..... (614)326–0352

Dayton
- FAI ..... (513)427–6090
- Future Electronics ..... (513)426–0090
- Hamilton/Hallmark ..... (513)439–6735
- Newark ..... (513)294–8980

Mayfield Heights
- Future Electronics ..... (216)449–6996

Miamisburg
- Wyle Electronics ..... (937)436–9953

Solon
- Arrow Electronics ..... (216)248–3990
- Hamilton/Hallmark ..... (216)498–1100
- Wyle Electronics ..... (440)248–9996

Toledo
- Newark ..... (419)866–0404

Worthington
- Hamilton/Hallmark ..... (614)888–3313

OKLAHOMA

Oklahoma City
- Newark ..... (405)843–3301

Tulsa
- Allied Electronics, Inc. ..... (918)250–4505
- FAI ..... (918)492–1500
- Hamilton/Hallmark ..... (918)459–6000

OREGON

Beaverton
- Arrow/Almac Electronics Corp. (503)629–8090
- Future Electronics ..... (503)645–9454
- Hamilton/Hallmark ..... (503)526–6200

Portland
- Allied Electronics, Inc. ..... (503)626–9921
- FAI ..... (503)297–5020
- Newark ..... (503)297–1984
- PENSTOCK ..... (503)646–1670
- Wyle Electronics ..... (503)598–9953

AUTHORIZED DISTRIBUTORS – continued

UNITED STATES – continued

PENNSYLVANIA

Allentown
- Newark ..... (610)434–7171

Chadds Ford
- Allied Electronics, Inc. ..... (610)388–8455

Coatesville
- PENSTOCK ..... (610)383–9536

Ft. Washington
- Newark ..... (215)654–1434

Harrisburg
- Allied Electronics, Inc. ..... (717)540–7101

Philadelphia
- Allied Electronics, Inc. ..... (609)234–7769

Pittsburgh
- Allied Electronics, Inc. ..... (412)931–2774
- Arrow Electronics ..... (412)963–6807
- Newark ..... (412)788–4790

SOUTH CAROLINA

Greenville
- Allied Electronics, Inc. ..... (864)288–8835
- Newark ..... (864)288–9610

TENNESSEE

Knoxville
- Newark ..... (423)588–6493

Memphis
- Newark ..... (901)396–7970

TEXAS

Austin
- Allied Electronics, Inc. ..... (512)219–7171
- Arrow Electronics ..... (512)835–4180
- Future Electronics ..... (512)502–0991
- FAI ..... (512)346–6426
- Hamilton/Hallmark ..... (512)219–3700
- Newark ..... (512)338–0287
- PENSTOCK ..... (512)346–9762
- Wyle Electronics ..... (512)833–9953

Benbrook
- PENSTOCK ..... (817)249–0442

Brownsville
- Allied Electronics, Inc. ..... (210)548–1129

Carrollton
- Arrow Electronics ..... (214)380–6464
- Arrow Zeus ..... (972)380–4330

Dallas
- Allied Electronics, Inc. ..... (214)341–8444
- FAI ..... (214)231–7195
- Future Electronics ..... (214)437–2437
- Hamilton/Hallmark ..... (214)553–4300
- Newark ..... (972)458–2528

El Paso
- Allied Electronics, Inc. ..... (915)779–6294
- FAI ..... (915)577–9531
- Newark ..... (915)772–6367

Ft. Worth
- Allied Electronics, Inc. ..... (817)595–3500

Houston
- Allied Electronics, Inc. ..... (281)446–8005
- Arrow Electronics ..... (713)647–6868
- FAI ..... (713)952–7088
- Future Electronics ..... (713)785–1155
- Hamilton/Hallmark ..... (713)781–6100
- Newark ..... (281)894–9334
- Wyle Electronics ..... (713)784–9953

Richardson
- PENSTOCK ..... (214)479–9215
- Wyle Electronics ..... (972)235–9953

San Antonio
- FAI ..... (210)738–3330
- Newark ..... (210)734–7960

UTAH

Draper
- Wyle Electronics ..... (801)523–2335

Salt Lake City
- Allied Electronics, Inc. ..... (801)261–5244
- Arrow Electronics ..... (801)973–6913
- FAI ..... (801)467–9696
- Future Electronics ..... (801)467–4448
- Hamilton/Hallmark ..... (801)266–2022
- Newark ..... (801)261–5660

West Valley City
- Wyle Electronics ..... (801)974–9953

VIRGINIA

Herndon
- Newark ..... (702)707–9010

Richmond
- Newark ..... (804)282–5671

Springfield
- Allied Electronics, Inc. ..... (703)644–9515

Virginia Beach
- Allied Electronics, Inc. ..... (757)363–8662

WASHINGTON

Bellevue
- Almac Electronics Corp. ..... (206)643–9992
- PENSTOCK ..... (206)454–2371

Bothell
- Future Electronics ..... (206)489–3400

Kirkland
- Newark ..... (206)814–6230

Redmond
- Hamilton/Hallmark ..... (206)882–7000
- Wyle Electronics ..... (425)881–1150

Seattle
- Allied Electronics, Inc. ..... (206)251–0240
- FAI ..... (206)485–6616

Spokane
- Newark ..... (509)327–1935

WISCONSIN

Brookfield
- Arrow Electronics ..... (414)792–0150
- Future Electronics ..... (414)879–0244
- Wyle Electronics ..... (414)879–0434

Madison
- Newark ..... (608)278–0177

Milwaukee
- Allied Electronics, Inc. ..... (414)796–1280
- FAI ..... (414)792–9778

New Berlin
- Hamilton/Hallmark ..... (414)780–7200

Wauwatosa
- Newark ..... (414)453–9100

CANADA

ALBERTA

Calgary
- FAI ..... (403)291–5333
- Future Electronics ..... (403)250–5550
- Hamilton/Hallmark ..... (800)663–5500
- Newark ..... (800)463–9275

Edmonton
- FAI ..... (403)438–5888
- Future Electronics ..... (403)438–2858
- Hamilton/Hallmark ..... (800)663–5500
- Newark ..... (800)463–9275

Saskatchewan
- Hamilton/Hallmark ..... (800)663–5500

BRITISH COLUMBIA

Vancouver
- Allied Electronics, Inc. ..... (604)420–9691
- Arrow Electronics ..... (604)421–2333
- FAI ..... (604)654–1050
- Future Electronics ..... (604)294–1166
- Hamilton/Hallmark ..... (604)420–4101
- Newark ..... (800)463–9275

MANITOBA

Winnipeg
- FAI ..... (204)786–3075
- Future Electronics ..... (204)944–1446
- Hamilton/Hallmark ..... (800)663–5500
- Newark ..... (800)463–9275

ONTARIO

Kanata
- PENSTOCK ..... (613)592–6088

London
- Newark ..... (519)685–4280

Mississauga
- PENSTOCK ..... (905)403–0724
- Newark ..... (905)670–2888

Ottawa
- Allied Electronics, Inc. ..... (613)228–1964
- Arrow Electronics ..... (613)226–6903
- FAI ..... (613)820–8244
- Future Electronics ..... (613)727–1800
- Hamilton/Hallmark ..... (613)226–1700

Toronto
- Arrow Electronics ..... (905)670–7769
- FAI ..... (905)612–9888
- Future Electronics ..... (905)612–9200
- Hamilton/Hallmark ..... (905)564–6060
- Newark ..... (905)670–2888

QUEBEC

Montreal
- Arrow Electronics ..... (514)421–7411
- FAI ..... (514)694–8157
- Future Electronics ..... (514)694–7710
- Hamilton/Hallmark ..... (514)335–1000

Mt. Royal
- Newark ..... (514)738–4488

Quebec City
- Arrow Electronics ..... (418)687–4231
- FAI ..... (418)682–5775
- Future Electronics ..... (418)877–6666

MOTOROLA WORLDWIDE SALES OFFICES

UNITED STATES

ALABAMA
Huntsville ..... (205)464–6800
ALASKA ..... (800)635–8291
ARIZONA
Phoenix ..... (602)302–8056
CALIFORNIA
Calabasas ..... (818)878–6800
Irvine ..... (714)753–7360
Los Angeles ..... (818)878–6800
San Diego ..... (619)541–2163
Sunnyvale ..... (408)749–0510
COLORADO
Denver ..... (303)337–3434
CONNECTICUT
Wallingford ..... (203)949–4100
FLORIDA
Clearwater ..... (813)524–4177
Maitland ..... (407)628–2636
Pompano Beach/Ft. Lauderdale .... (954)351–6040
GEORGIA
Atlanta ..... (770)729–7100
IDAHO
Boise ..... (208)323–9413
ILLINOIS
Chicago/Schaumburg ..... (847)413–2500
INDIANA
Indianapolis ..... (317)571–0400
Kokomo ..... (765)455–5100
IOWA
Cedar Rapids ..... (319)378–0383
KANSAS
Kansas City/Mission ..... (913)451–8555
MARYLAND
Columbia ..... (410)381–1570
MASSACHUSETTS
Marlborough ..... (508)357–8207
Woburn ..... (781)932–9700
MICHIGAN
Detroit ..... (248)347–6800
MINNESOTA
Minnetonka ..... (612)932–1500
MISSOURI
St. Louis ..... (314)275–7380
NEW JERSEY
Fairfield ..... (973)808–2400
NEW YORK
Fairport ..... (716)425–4000
Fishkill ..... (914)896–0511
Hauppauge ..... (516)361–7000
NORTH CAROLINA
Raleigh ..... (919)870–4355
OHIO
Cleveland ..... (440)349–3100
Columbus/Worthington ..... (614)431–8492
Dayton ..... (937)438–6800
OKLAHOMA
Tulsa ..... (918)251–3414
or ..... (918)258–0933
OREGON
Portland ..... (503)641–3681
PENNSYLVANIA
Colmar ..... (215)997–1020
Philadelphia/Horsham ..... (215)957–4100
TENNESSEE
Knoxville ..... (423)584–4841
TEXAS
Austin ..... (512)502–2100
Houston ..... (713)251–0006
Plano ..... (972)516–5100
VIRGINIA
Richmond ..... (804)285–2100
WASHINGTON
Bellevue ..... (425)454–4160
Seattle (toll free) ..... (206)622–9960
WISCONSIN
Milwaukee/Brookfield ..... (414)792–0122

Field Applications Engineering Available
Through All Sales Offices

CANADA

BRITISH COLUMBIA
Vancouver ..... (604)606–8502
ONTARIO
Ottawa ..... (613)226–3491
Mississauga ..... (905)501–3500
QUEBEC
Montreal ..... (514)333–3300

INTERNATIONAL

AUSTRALIA
Melbourne ..... (61–3)9887 0711
Sydney ..... (61–2)9437 8944
BRAZIL
Sao Paulo ..... 55(011)3030–5244
CHINA
Beijing 86–10–68437222
Guangzhou 86–20–87537888
Shanghai 86–21–63747668
Tianjin 86–22–25325072
CZECH REPUBLIC
..... (420) 2 21852222
FINLAND
Helsinki ..... (358) 9 6866 880
Direct Sales Lines ..... (358) 9 6866 8844
..... (358) 9 6866 8845
FRANCE
Paris 33134 635900
GERMANY
Langenhagen/Hanover ..... 49(511)786880
Munich 49 89 92103–0
Nuremberg 49 911 96–3190
Sindelfingen 49 7031 79 710
Wiesbaden 49 611 973050
HONG KONG
Kwai Fong 852–2–610–6888
Tai Po 852–2–666–8333
HUNGARY
..... (36) 1 250 83 29
INDIA
Bangalore 91–80–5598615
ISRAEL
Herzlia 972–9–9522333
ITALY
Milan ..... 39(2)82201
JAPAN
Kyusyu 81–92–725–7583
Gotanda 81–3–5487–8311
Nagoya 81–52–232–3500
Osaka 81–6–305–1801
Sendai 81–22–268–4333
Takamatsu 81–878–37–9972
Tokyo 81–3–3440–3311
KOREA
Pusan ..... 82(51)4635–035
Seoul 82–2–3440–7200
MALAYSIA
Penang ..... 60(4)228–2514
MEXICO
Chihuahua ..... 52(14)39–3120
Mexico City ..... 52(5)282–0230
Guadalajara ..... 52(36)78–0750
Zapopan Jalisco ..... 52(36)78–0750
Marketing ..... 52(36)21–2023
Customer Service ..... 52(36)669–9160
NETHERLANDS
Best ..... (31)4993 612 11
PHILIPPINES
Manila ..... (63)2 822–0625
POLAND
..... (48) 34 27 55 75
PUERTO RICO
Rio Piedras ..... (787)282–2300
RUSSIA
..... (7) 095 929 90 25
SCOTLAND
East Kilbride ..... (44)1355 565447
SINGAPORE ..... (65)4818188
SPAIN
Madrid ..... 34(1)457–8204
or ..... 34(1)457–8254
SWEDEN
Solna ..... 46(8)734–8800
SWITZERLAND
Geneva ..... 41(22)799 11 11
Zurich ..... 41(1)730–4074
TAIWAN
Taipei ..... 886(2)717–7089
THAILAND
Bangkok ..... 66(2)254–4910
TURKEY
..... (90) 212 274 66 48
UNITED KINGDOM
Aylesbury ..... 44 1 (296)395252

NORTH AMERICA

FULL LINE REPRESENTATIVES

ARIZONA, Tempe
S&S Technologies, Inc. ..... (602)414–1100
CALIFORNIA, Loomis
Galena Technology Group .... (916)652–0268
INDIANA, Indianapolis
Bailey's Electronics ..... (317)848–9958
NEVADA, Clark County
S&S Technologies, Inc. ..... (602)414–1100
NEVADA, Reno
Galena Tech. Group ..... (702)746–0642
NEW MEXICO, Albuquerque
S&S Technologies, Inc. ..... (505)414–1100
TEXAS, El Paso
S&S Technologies, Inc. ..... (915)833–5461
UTAH, Salt Lake City
Utah Comp. Sales, Inc. ..... (801)572–4010
WASHINGTON, Spokane
Doug Kenley ..... (509)924–2322

NORTH AMERICA

HYBRID/MCM COMPONENT SUPPLIERS

Chip Supply ..... (407)298–7100
Elmo Semiconductor ..... (818)768–7400
Minco Technology Labs Inc. .. (512)834–2022
Semi Dice Inc. ..... (310)594–4631

MOTOROLA

Mfax is a trademark of Mot

How to reach us:
USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1–303–675–2140 or 1–800–441–2447

Customer Focus Center: 1–800–521–6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1–602–244–6609
Motorola Fax Back System – US & Canada ONLY 1–800–774–1848
– http://sps.motorola.com/mfax/

HOME PAGE: http://motorola.com/sps/

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141,
4–32–1 Nishi–Gotanda, Shagawa–ku, Tokyo, Japan. 03–5487–848
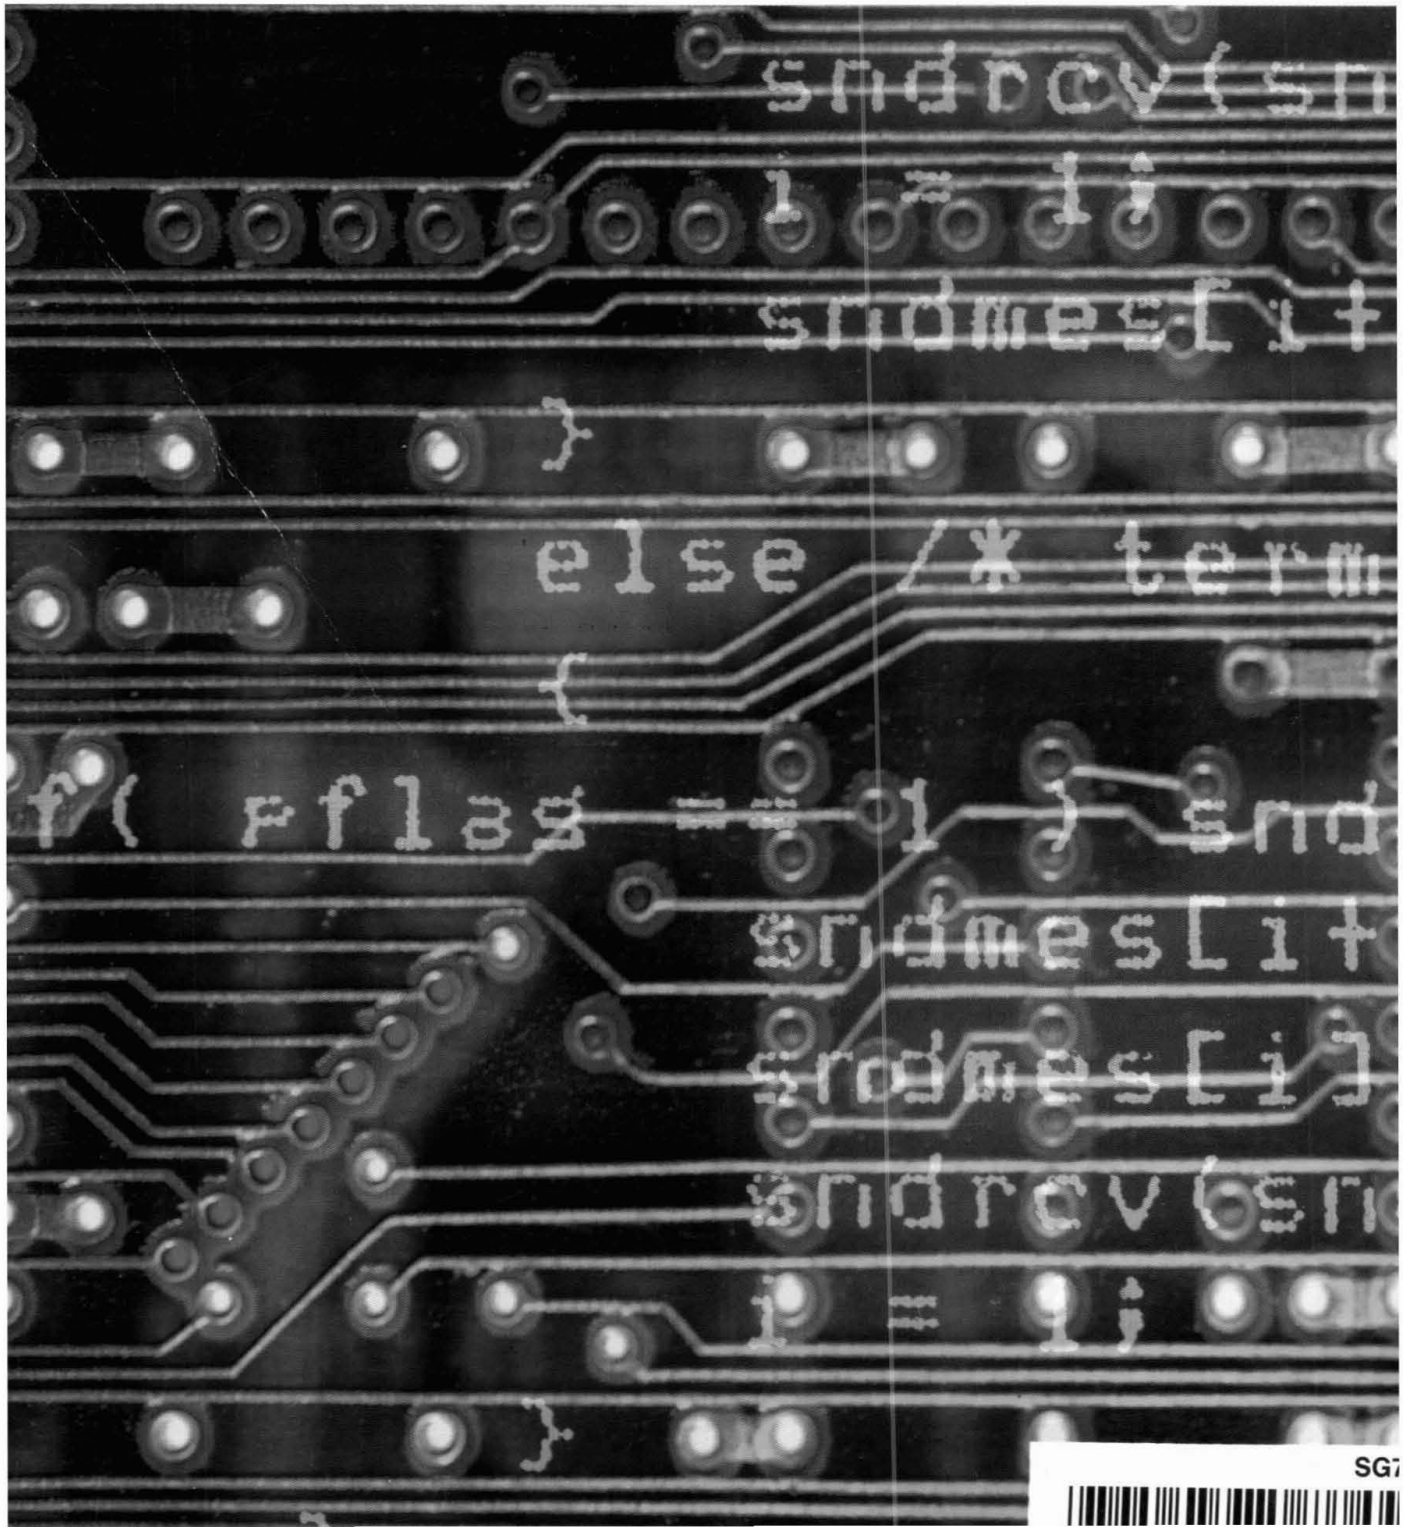
ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Indust
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298